Fanttik

NEX E2 Max

Electric Precision Screwdriver Kit

User Manual

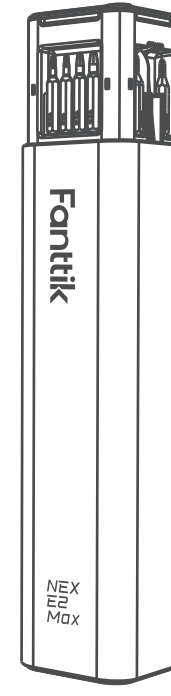

Please read this instruction manual carefully
before use and keep it for future reference.

Contents

1.Safety Warnings ---------- 02

2.Package Contents ---------- 03

3.Product Overview ---------- 04

4.Operation and Functions ---------- 05

5.Specifications ---------- 10

1.Safety Warnings

- Avoid moisture, dust, and drop.
- Do not store the product in extreme temperature environment.
- Stay alert, watch what you are doing and use common sense when operating. Do not operate while you are tired or under the influence of drugs, alcohol or medication.
- This product is not a toy and should not be used by kids under 10 years old.
- This product has built-in battery, do not throw it into fire and should be recycled by local laws and regulations.
- Do not dismantle the machine by yourself. Have your power tool serviced by a qualified repair person or contact us for advice.

2.Package Contents



Metal Housing x1



Bit storage x1



Electric Precision Screwdriver x 1



screwdriver bits x 50



Tweezers x 1



Metal Spudger x 1



User Manual x 1



USB charging cable x 1

3.Product Overview

1.Press area(press to eject the bit storage and screwdriver)
2.Metal Housing x1
3.Bit storage x1
4.USB Type-C Charging Port USB-C
5.Power Indicator ring light
6.Torque setting knob
7.Forward/Reverse rotation button
8.Bit chuck

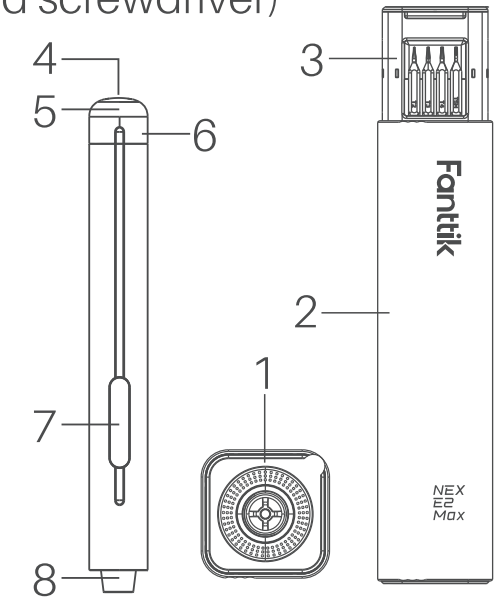

4.Operation and Functions

Open and close the bit storage

- To open: Press down on the top surface of the bit storage (avoid the central screwdriver). both the bit storage and screwdriver will then pop up from the metal housing.
- To close: First, place the bit storage back into the metal housing and press it down to lock in place. Then, position the screwdriver back into the center of the bit storage and press it down to secure it.

Storage of bits

- Bits are stored in the magnetic bit storage holders. Tweezers and a spudger are included. After using the bits, position them back into the

magnetic holders, and they will be attracted by magnet.

Storage of the screwdriver

- The screwdriver is stored in the center of the bit storage and secured by magnetic attraction.

Bit installation

- Retrieve a bit from the bit storage, then insert it into the screwdriver bit chuck.



Screwdriver Forward/Reverse button

- Press the ⌄ or ⌃ button to tighten or loosen screws.



Torque setting knob

- Rotate the torque knob from OFF to three different levels to gradually increase the torque.



Bit magnetizer

- Place the bit tip in the magnetizing window for a few seconds to complete magnetization.



Turn on/off the LED light

- Press the forward/reverse rotation button to turn on the LED light simultaneously.
- The LED light will stay on for 10 seconds if no further operation is performed.



Power Indicator



- When the battery level drops below 20% during use, the indicator will blink red rapidly.
- While charging, the indicator will blink green slowly.
- When the battery is fully charged, the indicator will display solid green.

Battery charging

- This screwdriver features a universal Type-C charging port and includes a USB charging cable. A charger is not included; please use a 5V output charger for charging.

5.Specifications

Product Name	Electric Precision Screwdriver Kit
Product Model	NEX E2 Max
Product Dimension	1.85x1.85x7.48 inches (47 x 47 x 190mm)
Net Weight	16.8oz (475g)
Max. hard torque	0.4 N·m
Max. permitted manual torque	3.0 N·m
Rotation Speed (unloaded)	220±10% RPM
Battery Capacity	800mAh/2.96Wh
Rated Voltage	3.7V
Charging Input	5V/0.5A
Charging Time	150-180 min
Storage Temperature	-4°F-140°F(-20°C-60°C)
Working Temperature	32°F-113°F(0°C-45°C)

Bit specifications

Bit Shank Size: 5/32inch (4mm) hex shank
Bit Length: 1.1 inches and 1.8 inches (28mm and 45mm)
Bit Material: Coated S2 Steel

Bit Type:


PH0000, PH000, PH00, PH0, PH1, PH2


SL1.0, SL1.5, SL2.0, SL2.5, SL3.0, SL3.5


H0.7, H0.8, H0.9, H1.0, H1.3, H1.5, H2.0, H2.5, H3.0


T2, T3, T4

 TR5, TR6, TR7, TR8, TR9, TR10, TR15

 U2.0, U2.6, U3.0

 P2, P5, P6

 S0, S1

 2.0, 2.3, 2.5

 W1.5

 Y0.6, Y1.0, Y2.0, Y2.5, Y3.0, Y1

 0.8

*Note: PH0, PH1, SL2.0, TR8, TR10, H2.0 are 1.8 inches(45mm) in length; the remaining are 1.1 inches(28mm).

929-693-6066 MON-FRI 9AM-5PM (ET)
www.fanttik.com
support@fanttik.com
METASEE LLC
12 GREENWAY PLZ STE 1161A HOUSTON,
TX 77046-1203
Made in China

