



Q0 CUSTOMIZABLE KEYBOARD USER MANUAL

Fully Assembled Version

Keyboard

1x Fully Assembled Keyboard

Including

1x Aluminum Case

1x PCB

1x Steel Plate

1x Sound Absorbing Foam

1x Case Foam

3 sets x Stabilizers

1 set x Keycaps (PBT Double-shot)

1 set x Switches (Gateron G Pro)

Cable

1x Type-C to Type-C Cable



1x Type-A to Type-C Adapter

Tools

1x Switch Puller

1x Keycap Puller

1x Screwdriver



Barebone Version

Keyboard Kit

1x Keyboard Kit (Without Keycaps & Switches)

Including

1x Aluminum Case

1x PCB

1x Steel Plate

1x Sound Absorbing Foam

1x Case Foam

3 sets x Stabilizers

Cable

1x Type-C to Type-C Cable



1x Type-A to Type-C Adapter

Tools


1x Switch Puller

1x Keycap Puller

1x Screwdriver



QUICK START GUIDE

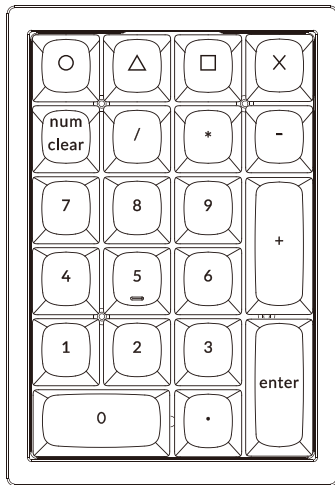

1 The VIA Key Remapping Software

Please visit caniusevia.com to download the latest VIA software to remap the keys. If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction.



2 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.




3 Watch The Building Tutorial On Our Website

If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.



4 Factory Reset





Troubleshooting? Don't know what's going on with the keyboard?

- ① Try factory reset by pressing $\bigcirc + 9 + 1$ (for 4 seconds)
 - ② Download the right firmware for your keyboard from our website.
Remove the power cable from the keyboard.
 - ③ Remove the "0" and "." keycap to find the reset button on the PCB.
 - ④ Hold the reset key while plugging in the power cable and then release the reset key. The keyboard now will enter DFU mode.
 - ⑤ Flash the firmware with the QMK Toolbox.
 - ⑥ Factory reset the keyboard again by pressing $\bigcirc + 9 + 1$ (for 4 seconds)
- * Step by step guide can be found on our website

Q0 CUSTOMIZABLE KEYBOARD SPECIFICATIONS

Specifications	
Layout	Numpad
Switch type	Mechanical
Width	128.8 mm
Length	88.8 mm
Front height	18.2 mm (without keycaps)
Back height	29.9 mm (without keycaps)
Front height	28.8 mm (with OSA keycaps installed)
Back height	39.8 mm (with OSA keycaps installed)
Keyboard feet height	2.4 mm
Angle	5.2 degree


Q0 MECHANICAL KEYBOARD OVERVIEW

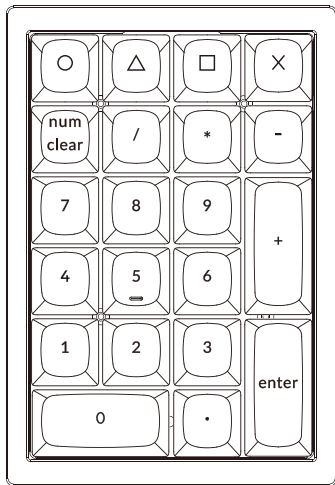


① Type-C Port

DEFAULT KEY LAYOUT:

LAYER 0: This layer will be activated when your keyboard is connected.

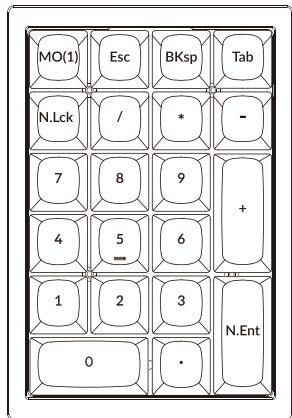

LAYER 1: This layer will be activated when you press the fn/MO(1) key.

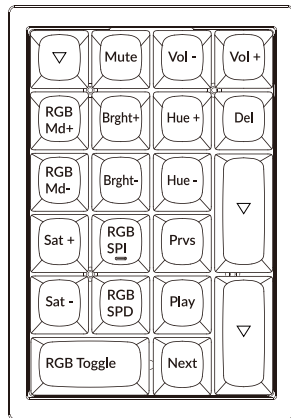

KEY DESCRIPTION

Key Description		Key Description	
Scr-	Screen Brightness Decrease	RGBMd+	RGB Mode Next
Scr+	Screen Brightness Increase	RGBMd-	RGB Mode Previous
Bright-	Backlight Decrease	Hue+	Hue Increase
Bright+	Backlight Increase	Hue-	Hue Decrease
Prvs	Previous	RGB SPI	RGB Speed Increase
Play	Play/Pause	RGB SPD	RGB Speed Decrease
Next	Next	MO(1)	Layer 1 will be activated when holding this key
Mute	Mute		
Vol-	Volume Decrease		
Vol+	Volume Increase		
RGB Toggle	Turn Backlight on/off		

Third party input tools are not compatible with the keyboard.

Due to compatibility, versions, brands and drivers of Windows/macOS, functionalities of third Party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

Certain fn keys or multimedia keys does not work under Windows/Android mode.

Functionalities of certain multimedia keys may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS.

Safety Precaution:

Keep the product, accessories and packaging parts out of reach of children to prevent any accidents and choking hazards.

Always keep the product dry to avoid corrosion.

Do not expose the product to extreme temperatures below -10°C (5°F) or above 50°C (131°F) to preserve the lifespan of the keyboard.

Keychron, Inc.
Dover, DE 19901, United States

Find us at:

<https://www.keychron.com>

Support@keychron.com

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China



Q0 客制化键盘用户手册

完全组装版本

键盘


- 1x 已组装成品键盘
- 1x 铝合金金属外壳
- 1x PCB
- 1x 铁质定位板
- 1x 底部吸音泡棉
- 1x PCB与定位板夹心吸音泡棉
- 3套PCB卫星轴
- 1套键帽 (PBT材质-双色注塑)
- 1套机械轴体 (佳达隆G PRO轴体)

线材

- 1x Type-C to Type-C 接口线材
- 1x Type-A to Type-C 转接头

工具

- 1x 拔键器
- 1x 拔轴器
- 1x 十字螺丝刀



套件版本

键盘


- 1x 键盘本体 (不包含键帽、轴体)
- 1x 铝合金金属外壳
- 1x PCB
- 1x 铁质定位板
- 1x 底部吸音泡棉
- 1x PCB与定位板夹心吸音泡棉
- 3套PCB卫星轴

线材


- 1x Type-C to Type-C 接口线材
- 1x Type-A to Type-C 转接头

工具

- 1x 拔键器
- 1x 拔轴器
- 1x 十字螺丝刀



快速入门指南

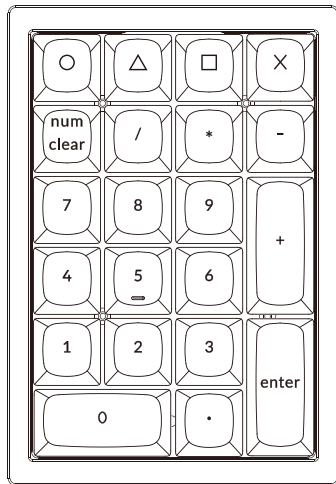

1、关于VIA映射软件

可以访问caniusevia.com下载最新的VIA软件，
VIA是可以映射按键的软件。
如果VIA软件不能识别你的键盘，
请联系我们以获得技术支持。



2、保修

由于Q0客制化键盘是可高度定制且易于组装的，
所以键盘的任何一个部件出了问题，
我们只会更换键盘有问题的部件而不是整个键盘。




3、键盘组装教程

如果您没有安装过类似产品的经验，我们建议您观看我们网站上的键盘组装教程视频，然后再开始进行键盘组装。



4、恢复出厂模式



如果键盘出现了故障，不知道怎么办？



1. 依照顺序长按 $\bigcirc + 9 + 1$ (等待四秒)；
2. 从我们的网站为您的键盘下载正确的固件，然后拔掉键盘上的数据线；
3. 拔掉“0”号键、“.”号键键帽，找到位于PCB上面的复位按钮；
4. 长按复位按钮同时插入键盘的数据线然后放开这个复位按钮，此时键盘会进入DFU模式；
5. 然后您可以使用QMK工具箱进行刷新固件的操作；
6. 再次将键盘恢复出厂设置长按 $\bigcirc + 9 + 1$ (等待四秒)。

* 步骤指南可以在我们的网站上找到

Q0客制化键盘规格

规格	
布局	数字键盘
开关类型	机械轴体
宽度	128.8 mm
长度	88.8 mm
键盘下沿高度	不含键帽 18.2 mm
键盘上沿高度	不含键帽 29.9 mm
键盘下沿高度	含键帽OSA高度 28.8 mm
键盘上沿高度	含键帽OSA高度 39.8 mm
键盘脚垫高度	2.4mm
键盘倾斜角度	5.2°


Q0客制化键盘按键说明

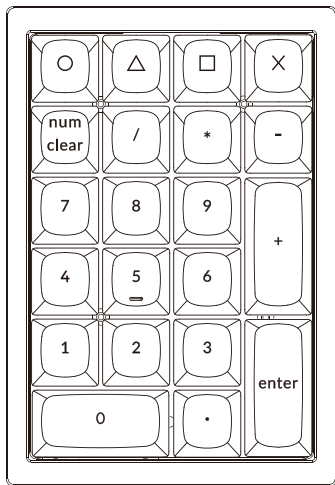


① Typec接口

按键布局

层0:当您的键盘连接时,该层将被激活。

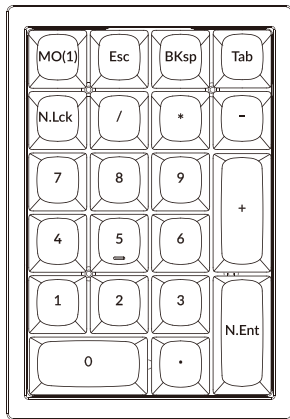

层1:当您按下 fn/MO(1) 键时,该层将被激活。

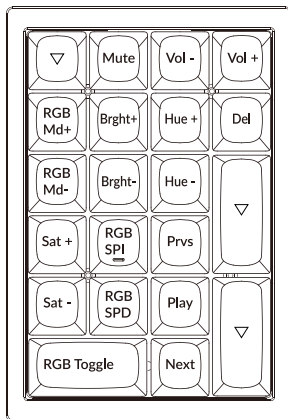

Q0客制化键盘多媒体按键说明

按键说明	
Scr-	屏幕亮度-
Scr+	屏幕亮度+
Bright-	键盘背光亮度-
Bright+	键盘背光亮度+
Prvs	上一曲
Play	播放/暂停
Next	下一曲
Mute	静音
Vol-	音量-
Vol+	音量+
RGB Toggle	关闭/开启键盘背光

按键说明	
RGBMD+	下一个RGB灯光模式
RGBMD-	上一个RGB灯光模式
Hue+	下一个灯光颜色
Hue-	上一个灯光颜色
RGB SPI	RGB灯光速度+
RGB SPD	RGB灯光速度-
MO(1)	按住MO(1),层1将被激活

第三方输入工具与键盘不兼容：

由于Windows/Android操作系统的兼容性、版本、品牌和驱动程序，使用键盘时，第三方输入工具可能会受到影响。请确保您的操作系统和驱动程序是最新的。

某些fn键或多媒体键不能在Windows/Android模式下工作：

由于Windows/Android操作系统的兼容性、版本和驱动程序，某些多媒体键的功能可能会被禁用。

安全预防措施：

防止儿童接触到产品、附件和包装部件，以防止任何意外和窒息的危险。

保持产品干燥，避免腐蚀。

不要将产品暴露在低于-10°C(5°F)或高于50°C(131°F)的极端温度下，以保持键盘的寿命。

Keychron, Inc.

Dover, DE 19901, United States

<https://www.keychron.com>

通过以下方式与我们联系

Support@keychron.com

 @keychron

 @keychron

 @keychronMK

Keychron设计

中国制造

中国区总代：渴创技术（深圳）有限公司

执行标准：GB/T 14081-2010

售后热线：400-0766268

地 址：深圳市龙岗区坂田街道大发埔社区
大发路24号文坑工业区2栋201