

Package Contents

- 4K Motorized Varifocal Bullet Camera with Smart Motion Detection
- Mounting Kit*
- Mounting Template*
- Ethernet Extension Cable with Pre-attached RJ45 Cable Gland*
- Allen Key*

* Per camera in multi-camera packs.

ATTENTION:

It is recommended to connect the camera to the NVR or an external PoE switch. If using a DC power adapter (not included) with the camera, a **REGULATED** power supply is **REQUIRED** for use with this camera. Use of a non-regulated, non-conforming power supply can damage this product and voids the warranty.

Safety Precautions

- Use the camera only with compatible Lorex NVRs.
- Read this guide carefully and keep it for future reference.
- Follow all instructions for safe use of the product and handle with care.
- Use the camera within given temperature, humidity and voltage levels noted in the camera's specifications.
- Do not disassemble the camera.
- Do not point the camera directly towards the sun or a source of intense light.
- Use only a regulated power supply with the product (optional). Use of a non-regulated, non-conforming power supply can damage the product and void the warranty.
- Periodic cleaning may be required. Use a damp cloth only. Do not use any harsh, chemical-based cleaners.
- The supplied cable is rated for surface mounting only. Cables for in-wall and floor-to-floor installations are sold separately (CMR type). These and other cables are available at lorex.com.

Using the RJ45 Cable Gland (Optional)


The RJ45 cable gland covers the camera's Ethernet connector and the RJ45 plug to provide weather-resistance and protection from dust, dirt and other environmental contaminants.

The RJ45 cable gland is pre-attached to the included Ethernet extension cable.



To use the RJ45 cable gland:

Twist the RJ45 cable gland barrel securely onto the camera Ethernet connector.




NOTE: The RJ45 cable gland is weather-resistant. Seal the cap with silicone and/or electrical tape for additional sealing if it will be exposed to precipitation regularly.

Disclaimers

- For a full list of compatible recorders, visit lorex.com/compatibility.
- Not intended for submersion in water. Installation in a sheltered location recommended.
- This camera includes an Auto Mechanical IR Cut Filter. When the camera changes between Day/Night viewing modes, an audible clicking noise may be heard from the camera. This clicking is normal, and indicates that the camera filter is working.
- For optimal remote viewing from your recorder, an upload speed of 256kbps per camera is required (default setting). For example, your Internet service package must support 2Mbps or greater upload speed for 8 cameras, 4Mbps or greater for 16 cameras, and 8Mbps or greater for 32 cameras (your Internet service provider can confirm your upload speed). You may lower the resolution and bitrate of camera video streams to further boost performance for slower Internet connections. See your NVR's user manual at lorex.com for full instructions (see "Configuring Recording Quality" section).


Dimensions

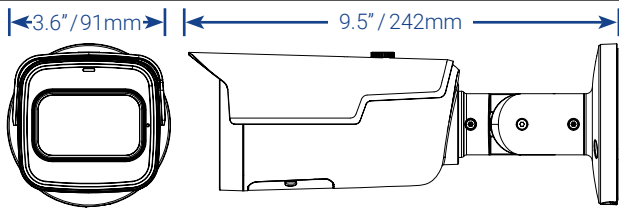

Important Installation Guidelines


Optimizing Person and Vehicle Detection Accuracy:

- Angle the camera so that objects of interest appear in the bottom 1/3 of the camera image.
- Choose a location where objects of interest will be no further than 50ft (~15m) from the camera.

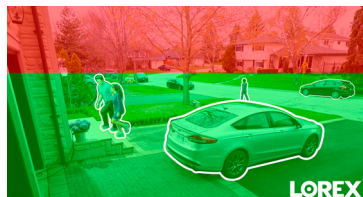

- Angle the camera between 30~60° down from the level position.
- Install the camera between 8-16ft (2.5-5m) off of the ground.

NOTE: Accuracy of person and vehicle detection will be influenced by multiple factors, such as the object's distance from the camera, the size of the object, and the height and angle of the camera. Night vision will also impact the accuracy of detection.




Additional Installation Tips:

- Point the camera where there is the least amount of obstructions (e.g., tree branches).
- Install the camera where vandals cannot easily reach.
- Secure cabling so that it is not exposed or easily cut.
- This camera is rated for outdoor use. Installation in a sheltered location is recommended.
- Smart motion detection is enabled by default. When enabled, the camera's recording frame rate is 20 frames per second.
- To obtain the maximum 30 frames per second, smart motion detection must be disabled.

Need Help?

Visit us online for up-to-date software and complete instruction manuals

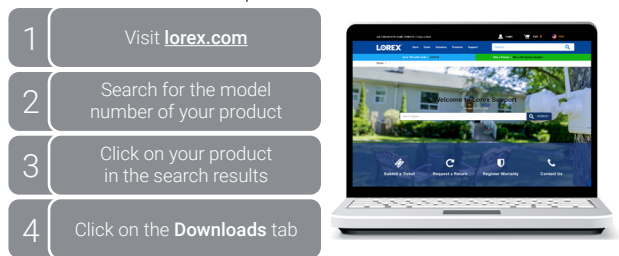

Copyright © 2020 Lorex Corporation

As our products are subject to continuous improvement, Lorex reserves the right to modify product design, specifications and prices, without notice and without incurring any obligation. E&OE. All rights reserved.

LOREX®

4K Motorized Varifocal Bullet Camera with Smart Motion Detection

Quick Start Guide English Version 2.0



LNB9282B SERIES

lorex.com

Installation Tips

- Point the camera where there is the least amount of obstructions (i.e., tree branches).
- Install the camera where vandals cannot easily reach.
- Secure cabling so that it is not exposed or easily cut.
- The camera is rated for outdoor use. Installation in a sheltered location is recommended.


Installing the Camera

ATTENTION:

Test your camera prior to selecting a permanent mounting location by temporarily connecting the camera and cable to your NVR.

Before Installing the Camera

- Decide whether to run the cables through the wall / ceiling (drilling required) or along the wall / ceiling.
- If you run the cables along the wall / ceiling, you must run the cable through the **cable notch** on the base. This will keep the camera base flush to the surface when mounted.



To install your camera:

1. Use the included mounting template to mark holes for the screws. Drill holes for the mounting screws.

NOTE: Insert the included drywall anchors if you are installing the camera in drywall.


2. Connect cables as shown in the section "Connecting the Camera".

3. Feed the cable through the mounting surface or cable notch. Mount the camera stand to the surface using the provided screws.

4. Use the included Allen key to loosen the three adjustment screws on the camera base. Make the necessary camera angle adjustments.

5. Tighten the adjustment screws to secure the position.

6. Remove the vinyl film from the camera lens when your installation is complete.

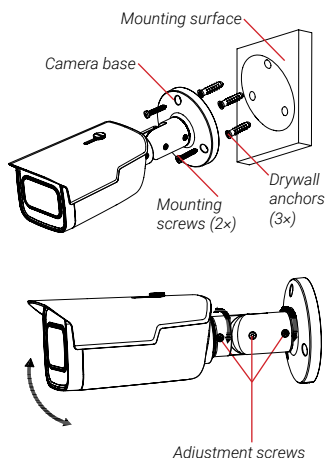

Cable Extension Options

Extend the Ethernet cable run for your camera up to 300ft (92m). See table below. It is recommended to use UL CMR approved cables available at lorex.com.

Cable Type	Max Cable Run Distance	Max # of Extensions
CAT5e (or higher) Ethernet cable	300ft (92m)	3

- You can use a RJ45 coupler or switch (not included) to connect male ends of Ethernet cable together.
- To extend the cable run beyond 300ft (92m), a switch will be required (sold separately).

Connecting the Camera

Camera

(Optional) 12V DC Power

Connect the Ethernet cable to the camera.

NOTE: A 12V DC power adapter (model#: **ACCPWR12V1**, not included) is only required if connecting the camera's Ethernet cable to a router or switch that does not support PoE.

NVR

Connect the other end of the Ethernet cable to the NVR's PoE ports. The camera may take a minute to power up after being connected.

OR

Connect the other end of the Ethernet cable to a router or switch on your network. See your NVR manual for details on connecting the camera to your NVR using a switch or router.

Setup Diagram

Scenario 1: Connect Cameras to NVR

Scenario 2: Connect Cameras to Local Area Network (LAN)

ATTENTION:


- This camera is compatible only with select NVRs supporting 4K camera input. For a list of compatible recorders, visit lorex.com/compatibility.
- You must connect the camera to a supporting H.265 NVR to take advantage of H.265 compression. For instructions on enabling H.265 compression, visit lorex.com, and search for "How do I enable H.265 compression?".

Adjusting Zoom and Focus

Adjust the camera's zoom and focus using a compatible NVR. For more information, see your NVR's instruction manual on lorex.com.

Right-click on the camera's live view and then click **AutoFocus**.

Use the sliders to adjust zoom and focus.



Troubleshooting

Problem	Solution
No picture / signal	• Ensure the camera is connected to a compatible NVR supporting 4K camera input. For full camera compatibility, visit lorex.com/compatibility. • The camera may take up to 1 minute to power up after being connected to the NVR. Wait two minutes before following the steps below. • Ensure the camera is connected to your NVR or to your local network. • If you are not using PoE, you must connect the camera to a 12V DC power adapter (not included). • If the camera is connected to the LAN, you must search your network for cameras using the NVR. See the NVR's instruction manual. • Ensure your NVR is properly connected to a TV/monitor. • There may be an issue with your extension cable run. Connect the camera to the NVR using a different Ethernet cable.
Picture is too bright	• Ensure your camera isn't pointed directly at a source of light (e.g., sun or spotlight). • Slide the sunshade forward to block excess light. • Move your camera to a different location. • Check the brightness and contrast settings on the NVR.
Picture is too dark	• If using during the day, the camera may not be getting enough light. Slide the sunshade backwards to let in more light. • Check the brightness and contrast settings on the NVR.
Night vision is not working	• The night vision activates when light levels drop. The area may have too much light.
Picture is not clear	• Check the camera lens for dirt, dust, spiderwebs. Clean the lens with a soft, clean cloth. • Make sure that the cable run is within the limitations specified in the section 'Cable Extension Options'.
Bright spot in video when viewing camera at night	• Night vision reflects when pointing a camera through a window. Move the camera to a different location.
Picture is in color in dark conditions	• This camera comes with an image sensor that is extra sensitive to light, meaning that the camera stays in color mode at low-light conditions. For instructions on how to make your camera switch to night mode, visit lorex.com, and search for "How do I make my camera switch to night mode?".
No audio	• Audio is only supported on Lorex NVRs. For a list of compatible recorders, visit lorex.com/compatibility. • Ensure NVR volume is turned on / turned up. • Ensure audio function on camera is turned on (see 'Audio Settings'). • Ensure audio is turned up on viewing device.
Low frame rate (frames per second)	• To obtain the maximum 30 frames per second, you must connect to a compatible recorder. For a complete list of compatible recorders, visit lorex.com/compatibility. • If your recorder is capable of supporting 30 frames per second, you will need to disable smart motion detection in order to use the maximum frame rate.