

36V 40AH OWNER'S MANUAL

NEWPORT®

NEWPORT BLUETOOTH LITHIUM BATTERY

36V 40AH



THE WAY FORWARD IS **ELECTRIC**





Leading Innovator of NEXT-GENERATION ELECTRIC Small Boat Motors

The leading innovator of next-generation electric small boat motors, Newport®, has delivered unrivaled experiences on the water for more than a decade.

As passionate, lifelong members of the angling community, we are committed to a cleaner, simpler future and a better fishing experience for everyone.

Newport's pioneering technology redefines electric power to reduce the hassle, cost and harmful impact on our environment associated with traditional gas-fueled motors.

At Newport, the way forward is electric. Visit newportvessels.com.

NEWPORT®

 (866) 721-0002

 support@newportvessels.com

 newportvessels.com

CONTENTS

1 Product Overview	4
2 General Information	4
3 User Guide	5
4 Battery-Pack Main Parameters	7
5 Notice Before Using	8
5.1 Long-Term Storage	8
6 Charging Methods	9
6.1 The Voltage when Charging & Discharging	9
6.2 Battery Charging Logic	10
6.2.1 LiFePO4 Battery Charging Mode	11
6.2.2 Lead Acid Battery Charging Mode	11
6.3 Method 1 Solar Panel(s) & Controller	12
6.3.1 Solar Panel	12
6.3.2 Controller	12
6.3.3 Controller Settings	12



See **Our Product Quick Start Videos**
for more information ►

6.4 Method 2 Battery Charger	13
6.5 Method 3 Alternator / Generator	13
7 Estimate the Battery Capacity	14
7.1 State of Charge (SOC)	14
8 Series / Parallel Connection	14
8.1 The Premise of Connection	14
9 Inverter Settings	15
10 What to do When the Battery Stops Working	16
11 App Setup	18
Customer Support	19

⚠ **CAUTION:** Risk of Fire, Explosion or Burns, **DO NOT** Short Circuit, **DO NOT** Reverse connections from the charger to the battery, **DO NOT** Disassemble, **DO NOT** Throw into fire or incinerate, **DO NOT** Heat above 70°C/158°F


⚠ **WARNING:** Battery Disposal - The electrodes of the waste battery should be wrapped with insulating paper to prevent fire and explosion.

⚠ **WARNING:** Prohibition of Disassembly - Never disassemble the cells. The disassembling may generate an internal short circuit in the cell, which may cause gassing, fire, explosion, or other problems. The electrolyte is harmful. Li-Fe battery should not have liquid from electrolyte flowing, but in case the electrolyte comes into contact with the skin, or eyes, physicians shall flush the electrolyte immediately with the fresh water and medical advice is to be sought. If any abnormal features of the cells are found such as damages in a plastic envelope of the cell, deformation of the cell packaging, smell of an electrolyte leakage and others, the cells shall not be used. The cells with a smell of electrolyte leakage shall be placed away from the heat to avoid fire or explosion.

⚠ **WARNING:** Prohibition of Dumping of Cells into Water - Do not soak the battery in liquid, like water, seawater and non-alcoholic drinks, fruit juice, coffee or other drinks.

⚠ **WARNING:** Prohibit use in Following Places - DO NOT use the battery in a place with a strong static electricity or strong magnetic field, otherwise, it may damage the battery safety protection device.

1 PRODUCT OVERVIEW

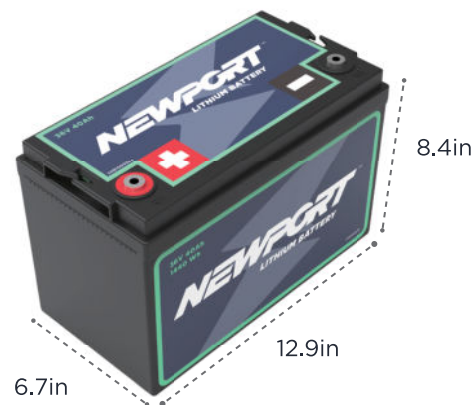


Terminal Size

M8(1.25mm Metric Thread)

Post Bolts

M8(1.25mm Metric Thread x 12mm Bolt Length) (The bolts can be replaced with M8 bolts of other lengths based on actual needs.)



2 GENERAL INFORMATION

Combination: **36V40Ah**

Dimension: **L 12.9" x W 6.7" x H 8.4"**

Plastic Shell Color: **Black**

Operating Voltage: **38.4V**

Charging Voltage: **43.8V**


Max Continuous Load Power: **1440W**

Max Continuous Charge/Discharge Current: **40A**


3 USER GUIDE



Contact us at support@newportvessels.com to activate **THE FIVE-YEAR WARRANTY**

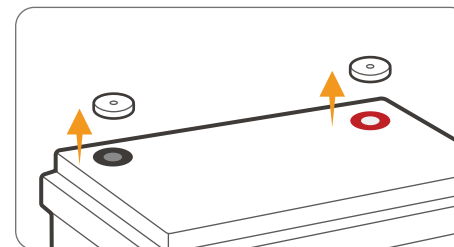


PULL OUT insulating plugs

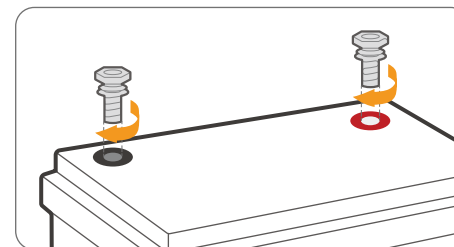


TIGHTLY SCREW IN post bolts

WARNING: Please tightly screw in the post bolts. Having loose battery terminals will cause the terminals to build up heat resulting in damage to the battery.

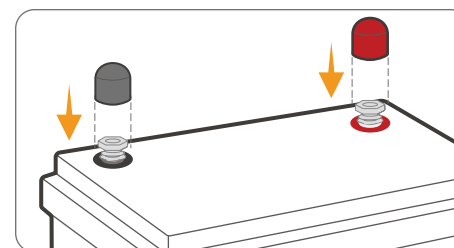


PUT ON insulating covers


WARNING: Please put on the insulating covers to avoid metal or conductive objects touching the positive and negative terminals of the battery at the same time, otherwise it is likely to cause a short circuit.

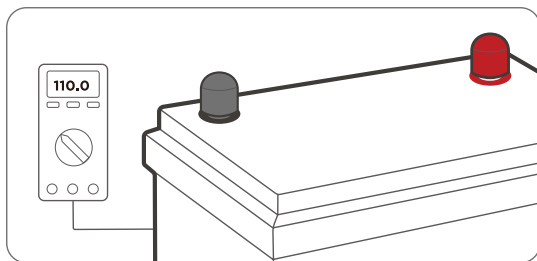

- **TEST** the battery voltage with multimeter
 - ≥ 30V to Next Step
 - < 30V Contact us at SUPPORT@NEWPORTVESSELS.COM to help solve the problem

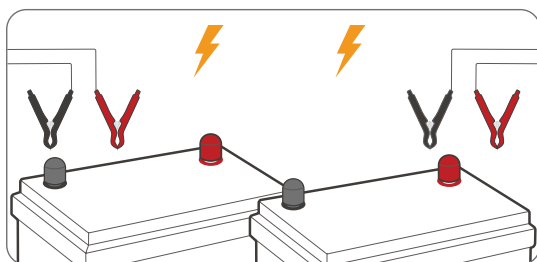

- **FULLY CHARGE** each battery separately
Refer to page 09 for battery charging methods

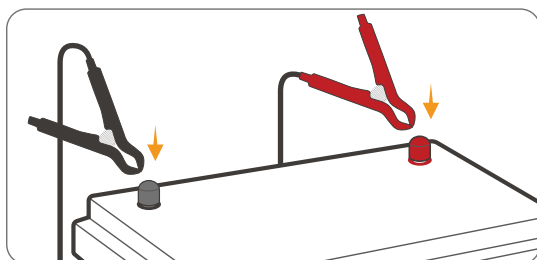

- **CONNECT TO USE** After Removing Plastic Caps
DO NOT charge with plastic caps on

4 BATTERY-PACK MAIN PARAMETERS

Cell: **Prismatic LiFePO4 Battery**

Nominal Capacity: **40Ah**

Usable Capacity: **40Ah**

Nominal Voltage: **38.4V**

Energy: **1440Wh**

Charge Method: **CC/CV**

Charge Voltage: **43.8V**

Recommend Charge Current: **8A (0.2C)**

Battery Management System (BMS) Board: **50A**

Max. Continuous Charge / Discharge Current¹: **50A**

Max. Discharge Current 5 Seconds: **150A**

Max. Continuous Load Power²: **1440W**

Cycle Life: **≥3000 times**

Internal Impedance: **≤20mΩ**

Battery Pack Case: **Acrylonitrile Butadiene Styrene (ABS) Plastic**

Protection Class: **IP65**

Dimension: **L 12.9" x W 6.7" x H 8.4"**

L 329 x W 172 x H 214mm

Temperature Range: Charge **0°C to 50°C / 32°F to 122°F**

Discharge **-20°C to 60°C / -4°F to 140°F**

Storage **-10°C to 50°C / 14°F to 122°F**

1. The maximum continuous current that the battery can withstand.
2. The maximum continuous output power that the battery can support.

5 NOTICE BEFORE USING

Always put the insulating covers on the post bolts to avoid metal or conductive objects touching the positive and negative terminals of the battery at the same time, otherwise it is likely to cause a short circuit.

Install the battery upright with post bolts facing up it cannot be mounted upside down. If you need to mount the battery on its side, please contact support@newportvessels.com to confirm this orientation is acceptable.

Tightly screw in the post bolts. Having loose battery terminals will cause the terminals to build up heat resulting in damage to the battery.

This battery is not intended to be used to start any devices, please **DO NOT USE IT AS A STARTING BATTERY.**


5.1 LONG-TERM STORAGE

Temperature

The battery can be operated at a temperature of -20°C to 60°C / -4°F to 140°F , and temperature between **10°C to 35°C / 50°F to 95°F** is ideal for long-term storage. Store in a fireproof container and away from children.

Capacity

For a longer-lasting product, it is best to store your battery at a 50% charge level and recharge every three months if it is not going to be used for a long time.

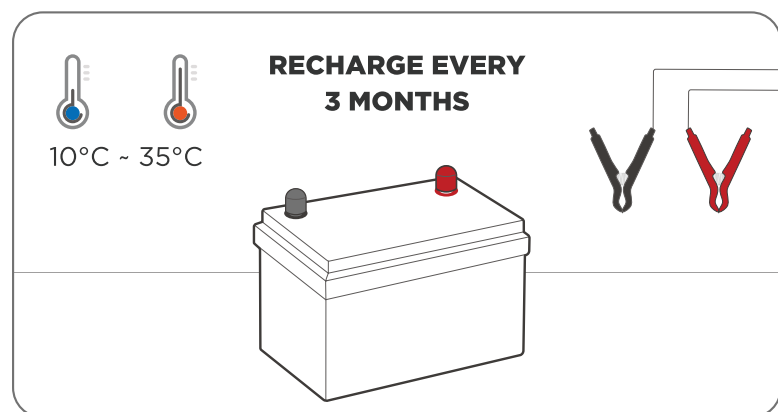


6 CHARGING METHODS

6.1 THE VOLTAGE WHEN CHARGING & DISCHARGING

Based on the characteristics of Lithium Iron Phosphate (LiFePO_4) batteries, the voltage measured by all LiFePO_4 batteries during charging/discharging is not the real voltage of the battery. Therefore, after charging/discharging and disconnecting the battery from power source, the voltage of the battery will gradually drop/increase to its real voltage.

If you need to test the voltage of the battery please disconnect all the connections to the battery and test its voltage after putting it aside for over 30 mins.

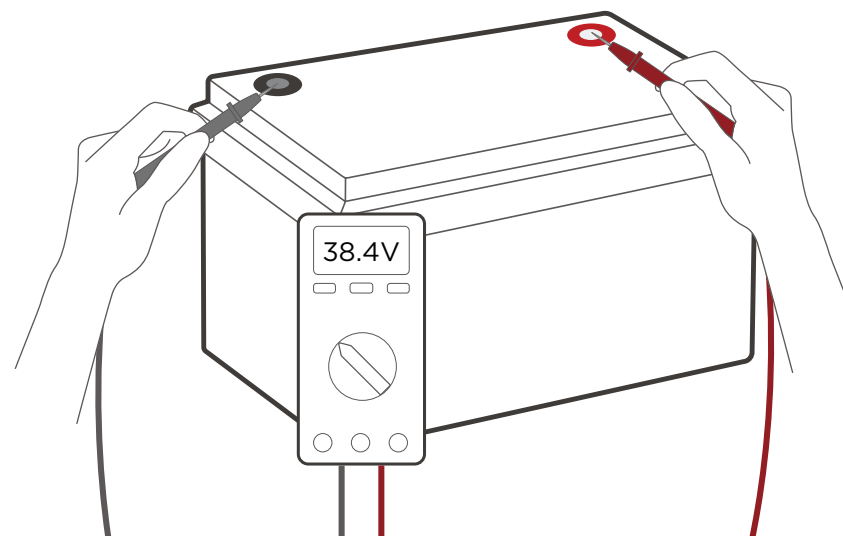

Tips When Testing The Battery Voltage with a Multimeter


- Put the red probe (+) tightly on the positive terminal (not the post bolts), and the black probe (-) on the negative terminal.
- Do not touch the metal part of the probes with your hands during use.

6.2 BATTERY CHARGING LOGIC

The material characteristics of the LiFePO₄ battery is determined that its charging curve is obviously different from that of a lead-acid battery. Compared with a lead-acid battery, the LiFePO₄ battery has a simpler charging process and mode. Therefore, it is recommended to select LiFePO₄ for your charging mode.

If LiFePO₄ mode is not available, please refer to the recommended parameters on Page 12-13 for setting.

6.2.1 LiFePO₄ Battery Charging Mode

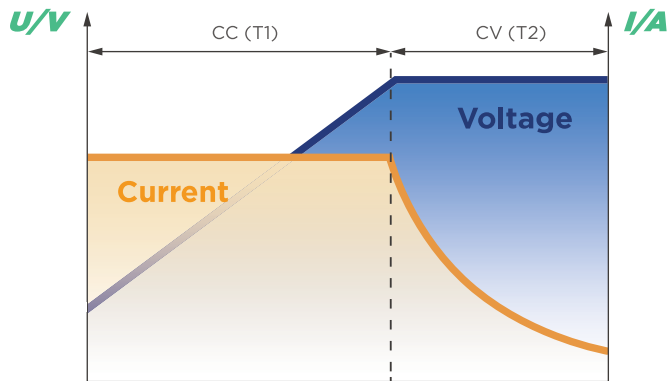

LiFePO₄ Battery Charging Curve

CC (Constant Current) Phase (T1)


In the beginning, a discharged battery will be charged with a constant current and voltage will be climbing steadily until reaching the constant voltage set point which varies for different charging methods.

CV (Constant Voltage) Phase (T2)

The battery maintains a constant voltage during this phase while the current gradually decreases to 0.8A (0.02C) which is also known as tail current¹. At this point, the charging is cut off and the battery is fully charged.

1. Tail Current (A) = Battery Capacity * 0.02C. Eg, Ah * 0.02C = 0.8A tail current

6.2.2 Lead Acid Battery Charging Mode

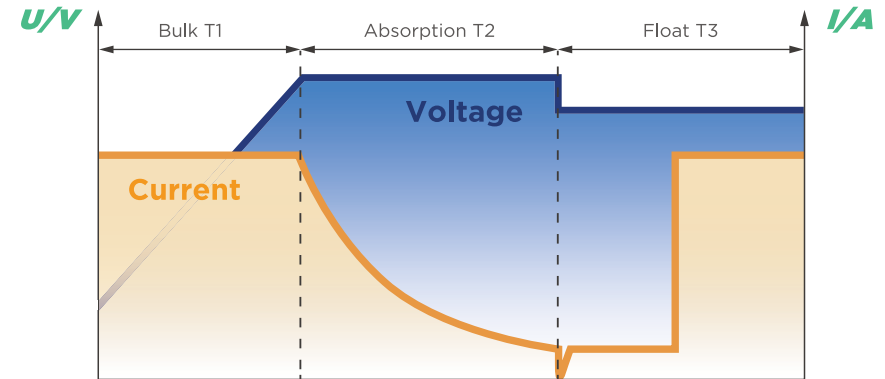

Lead Acid Battery Charging Curve

Bulk/Boost Phase (T1)

In the beginning, a discharged battery will be charged with a maximum current and voltage will be climbing steadily until reaching the absorption voltage set point.

Absorption Phase (T2)

The battery reaches the absorption voltage set point and holds the voltage constant while the current gradually decreases until the battery is becoming full (within 10-20%). Generally, absorption will not exceed 3 hours to prevent overcharging.

(This phase is basically equivalent to the CV phase of LiFePO₄ battery charging.)

Absorption Phase (T2)

After the absorption stage, the voltage of the battery will reduce to the float voltage set point and the current will also be discharging and offsetting any self-discharge. Heavier battery discharge may set the controller back to Bulk/Boost or Absorption to replenish energy lost while energy is available.

(LiFePO₄ battery does not have this charging phase.)

6.3 METHOD 1 | SOLAR PANEL(S) & CONTROLLER

6.3.1 Solar Panel

➤ **Recommend Power** > 400W

The battery can be fully charged in one day (with effective sunshine 4.5hrs/day) by 400W solar panels.

It may take more than one day to fully charge the battery by > 400W solar panels since the duration and intensity of light would be a great factor for their charging efficiency.

6.3.2 Controller

➤ **Recommended Charging Current**

8A (0.2C) The battery will be fully charged in around 5 hrs to 100% capacity.

20A (0.5C) The battery will be fully charged in around 2 hrs to around 97% capacity.

➤ **Recommended Charging Mode: 36V (43.8V) LI (LiFePO4)**

6.3.3 Controller Settings

Refer to the below parameters if you need to manually set up your controller. As different types of batteries have different charging modes (refer to Page 10-11), it is recommended to set only the following parameters for LiFePO4 batteries. The settings for other types of batteries do not apply to LiFePO4 batteries except for the following settings.

Charging	Charge/Bulk/Boost Voltage	43.8V
	Absorption Voltage	43.8V
	Over Voltage Disconnect	45V
	Over Voltage Reconnect	43.2V
	Tail Current	0.8A (0.02C)
Discharging	Under Voltage Warning	/
	Under Voltage Recover	/
	Low Voltage Disconnect	30V
	Low Voltage Reconnect	32.4V

6.4 METHOD 2 | BATTERY CHARGER

Use 30V lithium iron phosphate (LiFePO4) battery charger to maximize the capacity.

➤ **Recommended Charging Voltage:** 43.8V


➤ **Recommended Charging Current:**

8A (0.2C) The battery will be fully charged in around 5 hrs to 100% capacity.

20A (0.5C) The battery will be fully charged in around 2 hrs to around 97% capacity.

Tips

1. Connect the charger to the battery before connecting it to the grid power in case of sparks.
2. It's recommended to disconnect the charger from the battery after fully charging.



6.5 METHOD 3 | ALTERNATOR / GENERATOR


Newport Battery can be charged by an alternator or generator. If the alternator/generator supports DC output, a DC-to-DC charger needs to be added between the battery and the generator; if the alternator/generator supports AC output, please refer to the recommendations in “Battery Charger” above to add a suitable battery charger between the battery and the generator.

➤ **Recommended Charging Voltage:** 43.8V

➤ **Recommended Charging Current:**

8A (0.2C) The battery will be fully charged in around 5 hrs to 100% capacity.

20A (0.5C) The battery will be fully charged in around 2 hrs to around 97% capacity.



7 ESTIMATE THE BATTERY CAPACITY

7.1 STATE OF CHARGE (SOC)

The battery capacity could be roughly estimated by its rest voltage (not charging/discharging voltage). As there are subtle difference in the voltages of each battery, the below parameters are for reference only.

Rest Voltage: The voltage needs to be tested at rest (with zero current) after 30 mins of disconnecting from the charger and loads.

Capacity	Charge Voltage
100%	40.5V
99%	40.2V
90%	39.9V
70%	39.6V
40%	39.3V
30%	39V
20%	38.7V
10%	37.8V
1%	32.4V (recommend low voltage disconnect voltage)
0%	28.5V

8 SERIES / PARALLEL CONNECTION


8.1 THE PREMISE OF CONNECTION

To connect in series or/and parallel, batteries should meet the below conditions:

- Identical batteries with the same battery capacity (Ah) and BMS (A);
- From the same brand (as lithium batteries from different brands have a unique BMS);
- Purchased in near time (within one month).

Limitation for Series/Parallel Connection

Support connecting up to 2 identical batteries for up to: 1 in series as a 36V battery system/2 in parallel as 80Ah battery systems.

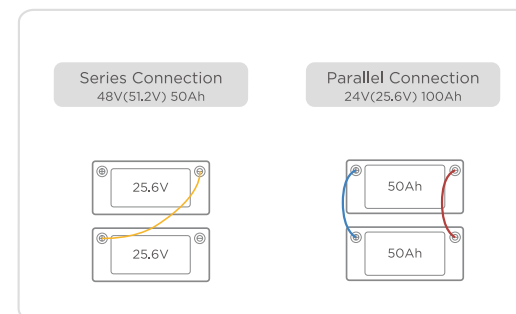

9 INVERTER SETTINGS

METHOD 1 (RECOMMENDED) |


Select “36v(38.4v) LI (LiFePO4) Mode”

METHOD 2 | If method one is not available, select “User Mode” to enter values according to below parameters.


Charging	Charge Voltage	43.8V
	Over Voltage Disconnect	45V
	Over Voltage Reconnect	43.2V
Discharging	Under Voltage Warning	/
	Under Voltage Recover	/
	Low Voltage Disconnect	30V
	Low Voltage Reconnect	32.4V

The above setting parameters **apply to common inverters on the market** (such as Victron, Renogy, Growatt, Go Power, Lux Power, etc.). Different brands have slightly different descriptions or naming methods for each parameter. **Please directly set the parameters with the same meaning.**

If the inverter parameters to be set are special or cannot correspond to one of the above items, please support@newportvessels.com for help.



10 WHAT TO DO WHEN THE BATTERY STOPS WORKING

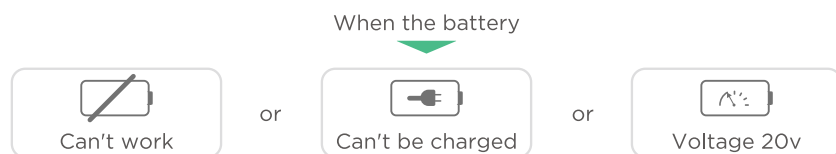


There is an 85% chance the BMS has shut off for protection. You can try one of the below ways to activate the battery.


General Steps

If the BMS has cut off the battery for protection, follow the below steps to activate it.

○ **UNPLUG** all the connections from the battery

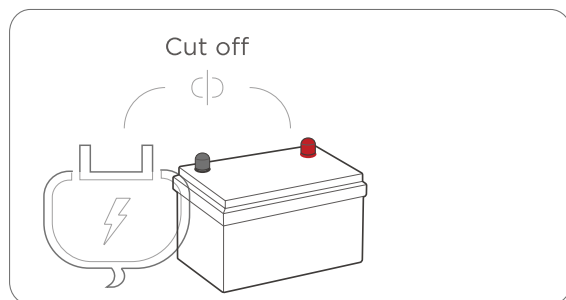


○ **LEAVE THE BATTERY ASIDE FOR 30MINS** Then the battery will automatically return to normal voltage ($>20V$) and can be used after being fully charged.

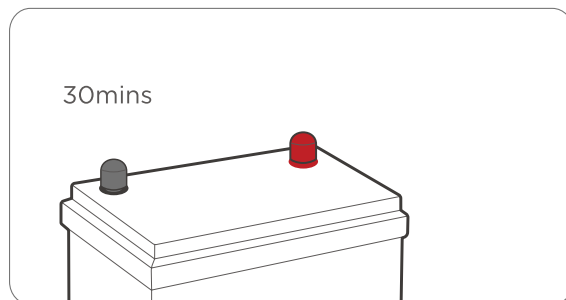

If the battery is unable to recover after the above steps, please try activating by one of below two methods:


After activated (voltage $> 30V$) and fully charged by the normal charging method, it can be used normally.

○ **METHOD 1:** Use a charger with a 0V charging function to fully charge the battery¹.

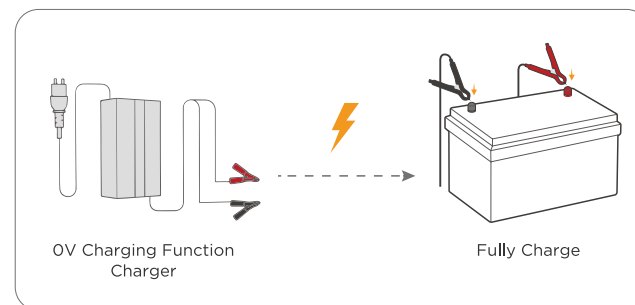


1. The charger can charge the battery starting from 0V.

○ **METHOD 2:** Connect a 30V solar panel to charge the battery for 3-10 hrs in sunny daytime.

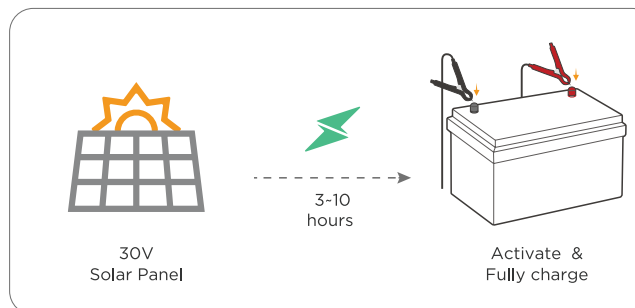

11 APP SETUP

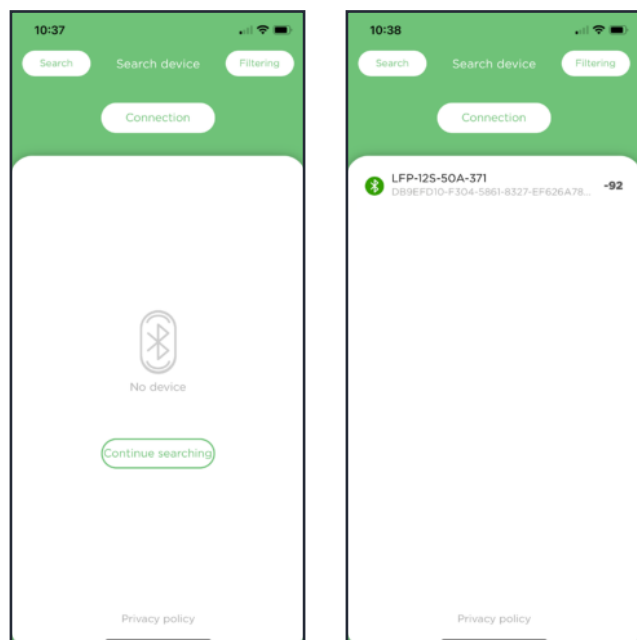

1. **Launch the Newport Bluetooth App:** Download the Newport Bluetooth App from your app store. Open the app to begin connecting your battery.
2. **Easy Battery Detection:** Upon opening the Newport Battery App, tap "Continue Searching." If you don't see any batteries appearing, ensure you're close to the battery.
3. **Seamless Battery Connection:** Your battery will be displayed on the screen. Match the last three digits of the displayed battery with the three serial numbers on top of your battery. If the numbers match, simply tap on the battery to establish the connection.

Voltage (V): Get a clear reading of your battery's voltage, closely aligned with its intended voltage.

SOC (State of Charge): Instantly see the current charge level of your battery as a percentage, allowing you to monitor battery life in real time.

Current (A): Understand the exact current your battery is delivering to your motor.

Rated Capacity: Discover your battery's Amp Hours capacity, ensuring it matches your purchased battery.

Cycle Count: Keep track of the number of times your battery has been charged, providing insights into its overall lifespan.

CUSTOMER SUPPORT

If you have questions that are not answered in this manual or troubleshooting is not successful, please contact Newport! Our California based customer service team is standing by to assist you. **8:30 AM - 7:00 PM ET**

 **(866) 721-0002**

 **support@newportvessels.com**

 **newportvessels.com**

**THE WAY FORWARD IS
WITH ACCESSORIES**

NEWPORT®

Newport designs innovative accessories crafted to elevate your time on the water, propelling you further.

Tiller Extension
Handle

NT300 Electric
Outboard Motor

Newport Bluetooth
Lithium Battery

NEWPORT®



SHARE YOUR
ADVENTURES

@newportvessels

THE WAY FORWARD IS **ELECTRIC**

103123