




ITEM PP1030i

1000W 1030Wh POWER STATION

Instruction Manual

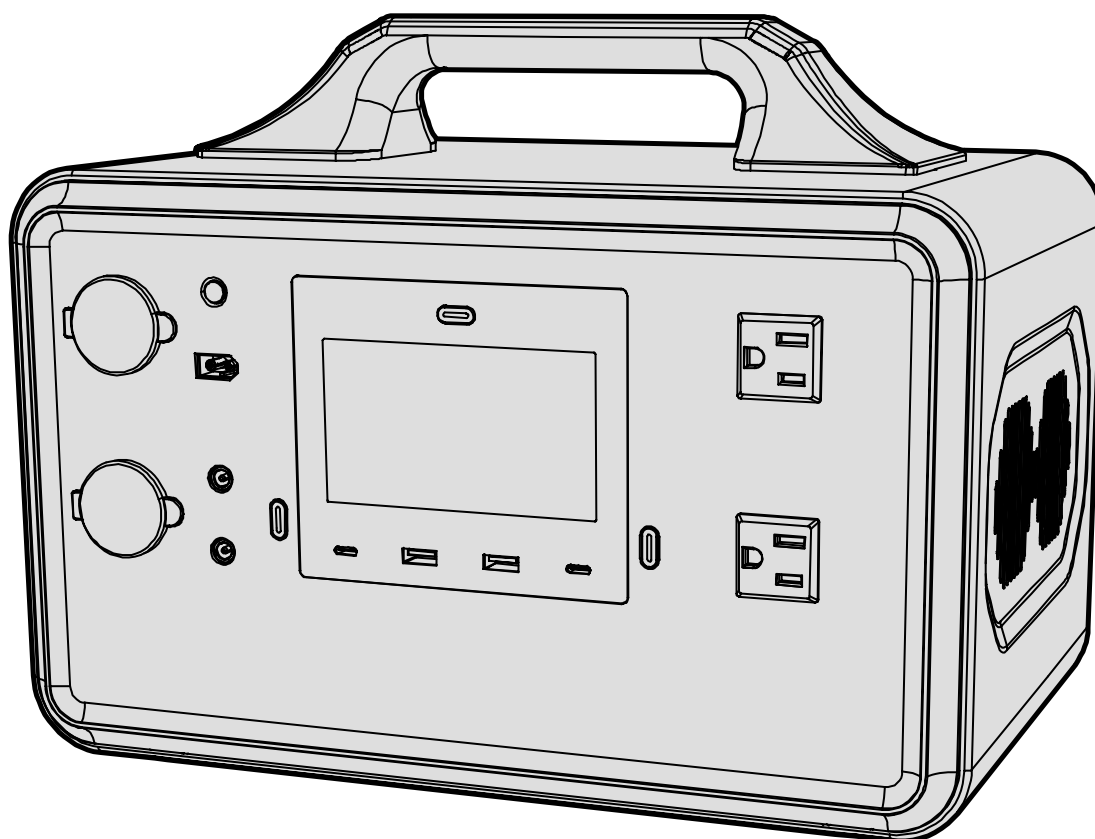

NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:



1-847-429-9263 (M-F 8AM-5PM CST)



TECHSUPPORT@WENPRODUCTS.COM

IMPORTANT: Your new tool has been engineered and manufactured to WEN's highest standards for dependability, ease of operation, and operator safety. When properly cared for, this product will supply you years of rugged, trouble-free performance. Pay close attention to the rules for safe operation, warnings, and cautions. If you use your tool properly and for its intended purpose, you will enjoy years of safe, reliable service.

For replacement parts and the most up-to-date instruction manuals, visit ***WENPRODUCTS.COM***

CONTENTS

WELCOME	3
Introduction	3
Specifications.....	3
 SAFETY	 4
General Safety Rules.....	4
Power Station Safety Warnings.....	6
Electrical Information (Charger).....	7
 BEFORE OPERATING	 8
Unpacking & Packing List.....	8
Know Your Power Station	8
 OPERATION & MAINTENANCE	 10
Operation	10
Troubleshooting Guide	12
Warranty Statement	13

To purchase accessories and replacement parts for your tool, visit ***WENPRODUCTS.COM***

DC 12V Automotive Charger (Part PP1030i-001)
AC Adapter Cable, IEC C13 (Part PP1030i-002)

INTRODUCTION

Thanks for purchasing the WEN Power Station. We know you are excited to put your tool to work, but first, please take a moment to read through the manual. Safe operation of this tool requires that you read and understand this operator's manual and all the labels affixed to the tool. This manual provides information regarding potential safety concerns, as well as helpful assembly and operating instructions for your tool.

 Indicates danger, warning, or caution. The safety symbols and the explanations with them deserve your careful attention and understanding. Always follow the safety precautions to reduce the risk of fire, electric shock or personal injury. However, please note that these instructions and warnings are not substitutes for proper accident prevention measures.

NOTE: The following safety information is not meant to cover all possible conditions and situations that may occur. WEN reserves the right to change this product and specifications at any time without prior notice.

At WEN, we are continuously improving our products. If you find that your tool does not exactly match this manual, please visit **wenproducts.com** for the most up-to-date manual or contact our customer service at **1-847-429-9263**.

Keep this manual available to all users during the entire life of the tool and review it frequently to maximize safety for both yourself and others.

SPECIFICATIONS

Item Number	PP1030i
Rated Wattage	1000W
Surge Wattage	2000W
AC Input	120V, 60 Hz, 10A 1000W MAX
PV / Car Input	12-59V 15A, 800W MAX
Output	DC 12V Automotive: 12V 10A, 120W
	USB-C1: 5V, 3A / 9V, 3A / 12V, 3A / 15V, 3A / 20V, 5A, 100W MAX
	USB-C2: 5V, 3A / 9V, 3A / 12V, 3A / 15V, 3A / 20V, 2.25A, 45W MAX
	USB-A: 5V, 3A / 9V, 2A / 12V, 1.5A, 18W MAX
DC Solar / Car Charging Input	12 - 59V, 15A 800W MAX
DC Solar / Car Charger Port Type	XT60
Product Dimensions	13.4 in. x 8.7 in. x 10.3 in.
Product Weight	27.3 lbs

GENERAL SAFETY RULES

 **WARNING!** Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Safety is a combination of common sense, staying alert and knowing how your item works. The term “power tool” in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

SAVE THESE SAFETY INSTRUCTIONS.

WORK AREA SAFETY

- 1. Keep work area clean and well lit.** Cluttered or dark areas invite accidents.
- 2. Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Power tools create sparks which may ignite the dust or fumes.
- 3. Keep children and bystanders away while operating a power tool.** Distractions can cause you to lose control.

ELECTRICAL SAFETY

- 1. Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** Unmodified plugs and matching outlets will reduce risk of electric shock.
- 2. Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators.** There is an increased risk of electric shock if your body is earthed or grounded.
- 3. Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.
- 4. Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** Damaged or entangled cords increase the risk of electric shock.
- 5. When operating a power tool outdoors, use an extension cord suitable for outdoor use.** Use of a cord suitable for outdoor use reduces the risk of electric shock.

- 6. If operating a power tool in a damp location is unavoidable, use a ground fault circuit interrupter (GFCI) protected supply.** Use of a GFCI reduces the risk of electric shock.

PERSONAL SAFETY

- 1. Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.** A moment of inattention while operating power tools may result in serious personal injury.
- 2. Use personal protective equipment. Always wear eye protection.** Protective equipment such as a respiratory mask, non-skid safety shoes and hearing protection used for appropriate conditions will reduce the risk of personal injury.
- 3. Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.** Carrying power tools with your finger on the switch or energizing power tools that have the switch on invites accidents.
- 4. Remove any adjusting key or wrench before turning the power tool on.** A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
- 5. Do not overreach. Keep proper footing and balance at all times.** This enables better control of the power tool in unexpected situations.
- 6. Dress properly. Do not wear loose clothing or jewelry. Keep your hair and clothing away from moving parts.** Loose clothes, jewelry or long hair can be caught in moving parts.

GENERAL SAFETY RULES

 **WARNING!** Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Safety is a combination of common sense, staying alert and knowing how your item works. The term “power tool” in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

SAVE THESE SAFETY INSTRUCTIONS.

7. If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.

POWER TOOL USE AND CARE

1. Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.

2. Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.

3. Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.

4. Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.

5. Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.

6. Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.

7. Use the power tool, accessories and tool bits, etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from those intended could result in a hazardous situation.

8. Use clamps to secure your workpiece to a stable surface. Holding a workpiece by hand or using your body to support it may lead to loss of control.

9. KEEP GUARDS IN PLACE and in working order.

SERVICE

1. Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

CALIFORNIA PROPOSITION 65 WARNING

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities may contain chemicals, including lead, known to the State of California to cause cancer, birth defects, or other reproductive harm. Wash hands after handling. Some examples of these chemicals are:

- Lead from lead-based paints.
- Crystalline silica from bricks, cement, and other masonry products.
- Arsenic and chromium from chemically treated lumber.

Your risk from these exposures varies depending on how often you do this type of work. To reduce your exposure to these chemicals, work in a well-ventilated area with approved safety equipment such as dust masks specially designed to filter out microscopic particles.

POWER STATION SAFETY WARNINGS

 **WARNING!** Do not operate the power station until you have read and understood the following instructions and the warning labels.

POWER STATION SAFETY

1. Always operate the power station on a dry, firm, level surface.
2. Do not expose the power station to rainy, wet, or snowy conditions; doing so significantly increases the risk of electrical shock.
3. Do not allow children or non-qualified persons to operate the power station.
4. If any part of the power station is broken, damaged, or defective, make sure it is repaired or replaced before operation. Service should only be performed by a qualified technician. Do not use receptacles or cords that show signs of damage, such as broken or cracked insulation.
5. The power station contains no user-serviceable parts. Do not attempt to open the power station. Doing so will void the warranty.
6. Do not drop the power station. Doing so may cause damage to the lithium-ion battery.
7. Do not store items on top of the power station.
8. Do not place food or drinks on top of the power station.
9. Turn off the AC outlets when not in use. This will save power and prolong the power station's life.
10. Leave room around the station so its cooling fans operate properly.
11. The power station contains lithium-ion batteries. Keep away from fire.
12. Do not charge the power station in temperatures below freezing.
13. Do not operate or charge the power station at altitudes above 6000 feet.

ELECTRICAL INFORMATION (CHARGER)

GROUNDING INSTRUCTIONS

In the event of a malfunction or breakdown, grounding provides the path of least resistance for an electric current and reduces the risk of electric shock. This tool is equipped with an electric cord that has an equipment grounding conductor and a grounding plug. The plug **MUST** be plugged into a matching outlet that is properly installed and grounded in accordance with ALL local codes and ordinances.


1. Do not modify the plug provided. If it will not fit the outlet, have the proper outlet installed by a licensed electrician.

2. Improper connection of the equipment grounding conductor can result in electric shock. The conductor with the green insulation (with or without yellow stripes) is the equipment grounding conductor. If repair or replacement of the electric cord or plug is necessary, **DO NOT** connect the equipment grounding conductor to a live terminal.

3. Check with a licensed electrician or service personnel if you do not completely understand the grounding instructions or whether the tool is properly grounded.

4. Use only three-wire extension cords that have three-pronged plugs and outlets that accept the tool's plug. Repair or replace a damaged or worn cord immediately.

CAUTION! In all cases, make certain the outlet in question is properly grounded. If you are not sure, have a licensed electrician check the outlet.



GUIDELINES AND RECOMMENDATIONS FOR EXTENSION CORDS

When using an extension cord, be sure to use one heavy enough to carry the current your product will draw. An undersized cord will cause a drop in line voltage resulting in loss of power and overheating. The table below shows the correct size to be used according to cord length and ampere rating. When in doubt, use a heavier cord. The smaller the gauge number, the heavier the cord.

AMPERAGE	REQUIRED GAUGE FOR EXTENSION CORDS			
	25 ft.	50 ft.	100 ft.	150 ft.
15A	14 gauge	12 gauge	Not Recommended	

1. Examine extension cord before use. Make sure your extension cord is properly wired and in good condition. Always replace a damaged extension cord or have it repaired by a qualified person before using it.

2. Do not abuse extension cord. Do not pull on cord to disconnect from receptacle; always disconnect by pulling on plug. Disconnect the extension cord from the receptacle before disconnecting the product from the extension cord. Protect your extension cords from sharp objects, excessive heat and damp/wet areas.

3. Use a separate electrical circuit for your tool. This circuit must not be less than a 12-gauge wire and should be protected with a 15A time-delayed fuse. Before connecting the motor to the power line, make sure the switch is in the OFF position and the electric current is rated the same as the current stamped on the motor nameplate. Running at a lower voltage will damage the motor.

UNPACKING & PACKING LIST

UNPACKING

Carefully remove the power station from the packaging and place it on a sturdy, flat surface. Make sure to take out all contents and accessories. Do not discard the packaging until everything is removed. Check the packing list below to make sure you have all of the parts and accessories. If any part is missing or broken, please contact customer service at **1-847-429-9263** (M-F 8-5 CST), or email techsupport@wenproducts.com.


PACKING LIST

DESCRIPTION	QTY.
Power Station	1
AC Charger	1
DC Charger	1

KNOW YOUR POWER STATION

Refer to the following diagrams to become familiarized with all the parts and controls of your power station. The components will be referred to later in the manual for assembly and operation instructions.


DISPLAY SCREEN

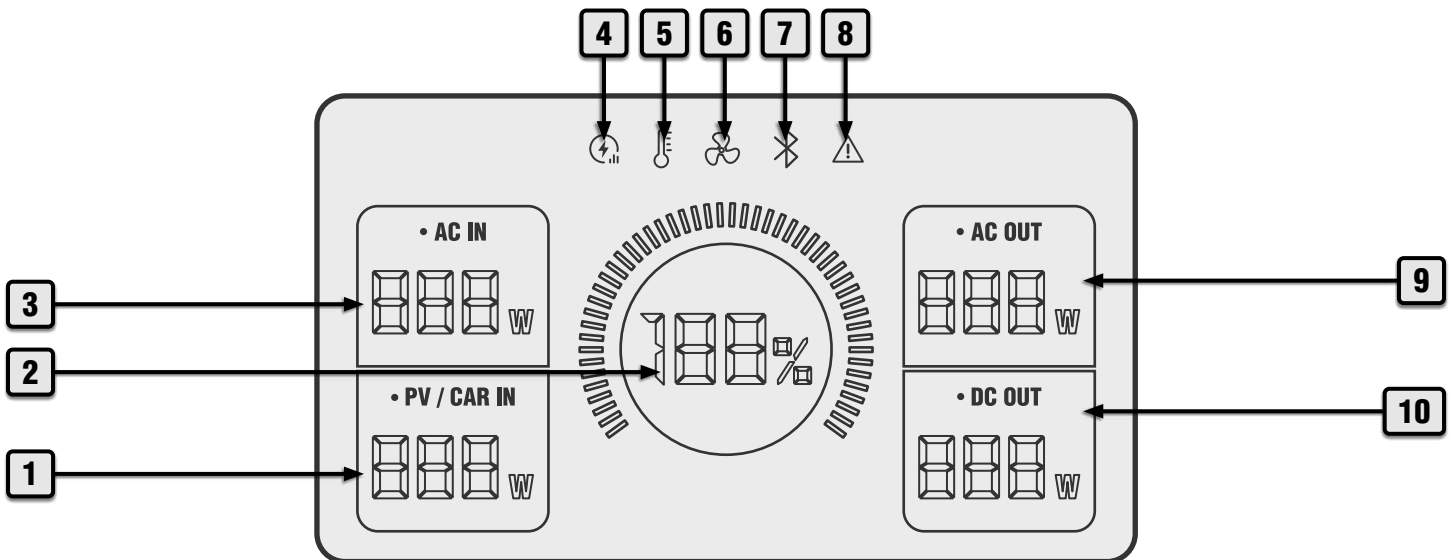


- 1. Solar / Car Input Display:** Shows the total input from the DC XT60 charging port in real time.
- 2. Battery Charge Level:** Shows how much charge is left in the battery.
- 3. AC Input Status Display:** Shows the total input from the AC IEC C13 charging port in real time.
- 4. Charging Icon:** When the icon is blinking, the unit is charging. When the icon is solid, the unit is fully charged.
- 5. Temperature Alarm Icon:** Appears when the power station is too hot.
- 6. Fan Icon:** Appears when the fan is running.
- 7. Bluetooth Icon:** Appears when the Bluetooth module is active.
- 8. Short Circuit / Overload Alarm Icon:** Appears when the power station is short circuited or overloaded.
- 9. AC Output Status Display:** Shows the total AC output power in real time.
- 10. DC Output Status Display:** Shows the total DC output power in real time.

KNOW YOUR POWER STATION

CONTROL PANEL

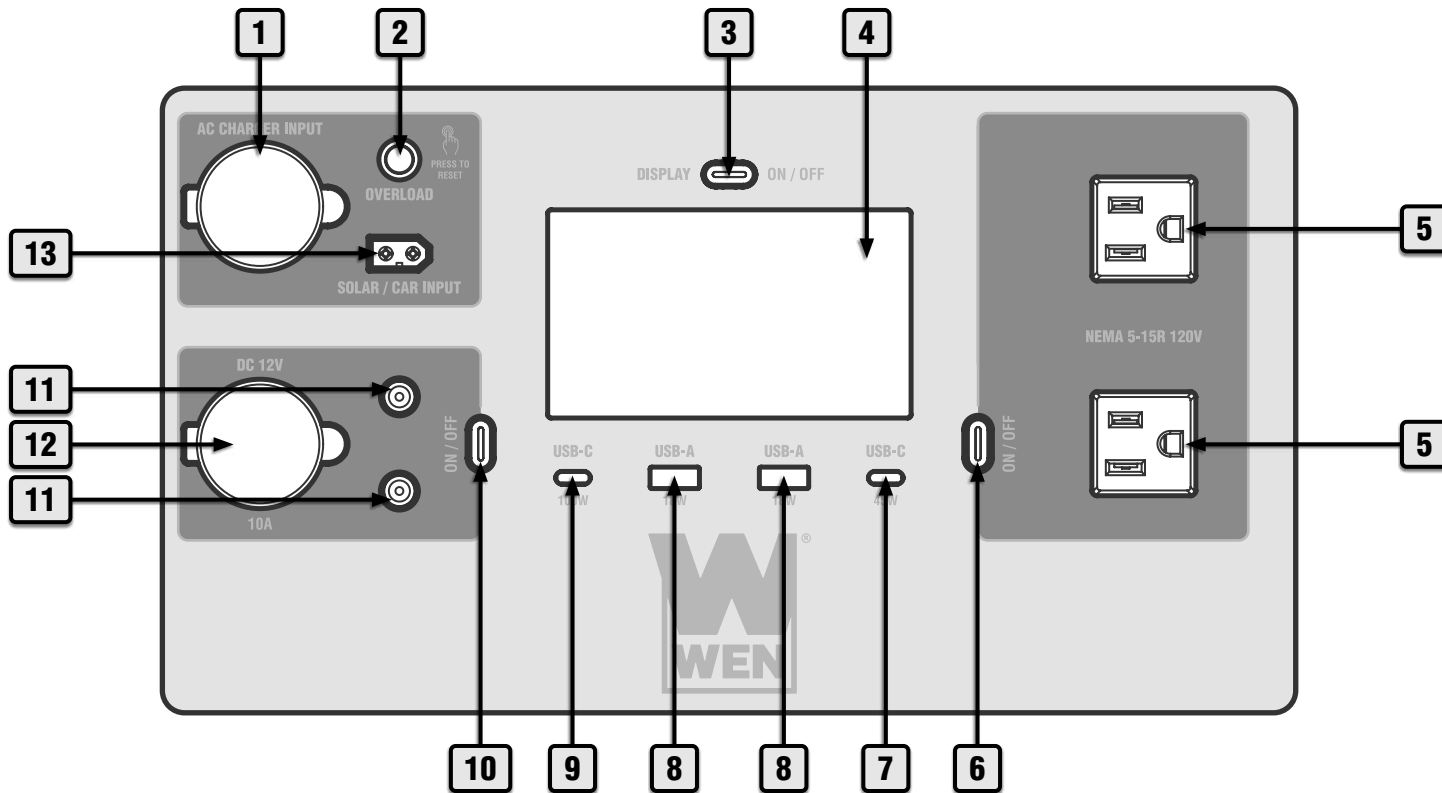

- 1. AC Charger Input:** Connect the included IEC C13 cable to a standard 120V household outlet to charge the station.
- 2. Overload Reset Button:** Press to reset the charging circuit in case of overload.
- 3. Display Power Button:** Press to turn the display ON / OFF.
- 4. Display Screen:** Provides real-time information about the power station. Must be ON to use the USB outlets.
- 5. AC 120V NEMA 5-15R Receptacles:** Standard household outlets provide 120V, 60 Hz, 1000W power.
- 6. AC Power Button:** Press to turn the AC receptacles ON or OFF.
- 7. USB-C1 Outlet:** 45W MAX
- 8. USB-A Outlets:** 9V DC, 2A, 18W MAX
- 9. USB-C2 Outlet:** 100W MAX
- 10. DC Power Button:** Press to turn ON the DC 12V outlet and DC barrel outlets.
- 11. DC Barrel Outlets:** 12V, 10A, 120W MAX
- 12. DC 12V Automotive Outlet:** 12V, 10A, 120W MAX
- 13. DC Charging Input:** 12V - 59V DC, XT60 connector. Connect solar panels or car charger here.
- 14. Handle**
- 15. Cooling Fan**

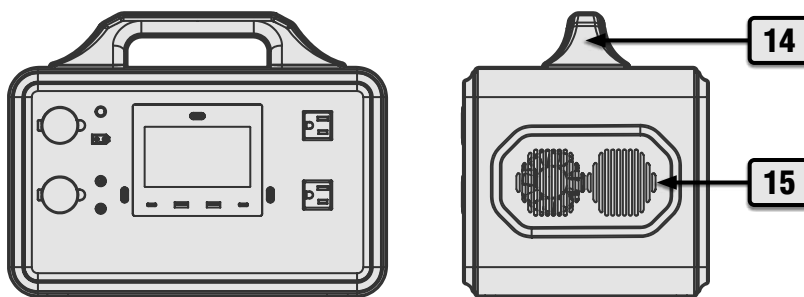

OPERATION

CHARGING THE POWER STATION

1. Your power station has been shipped partially charged, in order to maximize its service life. Charge it before using it for the first time. Connect the AC charger cord to the AC input port, or the DC charger cord to the DC input port, to charge the station. When charging from 0% to 100%, the power station will take about 1 hour to charge using the included AC charger. This time may vary based on temperature, the power station's age, etc.
2. Use the included AC or DC chargers to charge the power station, when possible. You may use an IEC C13 connector cable to charge the station from a standard 120V household outlet, or a DC charger (solar panels, car charger, etc.) with a standard XT60 connector. Make sure the DC charger has an output of 12 - 59V and a maximum output of 800W. DO NOT use a charger with an output voltage over 59V or an output amperage over 10A; you may damage the power station.
3. When the charger is connected, the battery charge level on the display screen will begin to increase.
4. You may also charge the power station using a solar panel. The power station includes a built-in Maximum Power Point Tracking (MPPT) charge controller. Use a solar panel with an output between 12V - 59V and an XT60 connector. All types of solar panels (monocrystalline, polycrystalline, thin-film, etc.) are acceptable. The solar panel's output may vary depending on temperature, latitude, time of day, panel cleanliness, shade, and other factors. You may connect a solar panel with an output greater than 800W. However, the power station will detect the charging input type (e.g. the included adapter, solar panel, etc.) and automatically adjust the wattage limit.
5. Pass-through charging is supported (you can use the power station while it is being charged). If using the AC charger, only DC output is available. If using a DC charger, only AC output is available.
6. The power station cannot be charged if it is too warm or too cold. Do not charge the power station in temperatures below freezing. At temperatures above 120° F, the power station will prevent itself from being charged to avoid damaging the battery. The working temperature of the power station should be between 14° F and 104° F. The charging temperature of the power station should be between 32° F and 104° F.

USING THE POWER STATION

1. The power station can supply up to 1000W of AC power and 120W of DC power continuously, and up to 2000W of AC power for a very short time. To estimate power requirements (watts), multiply each device's rated voltage by current (watts = volts x amps). Add all devices together to get total wattage. If there is no output, the station may have cut off power to protect itself. Turn unit off and back on to reset the circuit. Reduce the load on the station.
2. Turn the power station on by pressing and holding the main power button. The screen will illuminate.

3A. DC Operation:

1. Press the DC power button to turn on the DC 12V outlet and DC barrel outlets. The USB outlets are on when the screen is on, and off when the screen is off.
2. Connect your device to the outlet you want to use, then turn it on. The screen will display the current load (in watts).
3. If there is no output, the station may have cut off power to protect itself. Turn the device off, disconnect it from the outlet, and press the DC power button to turn DC output off. This will reset the DC circuit.
4. When using the USB-C or USB-A outlets, the power station will automatically put out the proper voltage and current, depending on the device connected. **These outlets operate at the following voltages and currents:**
 - a. USB-C1: 5V, 3A / 9V, 3A / 12V, 3A / 15V, 3A / 20V, 5A, 100W MAX
 - b. USB-C2: 5V, 3A / 9V, 3A / 12V, 3A / 15V, 3A / 20V, 2.25A, 45W MAX
 - c. USB-A: 5V, 3A / 9V, 2A / 12V, 1.5A, 18W MAX

OPERATION

3B. AC Operation:

1. Press the AC power button to turn on the 5-15R outlets.
2. Connect your device, then turn it on.
3. If there is no output, the station may have cut off power to protect itself. Turn the device off, disconnect it from the outlet, and press the AC power button to turn AC output off. This will reset the AC circuit.
4. The AC outlets use a floating ground, which is normal.
5. If the fan comes on when the AC outlet is turned on, or when it is being used, this is normal.
6. You can use any or all of the outlets at the same time.
7. Once all outlets are turned off, the power station screen backlight will turn off after 12 hours.
8. If the AC or DC load is lower than 10W, the power station will automatically power off after 12 hours in order to conserve power. Plan low-power device usage accordingly.
9. Do not use the power station at altitudes above 6000 feet, in temperatures below 14°F (-10°C), or in temperatures above 113°F (45°C).
10. Charge the power station when its charge level drops below 20%. When charging from 0% to 100%, the power station will take about 1 hour to charge using the included AC charger. This time may vary based on temperature, the power station's age, etc.

OVERLOAD

If you overload the power station (too much power is drawn), the station will cut off power to protect itself and the battery. Disconnect the load and press the appropriate power button on the panel to reset the circuit.

For some devices, especially those with motors (e.g. power tools, refrigerators, etc.), the power estimation equation (watts = volts x amps) mentioned previously is not always applicable. These devices, especially on startup, require more power than this equation would suggest – up to 3 times more power. Therefore, they may be difficult or impossible to use with the power station. If you have any questions about this, contact WEN customer service.

OVERHEATING

If the power station's battery gets too warm, the temperature alarm icon will appear on the panel. If you're using the power station in a very hot environment, remove the load, let it cool down, and use it in a cooler environment, if possible. Press the appropriate power button on the panel to reset the circuit. Let the power station's fans run for a few minutes to cool down the inverter, then reduce the load and try again.

STORAGE

The power station can hold a charge for several months. We recommend storing it at full charge. If not using it for a long time, periodically check the charge level. Your power station is meant to be used – using it will give the best long-term performance. Charge it at least every 3 months. Store the power station in a cool, dry place, out of the reach of children.

As the battery cells age, you may experience a loss of capacity. Your WEN power station is rated to last for several hundred charge/discharge cycles to 80% capacity. When the power station drops below 80% capacity, it has reached the end of its life and should be recycled. Take the power station to a local electronics recycling facility; make sure it is one that can safely and responsibly handle lithium-ion batteries.

TROUBLESHOOTING GUIDE

⚠ WARNING! Stop using the tool immediately if any of the following problems occur. Repairs and replacements should only be performed by an authorized technician. For any questions, please contact our customer service at **1-847-429-9263**, M-F 8-5 CST or email us at **techsupport@wenproducts.com**.

PROBLEM	CAUSE	SOLUTION
No output from outlets.	1. Power station has been overloaded, or load has an internal short.	1. The power station will reset the circuit after 10 seconds. Press the power button to restart the power station.
	2. Internal electronics problem.	2. Contact WEN customer service at 1-847-429-9263 for assistance.
Power station cannot support devices connected.	1. Load is too high.	1. Reduce load.
	2. Using a complex AC load.	2. Consult device nameplate rating; load may be too high (especially on startup) to be supported by power station.
Power station is not charging.	1. The station is too warm or too cold.	1. Move the station to a room-temperature location for at least 1 hour, if possible, and allow the temperature to adjust. Try again.
	2. A charger with an output over 59V was connected.	2. Station charging circuit may be damaged. Contact WEN customer service for assistance.
	3. AC charging - AC outlets are turned on.	3. Insert the AC charging cable and it will start charging in 2 minutes. Turn the AC outlets OFF and it will start charging immediately.
	4. Defective charger.	4. Contact WEN customer service at 1-847-429-9263 for assistance.
	5. Excess input detected.	5. Press overload button to reset circuit. Do not exceed 125V / 250V, 20A AC for AC charging.
Power station is taking a very long time to charge.	1. Not using the included charger, or using a charger with the wrong specifications.	1. Use the included charger(s) if possible. Double check charging specifications.
	2. The station is too warm or too cold.	2. Move the station to a room-temperature location, if possible, and allow the temperature to adjust. Try again.
	3. Internal electronics problem.	3. Contact WEN customer service at 1-847-429-9263 for assistance.

WARRANTY STATEMENT

WEN Products is committed to building tools that are dependable for years. Our warranties are consistent with this commitment and our dedication to quality.

LIMITED WARRANTY OF WEN PRODUCTS FOR HOME USE

GREAT LAKES TECHNOLOGIES, LLC ("Seller") warrants to the original purchaser only, that all WEN consumer power tools will be free from defects in material or workmanship during personal use for a period of two (2) years from date of purchase or 500 hours of use; whichever comes first. Ninety days for all WEN products if the tool is used for professional or commercial use. Purchaser has 30 days from the date of purchase to report missing or damaged parts.

SELLER'S SOLE OBLIGATION AND YOUR EXCLUSIVE REMEDY under this Limited Warranty and, to the extent permitted by law, any warranty or condition implied by law, shall be the replacement of parts, without charge, which are defective in material or workmanship and which have not been subjected to misuse, alteration, careless handling, misrepair, abuse, neglect, normal wear and tear, improper maintenance, or other conditions adversely affecting the Product or the component of the Product, whether by accident or intentionally, by persons other than Seller. To make a claim under this Limited Warranty, you must make sure to keep a copy of your proof of purchase that clearly defines the Date of Purchase (month and year) and the Place of Purchase. Place of Purchase must be a direct vendor of Great Lakes Technologies, LLC. Purchasing through third party vendors, including but not limited to garage sales, pawn shops, resale shops, or any other secondhand merchant, voids the warranty included with this product. Contact techsupport@wenproducts.com or 1-847-429-9263 with the following information to make arrangements: your shipping address, phone number, serial number, required part numbers, and proof of purchase. Damaged or defective parts and products may need to be sent to WEN before the replacements can be shipped out.

Upon the confirmation of a WEN representative, your product may qualify for repairs and service work. When returning a product for warranty service, the shipping charges must be prepaid by the purchaser. The product must be shipped in its original container (or an equivalent), properly packed to withstand the hazards of shipment. The product must be fully insured with a copy of the proof of purchase enclosed. There must also be a description of the problem in order to help our repairs department diagnose and fix the issue. Repairs will be made and the product will be returned and shipped back to the purchaser at no charge for addresses within the contiguous United States.

THIS LIMITED WARRANTY DOES NOT APPLY TO ITEMS THAT WEAR OUT FROM REGULAR USAGE OVER TIME, INCLUDING BELTS, BRUSHES, BLADES, BATTERIES, ETC. ANY IMPLIED WARRANTIES SHALL BE LIMITED IN DURATION TO TWO (2) YEARS FROM DATE OF PURCHASE. SOME STATES IN THE U.S. AND SOME CANADIAN PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING BUT NOT LIMITED TO LIABILITY FOR LOSS OF PROFITS) ARISING FROM THE SALE OR USE OF THIS PRODUCT. SOME STATES IN THE U.S. AND SOME CANADIAN PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE IN THE U.S., PROVINCE TO PROVINCE IN CANADA AND FROM COUNTRY TO COUNTRY.

THIS LIMITED WARRANTY APPLIES ONLY TO ITEMS SOLD WITHIN THE UNITED STATES OF AMERICA, CANADA AND THE COMMONWEALTH OF PUERTO RICO. FOR WARRANTY COVERAGE WITHIN OTHER COUNTRIES, CONTACT THE WEN CUSTOMER SUPPORT LINE. FOR WARRANTY PARTS OR PRODUCTS REPAIRED UNDER WARRANTY SHIPPING TO ADDRESSES OUTSIDE OF THE CONTIGUOUS UNITED STATES, ADDITIONAL SHIPPING CHARGES MAY APPLY.

**THANKS FOR
REMEMBERING**

