



SELECTING GASOLINE

If you want to start your generator using gas, follow steps 1-2, then continue with the remaining steps 3-8 below.

Step 1: Check the generator for gasoline. Add as needed.

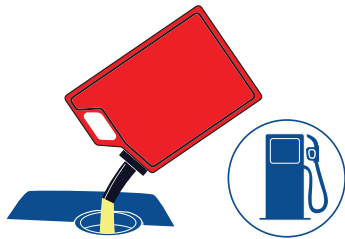


Step 2: Turn the FUEL CHOICE knob to GAS.



SELECTING PROPANE


If you want to start your generator using propane, follow steps 1-2, then continue with the remaining steps 3-8 below.

Step 1: Connect the included propane valve to the generator and to the propane tank. Open valve on propane tank.

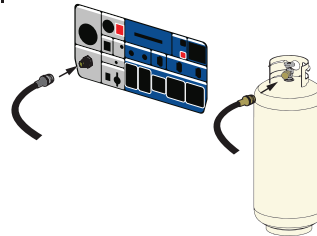

OR


Step 2: Turn the FUEL CHOICE knob to LPG.



SELECTING NATURAL GAS


If you want to start your generator using natural gas, follow steps 1-2, then continue with the remaining steps 3-8 below.

Step 1: Connect the gray gas line to the quick connect on the front of the generator and to the house quick connect. Turn the gas on.

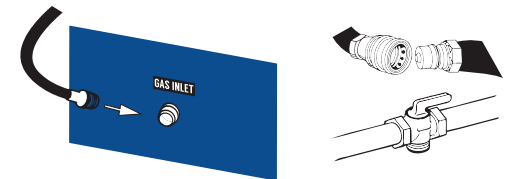


OR

Step 2: Turn the FUEL CHOICE knob to NG.




CONTINUE STARTUP STEPS


Step 3: Flip the main breaker to OFF.




Step 4: Flip the LOW IDLE switch to OFF.




Step 5: Flip 2 WIRE START switch to OFF.



Step 6: Flip the START UP switch to ON.



Step 7: Press START BUTTON and hold until green.



Step 8: Flip main breaker ON and plug in devices.

