



· AMT Ribbon Tweeter · 50mm Softdome Midrange · 6.5" / 8" Curv Cone Woofers · Acoustic Adjustment

THEATRUS SERIES

OWNER'S MANUAL

© 2025 Aperion Audio
All Rights Reserved

MODELS

Please click to jump to the specification page.

Theatrus Main Speakers

T107 | T87 | T80 | T65

Theatrus Slim On-Wall Speakers

T80S | T83S | T80SL | T65S | T63S | T65SL

Theatrus In-Wall Speakers

T80W | T83W | T80WL | T65W | T63W | T65WL

Theatrus Height Channel Speakers

TC65 | T8C | T6C

Theatrus Subwoofers

TS15

GENERAL USER GUIDELINES

Read these instructions and keep them in a safe place for future reference. Follow all electrical safety warnings, including any on the loudspeakers themselves.

- Do not use the loudspeakers near water.
- The cabinet and baffle should only be cleaned with a dry, lint-free, cloth.
- Do not use solvents, abrasives, waxes or liquids as they may be detrimental to the finish.
- Do not install near any heat sources such as radiators, ovens or other equipment that produce excessive heat.
- Unplug this product from both source and power during electrical storms, or when unused for extended periods of time.
- Packing material can pose danger to the young and vulnerable. Ensure these items are stored safely.
- High volume audio signals short or long periods of time, have the potential to cause hearing damage. Use care when setting the system volume level to ensure playback sound pressure levels remain within safe comfortable limits.
- Do not attempt to service the equipment. There are no user serviceable parts inside. Please refer all servicing to Aperion Audio authorized personnel.
- Servicing is required when the apparatus is damaged, exposed to moisture, or exhibits a distinct or sudden change of operation or audio performance.
- This guide provides information on how to safely install the product. Aperion Audio will not be held responsible or liable for injuries or property damage-direct, indirect or consequential-arising out of use or inability to use this product safely and properly.
- Theatrus series loudspeakers contain very powerful magnets and therefore may have a detrimental effect if left in close proximity to magnetically sensitive items.

IMPORTANT SAFETY INSTRUCTIONS

Caution

Do not attempt to install this product until all instructions and warnings have been read and properly understood. Please keep these instructions for future reference. It is the installer's responsibility to ensure that all documentation is given to the end user and read fully before operation. Aperion Audio and its representatives are not liable or responsible for damage or injury caused by improper installation.

General

Aperion Audio recommends that the end user work with a certified installer or other suitably qualified person install this product. Great care must always be taken during installation as most AV equipment is of a fragile nature, possibly heavy and easily damaged if dropped. If you do not fully understand the instructions or are not sure how to install this product safely, then please consult a professional for advice and/or to install this product for you. Failure to mount this product correctly may cause serious injury or death both during installation and at any time thereafter.

Product location

Please pay careful attention to where this product is located. Some surfaces are not suitable for installation due to their structural integrity or they conceal utilities such as pipework, cabling and other obstructions. Only attempt to mount to surfaces that are safe and mechanically sound.

Mounting hardware

It is important that the installer confirms that the provided mounting hardware is appropriate for the surface and structure that the product will be placed. If in doubt seek professional advice regarding the appropriate mounting hardware.

Hazard limitation

Some products have moving parts and the potential to cause injury through the crushing or trapping of fingers or other body parts. It is recommended that periodic inspections of the product and its mounting points are made as frequently as possible to ensure that safety is maintained. If in doubt consult a professional installer or other suitably qualified person.

IMPORTANT SAFETY INSTRUCTIONS

HOW TO AVOID SPEAKER DAMAGE

Use an appropriate amplifier. At high volumes, a very powerful amplifier can overdrive your speakers and damage them. On the other hand, if your amplifier isn't powerful enough, it can produce clipping distortion that can easily damage high-frequency drivers.

Don't be fooled by your amplifier's volume control. It adjusts listening level—it does not indicate power output. If your speakers begin to sound harsh or grating, or if you hear the bass breaking up, turn the volume down immediately to prevent damaging your speakers. This type of damage is not covered by warranty. Ensure that your amplifiers power handling matches with the Theatrus speaker that you choose. Tone controls and equalizers can demand even more power from an amplifier, lowering the impedance to the point at which it produces clipping distortion. Use them sparingly, if at all, and do not use them when listening at loud levels.

Risks to the young & vulnerable

Risk of death or serious injury may occur when children climb or tamper with audio equipment or its mounting hardware. This product may contain small parts like screws, mounting hardware, removable logos, and other small items that could cause a choking hazard. It is not Aperion Audio's responsible to ensure these items, including packaging are out of reach of young children at all times.

Aperion Audio intends to make this and all documentation as accurate as possible. However, Aperion Audio makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without prior notice or obligation of any kind. Aperion Audio makes no representation of warranty, expressed or implied, regarding the information contained herein. Aperion Audio assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

If you are unsure whether your amplifier and speakers are compatible, please contact Aperion directly via email: customerservice@aperionaudio.com

SPEAKER PLACEMENT GUIDELINES

Location


Your new Theatrus speakers can easily be mounted into the wall. Please follow all installation guidelines.

Accurate Timbre and Imaging

Our Theatrus speakers feature wide, uniform dispersion and can be installed almost anywhere. For the most accurate timbre and imaging, place speakers approximately equal distance apart and select locations that allow sound to reach the listening area unobstructed.

Bass Performance

Placing speakers near corners will emphasize bass. For more balanced sound, we recommend that you avoid corners when considering speaker placement.

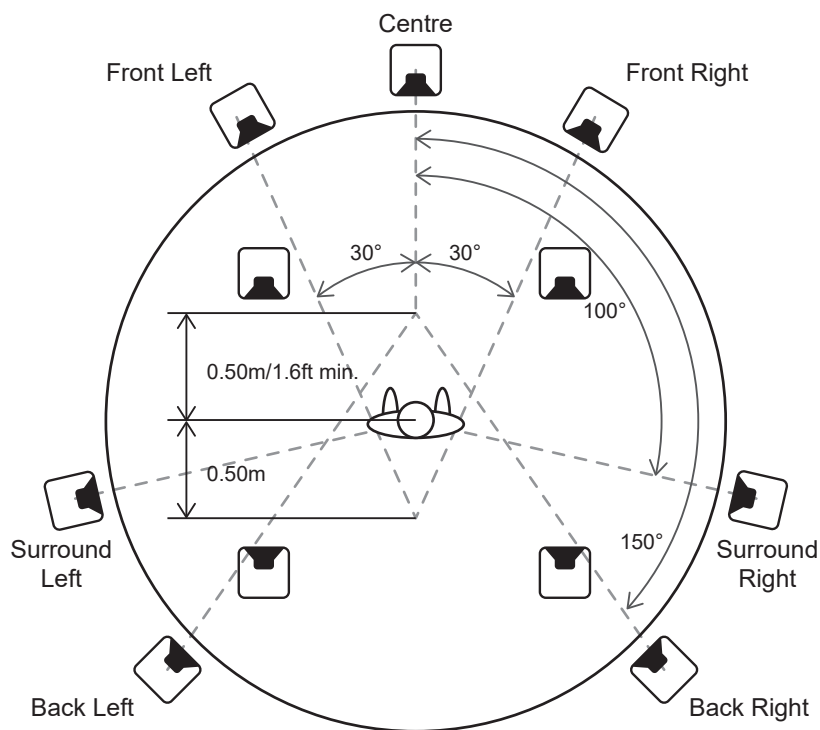

Idea for  DOLBY ATMOS®

 DTS™

INSTALLATION

Turn your receiver/amplifier OFF before connecting speakers. This will avoid damage which may result from accidental shorting of the speaker cable.

Use only speaker cable that is rated for in-wall use.

The Theatrus speakers can be rotated by 90, 180, or 270 degrees with the rear pre installed threaded inserts. This allows the speaker to be positioned in any fashion to fit the needs of the acoustic space. Included are four (4) adhesive rubber bumpers which are to be placed in each corner of the bottom of the speaker that is touching the surface in which the speaker rests on, or if wall mounting then use two (2) rubber bumpers on the rear bottom side of the speaker. This helps isolate the speaker from the set-top surface or allows it to hang straight on the wall.

The driver unit for the TS15 subwoofer is centered, so it can also be rotated to accommodate room positioning. Included in the packaging are four adhesive rubber bumpers which are to be placed on the chosen bottom side of the cabinet. This will help protect the finish from scratches and abrasions on rough surfaces.

On-Wall Mounting (follow step by step on page 6)


***Note: For safety and security purposes, we recommend mounting speakers directly into a wall stud for maximum strength.**

- 1.Place the wall bracket level on wall and mark out mounting position
- 2.Attach the wall bracket to the wall using provided mounting hardware
3. Attached second speaker bracket to the rear of the speaker
4. Attach the 2 small rubber pads in each corner to the speaker is isolated from the wall and it hangs straight for step 5.
5. Install speaker wire (see page 8) and place the speaker with bracket attached to the rear onto the bracket on wall
6. Tighten the two parts of bracket together by using safety screws
- 7.Place the magnet grille on Speaker
- 8.your installation is complete


WALL MOUNTING INSTALLATION

⚠ Please follow all safety warnings during installation (see pg 1)


*Please note the example in steps 3 & 4 show vertical mounting option. Please adjust rubber bumper position for horizontal, or opposite vertical installation.




1. Mark wall position




2. Install mount base




3. Install mount and rubber bumpers to speaker side




4. Additional mounting options



5. Install speaker wire (pg 8) and hang speaker



6. Install security screws




7. Install magnetic grille




8. Done


Rotatable Logo - Easy-Pull Spring-Loaded (On Cabinet)




1. Pull



2. Rotate



3. Release




4. Done

RUBBER PAD INSTALLATION




There are four rubber pads included with adhesive on one side. These rubber pads are to be installed to ensure that the speaker cabinet does not vibrate on the surface that it is placed on. It also will prevent vibrations while hanging on the wall. Lastly, the rubber pads also prevent the speakers surface from getting scratched.


Vertical Placement

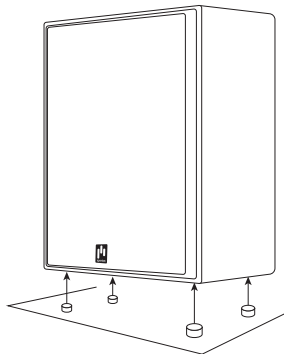

Horizontal Placement



Rear Placement




Be sure to install bumpers to prevent scratching the surface of your speakers, and to prevent unwanted vibrations


Magnetic Rotating Grille Logo

The magnetic logo attaches to the grille frame screws. See below placement options.


Placement Options



Vertical Placement



Horizontal Placement



CONNECTIONS

You are now ready to connect and install the speaker.

Caution

To avoid potential damage, please ensure that your power amplifier(s) or receiver is turned off before connecting or disconnecting your loudspeakers.

Cable & connectors

When selecting cables for use with your Theatrus series loudspeakers, ensure that their construction is of a high enough standard to withstand the rigors of everyday use and that they are suitably terminated. While bare wire can be accommodated by the Theatrus series binding posts, we recommend the use of either spade lugs or 4mm 'banana' plugs in order to maintain an electrical connection of the highest integrity and avoid the possibility of short circuits.

Do not use tools to tighten the binding posts (Polarity + & –) in order to avoid damaging the input plugs. It is of vital importance to observe the polarity markings and maintain positive-to-positive and negative-to-negative connections from amplifier or receiver to the loudspeaker. The Theatrus series terminals are colour-coded to aid in their identification: positive terminals are red, negative terminals are black.

PLUGGING THEM IN




SOUND ADJUSTMENT

With the growth of the home theater and private cinema market, a projector screen is the optimal choice to replicate the experience of the big movie theaters. Projector screens also pose potential acoustical issues due to screen size and material and whether they're acoustically transparent or not. This can require unique solutions and workarounds regarding speaker placement and positioning, especially while working with multiple rows of seating in larger rooms. The new Theatrus Speakers adapts to these listening conditions by replicating the type of speaker to be used in a professional listening studio. Each Theatrus speaker has a focused sound stage to accommodate listening distances both long, or short, allowing a uniform sound stage throughout the room. The Theatrus speaker is able to be mounted On-Wall or In-wall, which naturally will also have an affect on the acoustic response. To address this issue, the Theatrus speaker ultimately needed two settings: Baffle-Wall (In-Wall) or Free-Field (On-Wall).

On-Wall vs In-Wall Bass Adjustment

Baffle-Wall (In-Wall)  -----

***Note: Free Field (On-Wall) is the default setting**

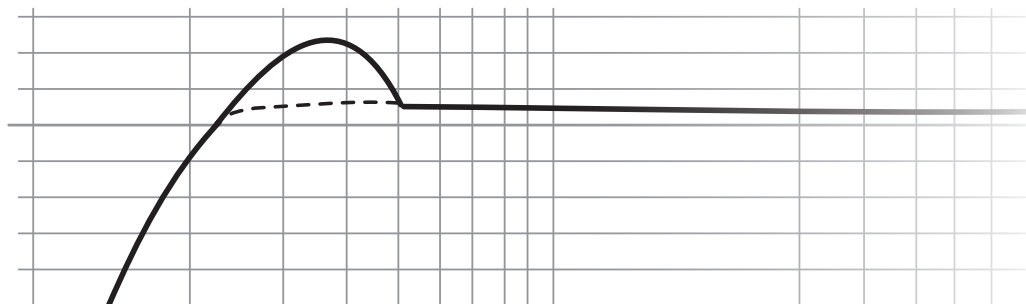

Solid-black line showing example result of placing speaker In-Wall

———— **Before**

----- **After**


SOUND ADJUSTMENT

Along with the bass adjustment, we also included a high frequency adjustment to compensate the high frequency when the speaker is placed behind a projection screen. These subtle yet effective customizations allow Theatrus to perform at it's optimal level in various configurations.

High Frequency Adjustment

Acoustic Screen (Behind Screen)  -----

***Note: Free Field (Front Screen) is the default setting**

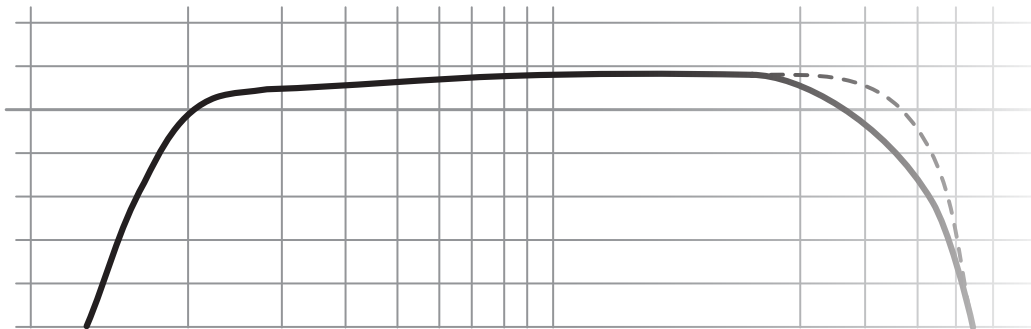


Solid-black line showing example result of placing speaker behind acoustically transparent screen.

———— Before
----- After

OPTIONAL PORT PLUGS

Optional port plugs are included and pre-installed with certain Theatrus speakers. Please remove them before playback for full frequency range effect.

This is another effective bass management system which allows the Theatrus speakers to perform their best in various configurations.

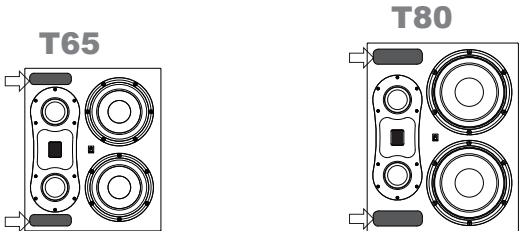

FEATURES & SPECIFICATION

Theatrus T80 Dual 8" Cinema Studio Speaker

Specifications:

Frequency Response: 30-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 122 dB

Recommended Power: 20-350W

Peak Power: 700W

Driver Configuration: 3-Way

Enclosure Type: Ported/Sealed Cabinet (with port plugs installed)

Product Dimensions(H/W/D): 19.7"x15.8"x11.81" / 500x400x300mm (Without Grilles)


Product Weight: 47 Lbs / 21.3 Kgs

Shipping Dimensions(L/W/H): 21"x19"x26" / 536x480x670mm

Shipping Weight: 56.2 Lbs / 25.5 Kgs

Package Contents:

- One(1) T80 Speaker
- One(1) AWZ Wall Mounting Bracket
- Four(4) Rubber Pads
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves
- One(1) Magnetic Logo On Grille
- Two(2) Foam Port Plugs (remove for full range frequency response)

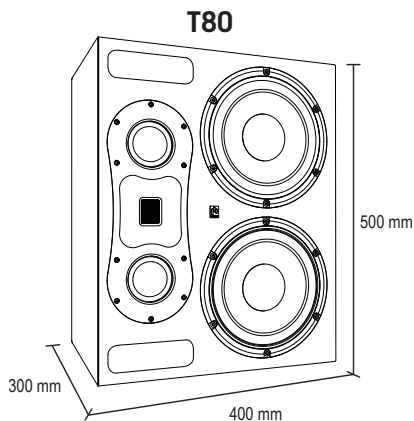

FEATURES & SPECIFICATION

Theatrus T65 Dual 6.5" Cinema Studio Speaker

Specifications:

Frequency Response: 35-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 121 dB

Recommended Power: 20-250W

Peak Power: 500W

Driver Configuration: 3-Way

Enclosure Type: Sealed Cabinet (with port plugs installed)

Product Dimensions(H/W/D): 16.9"x14.2"x8.7" / 430x360x220mm (Without Grilles)


Product Weight: 33 Lbs / 15 Kgs

Shipping Dimensions(L/W/H): 20"x15.5"x23.6" / 505x395x600mm

Shipping Weight: 39.7 Lbs / 18 Kgs

Package Contents:

- One (1) T65 Speaker
- One (1) AWZ Wall Mounting Bracket
- Four (4) Rubber Pads
- One (1) Manual Download Card
- One (1) Polish Cloth
- One (1) Gloves
- One (1) Magnetic Logo On Grille
- Two (2) Foam Port Plugs (remove for full range frequency response)

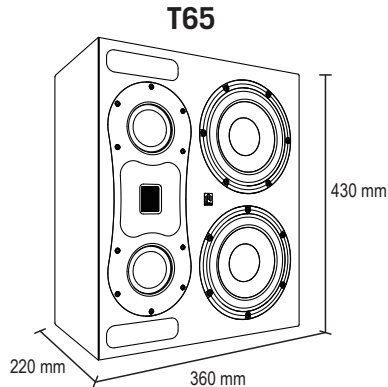

FEATURES & SPECIFICATION

Theatrus T107 Quad 10" Cinema Studio Flagship Speaker

Specifications:

Frequency Response: 26 Hz-26,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 97 dB

Max SPL: 130 dB

Recommended Power: 20-1000W

Peak Power: 2000W

Driver Configuration: 3 Ways

Enclosure Type: Ported Cabinet

Product Dimensions(HxWxD):31.1"x31.1"x22.4" / 790x790x570mm (Withno Grille)

Product Weight: 178.6 lbs/ 81 Kgs


Shipping Dimensions(LxWxH): 39"x31"x43" / 980x785x1095 mm

Shipping Weight: 249 Lbs / 113 Kgs

Package Contents:

- One(1) T107 Speaker
- One(1) One(1) Aluminum Foundation
- One(1) Manual Download Card
- One(1) Aluminum Foundation
- One(1) Polish Cloth
- One(1) Gloves

T107

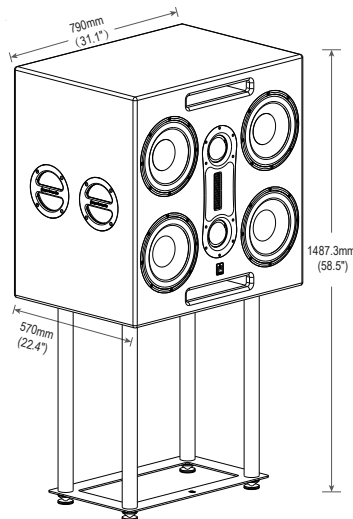

FEATURES & SPECIFICATION

Theatrus T87 Quad 8" Cinema Studio Flagship Speaker

Specifications:

Frequency Response: 30 Hz-26,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 97 dB

Max SPL: 128 dB

Recommended Power: 20-700W

Peak Power: 1400W

Driver Configuration: 3 Ways

Enclosure Type: Ported Cabinet

Product Dimensions(HxWxD): 26.7"x26.7"x15.9" / 678x678x404mm (Withno Grille)

Product Weight: 122 lbs/ 55.3 Kgs


Shipping Dimensions(LxWxH): 34"x24"x38" / 855x610x960 mm

Shipping Weight: 179 Lbs / 81.4 Kgs

Package Contents:

- One(1) T87 Speaker
- One(1) Aluminum Foundation
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves

T87

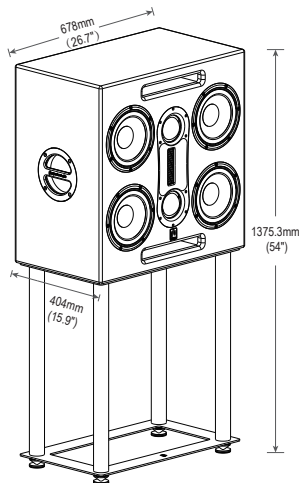

FEATURES & SPECIFICATION

Theatrus T80S Dual 8" Cinema Studio Slim On-Wall Speaker

Specifications:

Frequency Response: 60-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 122 dB

Recommended Power: 20-350W

Peak Power: 700W

Driver Configuration: 3-Way

Enclosure Type: Ported/Sealed Cabinet

Product Dimensions(HxWxD): 19.7"x15.8"x5.1" / 500x400x130mm (Without Grilles)


Product Weight: 35.7 Lbs / 16.2 Kgs

Shipping Dimensions(L/W/H): 20.5"x11.6"x25.4" / 520x295x645mm

Shipping Weight: 42.8 Lbs / 19.4 Kgs

Package Contents:

- One (1) T80S Speaker
- One (1) AWZ Wall Mounting Bracket
- Four (4) Rubber Pads
- One (1) Manual Download Card
- One (1) Polish Cloth
- One(1) Gloves
- One(1) Magnetic Logo On Grille

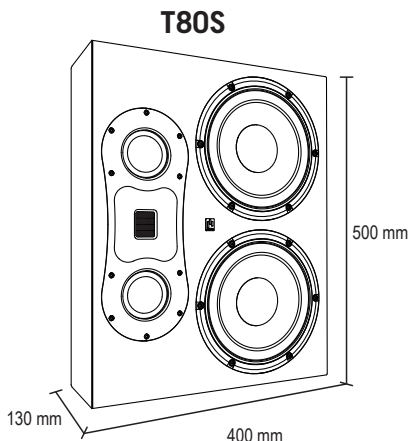

FEATURES & SPECIFICATION

Theatrus T65S Dual 6.5" Cinema Studio Slim On-Wall Speaker

Specifications:

Frequency Response: 65Hz-35 kHz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 121 dB

Recommended Power: 20-250W

Peak Power: 500W

Driver Configuration: 3-Way

Enclosure Type: Sealed Cabinet

Product Dimensions(H/W/D): 17"x14.2"x4.3" / 430x360x110mm (Without Grilles)


Product Weight: 26.5 Lbs / 12 Kgs

Shipping Dimensions(L/W/H): 19"x11"x23" / 485x275x580mm

Shipping Weight: 33 Lbs / 15 Kgs

Package Contents:

- One(1) T65S Speaker
- One(1) AWZ Wall Mounting Bracket
- Four(4) Rubber Pads
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves
- One(1) Magnetic Logo On Grille

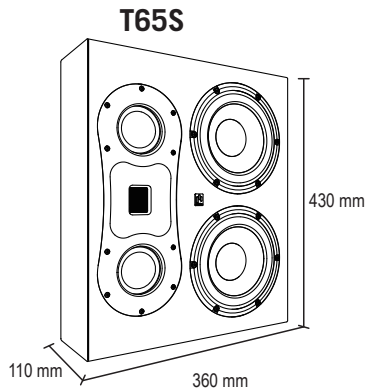

FEATURES & SPECIFICATION

Theatrus T80SL Dual 8" Slim Stack On-Wall LCR Speaker

Specifications:

Frequency Response: 60Hz-35 kHz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 122 dB

Recommended Power: 20-350W

Peak Power: 700W

Driver Configuration: 3-Way

Enclosure Type: Sealed Cabinet

Product Dimensions(H/W/D): 34.7" x 11" x 5.1" / 880 x 280 x 130mm (Without Grilles)


Product Weight: 40.4 Lbs / 18.3 Kg

Shipping Dimensions(L/W/H): 16" x12" x 40" / 395 x 295 x 1025mm

Shipping Weight: 51 Lbs / 23 Kgs

Package Contents:

- One(1)T80SL On-Wall Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) White Gloves
- Four(4) Rubber Bumpers
- Two(2) AWZ Wall Mount

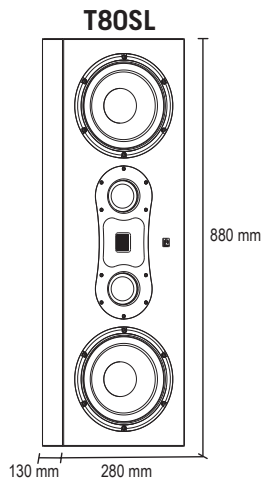

FEATURES & SPECIFICATION

Theatrus T65SL Dual 6.5" Slim Stack On-Wall LCR Speaker

Specifications:

Frequency Response: 60Hz-35 kHz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 121 dB

Recommended Power: 20-250W

Peak Power: 500W

Driver Configuration: 3-Way

Enclosure Type: Sealed Cabinet

Product Dimensions(H/W/D): 30.7" x 8.7" x 4.3" / 780 x 220 x 110mm (Without Grilles)


Product Weight: 28.7 Lbs / 13 Kg

Shipping Dimensions(L/W/H): 13" x 11" x 36" / 335mm x 275mm x 920mm

Shipping Weight: 37 Lbs / 17 Kgs

Package Contents:

- One(1)T65SL On-Wall Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) White Gloves
- Four(4) Rubber Bumpers
- One(1) AWZ Wall Mount

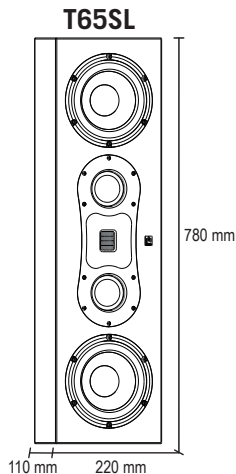

FEATURES & SPECIFICATION

Theatrus T83S Single 8" Cinema Studio Slim On-Wall Speaker

Specifications:

Frequency Response: 60Hz-35 kHz

Nominal Impedance: 4 Ohms

Sensitivity: 91 dB

Max SPL: 117 dB

Recommended Power: 20-200W

Peak Power: 400W

Driver Configuration: 3-Way

Enclosure Type: Sealed Cabinet

Product Dimensions(H/W/D): 20.5" x 11" x 5.1" / 520mm x 280mm x 130mm
(Without Grilles)


Product Weight: 23.8 Lbs / 10.8 Kgs

Shipping Dimensions(L/W/H): 16" x 12" x 26" / 395mm x 300mm x 660mm

Shipping Weight: 29 Lbs / 13 Kgs

Package Contents:

- One(1)T83S On-Wall Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) White Gloves
- Four(4) Rubber Bumpers
- One(1) AWZ Wall Mount

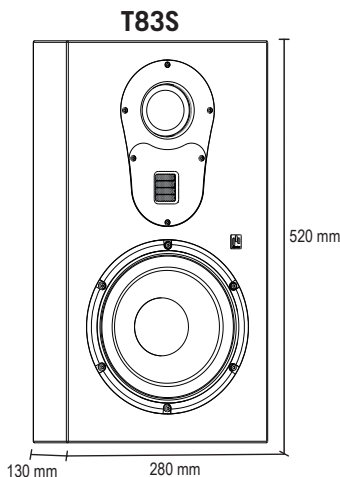

FEATURES & SPECIFICATION

Theatrus T63S Single 6.5" Cinema Studio Slim On-Wall Speaker

Specifications:

Frequency Response: 70Hz-35 kHz

Nominal Impedance: 4 Ohms

Sensitivity: 91 dB

Max SPL: 116 dB

Recommended Power: 20-150W

Peak Power: 300W

Driver Configuration: 3-Way

Enclosure Type: Sealed Cabinet

Product Dimensions(H/W/D): 18.1" x 8.7" x 4.3" / 460mm x 220mm x 110mm
(Without Grilles)


Product Weight: 17.2 Lbs / 7.8 Kgs

Shipping Dimensions(L/W/H): 13" x 11" x 24" / 335mm x 275mm x 605mm



Shipping Weight: 22 Lbs / 10 Kgs

Package Contents:


- One(1)T63S On-Wall Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) White Gloves
- Four(4) Rubber Bumpers
- One(1) AWZ Wall Mount

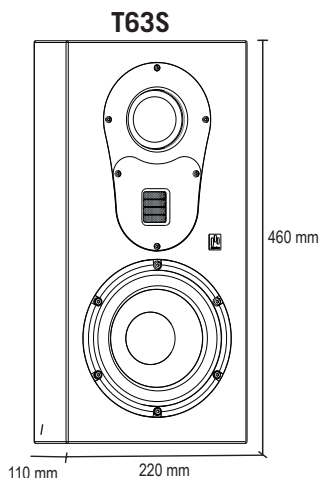


In-Wall Installation

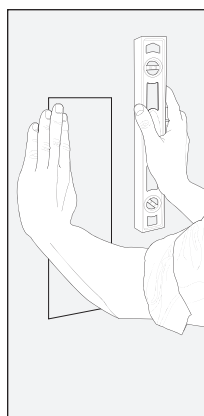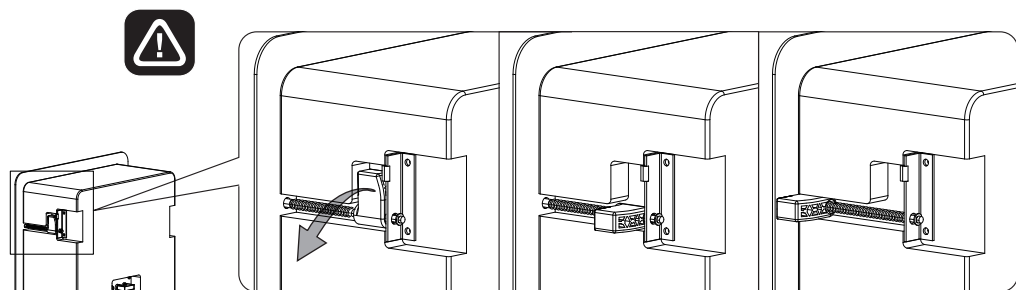


1

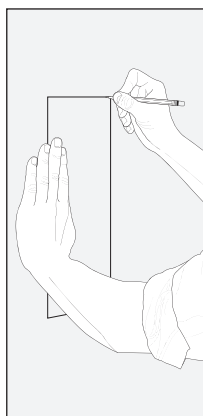


2

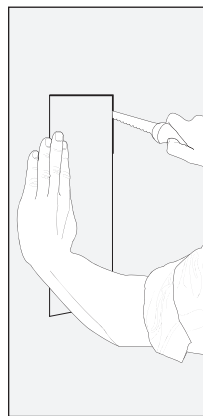


3

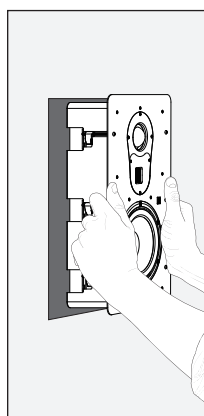

4

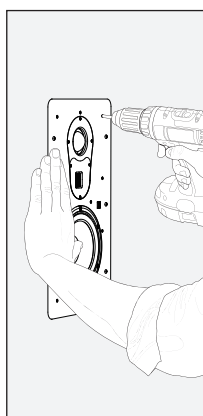

5

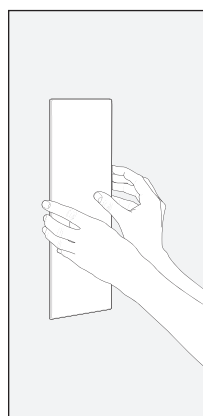

6

FEATURES & SPECIFICATION

Theatrus T80W Dual 8" Cinema Studio In-Wall Speaker

Specifications:

Frequency Response: 60-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 122 dB

Recommended Power: 20-350W

Peak Power: 700W

Driver Configuration: 3 Ways

Enclosure Type: Sealed Cabinet

Cut-out Dimensions(H/W): 19.92"x15.98" / 506x406mm

Product Dimensions(H/W/D): 21.3"x17.3"x5.2" / 540x440x132mm (Withno Grilles)


Product Weight: 40.1Lbs / 18.2Kgs

Shipping Dimensions(L/W/H): 20"x12"x26" / 515x300x650mm

Shipping Weight: 46.5Lbs / 21.1 Kgs

Package Contents:

- One(1) T80W Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves

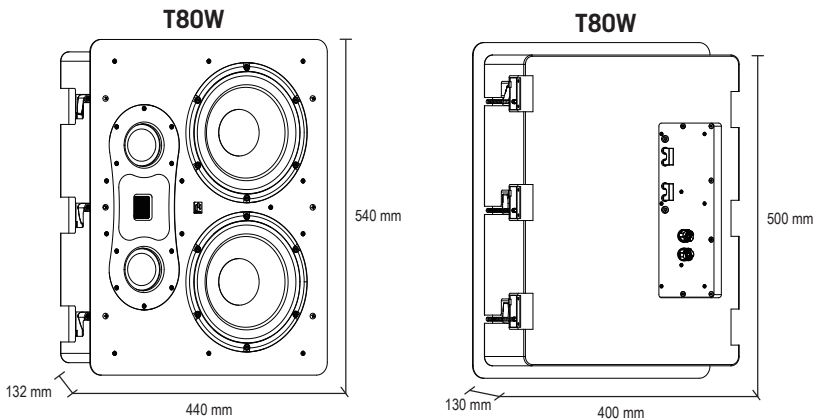

FEATURES & SPECIFICATION

Theatrus T65W Dual 6.5" Cinema Studio In-Wall Speaker

Specifications:

Frequency Response: 65-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 121 dB

Recommended Power: 20-250W

Peak Power: 500W

Driver Configuration: 3 Ways

Enclosure Type: Sealed Cabinet

Cut-out Dimensions(H/W): 17.17"x14.41" / 436x366mm

Product Dimensions(H/W/D): 18.5"x15.8"x4.4" / 470x400x112mm (Withno Grilles)



Product Weight: 31.3Lbs / 14.2 Kgs

Shipping Dimensions(L/W/H): 19"x11"x23" / 475x280x580mm (H/W/D)

Shipping Weight: 36.6Lbs / 16.6 Kgs

Package Contents:

- One(1) T65W Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves

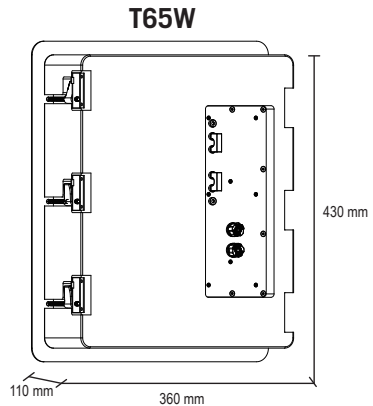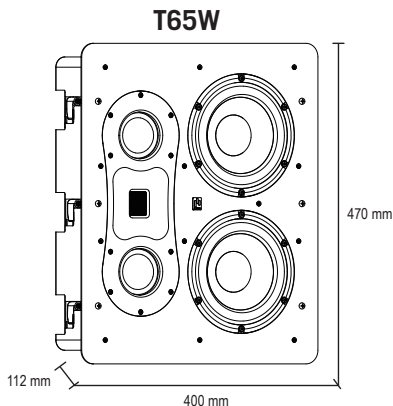

FEATURES & SPECIFICATION

Theatrus T80WL Dual 8" Slim Stack In-Wall LCR Speaker

Specifications:

Frequency Response: 60-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 122 dB

Recommended Power: 20-350W

Peak Power: 700W

Driver Configuration: 3 Ways

Enclosure Type: Sealed Cabinet

Cut-out Dimensions(H/W): 34.88" x 11.26" / 886mm x 286mm

Product Dimensions(H/W/D): 36.2"x 12.6"x 5.2" / 920mm x 320mm x 132mm
(Withno Grilles)



Product Weight: 49 Lbs / 22.2 Kg

Shipping Dimensions(L/W/H):16" x 12" x 40" / 395mm x 295mm x 1020 mm

Shipping Weight: 56.9 Lbs / 25.8 Kgs

Package Contents:

- One(1) T80WL Slim Stack In-Wall Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) White Gloves

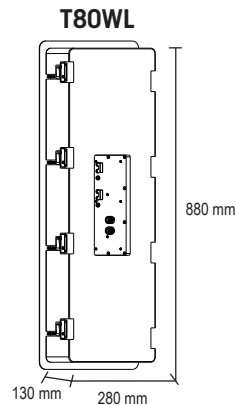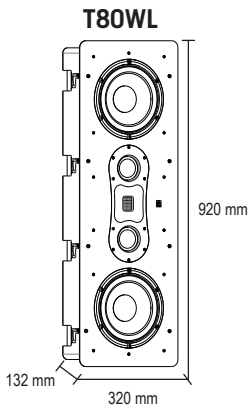

FEATURES & SPECIFICATION

Theatrus T65WL Dual 6.5" Slim Stack In-Wall LCR Speaker

Specifications:

Frequency Response: 65-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 94 dB

Max SPL: 121 dB

Recommended Power: 20-250W

Peak Power: 500W

Driver Configuration: 3 Ways

Enclosure Type: Sealed Cabinet

Cut-out Dimensions(H/W): 30.94" x 8.9" / 786mm x 226

Product Dimensions(H/W/D): 32.3" x 10.2"x 4.4" / 820mm x 260mm x 112mm
(Withno Grilles)



Product Weight: 34.6 Lbs / 15.7 Kg

Shipping Dimensions(L/W/H):13" x 11" x 36" / 330mm x 280mm x 920mm

Shipping Weight: 42 Lbs / 19 Kgs

Package Contents:

- One(1) Theatrus T65WL In-Wall Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) White Gloves

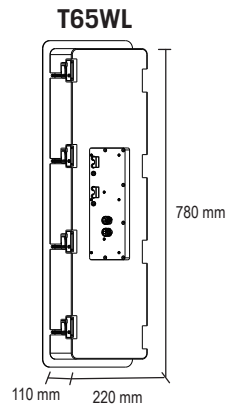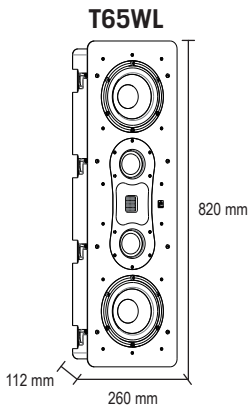

FEATURES & SPECIFICATION

Theatrus T83W Single 8" Cinema Studio In-Wall Speaker

Specifications:

Frequency Response: 60-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 91 dB

Max SPL: 117 dB

Recommended Power: 20-200W

Peak Power: 400W

Driver Configuration: 3 Ways

Enclosure Type: Sealed Cabinet

Cut-out Dimensions(H/W): 20.71"x11.26" / 526x286mm

Product Dimensions(H/W/D): 22.1"x12.6"x5.2" / 560x320x132mm (Withno Grilles)


Product Weight: 28.4 Lbs / 12.9 Kgs

Shipping Dimensions(L/W/H): 16"x12"x26" / 395x300x670mm

Shipping Weight: 32.4Lbs / 14.7Kgs

Package Contents:

- One(1) T83W Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves

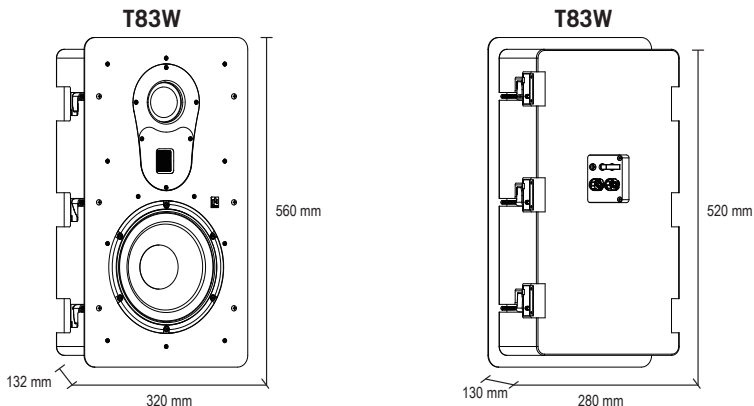

FEATURES & SPECIFICATION

Theatrus T63W Single 6.5" Cinema Studio In-Wall Speaker

Specifications:

Frequency Response: 70-35,000 Hz

Nominal Impedance: 4 Ohms

Sensitivity: 91 dB

Max SPL: 116 dB

Recommended Power: 20-150W

Peak Power: 300W

Driver Configuration: 3 Ways

Enclosure Type: Sealed Cabinet

Cut-out Dimensions(H/W): 18.35"x8.90" / 466x226mm

Product Dimensions(H/W/D): 19.7"x10.2"x4.4" / 500x260x112mm (Withno Grilles)



Product Weight: 20.5Lbs / 9.3Kgs

Shipping Dimensions(L/W/H):13"x11"x24" / 338x280x605mm

Shipping Weight: 24Lbs / 10.9Kgs

Package Contents:

- One(1) T63W Speaker
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves

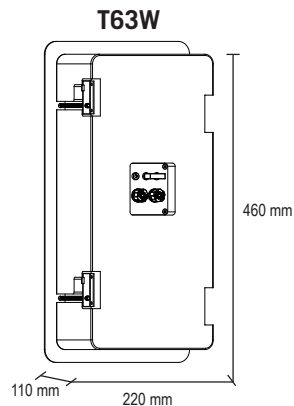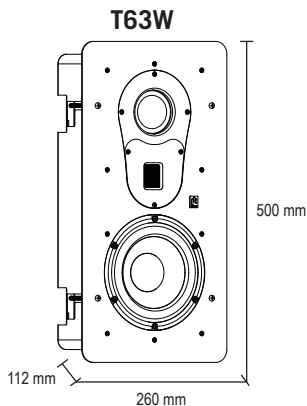

FEATURES & SPECIFICATION

Theatrus TC65 2-Way 6.5" Height Channel Surround Speaker

Specifications:

Frequency Response: 80Hz-35 kHz

Nominal Impedance: 4 Ohms

Sensitivity: 88 dB

Max SPL: 111 dB

Recommended Power: 20-100W

Peak Power: 200W

Driver Configuration: 2-Way

Enclosure Type: Sealed Cabinet

Product Dimensions(LxWxH) :12"x7.9"x6.7/3.2" / 305x200x170mm/80mm
(Without Grilles)

Product Weight: 11 Lbs / 5 Kgs each


Shipping Dimensions(L/W/H): 19.5"x16"x13" / 495x415x340mm

Shipping Weight: 28.7 Lbs / 13 Kgs

Package Contents:


- Two(2) TC65 Speaker
- Two(2) AWZ Wall Mounting Bracket
- Four(4) Rubber Pads
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves
- One(1) Magnetic Logo On Grille

TC65



FEATURES & SPECIFICATION

Theatrus T8C 2-Way 8" Aluminum Frame In-Ceiling Speaker

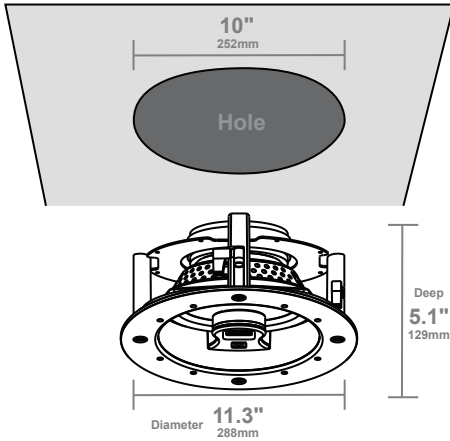

Package Contents:

- T8C Ceiling Speaker x One (1) Pcs
- Manual Download Card x One (1) Pcs
- Cut-out Template x One (1) Pcs

Specifications:

Frequency Response: (+/-3 dB)36HZ-35KHZ

Impedance: 4 Ohms

Sensitivity: 92 dB

Recommended Power: 20-150 Watts

Peak Power: 300 Watts

Tweeter: APERION AMT Ribbon Tweeter

Woofer: APERION 8" Curv® Cone Woofer

Driver Configuration: 2-Way

Enclosure Type: Infinite Baffle Design

Product Weight: 9 Lbs/4.1 Kgs

Product Dimensions: 11.3"/288 mm Diameter X 5.1"/129 mm Deep

Cut-out Dimensions: 9.93"/252 mm Round

Finish: Fireproofing Black Aluminum Frame, White Paintable Grille


Placement Location: Theatrus In-Ceiling Speaker

Shipping Weight: 11.3 Lbs / 5.1 Kg

Shipping Dimensions: 13.4"x13.4"x8"/340x340x205mm (LxWxH)

FEATURES & SPECIFICATION

Theatrus T6C 2-Way 6.5" Aluminum Frame In-Ceiling Speaker

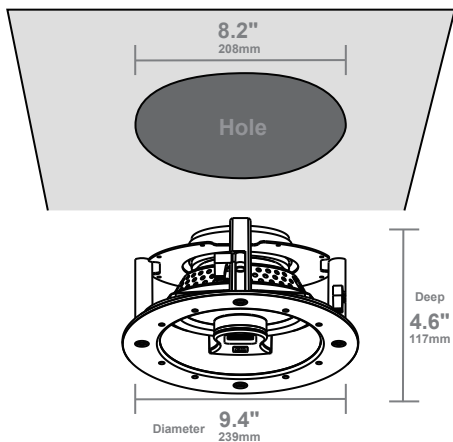

Package Contents:

- T6C Ceiling Speaker x One (1) Pcs
- Manual Download Card x One (1) Pcs
- Cut-out Template x One (1) Pcs

Specifications:

Frequency Response: (+/-3 dB)45HZ-35KHZ

Impedance: 4 Ohms

Sensitivity: 90 dB

Recommended Power: 20-120 Watts

Peak Power: 240 Watts

Tweeter: APERION AMT Ribbon Tweeter

Woofer: APERION 6.5" Curv® Cone Woofer

Driver Configuration: 2-Way

Enclosure Type: Infinite Baffle Design

Product Weight: 7.1 Lbs/3.2 Kgs

Product Dimensions: 9.4"/239 mm Diameter X 4.6"/117 mm Deep

Cut-out Dimensions: 8.19"/208 mm Round

Finish: Fireproofing Black Aluminum Frame, White Paintable Grille

Placement Location: Theatrus In-Ceiling Speaker

Shipping Weight: 8.2 Lbs / 3.7 Kg each

Shipping Dimensions: 11"x11"x7.3"/280x280x185mm (LxWxH)

FEATURES & SPECIFICATION

Theatrus TS15 Passive 15" Subwoofer

Specifications:

Frequency Response: 18-400Hz with amplifier

Nominal Impedance: 4 Ohms

Sensitivity: 89 dB@1m1w; 121 dB@1m1000w

Recommended Power: 750W

Peak Power: 1500W

Enclosure Type: Sealed Cabinet

Product Dimensions(H/W/D): 19.7"x19.7"x15.8" / 500x500x400mm (Without Grilles)


Product Weight: 77.2 Lbs / 35 Kgs

Shipping Dimensions(L/W/H): 26"x24"x27.5" / 655x615x700 mm

Shipping Weight: 93.5 Lbs / 42.4 Kgs

Package Contents:

- One(1) TS15 Subwoofer
- Four(4) Rubber Pads
- One(1) Manual Download Card
- One(1) Polish Cloth
- One(1) Gloves
- One(1) Magnetic Logo On Grille

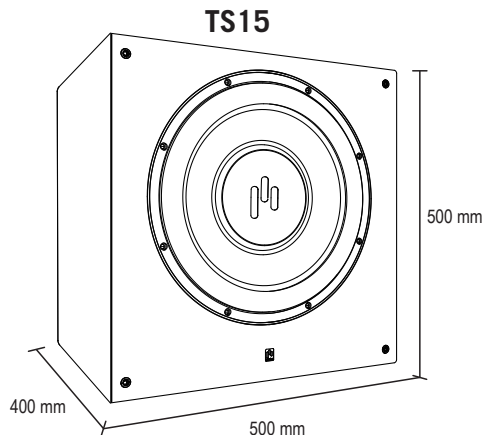



www.aperionaudio.com

25599 SW 95th Avenue, Suite D, Wilsonville, OR, 97070 - 503.598.8815