

EBS-2U300

2U Rackmount Chassis

Features

- Depth 18" of chassis for space-sensitive applications
- Support up to ATX (12" x 9.6") Mother Board
- Support Flex ATX PSU and 2U Redundant PSU
- 2x 5.25" + 2x 3.5" External Drive Bay; 2x 2.5" Internal Drive Bay
- Support 7x Low Profile Expansion Slot



Specifications

Drive Bay	Storage	External: 2 x 5.25", 2 x 3.5"
		Internal: 2 x 2.5"
Cooling	Chassis Fan	Front: 1 x 80mm Rear: 2 x 40mm
Front I/O Interface	USB 3.0	2
	Control	1 x System Reset Button 1 x Power On/Off Button
	LED Indicators	1 x Power LED 2 x LAN LED 1 x HDD LED
Rear I/O Interface	Expansion Slot	7 x Low Profile Expansion Slot
Environment	Operating Temperature	0~40°C
	Non-Operating Temperature	-20~60°C
	Relative Humidity	10~95%@40°C, non-condensing
Physical Characteristics	Material of chassis	SGCC
	Dimension	457(L) x 430(W) x 88.1(H) mm (W/O Handle) 476.5(L) x 430(W) x 88.1(H) mm (W/Handle)
Certification	EMI & Safety	CE, FCC

Front View




- 2x Type-A USB 3.0
- 1x System Reset Button
- 1x Power On/Off Button
- 1x HDD LED
- 1x Power LED
- 2x LAN LED

Rear View



- 7 x Low Profile Expansion Slot

Dimension

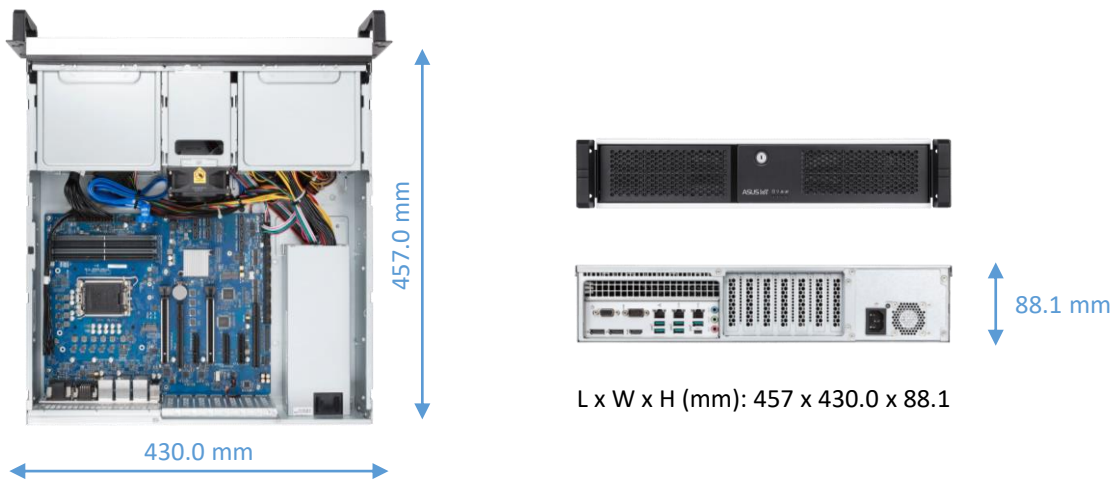

Ordering Information

Model Name	Part number	Power Supply
EBS-2U300/Q670EA-IM-A	90AE02E1*	Flex 850W

* The part number might vary for different regulations and package. Please consult the TPM in your region for exact 90PN.

Packing List

Part Number	Description	Quantity
13020*	M.2 screw pack	1
14013*	SATA Cable	1
13AE0*	SYSTEM ACCESSIORY	1