



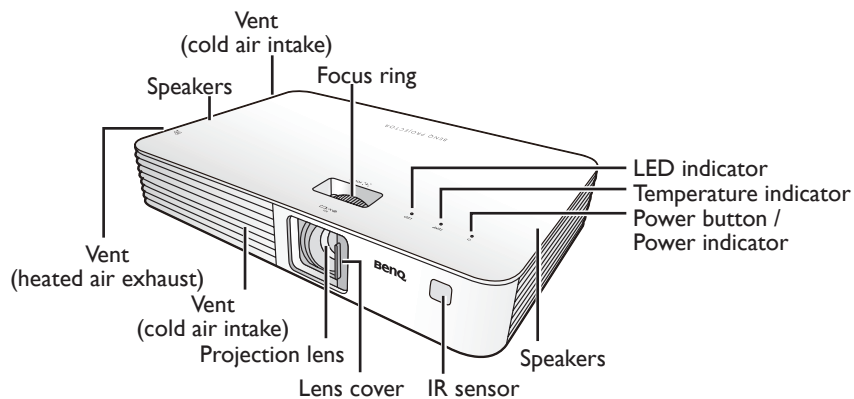
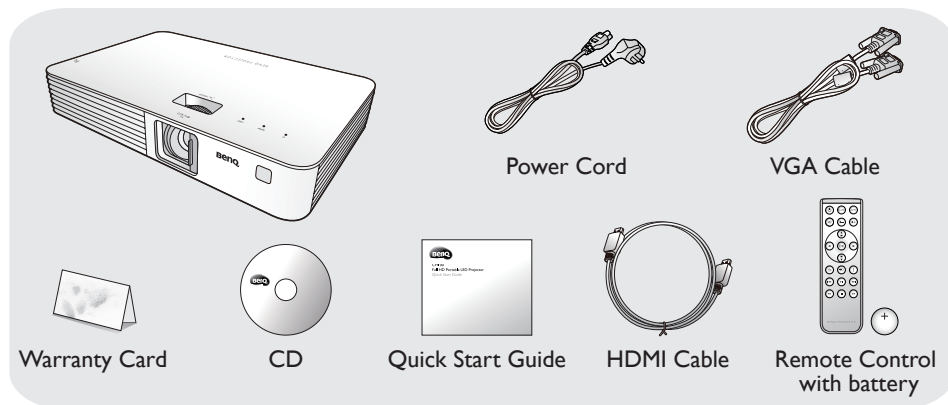





CH100
Full HD Portable LED Projector
Quick Start Guide

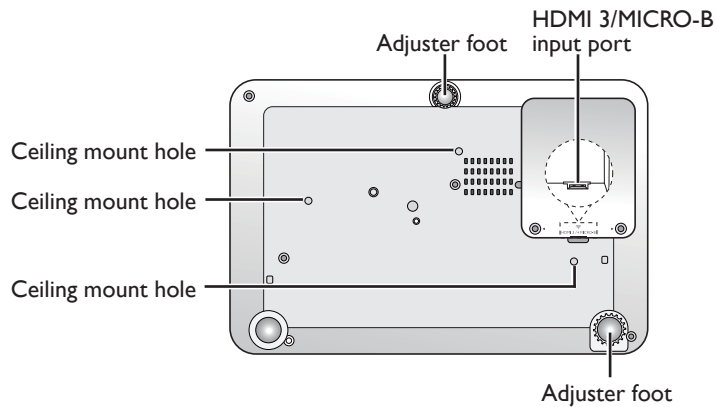

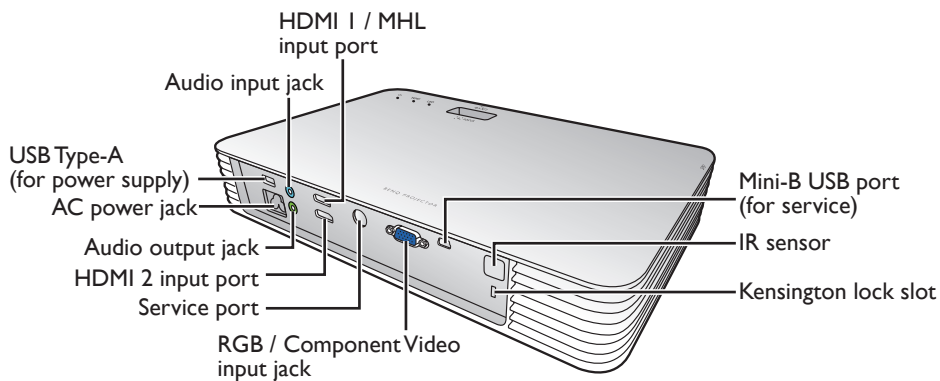




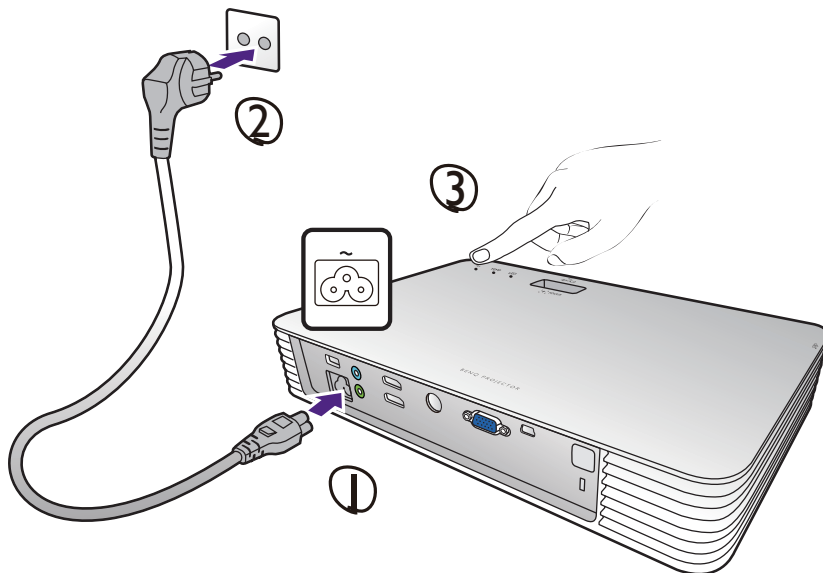


【同梱した電源コードセットは本機以外の電気機器で使用できません】







2

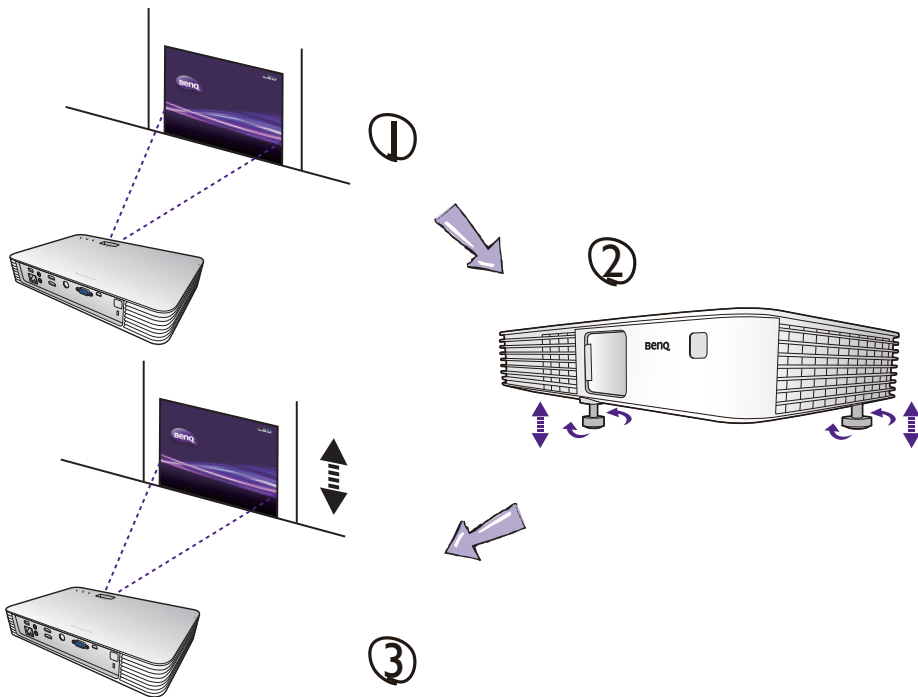





3



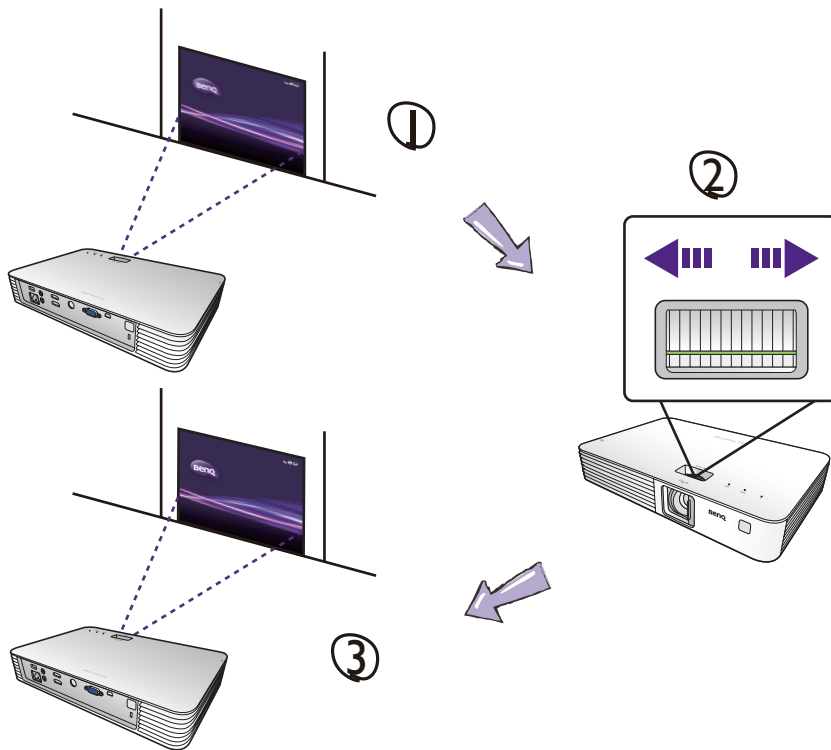







4

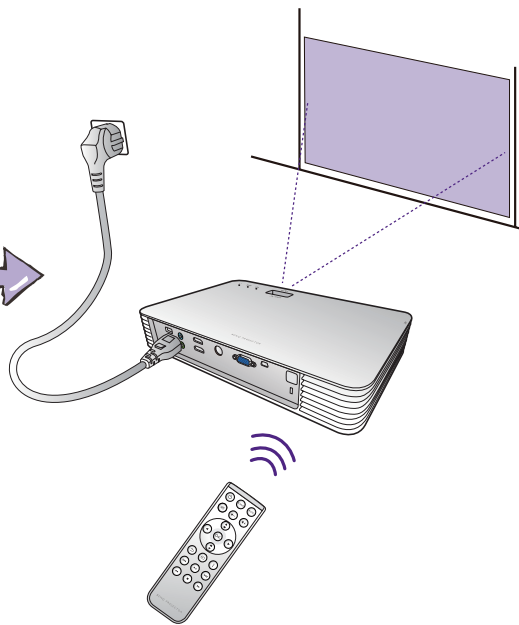
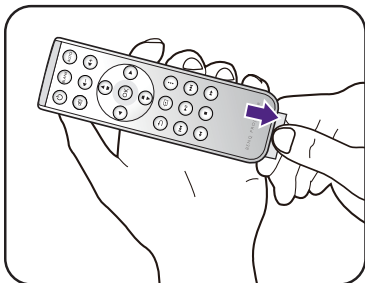



Setup wizard

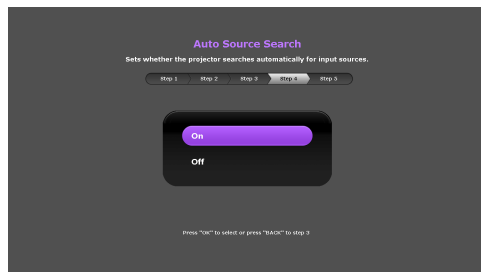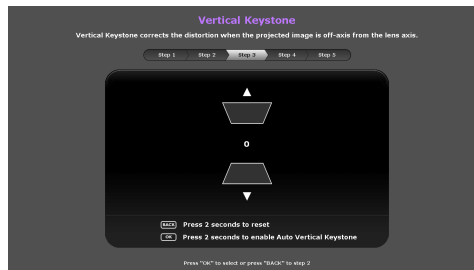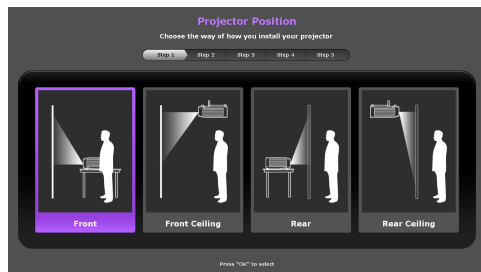




Controller
operations



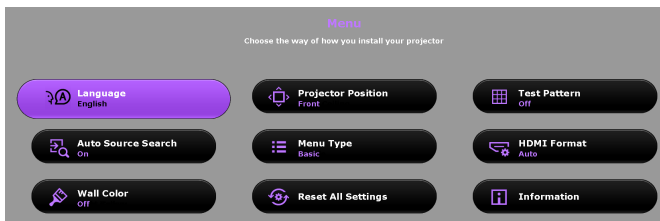






HDMI


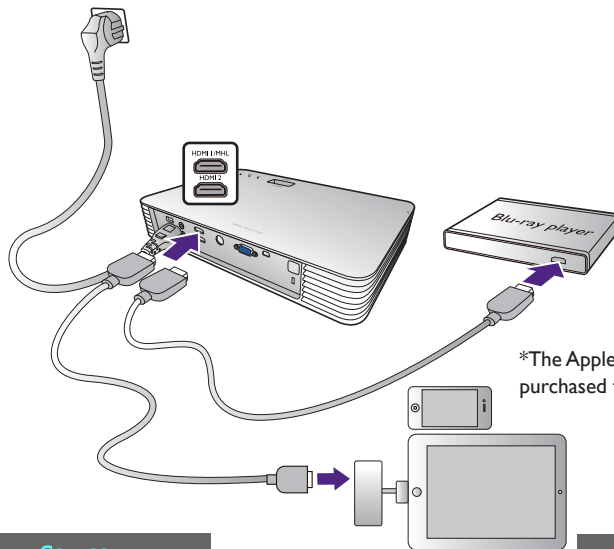


*The Apple Digital AV Adapter can be purchased from www.apple.com.




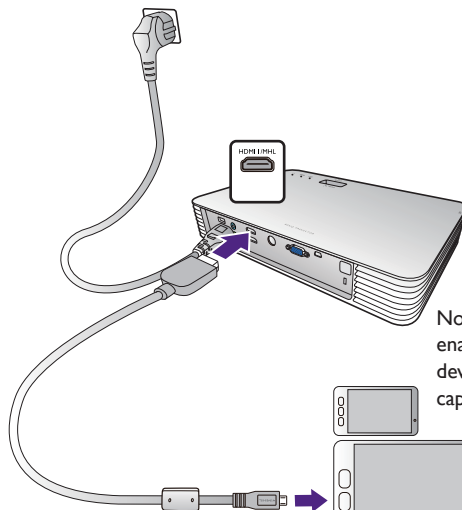








Not all mobile devices are MHL-enabled. Consult with your mobile device dealer to verify MHL capabilities.



MHL


Component video


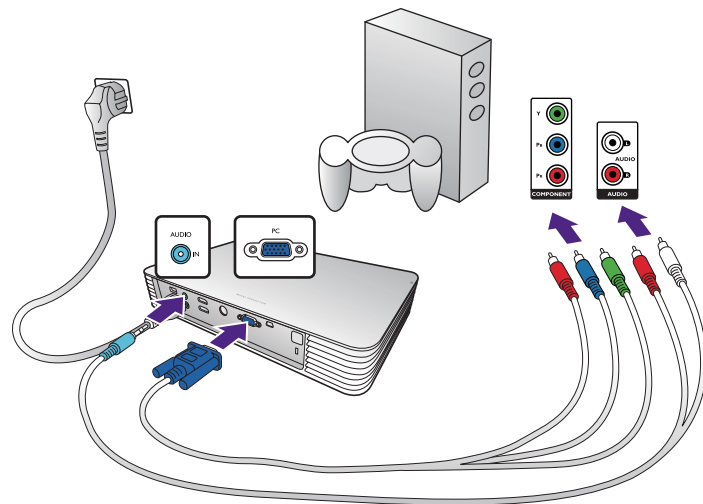


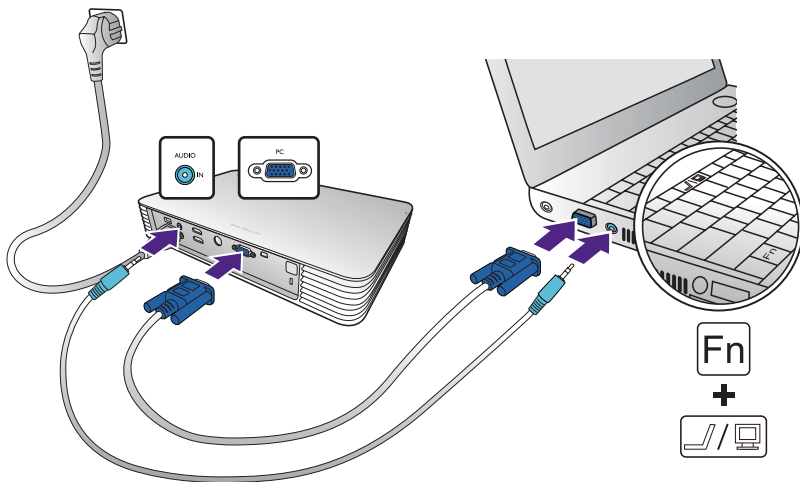


Computer


Connecting dongle
(via USB power supply)

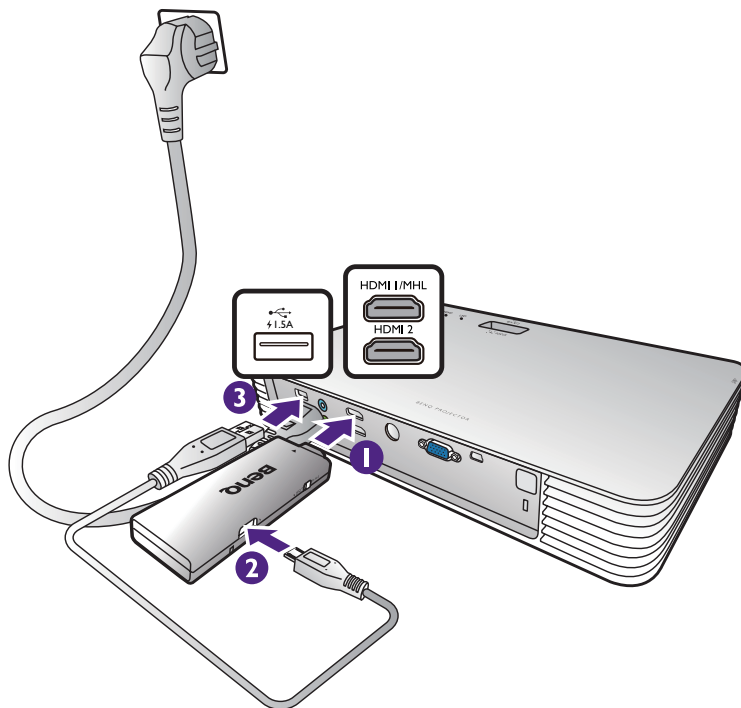

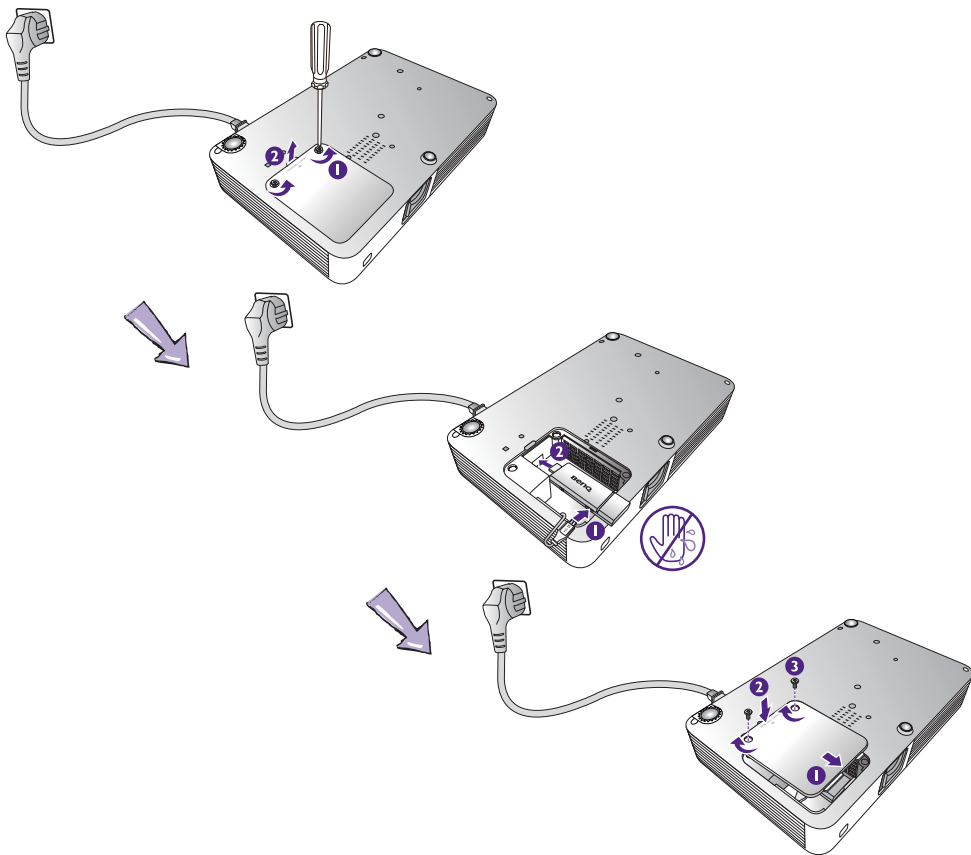



Connecting dongle
(via hidden space)





Projection distance

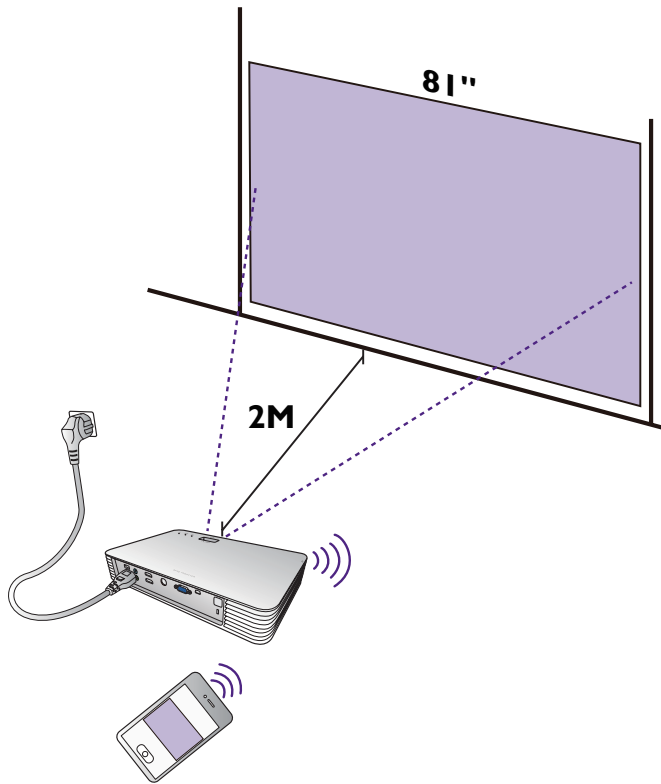



Product specifications

Projection System	DLP	
Native Resolution	1080p (1920 x 1080)	
Brightness	1000AL	
Contrast Ratio	100,000:1 (FOFO)	
Display Color	1.07 Billion Colors	
Lens	F=1.5, f=11.62mm	
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)	
Throw Ratio	1.108:1 (95±3%"@2.33m)	
Image Size (Diagonal)	60" ~ 120"	
Zoom Ratio	Fixed	
Lamp Type	OSRAM P1A	
Lamp (Normal/Economic)*	20,000/30,000 hours	
Keystone Adjustment	ID, Vertical ± 20 degrees	
Projection Offset	100%±2.5%	
Resolution Support	VGA (640 x 480) to UXGA (1600 x 1200)	
Horizontal Frequency	15 ~ 102KHz	
Vertical Scan Rate	23 ~ 120 Hz	
Compatibility	SDTV Compatibility EDTV Compatibility HDTV Compatibility Video Compatibility	480i, 576i 480p, 576p 720@50p/60p, 1080@50i/60i/24p/ 25p/30p/50p/60p NTSC, PAL, SECAM
Dimensions (W x H x D)	325 x 63 x 213 (excluding adjustment feet)	
Weight	2.5 kg (5.51 pounds)	
Power	Power Supply Max. Power Consumption	AC 100 to 240 V, 50/60 Hz 146W
Audible Noise	30/28 dBA (Normal/Eco)	

Specifications








Product specifications (continued)

Interface	Computer in (D-Sub 15pin) HDMI MHL Audio in (Mini jack) Audio out (Mini jack) Speaker USB (Type A) USB (Mini B) Service IR Receiver	x 1 x 3 x 1 share with HDMI x 1 (3.5mm) x 1 (3.5mm) 5W x 2 x 1 (for 1.5A power supply) x 1 (for FW upgrade) x 1 (for service) x 2 (front and back)
On-Screen Display Language	English / Français / Deutsch / Italiano / Español / Русский / 繁體中文 / 简体中文 / 日本語 / 한국어 / Svenska / Nederlands / Türkçe / Čeština / Português / ไทย / Polski / Magyar / Hrvatski / Română / Norsk / Dansk / Български / suomi / Indonesian / Ελληνικά / العربية / हिन्दी	
Picture Modes	Bright / Graphic (sRGB) / Motion Video / Lectures / Cinema (Film) / Vivid Color / User	
Standard Accessories	Remote Control with battery Power Cord (varies by region) Quick Start Guide Warranty Card (varies by region) HDMI Cable VGA Cable	



*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.





BenQ.com

© 2017 BenQ Corporation.
All rights reserved. Rights of modification reserved.

32Q01.003
P/N: 4JJF101.001

EAC

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

