
BIOBIDET®
BY BEMIS

BLISS BB-300 BIDET TOILET SEAT

USER MANUAL

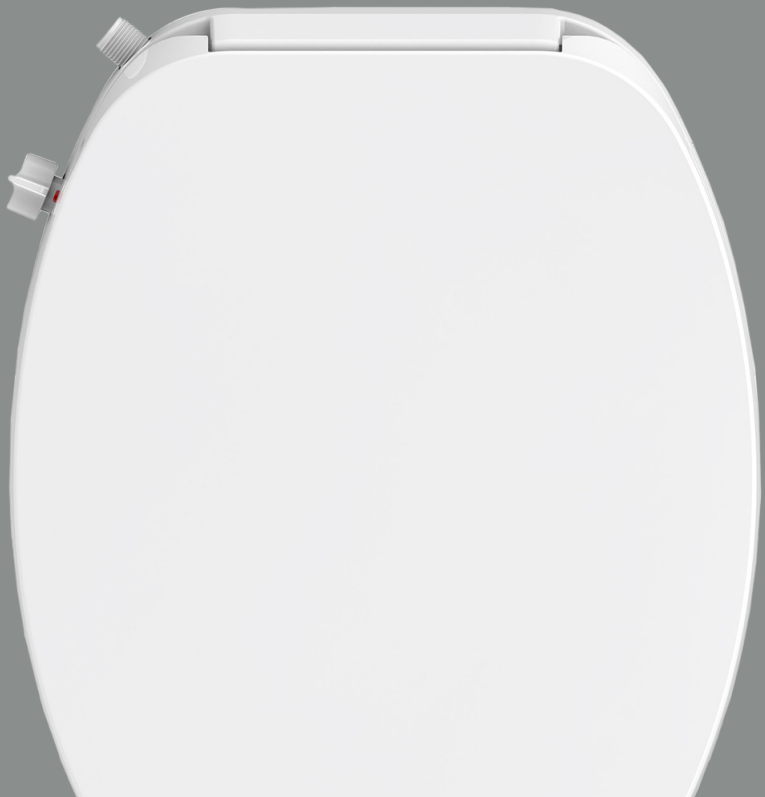

Registration and Installation Resources

Questions? We're here to help.

847.458.2334
support@biobidet.com
www.biobidet.com

Technical support and alternate fittings are available.

TABLE OF CONTENTS

04 **PRODUCT INFORMATION**

Important Safeguards
Dimensions
Overview & Parts
Functions & Features

09 **INSTALLATION**

Installation Guide

13 **MAINTENANCE**

Cleaning Tips
Removing The Bidet Seat
Troubleshooting Guide

15 **WARRANTY**

Warranty
Customer Support

IMPORTANT SAFEGUARDS


PLEASE OBSERVE THE FOLLOWING PRECAUTIONS AND INSTRUCTIONS BEFORE INSTALLATION AND USE.


- Do not open this product for repair without authorization from the manufacturer. Only qualified service personnel should service this product.
  Connect this product to a potable cold water supply line.
- If using any chemical toilet bowl cleaner, be sure to wipe up any spills that splash onto the bidet. Do not use benzene or any acid chemical detergent, as they can cause discoloration. Only neutral detergents are permitted.
- Do not stand on or place a heavy object on seat or cover.
- Seat is intended for use only by persons who weigh between 75 pounds to 325 pounds. Any weight greater than 325 pounds may cause seat to crack or break, resulting in physical injury.
- Use product only for its intended use as described in this manual.
- Do not use accessories not recommended by manufacturer.
- If there is a danger of freezing, follow the same procedures you would normally take to protect your toilet from freezing.

WATER DOES IT **BETTER**®


DIMENSIONS

ELONGATED

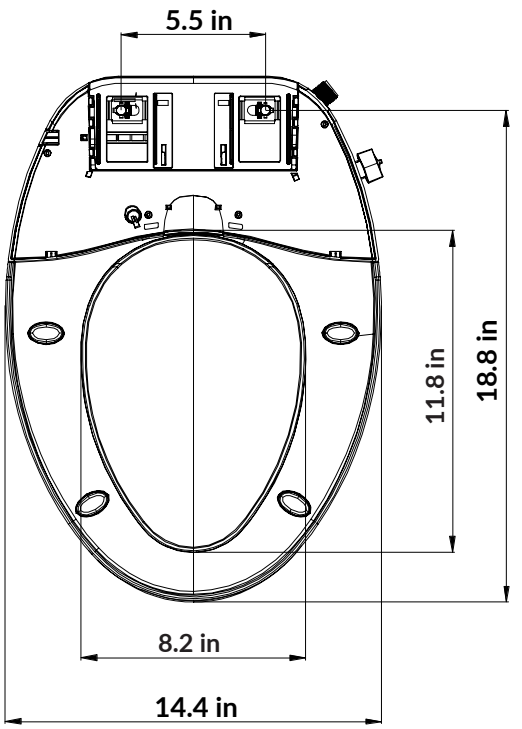


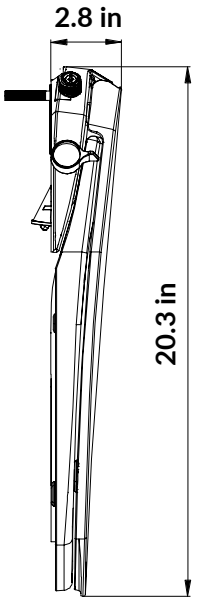

OVERVIEW

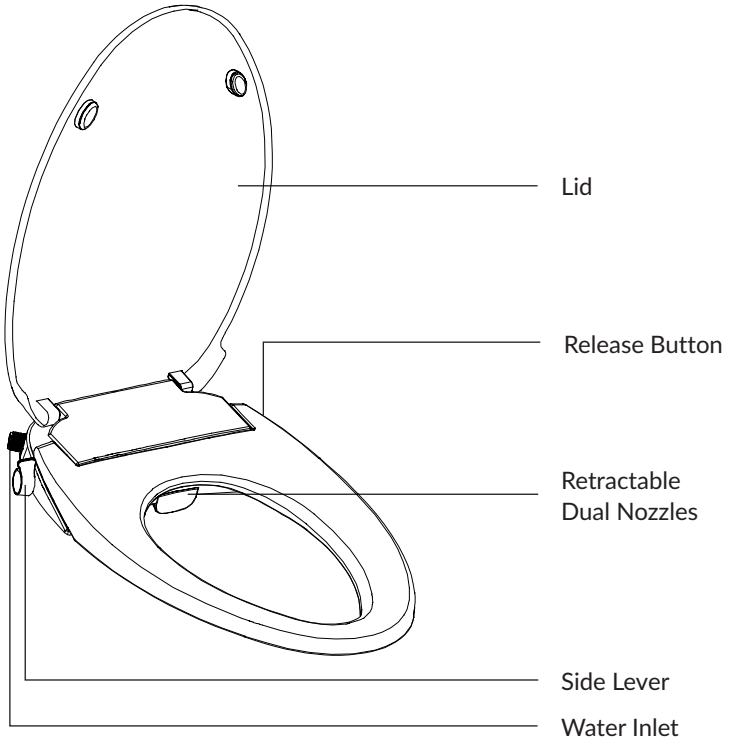


Side Lever with Safety Lock

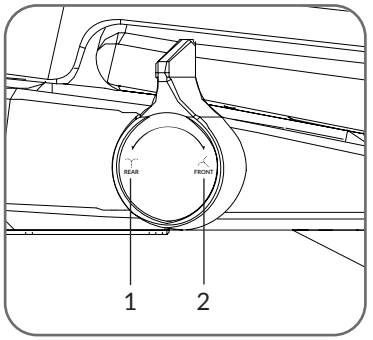


1. Rear Wash
2. Front Wash

Retractable Dual Nozzles

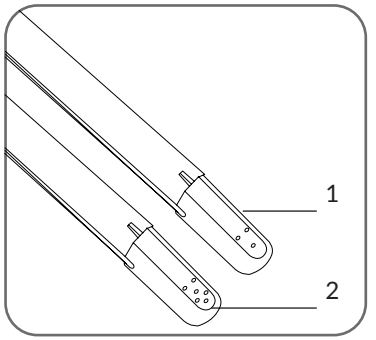


1. Front Wash
2. Rear Wash


PARTS LIST



T-Valve
*Rubber Washer Inside




(2) Stay·Tite®
Bolts



(2) Stay·Tite®
Nuts



(2) Mounting
Brackets



Catch
Plate



Bidet
Hose

Recommended Installation Tools



Wrench




Phillips Screwdriver

FUNCTION & FEATURES

PLEASE NOTE: This seat includes a safety lock feature to prevent any accidental sprays. The knob must be pressed in before it can be turned. When it is turned back to the stop position, the safety lock will automatically engage.


Side Lever (2 Washes)

Front Wash

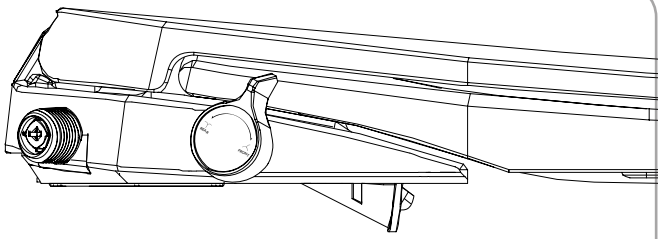

Adjust the water pressure by pressing in, then rotating the control knob button forward.

Rear Wash

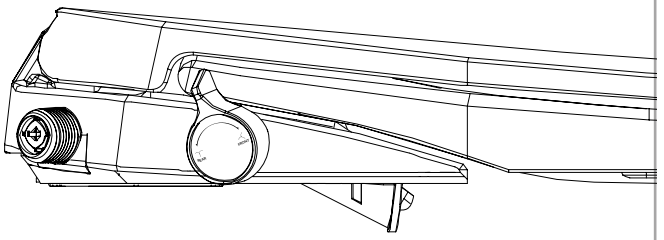


Adjust the water pressure by pressing in, then rotating the control knob button backward.

Stop/ "Off" Adjust the lever to the middle position to turn any wash functions off.

INSTALLATION GUIDE


Please be advised that the provided t-valve should be installed at the fill valve under the toilet tank, NOT down at the water supply coming from the wall. Inspect your current water supply line that connects to the toilet tank fill valve to ensure it is a flexible water supply hose and in good condition before installing. The hose needs to be 7/8" on one end to connect to the t-valve provided. If you are experiencing difficulty, contact Bio Bidet customer support at 847.458.2334 and we may be able to provide alternative hardware kits for those with skirted toilets.

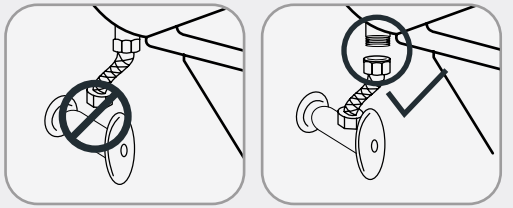

1. Turn Off Water


Turn off the water shut-off valve. Drain the toilet tank completely by flushing the toilet. Unscrew the hose connected to the toilet tank.

You may want to have a towel ready to catch any residual water.

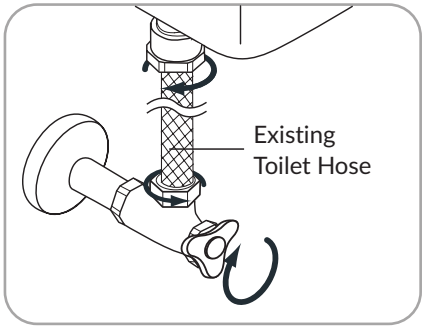


2. Remove Toilet Seat


Remove mounting bolts to release the existing toilet seat from the toilet.

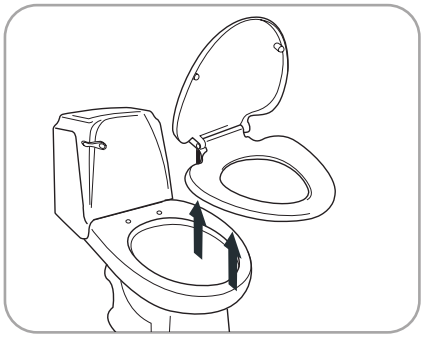


3. Installing the Mounting Plate

Place the mounting plate and bolt guides over the mounting holes. Insert the Stay·Tite® bolts through the metal mounting brackets, mounting plate, and mounting holes. Make sure to align the teeth on the bolts with the slots in the mounting bracket. Lightly finger tighten the Stay·Tite® nuts to the under side of the bowl.

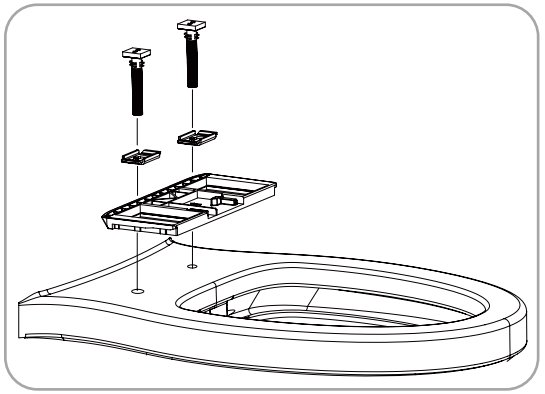


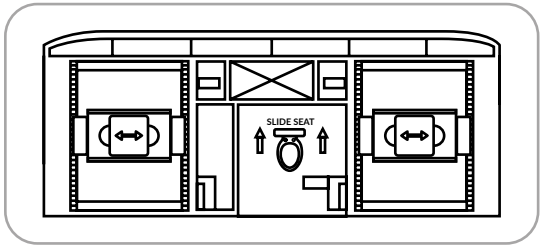

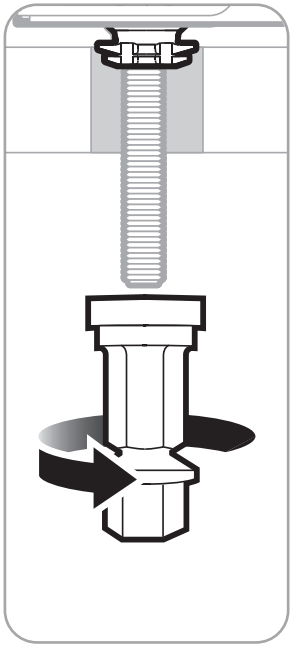

4. Install Your Bidet Seat On The Bowl


Slide the bidet seat all the way onto the mounting plate until you hear a click. Adjust the seat front to back and side to side for a proper fit.

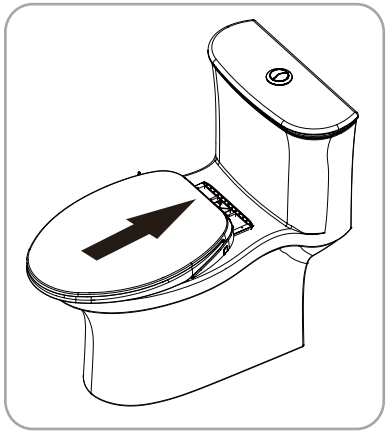


5. Tighten Stay·Tite®

Holding the seat centered on the bowl, tighten the Stay·Tite® nut until the lower portions snap off to prevent over-tightening and will never loosen.

On thinner toilets, nuts can be further tightened if seat does not feel secure after snapping off the nuts.

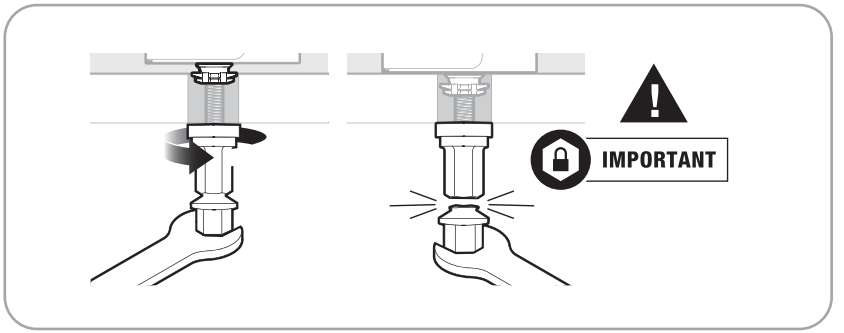

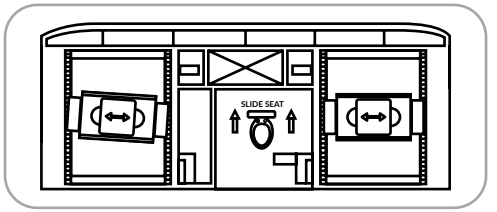

Note: Slight distortion of the bracket may occur due to the strong clamping force of Stay·Tite®. If the bracket slightly shifts during tightening, this will not affect the firm hold of the seat in place.

6. Connect Hoses


a. Install the t-valve onto the toilet tank. Ensure the cone washer is properly seated inside the t-valve.

b. Connect your existing toilet hose to the water shut-off and t-valve.

c. Connect the bidet hose to the bidet seat and t-valve.

d. Open the water shut-off valve. Check for any leaking or dripping. Use a wrench to tighten any loose connections.

Shut-off valves may vary. If supplied parts do not fit, please call 847.458.2334. Alternate fittings may be available upon request.

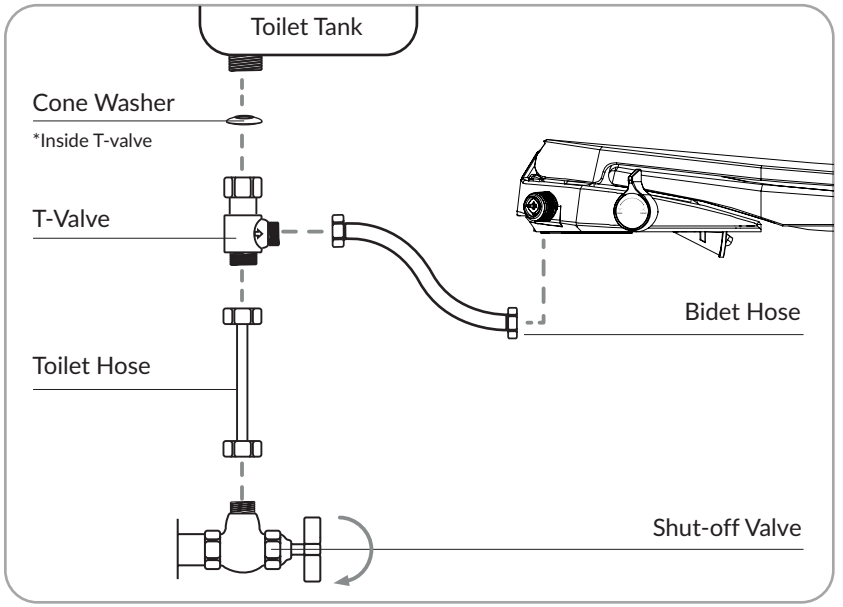

7. Turn On The Water

Slowly turn the water supply valve back on and check for leaks. Test the bidet to make sure it is functioning correctly.

MAINTENANCE


Cleaning the Bidet Seat

When you clean this product, do not use thinner, benzene or toilet bowl cleaner, as it may cause discoloration or damage.

Cleaning the Nozzle


Gently pull out the nozzle. Dip a soft cloth, sponge, or small brush into a neutral cleaning solution.

Use the cloth, sponge, or brush to carefully wipe the nozzle.

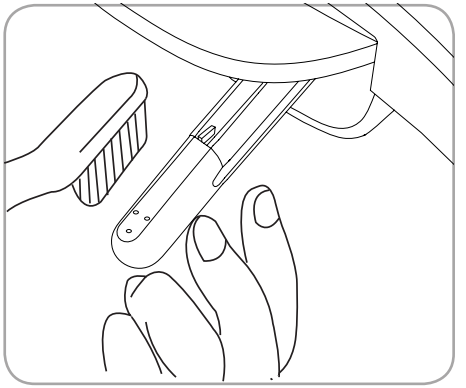


Cleaning the Hose Filter

Turn off the water supply, disconnect the water hose, and clean the hose filter.

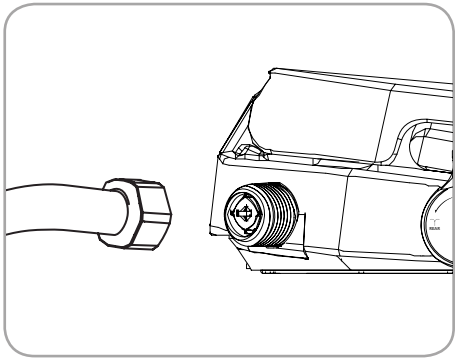

Removing the Bidet Seat

Close the cover. Push and hold the release button and pull the bidet seat forward.

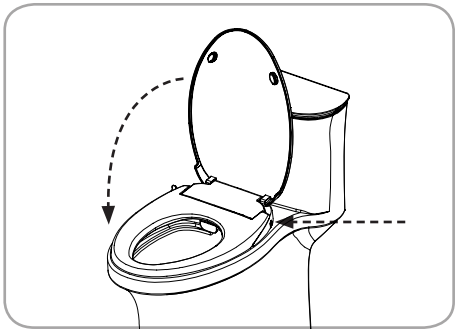

TROUBLESHOOTING GUIDE

Problem	Cause	Solution
Water is too low during REAR WASH/ FRONT WASH	Low water pressure of the unit.	During use, turn the lever forward or backward to highest setting
No water comes out during REAR WASH/ FRONT WASH	Water shut-off valve is turned off	Turn on the water shut-off valve
	Filter of the T-shaped connector is clogged	Clean the filter of the T-shaped connector
	Filter of water inlet hose is clogged	Clean the filter of water inlet hose
	Nozzle head is stuck	Take off and clean the nozzle head
	External water pressure is low	Increase the external water pressure

Do not disassemble, repair, or remodel the unit, as this will void the warranty. If any failure still occurs after above troubleshooting, please contact support@biobidet.com

Product Specifications	
Dimensions (L x W x H) inches	20.3 x 14.4 x 2.7
Weight	4.85lbs
Supply Water Pressure	29 PSI - 87 PSI
Incoming Temperature Range	39.2°F - 95°F
Flow Rate	Rear Wash: 0.20 gal/min - 0.40 gal/min Front Wash: 0.21gal/min ~ 0.41 gal/min
Bidet Hose Length	31.5”
Bidet Hose Fitting/ Connection Size	G 1/2” x G 1/2”
Cold Water T-Valve Connection Size	7/8” x G1/2” x 7/8”

WARRANTY

1 YEAR LIMITED WARRANTY

1 YEAR LIMITED WARRANTY

Bemis warrants that this product will be free of defects in material, workmanship, and title for a period of one (1) year from the date of original purchase. If you provide written notice of a defect to Bemis within the applicable warranty period and provide adequate documentation or evidence that establishes a Product defect to Bemis's satisfaction, your sole remedy is the repair, replacement, or refund of the Product's purchase price (less shipping, if applicable), at Bemis's option. Bemis may, at its option, require the return of any Product for inspection and testing before honoring any defect claim. This Limited Warranty excludes component parts not specified by Bemis, and excludes costs related to shipping and labor, including removal, disposal, repair, or replacement of the defective Product and installation of replacement Product (if applicable). Products returned for a refund must be in original packaging and in saleable condition, and may be subject to a restocking fee. Discontinued colors or models, and custom or specially ordered Products cannot be returned for a refund.
This Limited Warranty is void if: (a) the Product has not been installed, used, or maintained according to any applicable written materials, including written instructions, specifications, packaging, and manuals; (b) the Product is not used for the intended application, or (c) the Product has been modified or repaired without Bemis's express written permission. THIS LIMITED WARRANTY IS PROVIDED IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. BEMIS EXPRESSLY DISCLAIMS LIABILITY FOR SPECIAL, PUNITIVE, EXEMPLARY, CONSEQUENTIAL OR INCIDENTAL DAMAGES ASSOCIATED WITH THE PRODUCT, INCLUDING LOST PROFITS OR BUSINESS INTERRUPTIONS. BEMIS'S LIABILITY UNDER THESE TERMS AND CONDITIONS SHALL NOT EXCEED THE PURCHASE PRICE OF THE PRODUCTS.

Please see BemisMfg.com/terms-and-conditions for complete warranty terms

BIOBIDET®
BY BEMIS

BIOBIDET INNOVATION LLC

460 Jennings Drive, Lake in the Hills, IL 60156
T: 847.458.2334
F: 847.854.1296
support@biobidet.com
www.biobidet.com

THANK YOU!

BIOBIDET®
BY BEMIS

BioBidet Innovation LLC

460 Jennings Drive
Lake in the Hills, IL 60156

T: 847.458.2334
TOLL-FREE: 877.339.5214

support@biobidet.com
www.biobidet.com

5.26 | 1.3