




Parts Manual

Mfg. No: 1692902
6/14E, 6HP Chipper/Shredder (ES)

Model Components	Page
Hopper & Engine Group.....	4
Housing & Electrical Group.....	6
Rotor Group.....	8
Torque Specification Chart.....	10

Not For
Reproduction

**NOTE: Unless noted otherwise,
use the standard hardware torque
specification chart.**

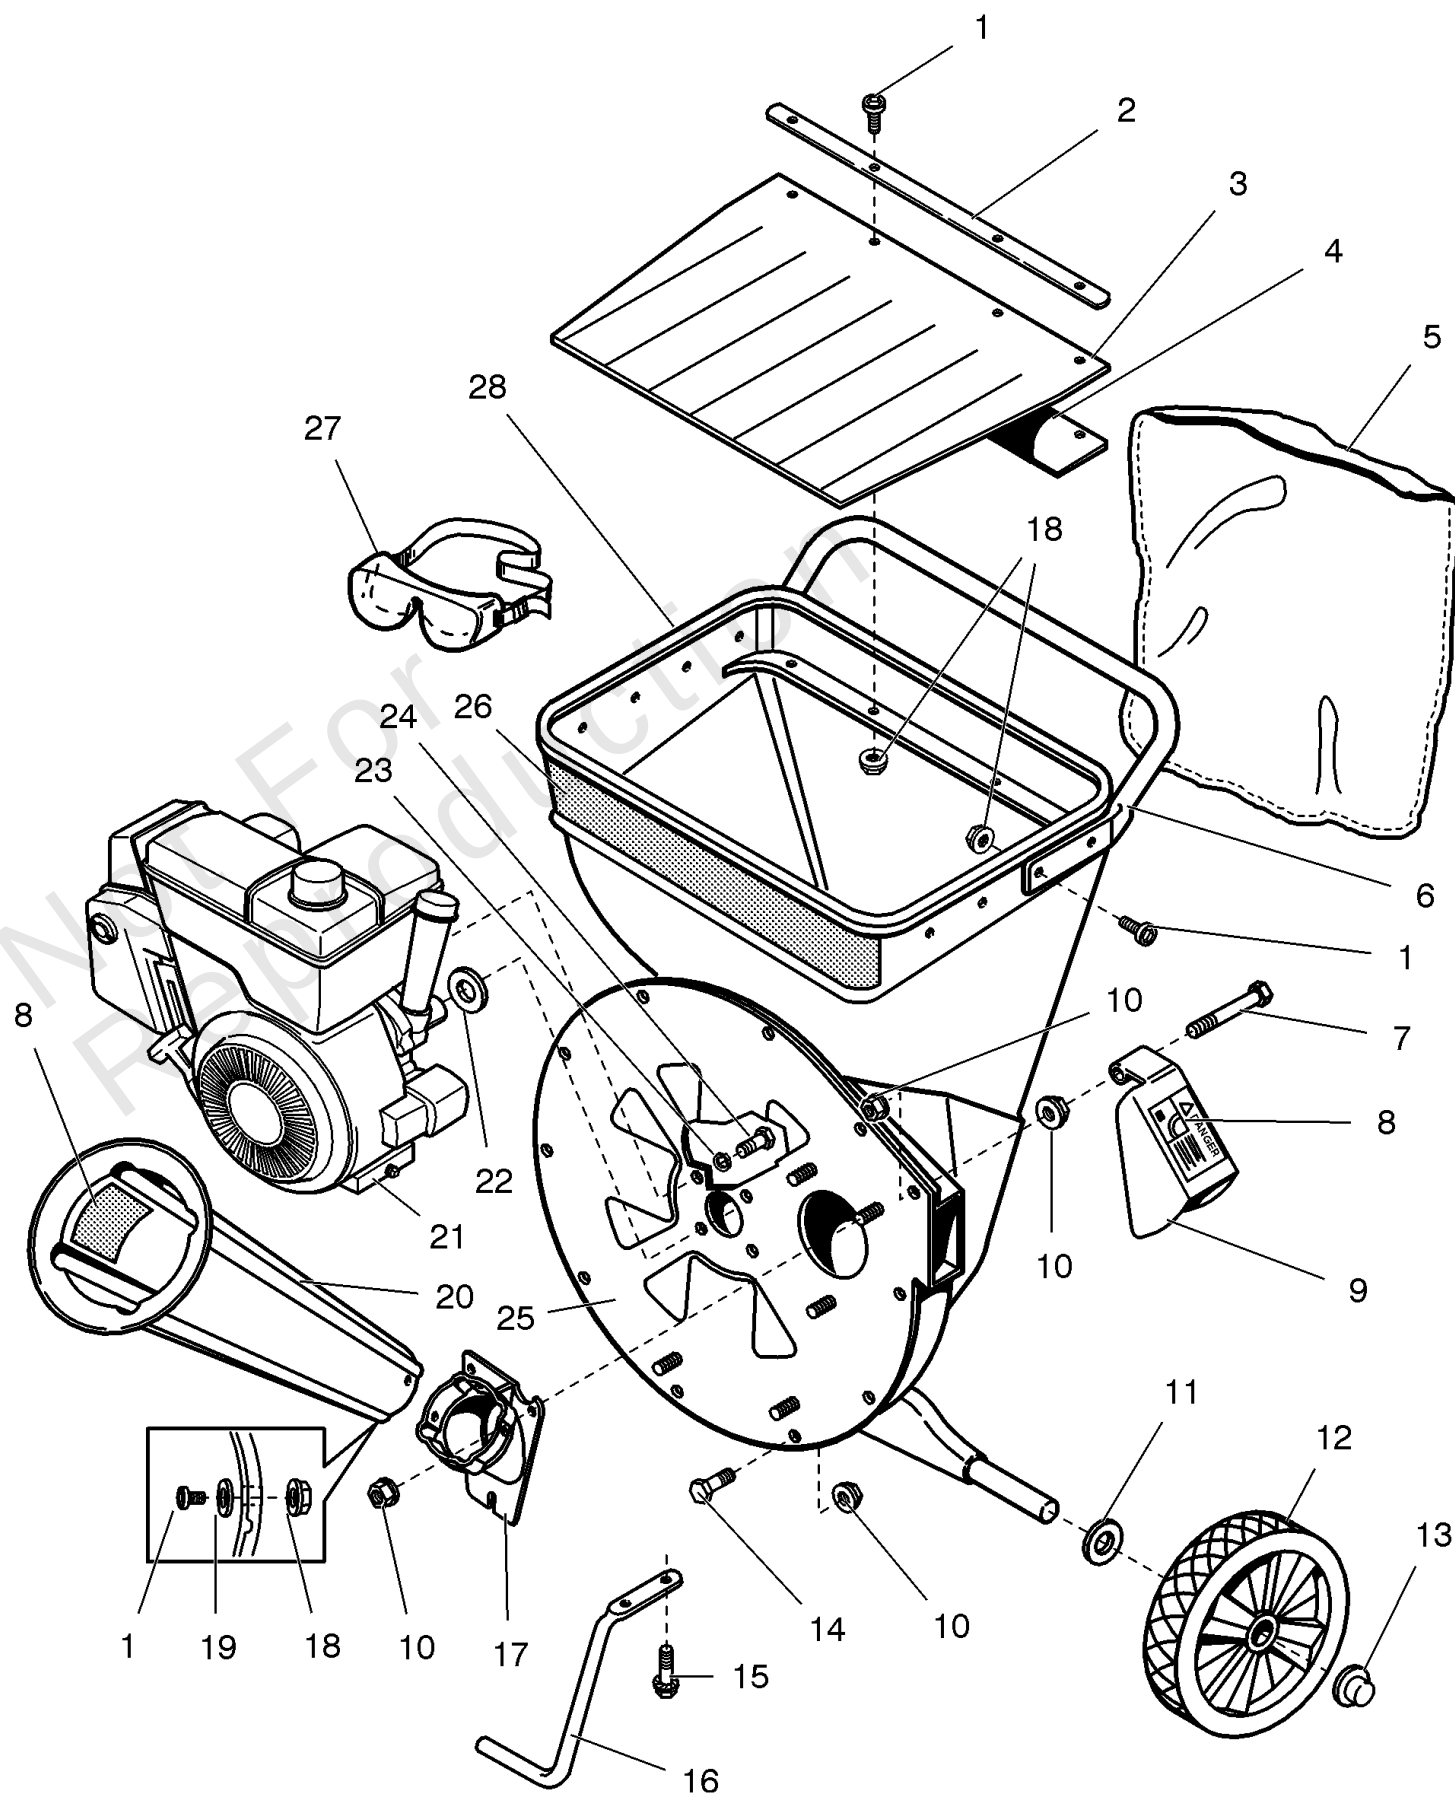

Hopper & Engine Group

REF NO	PART NO	QTY	DESCRIPTION
1	1960507SM	12	SCREW, Button Hd., Hex socket, 1/4-20 x 3/4
2	1098100SM	1	RETAINER STRIP, Hopper Guard
3	1095100SM	1	GUARD, Hopper
4	1709603SM	1	SUPPORT, Hopper Guard
5	1709403SM	1	BAG, Collection, 24" x 36"
6	1729181SM	1	HANDLE, Hopper
7	1926106SM	2	CAPSCREW, Hex Hd. 5/16-18 x 3-1/4, Grade 5
8	1729207SM	3	DECAL, Danger
9	1729194SM	1	DEFLECTOR, Discharge
10	1931277SM	13	NUT, Hex Whiz-lock, 5/16-18
11	1924361SM	2	WASHER, Plain, 17/32 x 1-1/4 x 5/64
12	1714250SM	2	WHEEL & TIRE, 1.75 x 12"
13	1960519SM	2	PUSH NUT, 1/2" dia.
14	1925205SM	8	CAPSCREW, Hex Hd., 5/16-18 x 5/8
15	1928635SM	3	SCREW, Taptite, 3/8-16 x 1-1/4
16	1713099SM	1	ROD, Leg
17	1713272SM	1	CHIPPER CONE CASTING, 3"
18	1930642SM	12	FLANGE NUT, 2-way lock, 1/4-20
19	1921319SM	4	WASHER, Plain
20	1709409SM	1	CONE, Chipper, 3" Yellow
20	1709409SM	1	CONE, Chipper, 3" Orange
21	-----	1	ENGINE
22	2118403SM	1	SHIELD
23	1917356SM	8	LOCKWASHER, Spring, 5/16
24	1921515SM	4	CAPSCREW, Hex, 5/16-24 x 3/4
25	1714085SM	1	ENGINE PLATE ASSY.
26	1717124	1	DECAL, 6/14E Simplicity -(Mfg. 1692902 only)
26	1717125	1	DECAL, 6/14E Baker -(Mfg. 1692904 only)
27	1729013SM	1	GOGGLES
28	1018100SM	1	HOPPER-SHREDDER, Yellow -(Mfg. No. 1692904 only)
28	1713521SM	1	HOPPER-SHREDDER, Orange -(Mfg. No. 1692902 only)

Footnotes:


Note:* See your local Tesmuseh distributor for engine parts and service.

Housing & Electrical Group

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 1692902

**NOTE: Unless noted otherwise,
use the standard hardware torque
specification chart.**

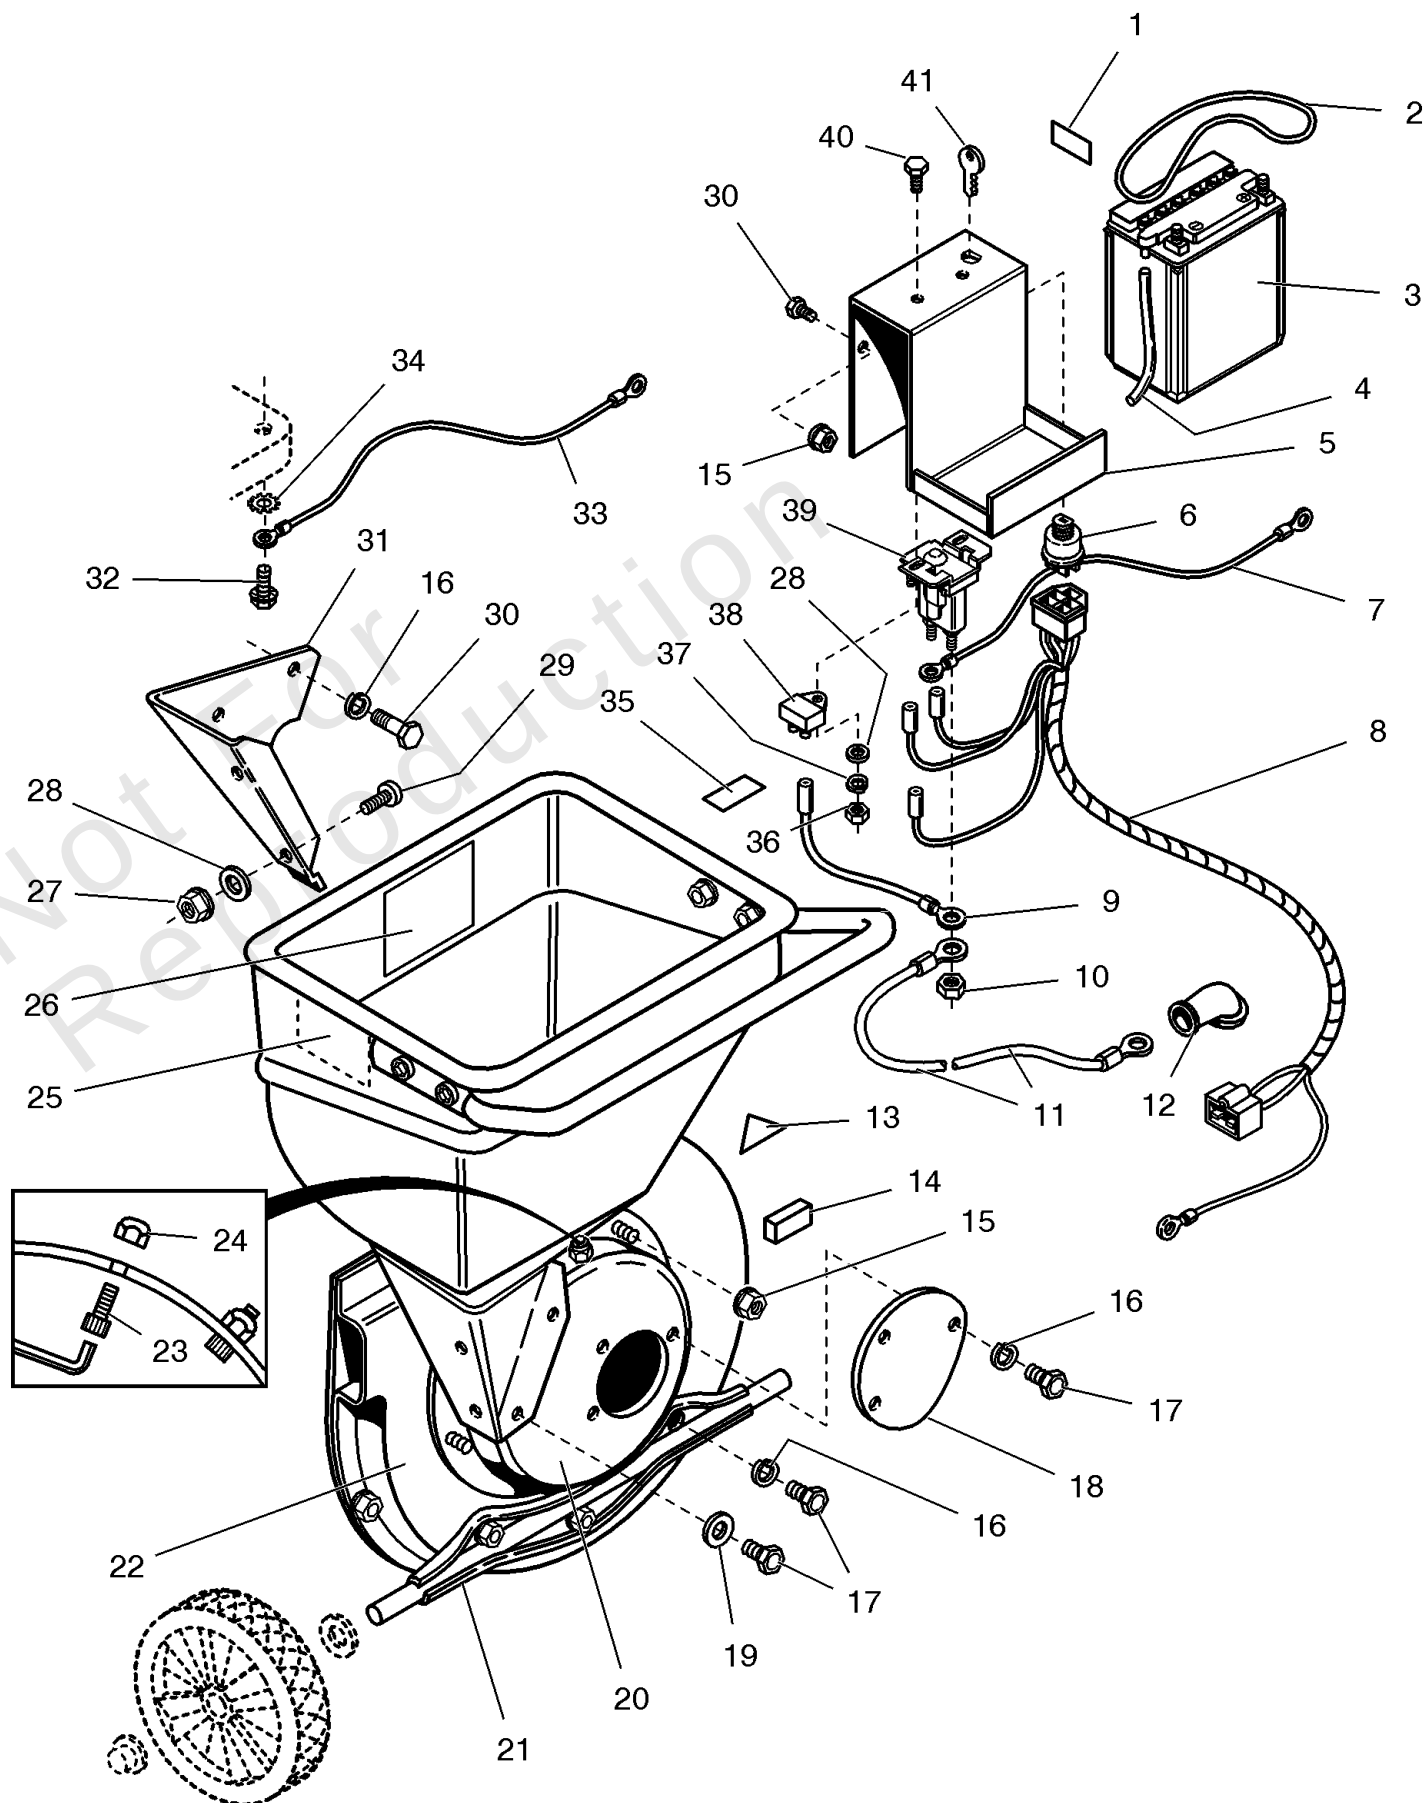

Housing & Electrical Group

REF NO	PART NO	QTY	DESCRIPTION
1	1716893	1	DECAL, Ignition Switch
2	1665872SM	1	STRAP, Battery
3	1686695SM	1	BATTERY
4	-----	1	TUBE, Battery
5	1716892SM	1	BOX, Battery
6	1686734SM	1	IGNITION SWITCH
7	1707056SM	1	CABLE, #6 x 15, 5/16 + 1/4
8	1716894SM	1	WIRE ASSY.
9	1665237SM	1	WIRE ASSY, Circuit Breaker
10	2820263SM	2	NUT, Hex, 5/16-24
11	1668819SM	1	CABLE, #6 x 25, 5/16 + 1/4
12	2122023SM	4	COVER, Terminal
13	-----	1	DECAL, OPEI
14	1713337SM	1	PAD, Foam
15	1931277SM	12	NUT, Hex whiz lock, 5/16-18
16	1917356SM	8	LOCKWASHER, Spring, 5/16
17	1920787SM	8	CAPSCREW, Hex. Hd., 5/16-18 x 1/2, Grade 5
18	1729174SM	1	COVER-ROTOR HOUSING 2
19	1924874SM	4	WASHER, Plain, 11/32 x 7/8 x 1/16
20	1729175SM	1	HOUSING-ROTOR W/WELDN
21	1729164SM	1	AXLE ASSY.
22	1729160SM	1	FAN HOUSING ASSY.
23	1729214SM	2	CAPSCREW, Socket Hd., 5/16-18 x 1/2
24	1919438SM	2	NUT, Fiber lock, 5/16-18
25	1729207SM	1	DECAL, Danger
26	1729208SM		DECAL, Caution/Operate
27	1930642SM	2	NUT, Flange, 2-way Lock, 1/4-20
28	1921319SM	4	WASHER, Plain, 17/64 x 5/8 x 3/64
29	1960507SM	2	SCREW, Button Hd. Hex Socket, 1/4-20 x 3/4
30	1921332SM	4	CAPSCREW, Hex Hd., 5/16-18 x 3/4
31	1729176SM	1	LINER, Hopper
32	1928635SM	1	SCREW, taptite, 3/8-16 X 1-1/4
33	1703589SM	2	CABLE, #6 x 31, 3/8 + 1/4
34	2820427SM	1	LOCKWASHER, Ext., Tooth
35	-----	1	DECAL, Patent
36	1916622SM	3	NUT, Hex, 1/4-20
37	1916964SM	3	LOCKWASHER, 1/4
38	1665238SM	1	BREAKER-CIRCUIT
39	1686981SM	1	SOLENOID
40	1921959SM	2	CAPSCREW, Hex Hd. 1/4-20 x 5/8
41	1717163SM		KEY-IGNITION INDAK

Footnotes:


Note:* Not a servicable part.
Note:* Not a serviceable part.

Rotor Group

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 1692902

**NOTE: Unless noted otherwise,
use the standard hardware torque
specification chart.**

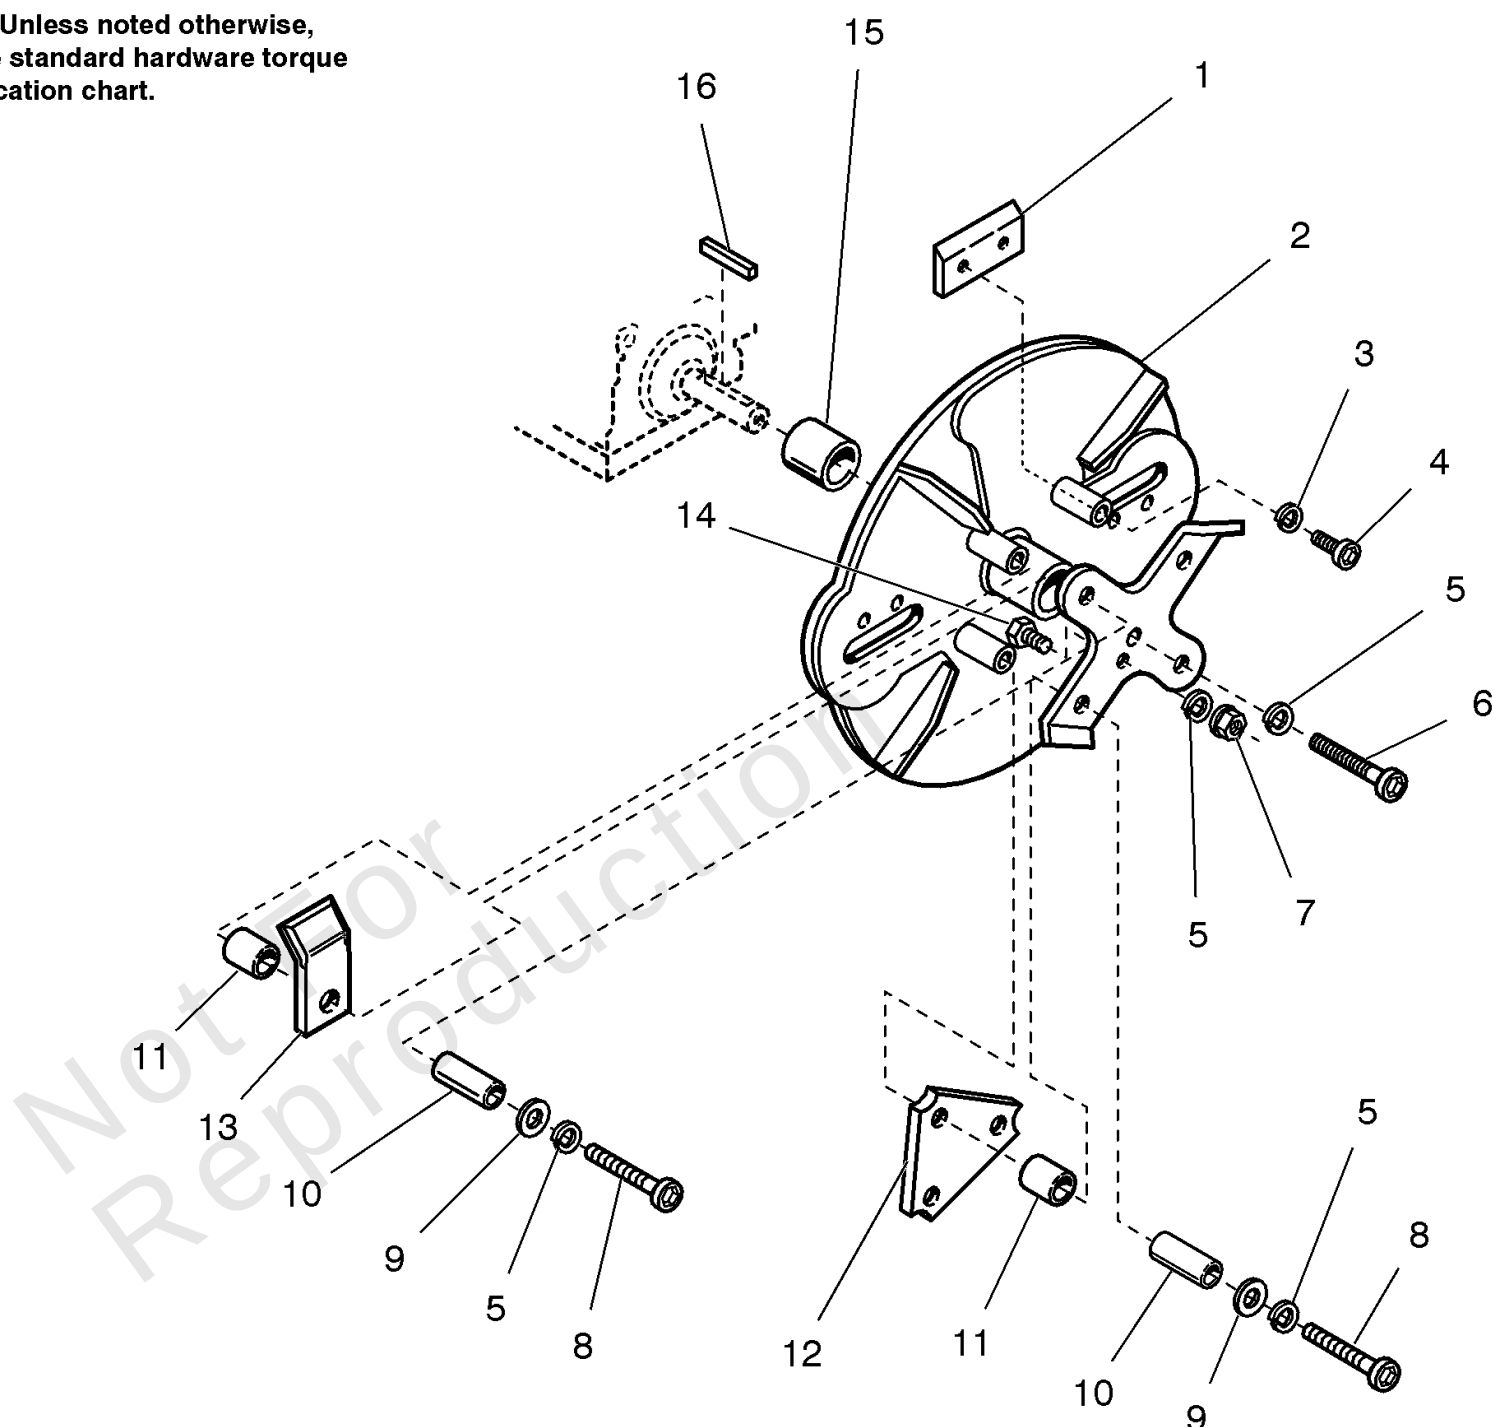

Rotor Group

REF NO	PART NO	QTY	DESCRIPTION
1	1729148SM	2	KNIFE-.250THK 1.37 WD
2	1714177SM	1	ROTOR ASSY.
3	1917356SM	4	LOCKWASHER, Spring, 5/16
4	1729215SM	4	CAPSCREW, Socket Hd. 5/16-24 x 5/8
5	1916965SM	3	LOCKWASHER, 3/8-16
6	1729235SM	1	CAPSCREW, Socket Hd. 3/8-25 x 2, Grade 8
7	1916950SM	2	NUT, Hex, 3/8-16
8	1960508SM	4	CAPSCREW, Socket Hd., 3/8-16 x 2, Grade 8
9	1924940SM	4	WASHER, Plain, 13/32 x 7/8 x 5/64
10	1709614SM	4	SPACER
11	1709616SM	4	SPACER, 33/64 X 1 X 33/64
12	1729138SM	2	HAMMER-TRIANGLE
13	1729137SM	2	HAMMER-J
14	1729236SM	2	CAPSCREW, Socket Hd. 3/8-16 x 5/8
15	1729132SM	1	SPACER, Rotor, 13/32 x 1 x 13/16
16	2805100SM	1	KEY, Square, 1/4 x 1/4 x 2-1/4

Hardware Identification & Torque Specifications

Torque Specification Chart								
FOR STANDARD METRIC MACHINE HARDWARE (Tolerance ± 20%)								
Property Class	 Class 5.6		 Class 8.8		 Class 10.9		 Class 12.9	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
M3	5.88	.56	13.44	1.28	19.2	1.80	22.92	2.15
M4	13.44	1.28	30.72	2.90	43.44	4.10	52.56	4.95
M5	26.4	2.50	60.96	5.75	5.97	8.10	7.15	9.7
M6	44.64	4.3	7.3	9.9	10.3	14	12.1	16.5
M7	5.2	7.1	12.1	16.5	16.9	23	19.9	27
M8	7.7	10.5	17.7	24	25	34	29	40
M10	15	21	35	48	50	67	59	81
M12	26	36	61	83	86.2	117	103	140
M14	42	58	101	132	136	185	162	220
M16	64	88	147	200	210	285	250	340
M18	89	121	202	275	287	390	346	470
M20	126	171	290	390	405	550	486	660
M22	169	230	390	530	559	745	656	890
M24	217	295	497	375	708	960	840	1140
M27	320	435	733	995	1032	1400	1239	1680
M30	435	590	995	1350	1401	1900	1681	2280
M33	590	800	1349	1830	1902	2580	2278	3090
M36	759	1030	1740	2360	2441	3310	2935	3980
M39	988	1340	2249	3050	3163	4290	3798	5150

The guides and ruler furnished below are designed to help you select the appropriate hardware.



Standard Hardware Sizing

When a washer or nut is identified as 1/2" (M8), this is the *Nominal size*, meaning the *inside diameter* is 1/2 inch (8mm metric thread diameter); if a second number is present it represents the *threads per inch* (distance between threads).

When bolt or capscrew is identified as 1/2 - 16 x 2" (M8 - 1.25 x 50), this means the *Nominal size*, or body diameter is 1/2 inch (8mm metric thread diameter), the second number, 16, represents the *threads per inch*, (*distance between threads*). The final number is the body length of the bolt or screw, 2 inches (50mm).

Torque Specification Chart						
FOR STANDARD MACHINE HARDWARE (Tolerance ± 20%)						
Hardware Grade	 SAE Grade 2		 SAE Grade 5		 SAE Grade 8	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
8-32	19	2.1	30	3.4	41	4.6
8-36	20	2.3	31	3.5	43	4.9
10-24	27	3.1	43	4.9	60	6.8
10-32	31	3.5	49	5.5	68	7.7
1/4-20	66	7.6	8	10.9	12	16.3
1/4-28	76	8.6	10	13.6	14	19.0
5/16-18	11	15.0	17	23.1	25	34.0
5/16-24	12	16.3	19	25.8	29	34.0
3/8-16	20	27.2	30	40.8	45	61.2
3/8-24	23	31.3	35	47.6	50	68.0
7/16-14	30	40.8	50	68.0	70	95.2
7/16-20	35	47.6	55	74.8	80	108.8
1/2-13	50	68.0	75	102.0	110	149.6
1/2-20	55	74.8	90	122.4	120	163.2
9/16-12	65	88.4	110	149.6	150	204.0
9/16-18	75	102.0	120	163.2	170	231.2
5/8-11	90	122.4	150	204.0	220	299.2
5/8-18	100	136	180	244.8	240	326.4
3/4-10	160	217.6	260	353.6	386	525.0
3/4-16	180	244.8	300	408.0	420	571.2
7/8-9	140	190.4	400	544.0	600	816.0
7/8-14	155	210.8	440	598.4	660	897.6
1-8	220	299.2	580	788.8	900	1,244.0
1-12	240	326.4	640	870.4	1,000	1,360.0

NOTES

- These torque values are to be used for all hardware excluding: locknuts, self-tapping screws, thread forming screws, sheet metal screws and socket head setscrews.
- Recommended seating torque values for locknuts:
 - for prevailing torque locknuts - use 65% of grade 5 torques.
 - for flange whizlock nuts and screws - use 135% of grade 5 torques.
- Unless otherwise noted on assembly drawings, all torque values must meet this specification.

Common Hardware Types



Wrench & Fastener Size Guide

 1/4" Bolt or Nut Wrench—7/16"	 5/16" Bolt or Nut Wrench—1/2"	 3/8" Bolt or Nut Wrench—9/16"	 7/16" Bolt or Nut Wrench (Bolt)—5/8" Wrench (Nut)—11/16"	 1/2" Bolt or Nut Wrench—3/4"
M6 Bolt or Nut Wrench—10mm	M8 Bolt or Nut Wrench—13mm	M10 Bolt or Nut Wrench—17mm	M12 Bolt or Nut Wrench—19mm	M14 Bolt or Nut Wrench—22mm

