

Supplement Sheet

Date: March 15, 2010

Subject: Hitch Bracket

Model(s): 17AI5BHB010, 17AI5BHB056,
17AI5BHB009, 17AP5BHB710,
17AI5GHD010, 17AI5GHD210,
17AP5GHD710

Before operating the Z-Force S or Z-Force S LPG tractor, the rear hitch bracket must be removed and placed in the proper operating position.

Install the Rear Hitch Bracket

1. Remove the hex flange screws and flange lock nuts that secure the hitch bracket and muffler mount bracket to the bumper bracket. See Fig. 1.

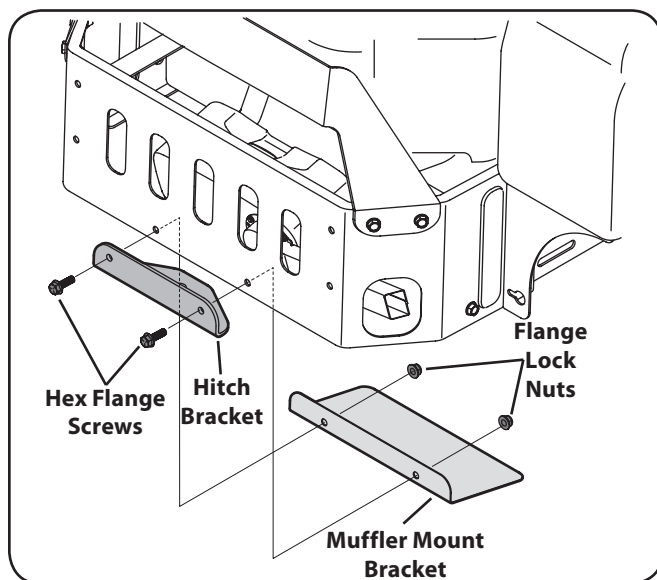


Figure 1

2. Install the hitch bracket and muffler mount bracket as shown in Fig. 2 and secure with the hex flange screws and flange lock nuts removed in step 1.

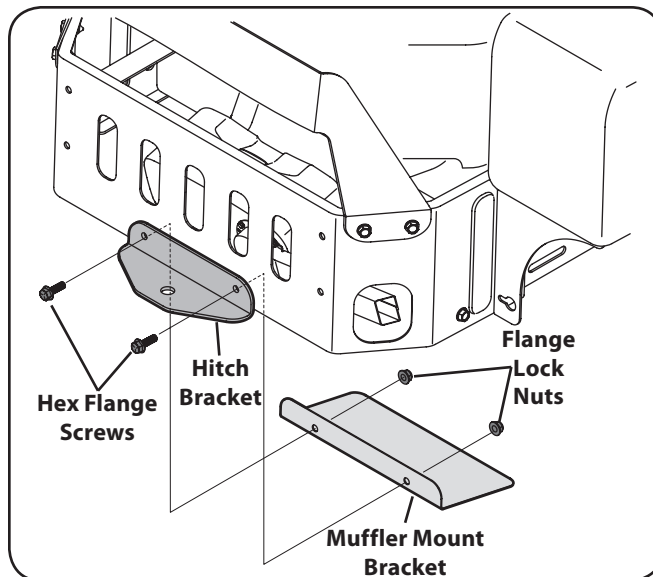


Figure 2

CUB CADET LLC, P.O. BOX 361131 CLEVELAND, OHIO 44136-0019