

Supplement Sheet

Date: October 2, 2014

Subject: Snow Thrower Installation

Model(s): 19A40023100

To correctly install the snow thrower attachment on tractors with a brush guard, the brush guard and bumper need to be removed. See Figure 1-1.

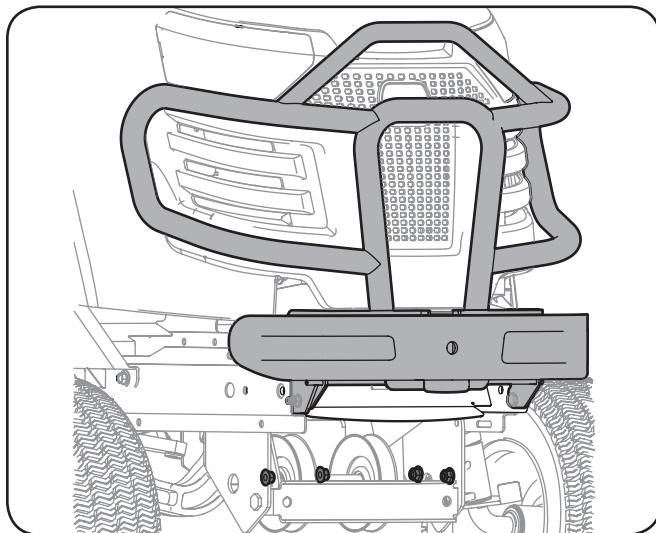



Figure 1-1

Tools required:

$\frac{5}{8}$ " , $\frac{1}{2}$ " , $\frac{7}{16}$ " wrenches and/or sockets

Remove the brush guard and bumper as follows:

1. Un-hook the two springs from under the frame. See Figure 1-1.

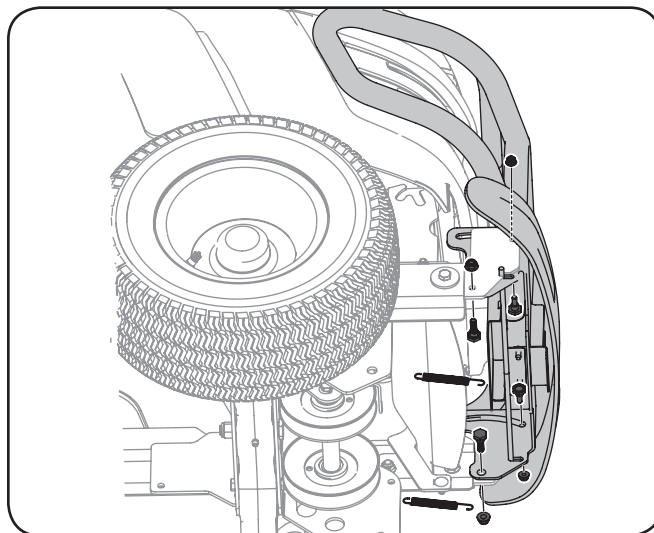

2. Remove the shoulder bolts and nuts that secure the bumper and brush guard to the frame. See Figure 1-1.
3. The bumper and brush guard can be re-installed after the snow thrower attachment is removed. Be sure to keep the hardware in a safe place for re-installing the brush guard and bumper.

CUB CADET LLC, P.O. BOX 361131 CLEVELAND, OHIO 44136-0019
