

Product Specifications

Printing Method	Drop on demand 48-nozzle ink jet
Print Speed	Letter Quality: 150 cps (10 cpi) 180 cps (12 cpi) 225 cps (15 cpi)
Resident Bit-Mapped Fonts	Epson Roman 10, 12, 15 proportional Epson Sans Serif 10, 12, 15 proportional Epson Courier 10, 12, 15 Epson Prestige 10, 12, 15
Scalable Fonts	Epson Roman 8 to 32 points Epson Sans Serif 8 to 32 points Epson Roman T (PS) 8 to 32 points Epson Sans Serif H (PS) 8 to 32 points
Sound Level	45 dB (A)
Emulation	Epson ESC/P 2™
Maximum Graphics Resolution	360 x 360 dpi
Print Enhancements	
Bit-mapped fonts	Double-wide, double-high, condensed
Bit-mapped & scalable fonts	Superscript, subscript, emphasized, underline, outline, shadow, italic, strike-through, double-underline, overscore, double-strike
Dimensions	
H x W x D	5.5" x 17" x 10.3"
Weight	11 lbs.
Input Buffer	32KB - Mixed text/graphics ON 8KB - Mixed text/graphics OFF
Interfacing	Centronics-compatible 8-bit parallel standard
Character Matrix (Bit mapped LQ)	48 x 36 letter quality mode (10 cpi) 48 x 30 letter quality mode (12 cpi) 32 x 24 letter quality mode (15 cpi)
Character Sets	596 ASCII characters; 14 international character sets; 128 user-defined characters; extended IBM style graphics characters; legal characters; 5 code pages
Column Width	Pica (10 cpi): 80 Elite (12 cpi): 96 (15 cpi): 120 Condensed Pica (17 cpi): 137 Condensed Elite (20 cpi): 160
Electrical Requirements	120V AC+/- 10%; 50 to 60 Hz; 60 VA Maximum
Formatting	32 horizontal tabs, line spacing in 1/6", 1/8" or programmable (minimum 1/360" increments), page length in lines or inches

Epson Stylus™ 800 Ink Jet Printer

Hardware Features	Control panel selection of fonts, form feed, default settings
Ink Cartridge	Black - 700,000 characters
Paper Feed Mechanism	Friction feed with auto sheet feed or manual insertion
Paper Feed Speed	82 milliseconds per 1/6" line spacing
Paper Handling	
Cut sheet (paper tray)	
Size	Letter (Width 8.5" x Length 11")
Thickness	.0026 to .0055 inches
Weight	18 to 24 lbs.
Quality	Bond paper, plain paper
Cut sheet (manual insertion)	
Width	7.1" - 8.5"
Length	10.1" - 11.7"
Thickness	.0026 to .0043 inches
Weight	14 to 24 lbs.
Quality	Bond paper, plain paper
Envelope No. 6	
Size (W x L)	6.5" x 3.6"
Envelope No. 10	
Size (W x L)	9.5" x 4.1"
Thickness	.0063 to .0197 inches
Weight	12 to 24 lbs.
Quality	Bond paper, plain paper, air mail
Print Direction	Bi-directional logic seeking in text and graphics modes
Printable Area	
Minimum top margin	.12"
Minimum left margin	.12"
Minimum right margin	.38" letter size; .12 manual insertion
Minimum bottom margin	.51"
Environmental Characteristics	
Temperature	Operating: 50° to 95° (10° to 35°C) Storage: -4° to 140° (-20° to 60°C)
Humidity	Operating: 20 to 80% relative humidity Storage: 5 to 85% relative humidity (no condensation)
Safety Approvals	
Safety Standards	UL1950 w/D3, CSA22.2 #290
R.F.I.	FCC Part 15 Subpart B class B
Reliability/Life Expectancy	
Printer	MTBF 4,000 power on hours
Print head life:	1 billion dots per nozzle
Order Codes	
Ink Cartridge	S020025
Warranty	Two-year limited warranty in the U.S.
Support	Epson Connection information hotline 800-922-8911 Faxback System 310-782-4214 Electronic Bulletin Board 310-782-4531



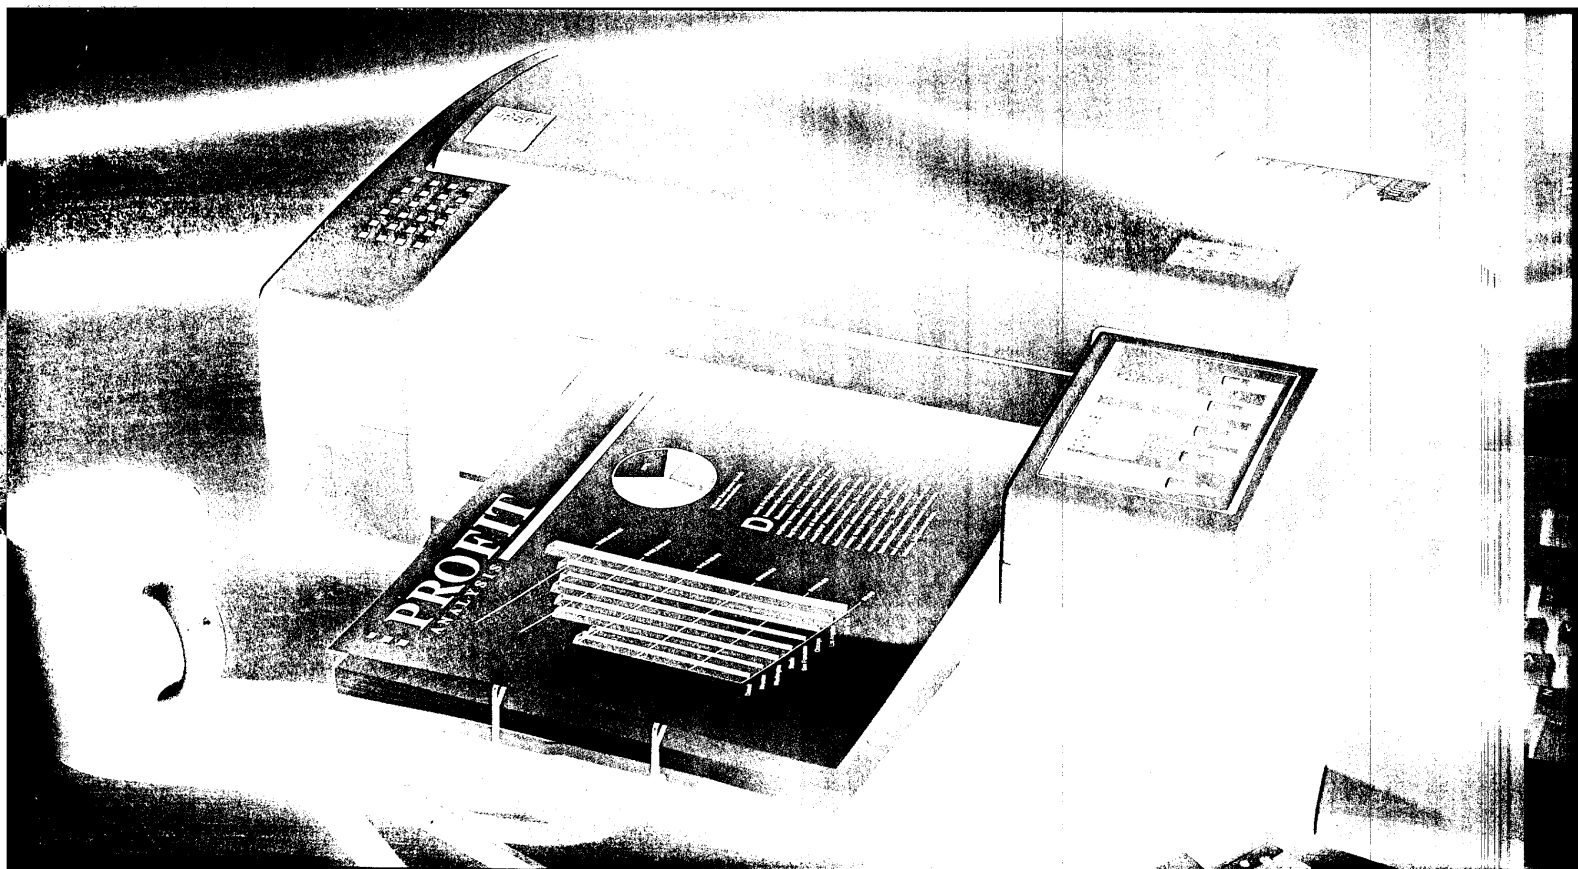
USA: Call 1-800-289-3776 for the nearest dealer location
Epson America, Inc. 20770 Madrona Avenue, Torrance, CA 90503

Canada: Call 1-800-463-7766 Epson Canada, Ltd.
550 McNicoll, Willowdale, Ontario M2H 2E1 Fax 416-498-4574

Latin America: Call 1-305-265-0092 Epson Latin American, Inc.
6303 Blue Lagoon Drive, Suite 390, Miami, Florida 33126 Fax 301-265-0097

Specifications are subject to change without notice. Epson is a registered trademark and Epson Stylus is a trademark of Seiko Epson Corporation; Epson ESC/P 2 is trademark and Epson Connection is a servicemark of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. © Copyright 1993 Epson America, Inc. CPD-1294-R1 200M 9.93 AL

Printed on Recycled Paper ♻️

EPSON®**Epson Stylus™ 800 Ink Jet Printer**

Affordable as an ordinary ink jet, but its print quality is extraordinary.

Now you can have the finest ink jet technology ever offered, with the Epson Stylus 800.

The Stylus 800 prints 360 dots per inch, with the sharpest, clearest images ever formed by a personal ink jet. Epson's exclusive high pressure "Piezo" print head applies ink with the greatest precision yet seen in an ink jet and at the lowest cost per page.*

Scalable fonts let you change the size of typefaces easily. And when you're working with graphics, the Stylus 800 will really do them justice.

The Epson Stylus 800 truly is an extraordinary ink jet printer. Print a page for yourself and see. You'll never settle for ordinary again.

Crisp laser-sharp printing

Amazingly sharp, clean output of text and graphics at 360 dots per inch.

Convenient paper handling

High capacity 100 sheet plain paper tray cuts down on reloading. Easily handles single envelopes and transparencies

Fast, quiet and compact

150 characters per second. Whisper-quiet, at 45 dB(A). Very compact at 17" x 10.5".

Your choice of fonts

Seven built-in typefaces, with four scalable fonts. Windows™ compatible.

Epson support

Two-year limited warranty and toll-free Epson Connection™ technical support hotline to answer your questions.

Award-winning

Won leading industry magazine awards for Best Value, Top Rated and Experts' Pick for ink jet printers.



* Based on an independent test comparing the standard printing modes of the Canon BJ-200, the HP DeskJet 500 and the Epson Stylus 800.

See other side for technical specifications.