
Fanttik

NEX S1 Capsule Cordless Screwdriver

User Manual

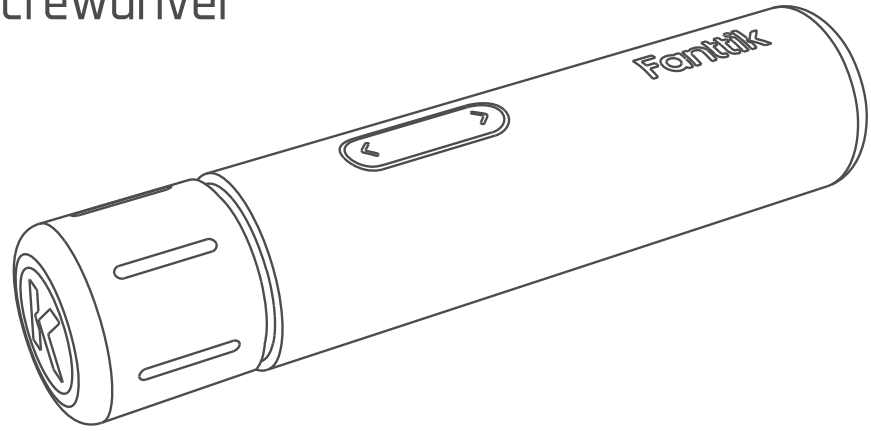

Please read this instruction manual carefully
before use and keep it for future reference.

Contents

1.Safety Warnings - - -


1.Safety Warnings

- Avoid moisture, dust, and drop.
- Do not store the product in extreme temperature environment.
- Stay alert, watch what you are doing and use common sense when operating. Do not operate while you are tired or under the influence of drugs, alcohol or medication.
- This product is not a toy and should not be used by kids under 10 years old.

- This product has built-in battery, do not throw it into fire and should be recycled by local laws and regulations.
- Do not dismantle the machine by yourself. Have your power tool serviced by a qualified repair person or contact us for advice.

2.Product Overview

1.Screwdriver Cap
2.Double-ended Bits
3.LED Light
4.Forward/Reverse Rotation Button
5.Power Indicator
6.USB Type-C Charging Port

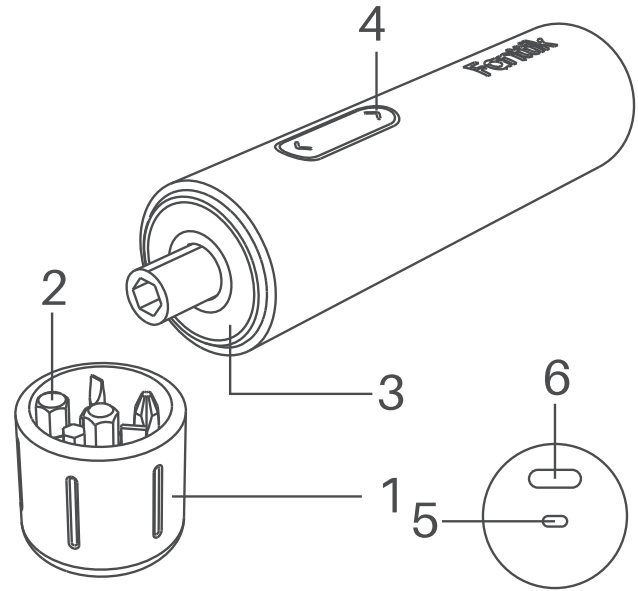

3.How to Use

Forward/Reverse rotation button

- Press the Forward/Reverse Rotation button to tighten or loosen a screw.

Turn on/off the LED light

- When press the forward/reverse rotation button, the LED light turns on simultaneously.

- The LED light will stay on for 10 seconds without any operation.

Power Indicator

- When the battery level is below 20% in use, the indicator will rapidly blink white.
- When charging, the indicator will slowly blink white.
- When the battery is fully charged, the indicator will become solid white.

Battery Charging

- This screwdriver is equipped with a universal Type-C charging port. Charger and charging cable are not included. Please use a 5V charger for charging. The screwdriver supports a maximum charging input of 5V/1A.

4.Specifications

Product Name	Cordless screwdriver
Product Model	NEX S1 Capsule
Product Dimension	152.6*34*34 mm
Net Weight	240g
Max. hard torque	5 N·m
Max. manual torque	8 N·m

Rotation Speed (unloaded)	320±10%RPM
Battery Capacity	850mAh/3.15Wh
Rated Voltage	3.7V
Charging Input	5V/1A
Charging Time	90min

Bit specifications

Bit Shank: 1/4-inch (6.3mm) hex shank

Bit Material: Coated S2 Steel

Bit 1: PH1, PH2

Bit 2: SL4, SL5

Bit 3: TR20, TR25

Bit 4: H3, H4

Bit 5: H5, H6

929-693-6066 MON-FRI 9AM-5PM (ET)
www.fanttik.com
support@fanttik.com
METASEE LLC
12 GREENWAY PLZ STE 1161A HOUSTON,
TX 77046-1203

RoHS
Made in China