



Product features and decoration may vary from photos shown.

- Keep these instructions for future reference as they contain important information.

IMPORTANT! It is a good practice to start training children very young regarding the importance of helmet use. When children are older and riding bicycles and faster vehicles, it is important that they use a helmet each and every time they ride. For this reason, even while riding a tricycle, it is a good idea to familiarize your child with helmet use, so that it becomes a habit for life. Choose a helmet that complies with requirements of the applicable certifying agency for bicycle helmets. In the United States, choose a helmet that complies with requirements of the U.S. Consumer Product Safety Commission (CPSC) Standard 16 CFR 1203. Outside the U.S., choose a helmet that complies with the requirements of the applicable certifying agency for bicycle helmets.

- Periodically inspect this product for wear or damage. Check the plastic parts and if broken or cracked, dispose of them properly. Replace worn or broken parts immediately.
- Periodically check all fasteners regularly to be sure they are tight. If the fasteners are not tight, tighten them as necessary.
- To clean, use a mild soap and water solution and a clean cloth. Rinse clean with water to remove soap residue.
- Adult assembly is required.
- Tools required for assembly: Phillips screwdriver, hammer and scrap block of wood (not included).
- Age: 2-5 years
- Weight limit: 25 kg (55 lb).
- Choose areas for riding that are free of obstacles.
- Learn to stop safely.
- Use with caution as this product requires skill to operate safely to avoid falls, collisions, and injuries to yourself (the rider) and others.



CONSUMER ASSISTANCE

1-800-432-5437 (US & Canada)

1300 135 312 (Australia)

service.fisher-price.com

Fisher-Price, Inc., 636 Girard Avenue, East Aurora, NY 14052.
Hearing-impaired consumers: 1-800-382-7470.

Outside the United States:

Canada: Mattel Canada Inc., 6155 Freemont Blvd.,
Mississauga, Ontario L5R 3W2; www.service.mattel.com.

Great Britain: Mattel UK Ltd, Vanwall Business Park,
Maidenhead SL6 4UB. Helpline: 01628 500303.
www.service.mattel.com/uk

Mattel Europa B.V., Godel 1, 1186 MJ Amstelveen, Nederland.

Australia: Mattel Australia Pty. Ltd., 658 Church Street,
Locked Bag #870, Richmond, Victoria 3121 Australia.

New Zealand: 16-18 William Pickering Drive,
Albany 1331, Auckland.

South Africa: Mattel South Africa (PTY) LTD, Office 102 I3,
30 Melrose Boulevard, Johannesburg 2196.

Parts

- Tighten assembled screws with a Phillips screwdriver. Do not over-tighten the screws.
- Please save all packaging material until assembly is complete to ensure that no parts are discarded. Please wipe each part with a clean, dry cloth before assembly.
- Label sheet is not shown.




WARNING

TO AVOID SERIOUS INJURY:

- Continuous adult supervision is required.
- Never use near cars and other motor vehicles, near streets, steps, sloped driveways, hills, roadways, alleys, swimming pools or other bodies of water.
- Always wear shoes.
- Never allow more than one rider.




Seat

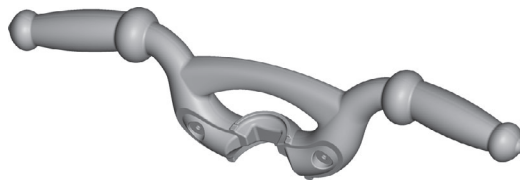


Handlebar Front




Handlebar Back

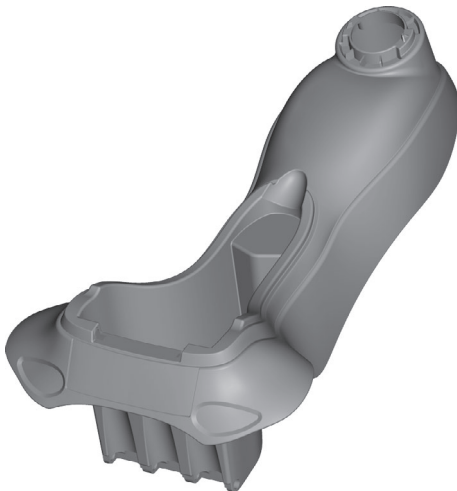

Frame

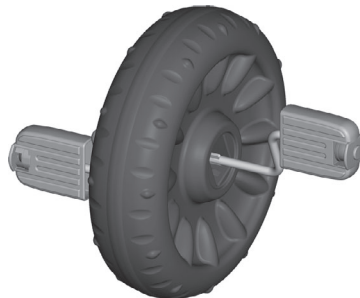

Front Wheel Assembly

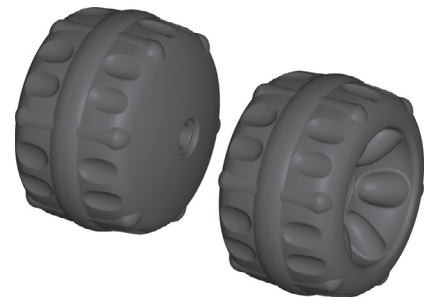

Rear Wheel - 2



M4,5 x 5,7 cm Screw – 1



M4,5 x 1,9 cm Screw – 6




Cap Nut – 1

ALL SHOWN ACTUAL SIZE




Pedal Hub - 4

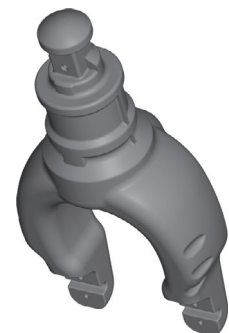


Fork



Rear Axle



Bushing - 2



Fork Cover - 2



Wheel Hub - 2




Wheel Cap - 2

Assembly


WARNING

- Adult assembly required. Choking hazard to children under the age of 3 years – contains small parts prior to assembly.

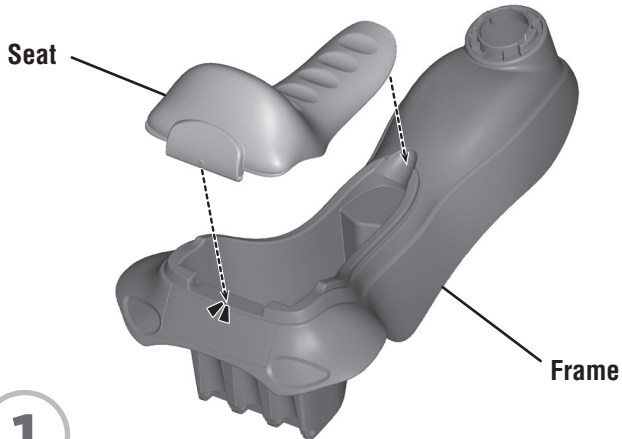


1

- Fit the seat onto the frame. Push firmly near the back end of the seat to "snap" it into place.

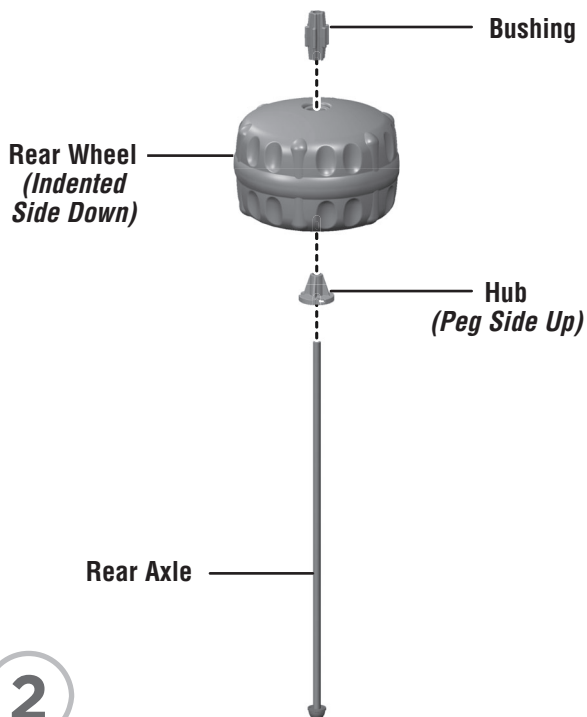


2

- Slide a hub (peg side up) onto the rear axle.
- Slide a rear wheel, indented side down, onto the rear axle.
- Slide a bushing onto the rear axle.

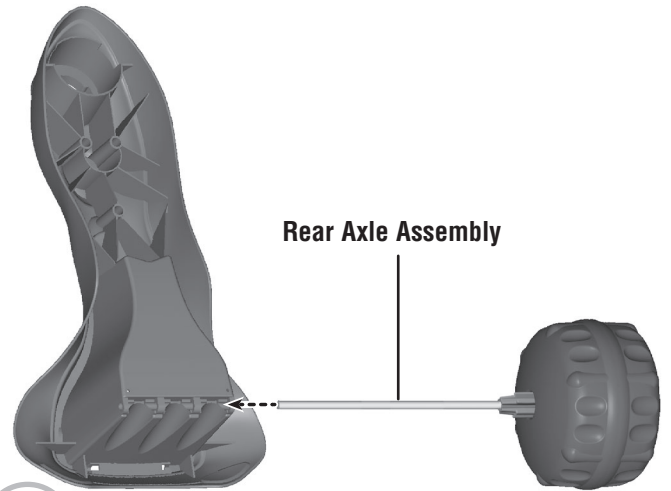

3


- Turn the frame so that the bottom side is facing you.
- Insert the rear axle assembly through the holes in the rear of the frame.

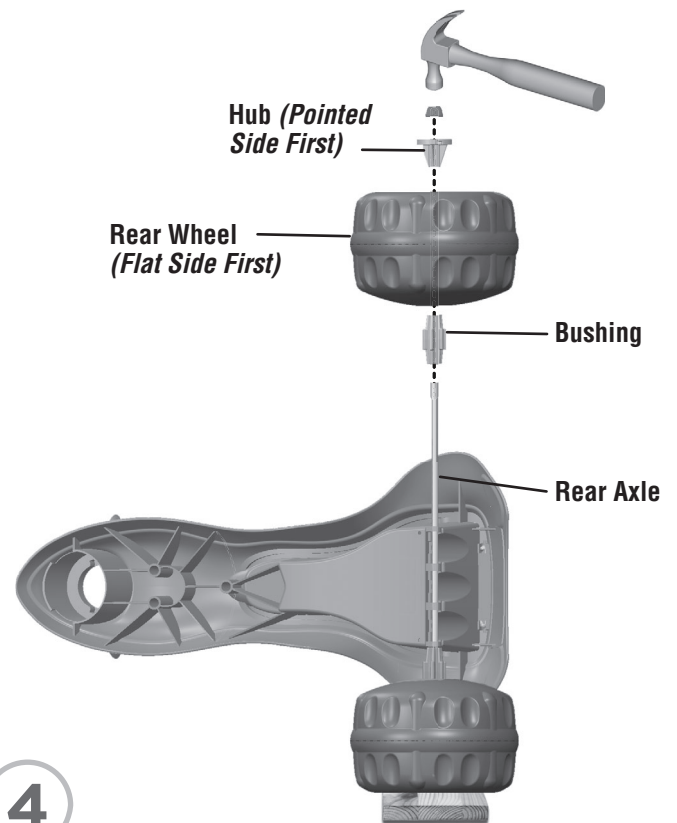


4

- Place a scrap block of wood on a flat surface.
- Slide a bushing onto the rear axle.
- Slide a rear wheel, flat side first, onto the rear axle.
- Slide a hub, pointed side first, onto the rear axle.
- Place a cap nut on the rear axle.
- Tap the cap nut with a hammer. Gently pull the rear wheel to be sure the cap nut is secure on the rear axle.


Assembly

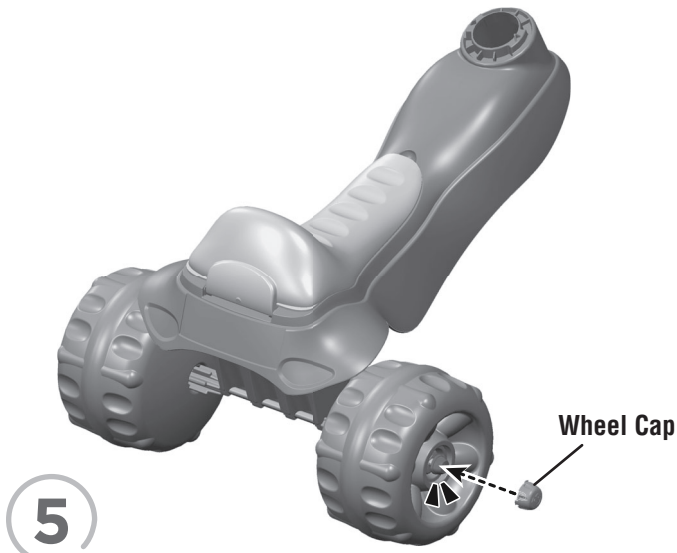


- Turn the assembly upright.
- Fit and “snap” the tabs on a wheel cap into the slots in the hub. Repeat this procedure to attach the remaining wheel cap to the other hub.

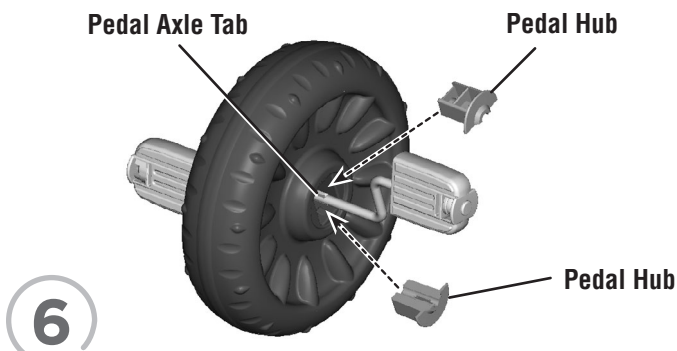

- Fit two pedal hubs onto the pedal axle tabs. Make sure the tabs fit into the slot in each pedal hub.
- Press the pedal hubs into the centre of the front wheel until they are flush with the surface of the front wheel.
- Repeat this procedure on the other side with the other two pedal hubs.

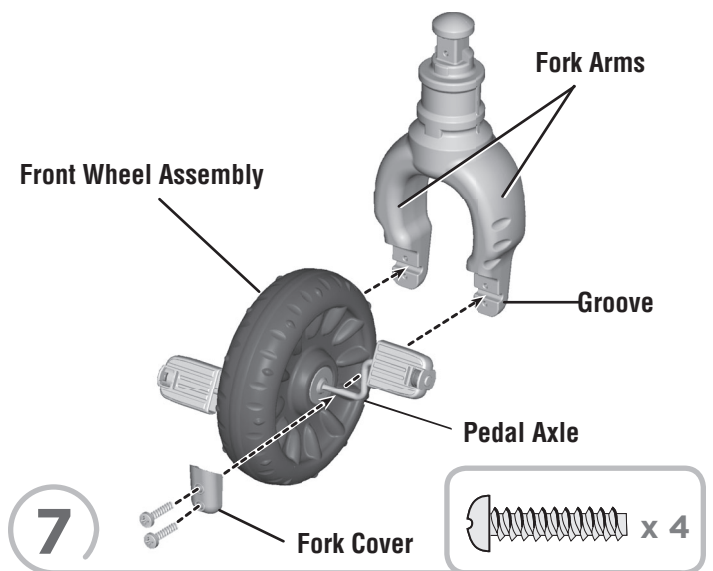


- Place the front wheel assembly between the fork arms. Make sure the pedal axle fits into the groove at the bottom of each fork arm.
- Place a fork cover over the pedal axle on one fork arm.
- Insert two M4,5 x 1,9 cm screws into the fork cover and tighten.
- Repeat this procedure to attach the other fork cover to the other fork arm.

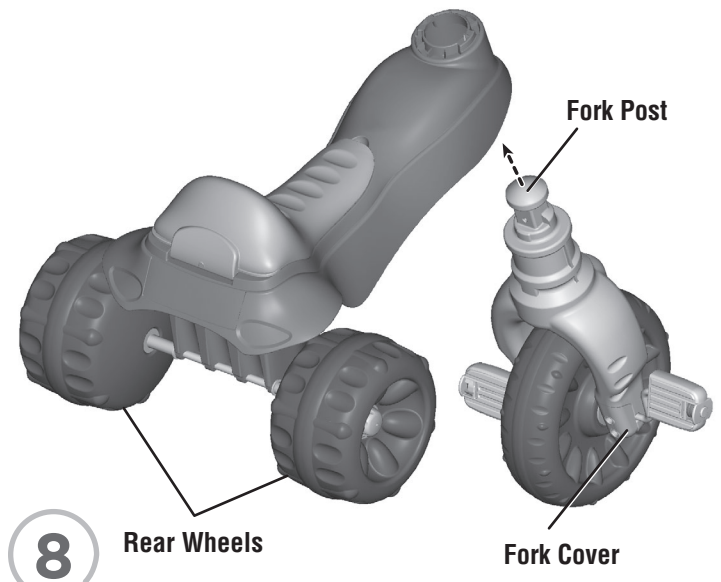

- With the fork covers facing the rear wheels, insert the fork post up through the hole in the neck of the frame.

Assembly

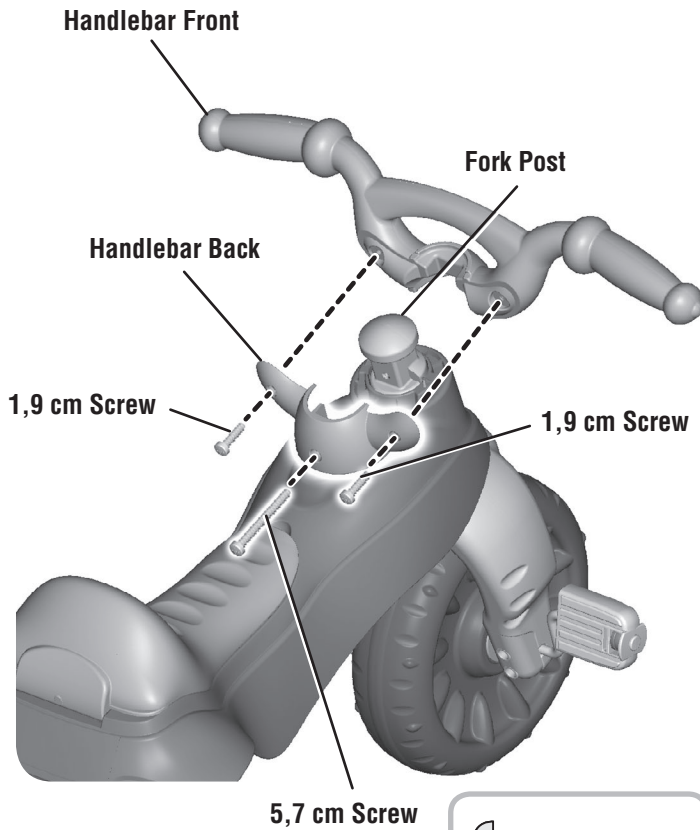

9



- Fit the handlebar front to the fork post.

Hint: The handlebar front is designed to assemble to the fork post one way.

- Fit the handlebar back to the fork post and handlebar front. Hold them together firmly.
- First, insert the remaining M4,5 x 1,9 cm screws through the outer holes in the handlebar back and tighten.
- Then, insert the M4,5 x 5,7 cm screw through the center hole in the handlebar back and tighten.

Label Decoration

- Make sure the areas where the labels will be applied are clean and dry. Wipe your product with a clean, soft, dry cloth to remove any dust or oils.
 - Refer to the photos located on the package flaps to apply the labels.
 - For best results, avoid applying a label more than once.
- Note:** Your product may come with replacement warning labels which you can apply over the factory applied warning label if English is not your primary language. Select the warning label with the appropriate language for you.