

NEW PRODUCT Bulletin



MDBD850AWW/B/Q



MDBD880AWW/B/Q

Maytag Jetclean® MDBD880/MDBD850 Dishwashers

"Clean The First Time"

With a Maytag Jetclean® dishwasher, there is virtually never a reason to prewash dishes. Sixty high-velocity spray jets scour food off of dishes, while the two-stage dual filtration system and patented hard food disposer take food out of the water. These two new derivative models offer consumers racking flexibility and cleaning power.

STANDARD FEATURES:

- Six-Tier Wash System
- Hard Food Disposer
- Dual, Self-Cleaning Filtration System
- Heavy, Normal, Light And Rinse Only Cycles
- Easy-To-Remove Upper Rack
- Sturdy, Smooth-Rolling Racks With Ball-Tip Tines
- Heated Dry System

MDBD850

Standard Features Plus:

- Microprocessor Control With 9 Touch-Pads
- 2-/4-/6-Hour Delay Option
- Quiet Pack Sound Package
- Premium Upper Rack With Shelf
- Lower Rack Convertible Bowl Tines
- One-Piece Silverware Basket With Cover
- AccuTemp™ Option
- Available In White, Bisque Or Black

MDBD880

Standard Features Plus:

- Microprocessor Control With 12 Touch-Pads
- 1- To 9-Hour Delay Option
- EQ™ Plus Sound Package
- High-Side Lower Rack With Shelf
- Folding Tines Lower Rack
- Convertible Bowl Tines
- Automatic Temperature Control
- Auto Clean Option With Sensor
- Extra Rinse Option
- ToughScrub™ Plus Option
- Energy Saver Rinse Option
- Sanitize Option
- Available In White, Bisque Or Black

**Available to
Order NOW!**





MDBD880AWW





BUILT-IN DISHWASHER

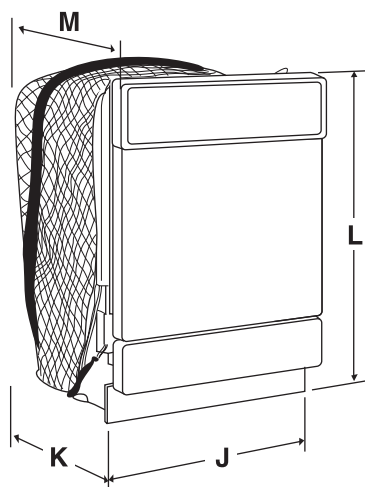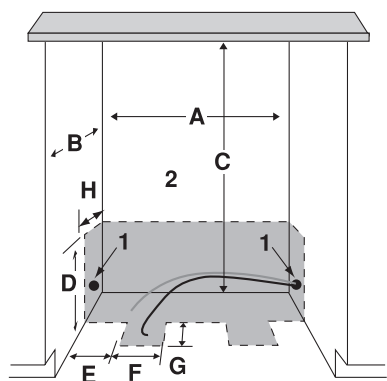

Dimensions

■	Inches	Centimeters
A	24	61.0
B	24	61.0
C	34-35	86.4-88.9
D	7	17.8
E	3	7.6
F	5	12.7
G	8	20.3
H	5	12.7
I	3	7.6
J	23 7/8	60.6
K	23 1/2	59.7
L	33 3/4 min.-35 1/4 max.	85.7 min.-89.5 max.
M ³	25 5/16	64.3

Notes:

1. Preferred drain area.
2. Keep back free of drain, water and electrical supply.
3. Add 9/16" (2.1 cm) to depth for timer dial.
4. Minimum 32" drain loop, 1/2" I.D. (Inside Diameter) minimum. Floor drains require a siphon break.
5. Connections preferably located toward left side of dishwasher. Care should be taken to route plumbing away from motor and blower (if equipped).
6. Electrical and plumbing should meet all local and national codes.
7. Electrical and water supplies should enter cabinet opening on the floor, or through the back or side walls, as shown in the shaded area of the drawing.
8. When installing dishwasher in or near a corner, allow enough room for door to open without interfering with cabinet drawers or hardware.

Electrical Requirements: Adequately wired individual 120 VAC, 60 Hz. approved electrical circuit.
Use required fuse (15 amp) or comparable circuit breaker.

Important: Because of continuing product improvements, Maytag reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions that accompany each product before selecting cabinetry, making cutouts or beginning installation.