



New Product

BULLETIN

MAYTAG SLIDE-IN GAS RANGES

Maytag Slide-in Gas Ranges are designed to deliver on baking, roasting and broiling performance. A new dual broil element uses the heat from the gas flame spreader and adds a 120 Volt electric element around the flame spreader to provide additional heat during baking, roasting and broiling. The result - superb performance and a 20 percent faster preheat. The cooking surface has been enhanced to include a 650 BTU simmer burner for cooking those delicate foods. Plus, now cleanup is a breeze with the removable burner caps, porcelain drip pans and Dura-Clean™ porcelain on steel manifold. The style and quality features the Maytag freestanding ranges have now are incorporated on our slide-in range.

Special Features:



New model upgrades shown in **Bold**

CHG9800	MGS5770ADW	● Super Capacity Self-Clean Oven Interior ● “Create-A-Space” Half Rack Included ● Auto-Lock Self-Clean Feature ● Waist High “Dual Fuel” Broiler ● EasyCook 5 VFD Electronic Clock & Oven Control ● Dura-Clean Porcelain on Steel Manifold ● One Piece Sealed Burners with Burner Caps ● One 12,000 BTU Power Boost™ Burner ● One 650 btu Simmer Burner ● Cast Iron Grates ● Dura-Clean Porcelain Drip Pans ● Color Matching Frameless Glass Oven Door ● Full View Oven Window ● FingerGrip Towel Bar Handle ● 2 Super Size Heavy-Duty Oven Racks ● Easy-Roll Super Storage Drawer ● Optional side panel kit - K70SIDE ● Optional rear filler kit - K70FILL
	MGS5770ADA	
	MGS5770ADB	
CHG9830	MGS5870ADW	Convection version of MGS5770 with: ● 3 Super Size Heavy- Duty Oven Racks
	MGS5870ADA	
	MGS5870ADB	



30"

GAS SLIDE-IN RANGES

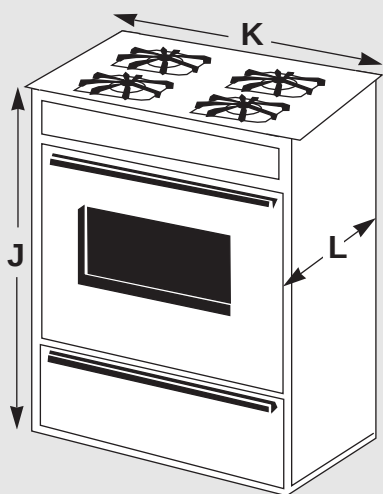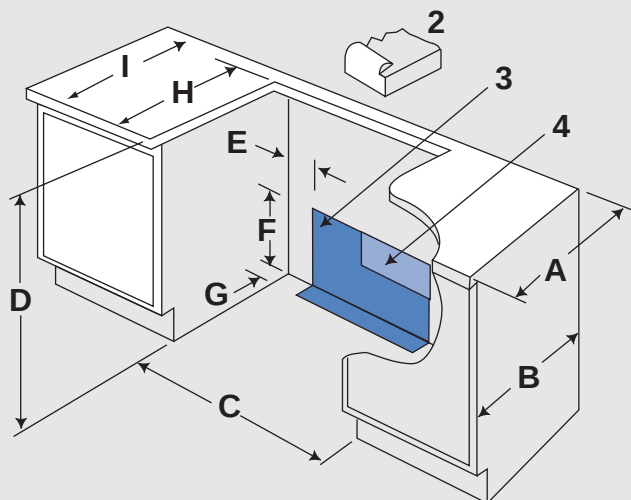

Dimensions

■	Inches	Centimeters
A	25	63.5
B	24	61.0
C	30	76.2
D	36	91.4
E	5 1/2 each side	14.0 each side
F	10	24.5
G	2 1/4	5.7
H ¹	23 1/2 maximum	59.7 maximum
I	23 3/4 min. flat area	60.3 min. flat area
J ⁵	36 7/16	92.5
K	30 3/4	78.1
L ⁶	26 5/16	66.8

Caution: Some white European style cabinets are equipped with delicate white vinyl drawer and door fronts. The vinyl may not be designed to withstand the heat produced by the normal safe operation of a self-cleaning range. Discoloration or delamination may occur. To avoid possible damage, we recommend increasing the 30" cabinet opening to 30 1/4" minimum and using a heat shield kit CABKIT V.

Notes:

1. 23 3/8" recommended. Filler strip is not used. For cutout greater than 23 1/2", use filler kit K70FILL.
2. On cabinet tops with formed front edge, shave raised section to clear top.
3. Recommended gas line location.
4. Gas Models: Provide for 120 volt grounded electrical outlet in this area. Outlet must be flush. Area is 19"W x 10"H, located 5 1/2" from side wall.
5. From floor to top of cooking surface. May vary depending on leveling legs.
6. Not including handle. Dimension given is from wall to front of oven door. Add 1 1/4" to depth for control panel.

Important: Because of continuing product improvements, Maytag reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions that accompany each product before selecting cabinetry, making cutouts or beginning installation.