WIRING INSTRUCTIONS

TITLE	BULLETIN
SUPER HOLE SHOOTER	**58-01-0940**
MILWAUKEE ELECTRIC TOOL CORP. 13135 WEST LISBON RD. BROOKFIELD WIS	DATE Sept. '86

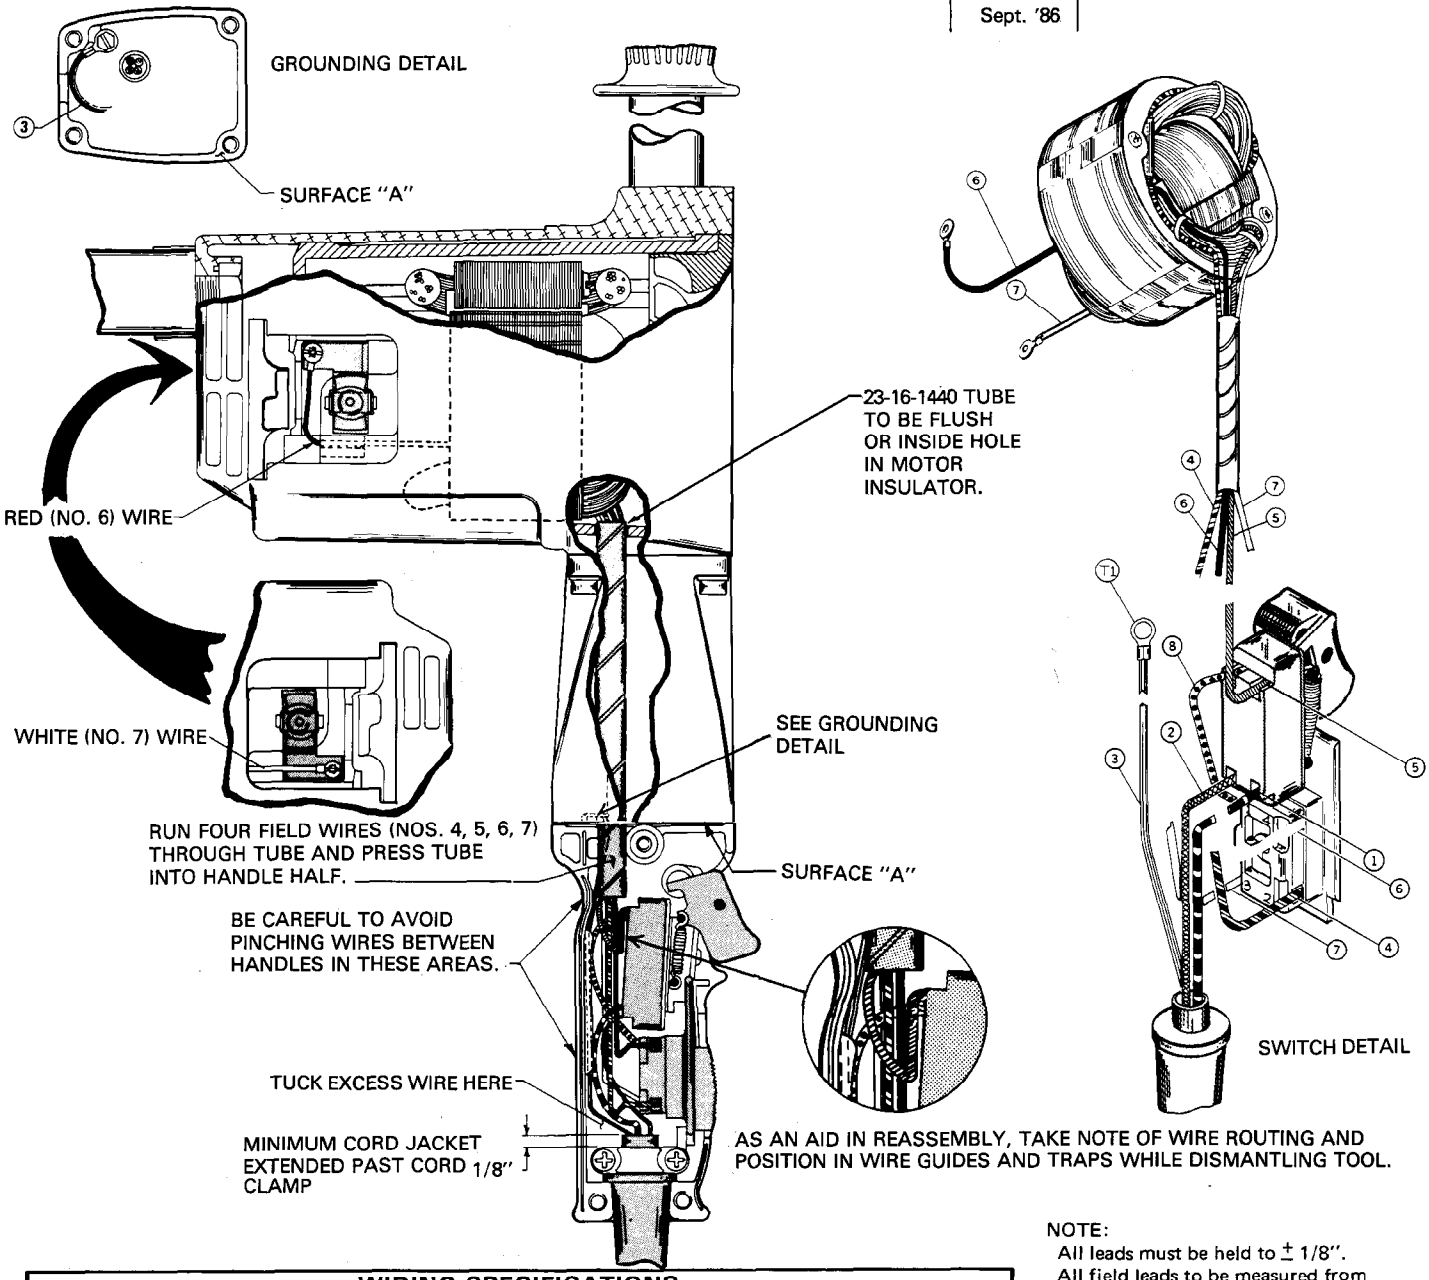

AS AN AID IN REASSEMBLY, TAKE NOTE OF WIRE ROUTING AND POSITION IN WIRE GUIDES AND TRAPS WHILE DISMANTLING TOOL.

NOTE:
All leads must be held to ± 1/8".
All field leads to be measured from and perpendicular to laminations.
All lead lengths are before stripping.

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
1	BLACK	CORD	3-1/4"	3/8" STRIP AND TIN
2	WHITE	CORD	3-1/4"	3/8" STRIP AND TIN
3	GREEN	CORD	6-1/4"	3/16" STRIP FOR T1
4	YELLOW	FIELD	11"	3/16" STRIP AND TIN
5	BLACK	FIELD	8-3/4"	3/8" STRIP AND TIN
6	RED	FIELD	3-1/2"	BRUSH END. STRIP 3/16" FOR T1
			11-3/8"	SWITCH END. STRIP 3/16" AND TIN
7	WHITE	FIELD	2"	BRUSH END. STRIP 3/16" FOR T1
			11"	SWITCH END. STRIP 3/16" AND TIN
8	BLACK	JUMPER	—	PART OF SWITCH

TERMINAL DESCRIPTION

Code	Part No.	Qnty.
T1	23-74-0841	3

CONNECTOR DESCRIPTION

Code	Part No.	Qnty.