

WIRING INSTRUCTIONS


TITLE

DIAL SPEED CONTROL POLISHER

MILWAUKEE ELECTRIC TOOL CORP. 13135 WEST LISBON RD. BROOKFIELD, WIS.

DATE
Sept. '96

BULLETIN
58-01-1390

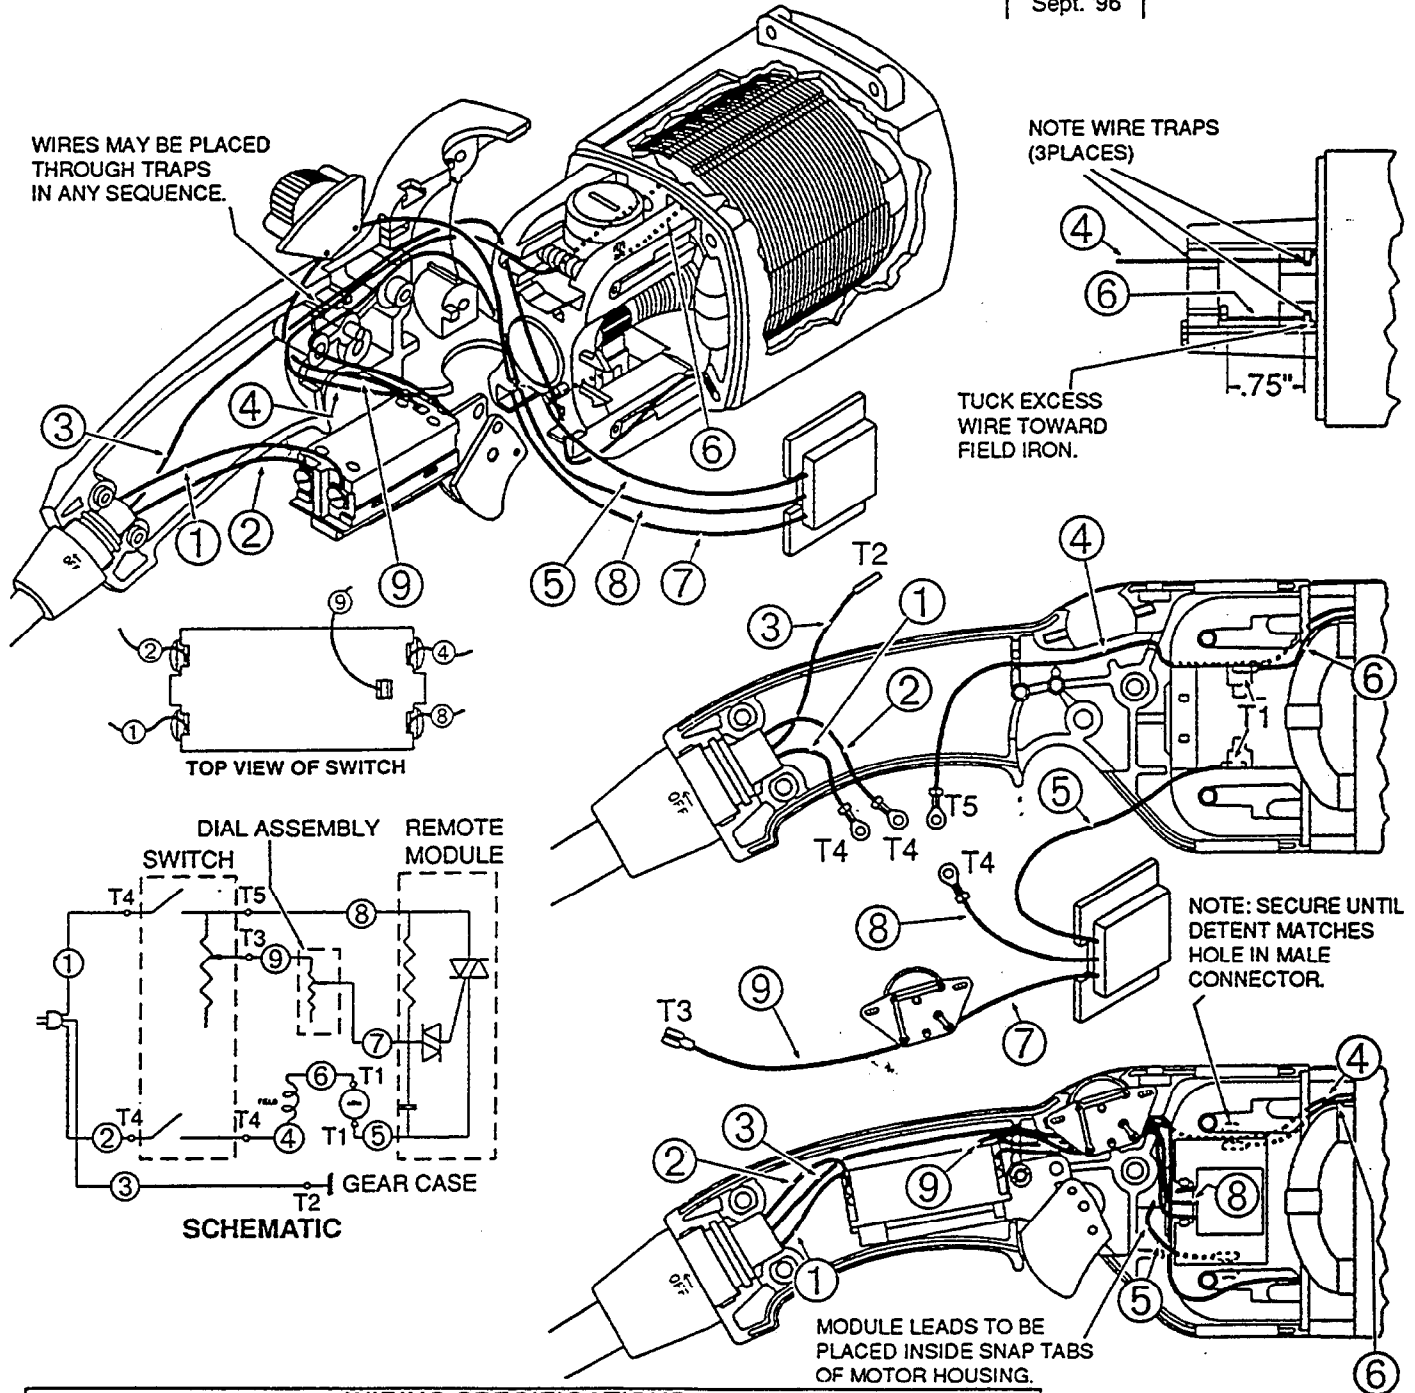

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Part No.	Gauge	Length	Terminals, Connectors and End Wire Preparation
1	WHITE	CORD	18	2-1/4"	PART OF PIN HSG. ASSY. STRIP 3/16" FOR T4.
2	WHITE	CORD	18	2-1/4"	PART OF PIN HSG. ASSY. STRIP 3/16" FOR T4.
3	GREEN	CORD	16	11-1/2"	PART OF PIN HSG. ASSY. STRIP 3/16" FOR T2.
4	BLACK	FIELD	16	6"	STRIP 3/16" FOR T5.
5	BLACK	MODULE	18	4-1/4"	PART OF DIAL/MODULE ASSY. STRIP 1/8" FOR T1.
6	YELLOW	FIELD	16	1-3/8"	STRIP 1/8" FOR T1.
7	BLACK	MODULE	18	3"	PART OF DIAL/MODULE ASSY.
8	BLACK	MODULE	18	5-9/16"	PART OF DIAL/MODULE ASSY. STRIP 3/16" FOR T4.
9	BLACK	DIAL	18	2-5/16"	PART OF DIAL/MODULE ASSY. STRIP 1/8" FOR T3.

NOTE:
All leads must be held to $\pm 1/8"$.
All lead lengths are before stripping.

TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	23-74-0750	2
T2	23-74-0810	1
T3	23-74-1170	1
T4	23-74-0895	3
T5	23-74-0850	1