

TROLLING MOTOR CONTROL FOIL INSTALLATION **INSTRUCTIONS**

**NEWPORT**®

**TROLLING MOTOR  
CONTROL FOIL**  
**INSTRUCTIONS**

**THE WAY FORWARD IS **ELECTRIC****



**CONTENTS**

|                             |   |
|-----------------------------|---|
| 1 Kit Contents              | 2 |
| 2 Tools Required            | 2 |
| 3 Installation Instructions | 2 |
| Customer Service            | 4 |



See **Our Product Quick Start Videos** for more information ►

**1 KIT CONTENTS**


- a. CONTROL FOIL LEADING EDGE
- b. CONTROL FOIL TRAILING EDGE
- c. MOUNTING HARDWARE
- d. FRICTION TAPE

**2 TOOLS REQUIRED**


- PHILLIPS HEAD SCREWDRIVER

**3 INSTALLATION INSTRUCTIONS**


1. While your boat is NOT underway, take note of where the waterline meets the trolling motor shaft and make a mark.
2. Position the control foil on your trolling motor shaft so 1-2" of control foil extends above the waterline. Make a mark at the top and bottom of the control foil to indicate its positioning.

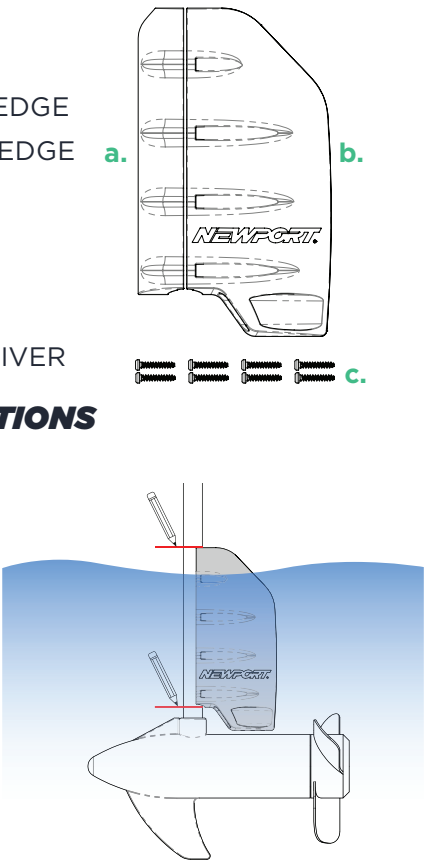



3. Clean and dry the trolling motor shaft, then apply one side of the double-sided friction tape vertically where the control foil will be mounted. Installing the friction tape directly to the front or back of the trolling motor shaft is acceptable. Once the friction tape has been applied, remove the backing strip from the other side of the tape.

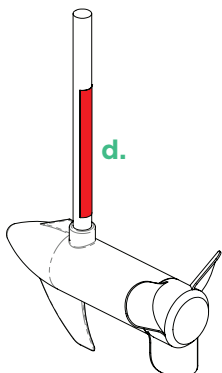

4. Place the trailing edge of the control foil over the trolling motor shaft, and align it with the centerline of the motor.

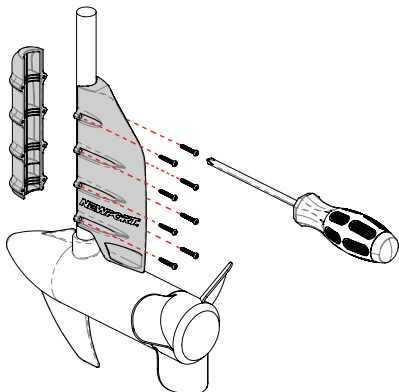

5. Place the leading edge of the control foil over the front of the trolling motor shaft, and fasten it to the trailing edge of the control foil using the screws provided. Tip: Partially install each screw, then alternate fastening screws all the way down, to get a balanced clamping force. Once snug, the control foil shouldn't rotate or wiggle. Take care not to overtighten.

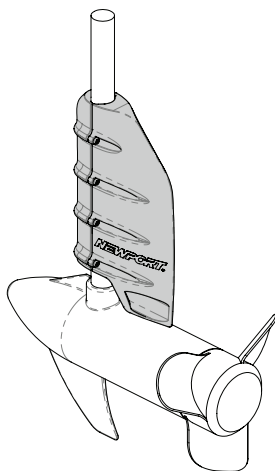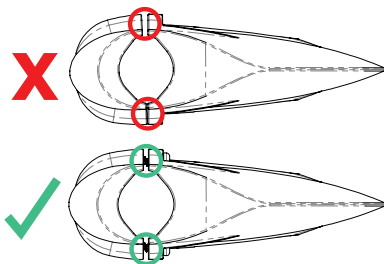



## **CUSTOMER SUPPORT**

If you have questions that are not answered in this manual or troubleshooting is not successful, please contact Newport!

Our California based customer service team is standing by to assist you. **8:30 AM - 7:00 PM ET**



**(866) 721-0002**



**support@newportvessels.com**



**newportvessels.com**



**SHARE YOUR  
ADVENTURES**

**@newportvessels**

**THE WAY FORWARD IS *ELECTRIC***



**⚠ WARNING:** This product contains a chemical known to the State of California to cause cancer.

**⚠ WARNING:** This product can expose you to chemicals including arsenic, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).