

PART NUMBER
ACC-539


OUTLAND LIVING®

FIRE TABLE GLASS WIND BREAK AND MOUNTING BRACKET KIT

OUTDOOR LIVING PERFECTED®

COMPATIBLE WITH OUTLAND LIVING FIRE TABLE MODELS:

TICK	SERIES NAME	MODEL NUMBERS	SERIES NUMBERS
☐	OUTLAND FIRE TABLE	FMPPC2E-430, FMPPC2E-435	430, 435

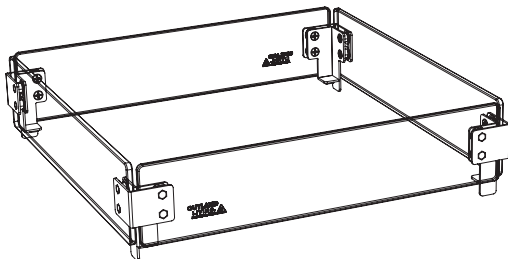

® is a registered trademark of FMI Brands Inc.

The OUTLAND flame is a registered trademark of FMI Brands Inc.

D.539.000.V0





FMI BRANDS INC.


101 – 3570 194 Street, Surrey, BC, Canada V3Z 1A5

Toll Free: 1-888-514-1663 | Email: info@outlandliving.com

Hours of Operation 8:30AM - 4:00PM (Pacific Time)

SUPPLIED PARTS & HARDWARE LIST

PART NUMBER	DESCRIPTION	PART
1	GLASS WALL WITH LOGO (x2)	
2	GLASS WALL WITH NO LOGO (x2)	
3	EXTERIOR BRACKET (x4)	
4	INTERIOR BRACKET (x4)	

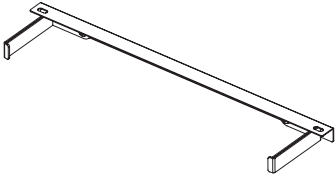PART NUMBER	DESCRIPTION	PART
5	SPACER (x16)	
6	M5 x 8 SCREW (x16)	
7	GLASS WIND BREAK MOUNTING BRACKET (x2)	


REQUIRED TOOLS (Not Supplied):

Philips (cross) screwdrivers (PH2 & PH3)

ASSEMBLY INSTRUCTIONS

STEP 1

ENSURE THE ORIENTATION OF THE GLASS PANELS WITH LOGO IS CORRECT.

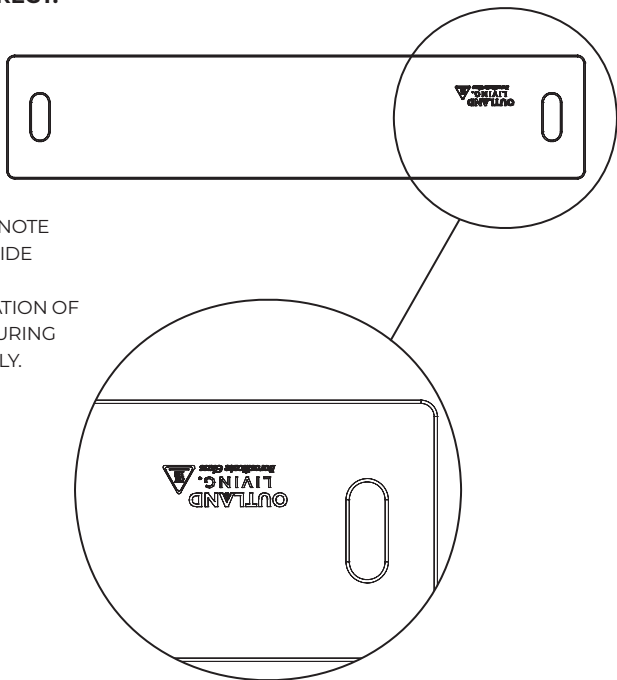


PLEASE NOTE
THE UPSIDE
DOWN
ORIENTATION OF
LOGO DURING
ASSEMBLY.

STEP 2

ASSEMBLE GLASS PANEL CONNECTING BRACKETS

For each bracket assembly:

- a. Press Spacers (Part 5) over studs on Exterior Brackets (Part 3).
- b. Repeat for each bracket (4 times).

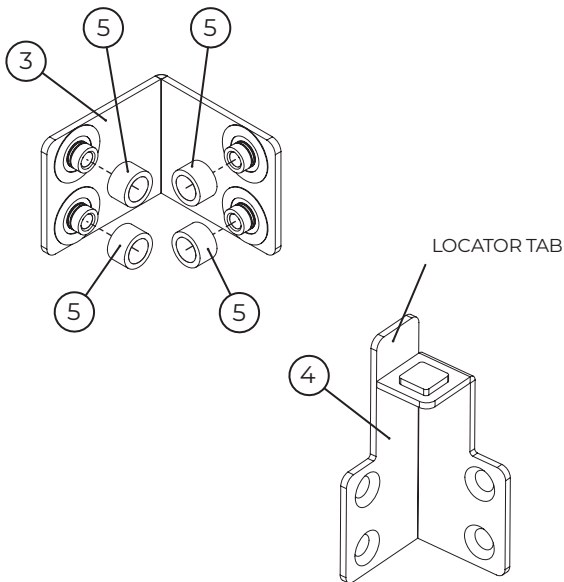


ASSEMBLY INSTRUCTIONS (continued)

STEP 3

ASSEMBLE THE GLASS WIND BREAK

There are 4 sets of Glass Panel Connecting Brackets to install.


- a. Assemble the glass wind break upside down on a flat and even surface.
- b. Insert Exterior Bracket (Part 3) studs through the vertical slots on the Glass Panels (Part 1 & 2).
- c. ****LOOSELY**** Assemble Interior Brackets (Part 4) to the Exterior Brackets (Part 3) using M5 Flat Head Screws (Part 6) - do not tighten screws.
- d. Once all 4 brackets are loosely assembled tighten the screws. Ensure the glass panels are straight and squarely aligned.

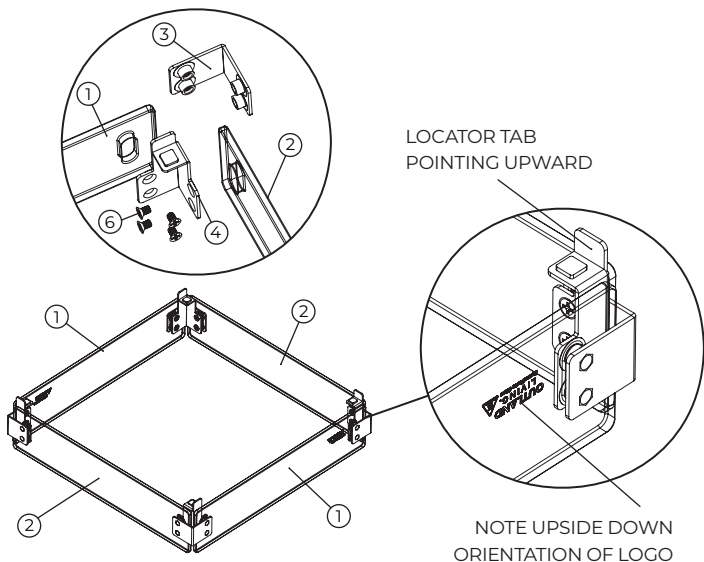

ASSEMBLY INSTRUCTIONS (continued)

STEP 4

Your Glass Wind Break is now assembled.

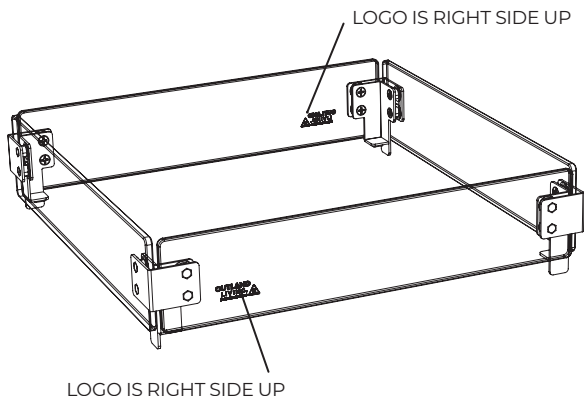


FT430 only. See Page 14 for FT435.

STEP 5


INSTALL GLASS WIND BREAK ON FIRE TABLE.

- Turn the glass wind break right side up so that the locator tabs are pointing downward.
- Align the locator tabs of the Interior Brackets (Part 4) with the gaps at the corners outside the burn tray.
- Slowly lower the glass wind break until it sits on the burn tray.

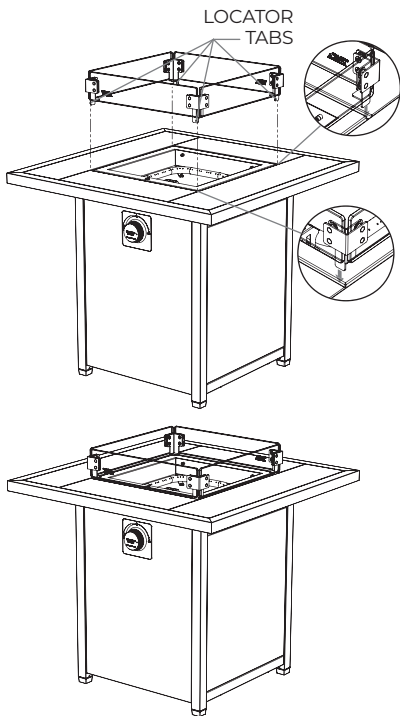

FT430 only. See Page 15 for FT435.**STEP 6****INSTALL GLASS WIND BREAK MOUNTING BRACKET**

- a. Locate and remove the M6 screws (X2) at the back side of the rear leg post mounting brackets.

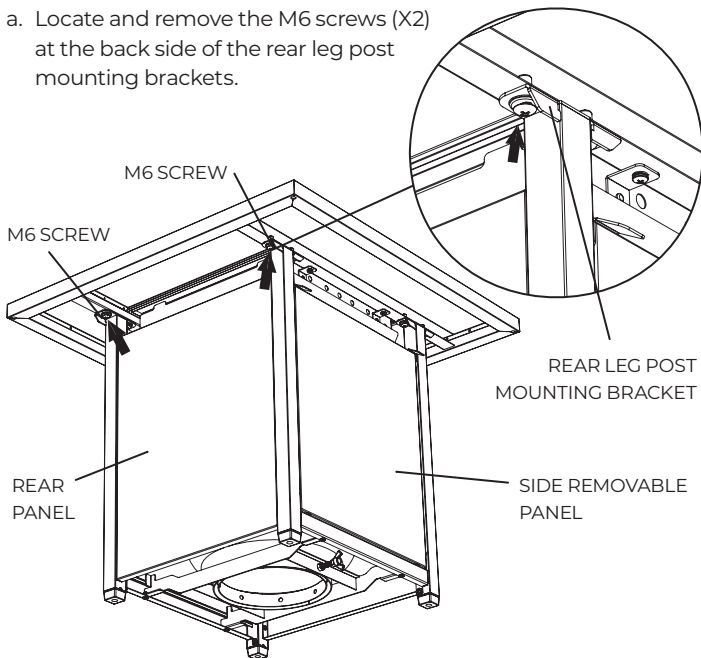


FT430 only. See Page 15 for FT435.

STEP 6 (continued)


INSTALL GLASS WIND BREAK MOUNTING BRACKET

- b. Install the Glass Wind Break Mounting Bracket (Part 7) with the M6 screws.

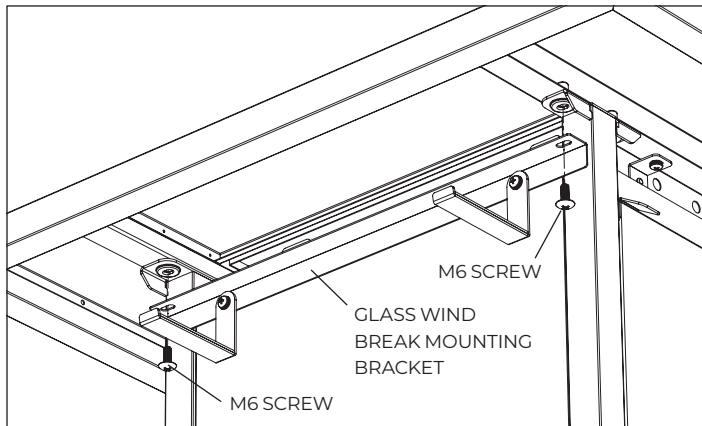

FT430 only. See Page 16 for FT435.**STEP 6 (continued)****INSTALL GLASS WIND BREAK MOUNTING BRACKET**



- c. Place the Glass Wind Break on the Glass Wind Break Mounting Bracket.

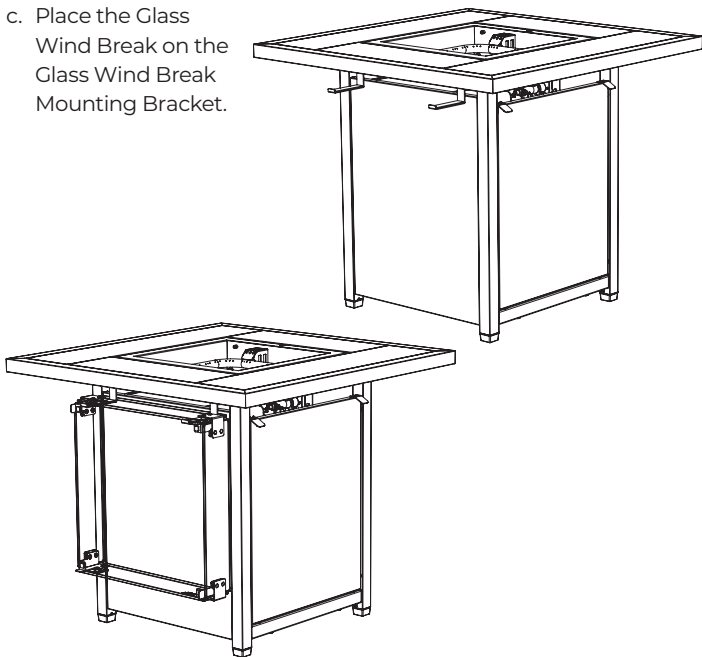

FT430 only. See Page 18 for FT435.


STEP 7
STOWING THE GLASS
WIND BREAK
MOUNTING BRACKET

The Glass Wind Break Mounting Bracket can be folded up when it is not in use.

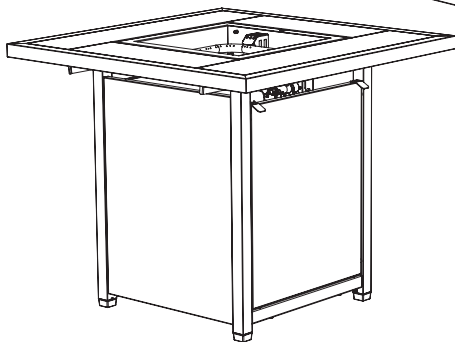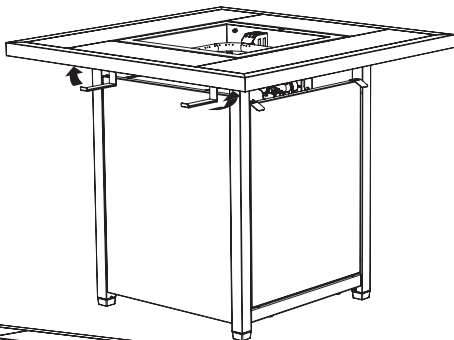

FT435 only. See Page 9 for FT430.**ASSEMBLY INSTRUCTIONS (continued)****STEP 5****INSTALL GLASS
WIND BREAK ON
FIRE TABLE**

- a. Turn the glass wind break right side up so that the locator tabs are pointing downward.
- b. Align the locator tabs of the Interior Brackets (Part 4) with the gaps at the corners outside the burn tray.
- c. Slowly lower the glass wind break until it sits on the burn tray.

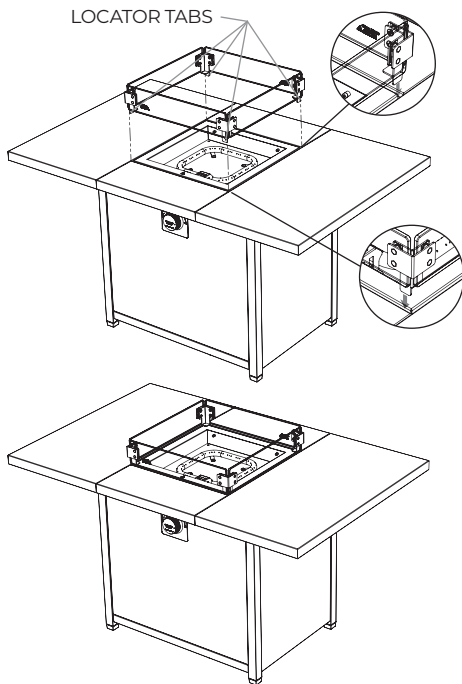


FT435 only. See Page 10-11 for FT430.

STEP 6


INSTALL GLASS WIND BREAK MOUNTING BRACKET

- Lift away the removable rear panel.
- Remove the propane cylinder.

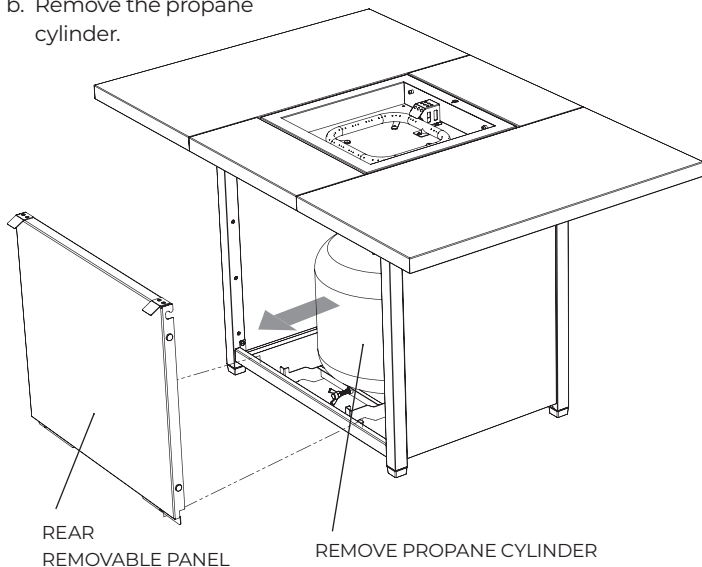

FT435 only. See Page 12 for FT430.**STEP 6 (continued)**


- c. Locate and remove the M6 screws (X2) at interior side of the RIGHT or LEFT leg post mounting brackets.

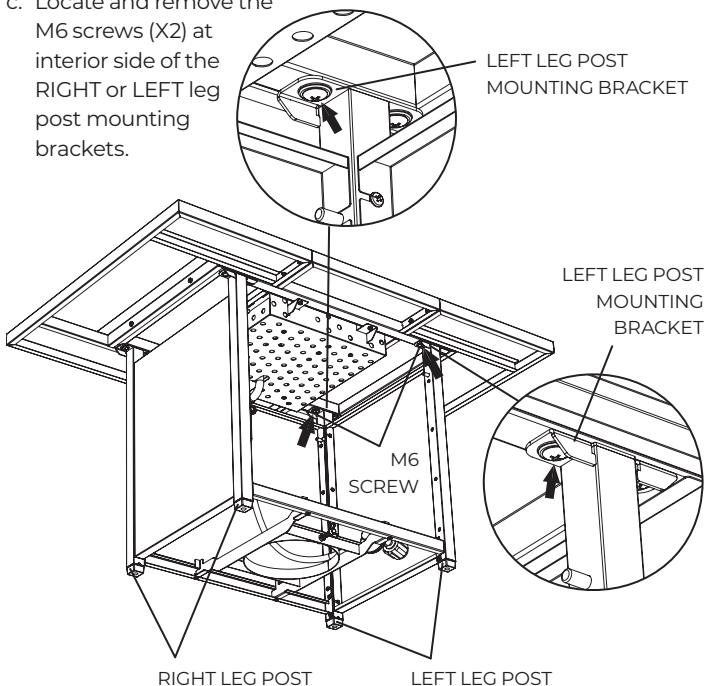

FT435 only. See Page 12 for FT430.

STEP 6 (continued)


- d. Install the Glass Wind Break Mounting Bracket (Part 7) with the M6 screws.

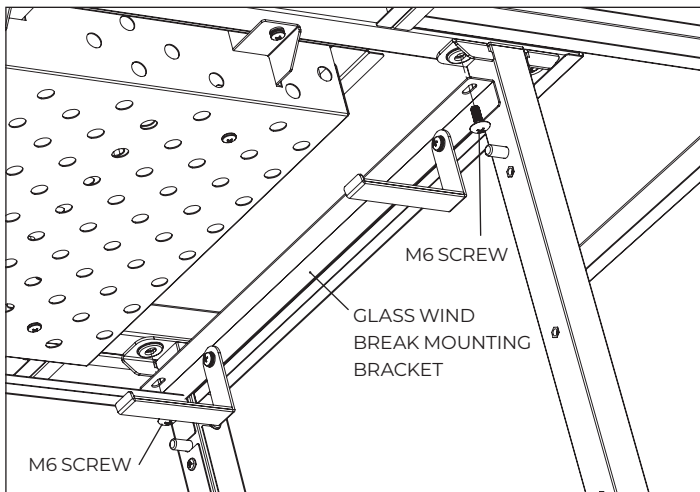

- e. Place the Glass Wind Break on the Glass Wind Break Mounting Bracket.

FT435 only. See Page 13 for FT430.**STEP 7****STOWING THE GLASS WIND BREAK MOUNTING BRACKET**

- a. Remove the propane cylinder.

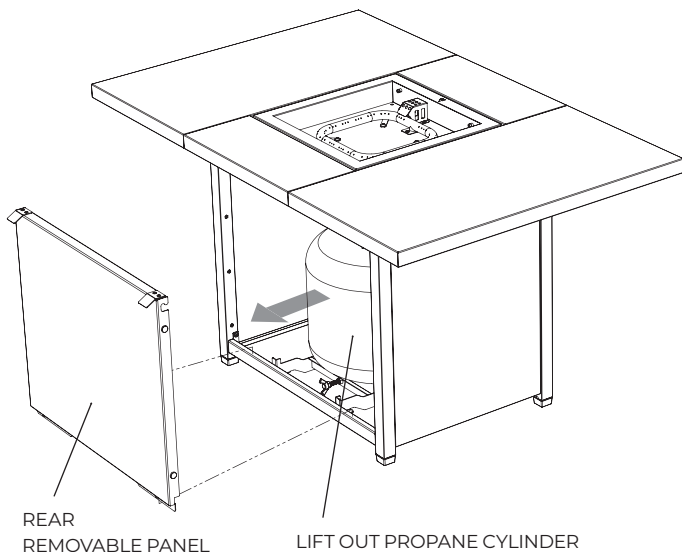


FT435 only. See Page 13 for FT430.

STEP 7 (continued)

STOWING THE GLASS WIND BREAK MOUNTING BRACKET

- b. Place the Glass Wind Break on the Glass Wind Break Mounting Bracket.

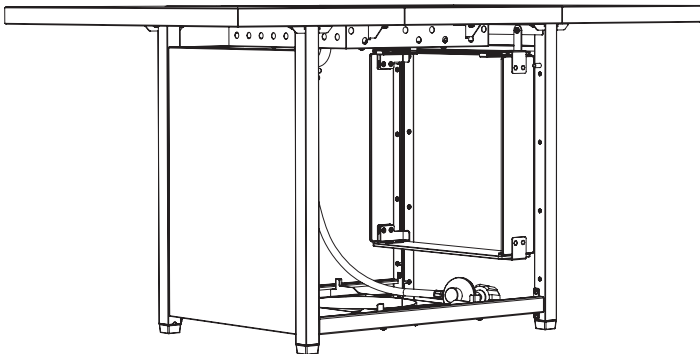

CAUTION:

Always lift out the propane cylinder before attempting to place or remove the glass wind break. Failure to do so may result in damaging or breaking your glass wind break!

FT430 & FT435**MAINTENANCE**

Simply use warm soap water to wipe down your Glass Wind Break to keep it clean.

Do not use abrasive cleaners.

**DANGER:**

Glass Wind Break will become extremely hot during operation!

DO NOT TOUCH GLASS WIND BREAK while fire table is in operation!



**WARNING!
HOT SURFACE!**



**GLASS.
FRAGILE!**



**HANDLE
WITH CARE**

 WARNING:

This is NOT a toy.

Do not place ANY cover on the Glass Wind Break while the fire table is in operation.

Do not rest anything on or over the Glass Wind Break while the fire table is in operation.

The fire table is a decorative gas appliance only. NEVER cook food on the fire table. Do not use the Glass Wind Break, or any other type of accessory, as a means to cook or keep food warm on the fire table,

Wait at least 30 minutes after turning off the fire table to allow it to cool down before touching Glass Wind Break or putting ANY cover over the fire table.

Please ensure that all adults and children which use or are near a unit in use are aware of the hazard of high-surface temperatures present on the unit during use and should use caution and stay away to avoid burns or clothing ignition.

Children should be supervised at all times when using this unit without exception.

**Do not return this product to the store.**

If you need help or parts, call the OUTLAND Hotline: **1-888-514-1663**

Get help for:

- Missing/damaged parts • Assembly • Troubleshooting
- Warranty Assistance • Product Information

1 YEAR LIMITED WARRANTY - Customers in Canada and USA

All components are warranted by the manufacturer for a period of 1 year after date of purchase by the original owner against defects in materials and workmanship under normal use. This warranty does NOT cover normal wear and weathering, assembly and/or maintenance OR use in a commercial application. At FMI Brands' sole discretion, products under warranty will be repaired and/or replaced at no charge to the customer. Any returns sent back to FMI Brands must be sent via prepaid freight and in the original retail packaging.

Please register your OUTLAND Living product for proof of purchase and warranty at **<https://outlandliving.com/register-products/>**

For more warranty information and details please contact FMI Brands Inc. at **info@outlandliving.com**

FOR REPLACEMENT PARTS AND ACCESSORIES PLEASE VISIT

WWW.OUTLANDLIVING.COM

Should you have any questions or comments regarding this appliance, please do not hesitate to contact FMI Brands Inc. at **(888) 514-1663** or E-Mail to **info@outlandliving.com**.