

Easy Setting Guide

Blu-ray Disc™ Home Theater Sound System

Model No. **SC-BTT370**

The order of setting




1 Prepare the speakers

STEP 1

Thread the speaker cable through the base.

- Use cables with a white connector and red connector.

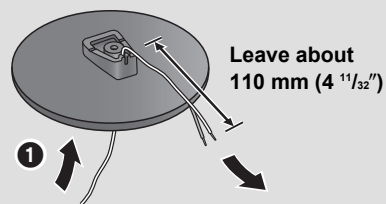

Front speaker



STEP 2

2

4 Insert the wire fully, taking care not to insert beyond the wire insulation.

+: White
-: Blue line




5 Press into the groove.

3

6 Pull the cable straight along the line and slide into the groove.


Back of the base



Tighten securely.

STEP 3


Label each speaker cable by attaching the numbered sticker at the position indicated in the illustration. Be sure to match the number on each sticker with the circled number in the illustration.



STEP 4

Connect the speaker cables. Insert the wire fully, taking care not to insert beyond the wire insulation.

+: White
-: Blue line



Subwoofer

Center speaker

Front speakers

Surround speakers

PURPLE





GREEN

Rch RED

Lch WHITE

Rch GRAY


Lch BLUE




Speakers	(A)
Front speakers	FRONT/AVANT
Center speaker	CENTER/CENTRE
Surround speakers	SURROUND/AMBIOPHONIE

Refer to the rear label of the speaker before connecting the corresponding cable. Verify the type of speaker with the label on the rear of the speaker.

e.g.,




2 Place the speakers

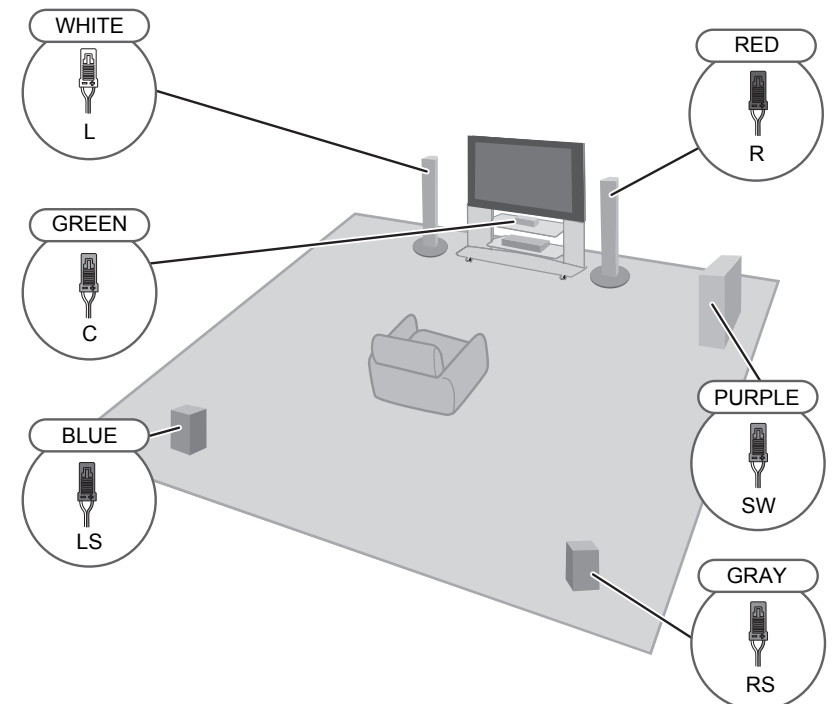


Recommended

Front speakers (L, R)




Surround speakers (LS, RS)



3 Connect the cables

Connect the cables by color or by the numbers indicated in the illustration to the appropriate terminals on the rear panel of the unit.

It is possible to play back 3D videos and 3D still pictures by connecting this unit with a 3D compatible TV.
For detailed information, refer to the Owner's Manual.

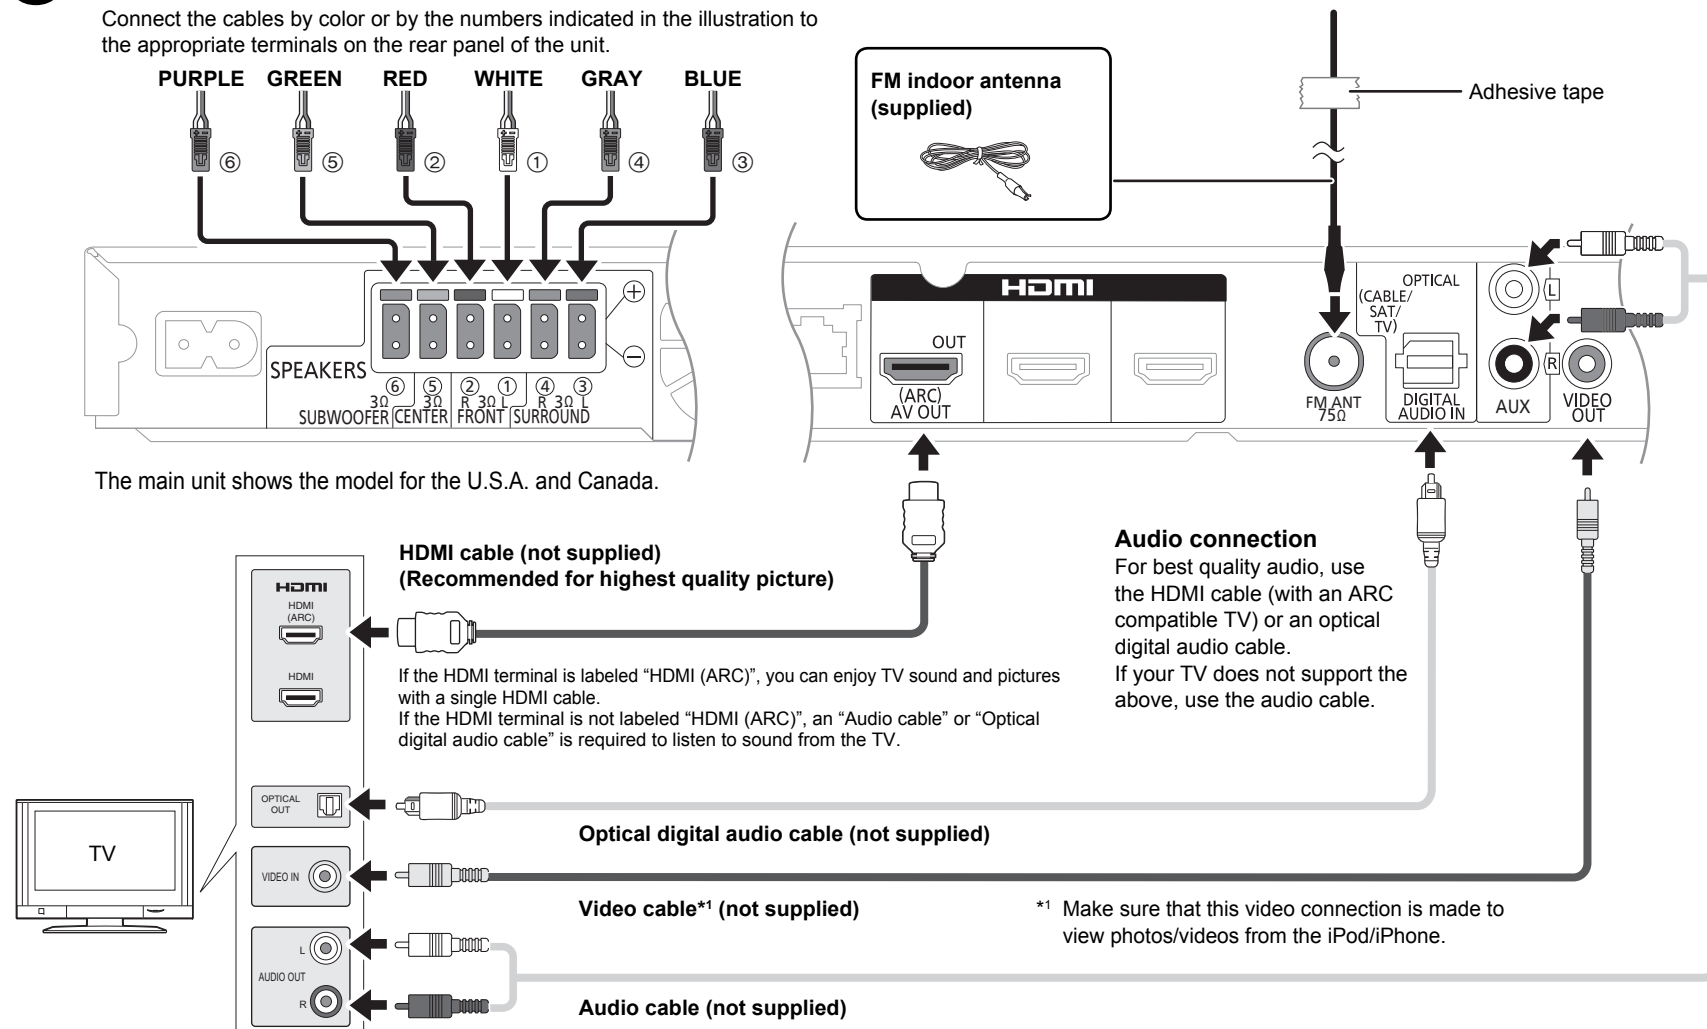

4 Turn on the main unit


1 Connect the AC power supply cord

Connect the AC power supply cord to the main unit before connecting to the household AC outlet.

(For units with PX printed on the packaging)
Before connecting the AC power supply cord;
Set the voltage at the bottom of the main unit.




Use a flat-head screwdriver to move the voltage selector to the appropriate position for the area in which this system is used.

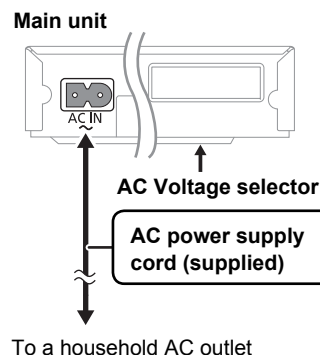

2 Turn on the TV

Turn on your TV and select the appropriate video input mode (e.g., VIDEO 1, AV 1, HDMI, etc.) to suit the connections to this unit.

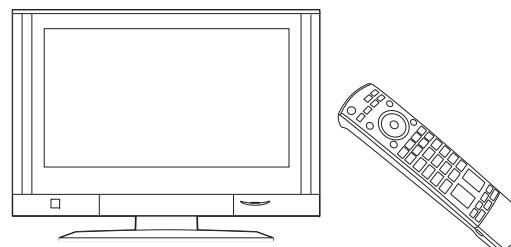


3 Turn on the main unit

Press [] to turn on the main unit.

Installing batteries in the remote control

R6/LR6, AA

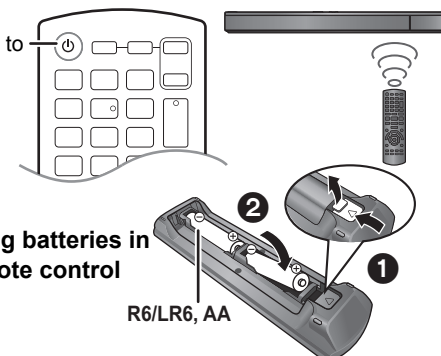


Other connection

Broadband Network Connections


By connecting this unit to the network, you can optimise the internet features of this unit.

- Use category 5 or above straight LAN cables (STP) when connecting to peripheral devices.
- When using the wireless LAN function, the LAN cable that connected to the main unit is not necessary.

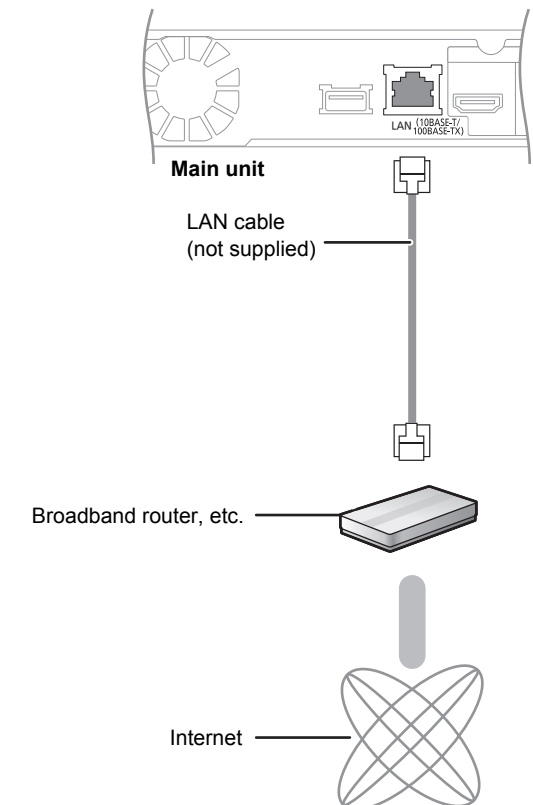

4 The Easy setup starts

The on screen display will guide you through the steps.



Press [◀, ▶] to select [Yes/Oui/Si] and press [OK].

If you have any questions contact

U.S.A. and Puerto Rico: 1-800-211-PANA (7262)

Mon-Fri 9 am-9 pm (EST) Lunes-Viernes
Sat-Sun 10 am-7 pm (EST) Sabado-Domingo

Canada:

Telephone: 1-800-561-5505

E-mail link: "Support → contact us → email" on www.panasonic.ca