



The new degree of comfort.®

Rheem® IKONIC™ Super High Efficiency Condensing Tankless Gas Water Heater

Easy Installation

- PVC Vent runs up to 70' (2"), 150' (3")
- Easy set up with full text digital display and no dip-switches

Ready for Retrofits

- Allows flex venting through existing B-vent up to 50'
- 1/2" Gas line compatibility (subject to local code)
- Approved for installations in Manufactured Home (Mobile Home) environments

Key Features

- Stainless steel Primary and Secondary heat exchangers provide increased efficiency and durability
- **Rheem® Exclusive!** Hot-start programming™ ensures the unit is in a ready state between back-to-back usage, avoiding any cold water bursts
- Built-in Recirculation pump for no wait continuous hot water at the tap (SR models)
- Built-in Wi-Fi with EcoNet® capability for direct control from your device (optional for S models)

Specifications

Rheem Model Number		ECOHS160iN ECOHS160iP ECOHSR160iN ECOHSR160iP	ECOHS180iN ECOHS180iP ECOHSR180iN ECOHSR180iP	ECOHS200iN ECOHS200iP ECOHSR200iN ECOHSR200iP
Gas Input Rate	MAX	157,000 BTU/h	180,000 BTU/h	199,900 BTU/h
	MIN	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h
Uniform Energy Factor (UEF)		0.96		
Gallons Per Minute (GPM)	MAX (35°F)	8.4	10.1	11.2
	45°F Rise	6.9	7.9	8.8
	67°F Rise	4.6	5.3	5.9
Number of Bathrooms ¹		3	4	5
Temp. Range		85°F - 140°F		
Temp. Setting from Factory		120°F		
Installation Type		Indoor (Outdoor Conversion Kit sold separately: RTGH-SX)		
Heat Exchanger Material		Primary: Stainless Steel – Secondary: Stainless Steel		
Minimum Activation Flow		0.4 GPM		
Minimum Continuous Flow		0.26 GPM		
Maximum Altitude		10,200 ft.		
Ultra Low NOx		Meets 14 ng/J NOx requirements – SCAQMD Rule 1146.2 compliant		
Warranty		15 Year Heat Exchanger 5-Year Parts 1-Year Labor		


Model Number	ECOHS N/P	ECOHSR N/P
Height	28-9/16"	
Width	17-5/16"	
Depth	13-11/16"	
Weight	77.6lbs	86lbs
Venting Diam. Allowed	2" / 3"	
Max. Single Vent Run (straight pipe)	70 ft (2")/ 150 ft (3")	
Venting Materials	Sched. 40 PVC, CPVC, PP	
Common Venting (max. units)	2 units ³	
Flex Venting	Allowed: 2" up to 50'	
Manifold Controls (max. units)	Up to 20 units without external control required ⁴	
Controls	Built-in digital display with full-text menus	
Power Supply	120V 60Hz	
Max. Power Consumption	85W (Normal use), 0.7Amps 132W (Anti freeze only), 1.1Amps 3.5W (Standby), 0.03Amps ⁵	100W (Normal use), 0.83Amps 200W (Anti freeze), 1.67Amps 3.5W (Standby), 0.03Amps ⁵
Gas Connection	3/4" NPT	
Hot Water Connection	3/4" NPT	
Cold Water Connection	3/4" NPT	
Condensate Connection	1/2" NPT	
Vent Connections Diameter	2" Band Connections (Adapter required to vent with 3" PVC from unit)	

¹For Propane replace the N with P when ordering.



Crossover valve⁷ and service valves included.

\$125 VALUE



**ECOHS200iN(P)*/ECOHSR200iN(P)*,
ECOHS180iN(P)*/ECOHSR180iN(P)*,
& ECOHS160iN(P)*/ECOHSR160iN(P)***

Indoor Models
(Outdoor Conversion Kit Available:

RTGH-SX)


11,000-199,900 BTU/h

Natural and LP Gas



Clearances	
Top / Bottom	12"
Front	1/2" ⁶
Sides	1/2"
Back / From Vent Pipe	0"

Recirculation Length (SRi Models)	
Pipe Diameter	Max. Recirculation Loop
3/4"	400 ft.
1/2"	100 ft.

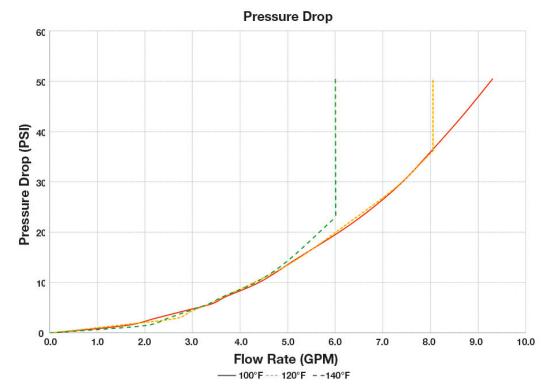


¹ Based on simultaneous showers using 2.5 GPM flow rate pre-mixed with cold water line. Flow rates vary depending on temperature of incoming cold water and water heater set temperature. Refer to flow rate curves for accurate sizing. ² For indoor application, this is the temperature of outdoor intake air. ³ External check valve required for installation. ⁴ Manifolds with standard RJ25 communication cables. ⁵ If anti freeze is on and combustion is on, total W will be 217W (85+132). ⁶ Recommended 24" clearance for service. ⁷ Only in Rheem® IKONIC™ SR models.

Rheem® IKONIC™ Super High Efficiency Condensing Tankless Gas Water Heater



The new degree of comfort.™

Water Heater Flow Rate Curves

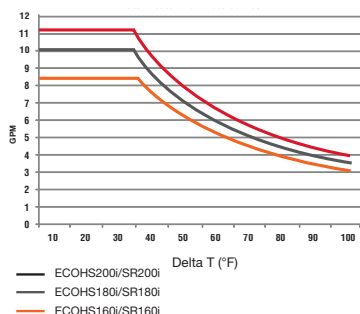

	Temperature Rise (°F)									
Model Number	35°	45°	50°	60°	67°	70°	80°	90°	100°	
ECOHS160i/SR160i Water Flow (GPM)	8.4	6.9	6.2	5.2	4.6	4.4	3.9	3.4	3.1	
ECOHS180i/SR180i Water Flow (GPM)	10.1	7.9	7.1	5.9	5.3	5.1	4.4	3.9	3.5	
ECOHS200i/SR200i Water Flow (GPM)	11.2	8.8	7.9	6.6	5.9	5.6	4.9	4.4	3.9	

Above estimates are for sizing purposes only.

Venting

SINGLE UNIT: MAX. EQUIVALENT VENT LENGTHS - STRAIGHT PIPE		
Number of 90° Elbows	Max Length 2" straight pipe	Max. length 3" straight pipe
0	70 ft. (21.3 m)	150 ft. (45.7 m)
1	64 ft. (19.5 m)	145 ft. (44.2 m)
2	58 ft. (17.7 m)	140 ft. (42.7 m)
3	52 ft. (15.8 m)	135 ft. (41.1 m)
4	46 ft. (14.0 m)	130 ft. (39.6 m)
5	40 ft. (12.2 m)	125 ft. (38.1 m)
6	34 ft. (10.4 m)	120 ft. (36.6 m)

Equivalent Ft. of Elbows		
	2" Pipe	3" Pipe
90° Elbow	6 ft. (1.83 m)	5 ft. (1.52 m)
45° Elbow	3 ft. (0.9 m)	2.5 ft. (0.75 m)


Venting Materials Allowed: Schedule 40 PVC, CPVC, Polypropylene

Min. Vent Length Straight Pipe	
Number of 90° Elbows	Min. Length 2" 3" pipe
1	1.0 ft. (0.3 m)


COMMON VENTING	
# of Water Heaters	3" Common Vent
2	60 ft.

SINGLE UNIT: Max. Flex Venting	
Max Length 2" flex vent	50 ft.


Dimensions

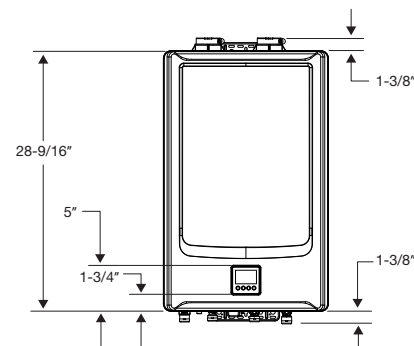

TOP VIEW



BOTTOM VIEW

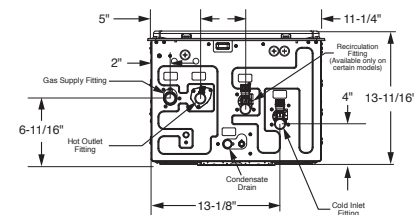

INCLUDED IN THE BOX:

- ☒ Tankless water heater with built-in recirculation pump
- ☒ Brass service valves
- ☒ Crossover valve
- ☒ Pressure relief valve
- ☒ 5' 120V 3-prong power cord
- ☒ Mounting & spare parts kit
- ☒ Vent screens
- ☒ Use & care manual

ALSO NEEDED FOR INSTALLATION:

- ☐ Schedule 40 PVC venting in 2" or 3" (sold separately)
- ☐ 120V outlet near installation location*
- ☐ Water and gas lines near installation location*
- ☐ Condensate Wastewater Neutralizer (sold separately)*

*Check local code requirements

OPTIONAL ACCESSORIES:

- ☐ On-Demand Recirculation kit & Manual Wall Switch
- ☐ Venting kits
- ☐ Outdoor conversion kit

Accessories available at homedepot.com

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.