

MHS Cargo Basket #4690


Assembly Instructions | Instrucciones de montaje | Instructions d'assemblage




WHAT'S IN THE BOX

LETTER	QTY	PART DESCRIPTION
A	1	MHS cargo basket
B	2	MHS clasp hardware kit
C	8	M8 (16mm) socket head screw
D	8	M8 cap nuts
E	1	Torx (T40) key


A

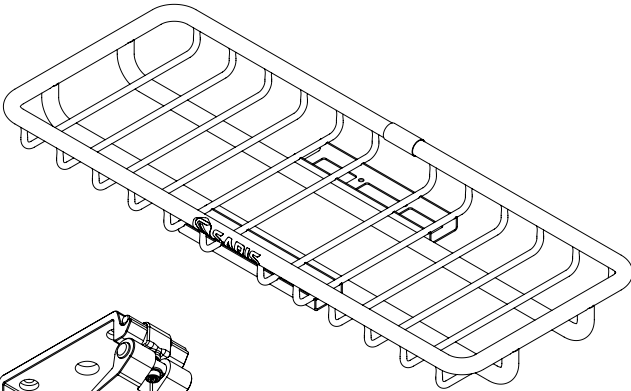


B




C

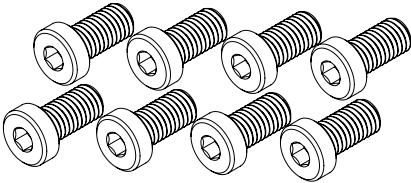

D



E



TOOLS NEEDED (NOT INCLUDED):
5mm hex key, 13mm socket or adjustable wrench.



FOLLOW INSTRUCTIONS



SARIS FIT GUIDE

<https://saris.com/pages/hitch-fit-guide>



ASSEMBLY/INSTALLATION VIDEO

<https://saris.com/pages/videos>



REGISTER YOUR PRODUCT

<https://saris.com/pages/product-registration>




LOT CODE

INSTALL UNO ADD-ON HARDWARE FOR MHS BASE

MHS Cargo Basket is compatible with MHS 2+1 (SKU: 4620) and MHS 3+1 (SKU: 4630) only. The basket requires two MHS module spots for complete attachment. Add-On trays can still be used while MHS Cargo is installed. MHS Cargo Basket must be installed using the first and second MHS module spots (spots closest to the vehicle).


1 ASSEMBLY MHS CLASP KITS

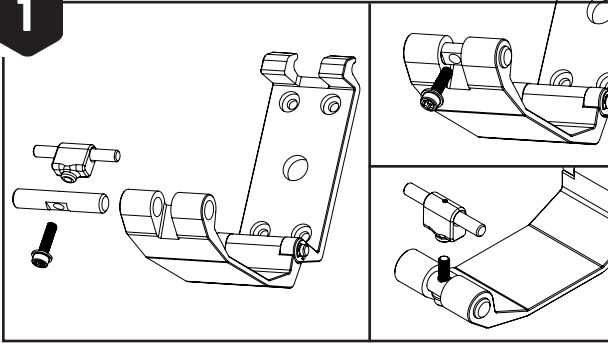

Install The clasp hardware to the lower clasp bracket as follows:


- Insert main pin through lower clasp as shown, with flat side facing out.
- Insert the security bolt through the flat side of the pin.
- loosely thread security bolt into the T- nut assembly.

3 INSTALL MHS CARGO ON MHS BASE

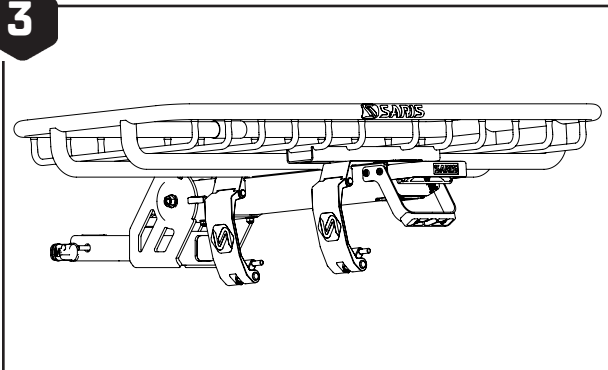

- Place the cargo basket (with clasps installed) over the MHS Base's first two spots. Align clasps with spine edge cutouts.
- Close clasp brackets and latch T-nut into position. Tighten with Torx (T40) key.

2 INSTALL MHS CLASPS ON MHS CARGO BASKET

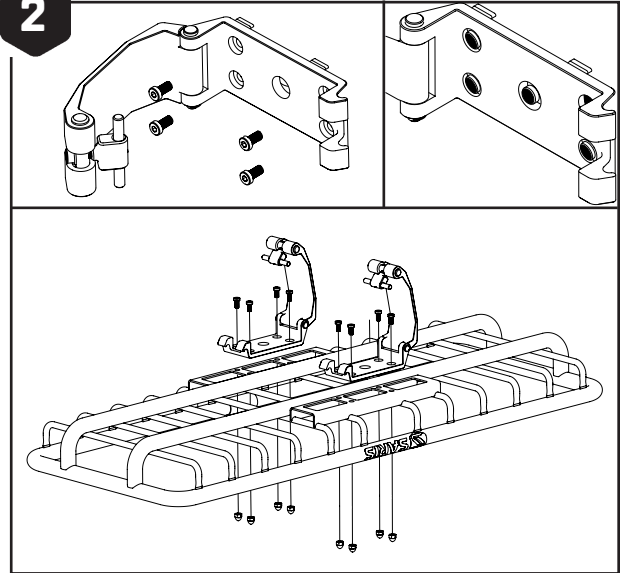


With the cargo basket upside down, install each clasp to each of the bottom brackets using (4x) M8 bolts and a 5mm hex key to tighten. Torque to approximately 12ft-lbs/16Nm.

***Note** the direction the clasp opening is facing so you can match the clasp direction on additional trays.


CARGO CONFIGURATIONS

1

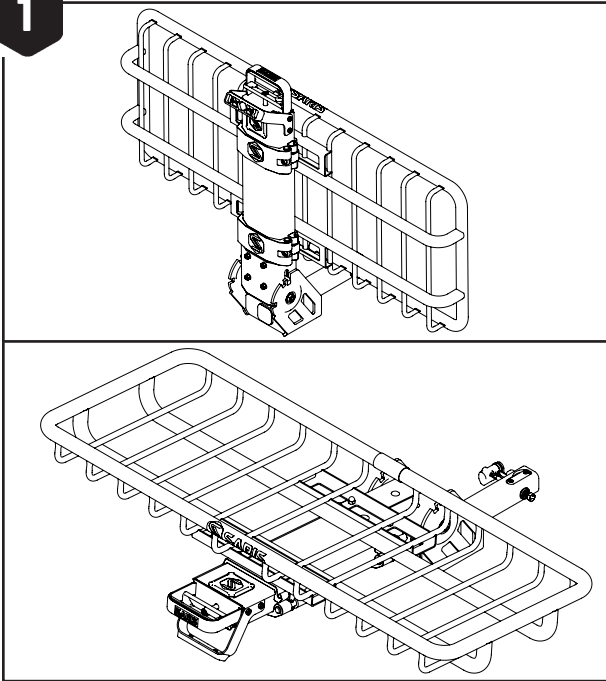


2+1 Base, Cargo (4620, 4690)

2

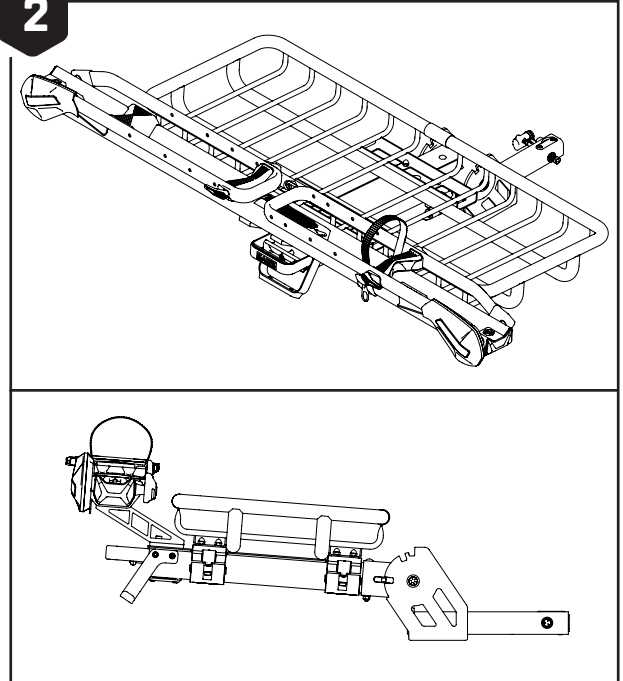


2+1 Base, Cargo, 1-Bike Add-On (4620, 4690, 4650)

3

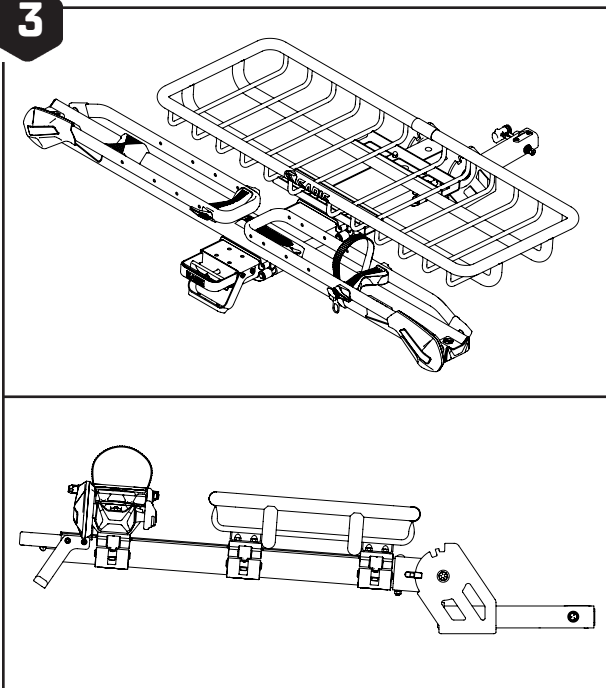

3+1 Base, Cargo, Duo Tray (4630, 4690, 4640)

4

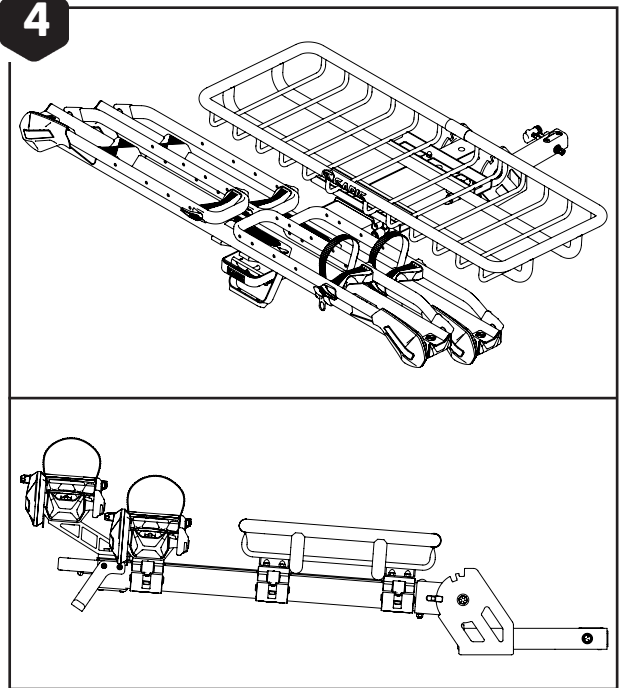

3+1 Base, Cargo, Duo Tray, 1-bike Add-On (4630, 4690, 4640, 4650)

RECOMMENDED MAINTENANCE :

Before Each Use:

- Check for loose bolts, tighten as necessary

Every 90-Day Actions:

- Clean with water and mild soap
- Lubricate locks if applicable (use wet, oil-based lubricant; NO WD-40)
- Grease hitch bolt threads
- Check for scratches in paint

CAUTIONS:

- All requirements for compatibility/fit as stated in the current Saris vehicle/carrier compatibility guide must be followed. (Available at any Saris dealer or www.saris.com). If your vehicle is not listed or you have any questions, please call our customer service at 800-783-7257 or visit www.saris.com.
- Read and follow instructions carefully. Save owner's manual for future reference or parts information. Ensure that any other users of the carrier are familiar with their content.
- Drive slowly over speed bumps, 5 to 10 mph max speed.
- It's the end users responsibility to ensure that use of this product meets all local and state laws.
- When cleaning vehicle and rack, use only water soluble cleaners. Do not take rack through car wash.
- Make sure bike tires are not directly behind exhaust pipe.
- Rack must be installed directly into vehicle hitch receiver. Do not modify the hitch receiver or use hitch extenders.
- Do not mount to any type of trailer or RV including Class B vehicles. Prior to usage on the road,
- This carrier is not recommended for off-road use or for use at speed exceeding 70 mph (113 km/h).
- The handling characteristics of a vehicle will change when a carrier is fitted and especially when it is loaded (in particular crosswind sensitivity, handling on bends and braking). Driving techniques should be altered to allow for these changes, reduce speed, especially on bends and allowing for longer braking distances.
- The vehicle's total length increases when the carrier is attached. The carrier and cargo may increase the vehicle's total width and height. Take care when reversing and/or entering garages or ferries, etc.
- Remove carrier from vehicle when not in use.
- Tighten straps regularly during the journey. Vehicle should be in good condition in the area at which the hitch is located.
- Do not exceed maximum load capacity of carrier (200 lbs max) Secure properly and adjust for even load distribution.
- User is responsible for properly securing cargo to platform.
- Saris absolves itself of responsibility for any personal injuries or consequential damage to property or wealth caused by incorrect fitting or use.

WARNING AND DISCLAIMER:

Before installation, user must read and follow current Saris Fit Guide (available through Saris dealer) recommendations and enclosed instructions. Fit recommendations are based on vehicle's standard features; optional features may affect the fit recommendations. User must attach carrier correctly to the vehicle, check its attachment before each use, and inspect carrier parts for wear. Carrier's attachment to the vehicle is critical and beyond the control of the manufacturer. Manufacturer and seller expressly disclaim any and all liability for personal injury, property damage or loss, whether direct, indirect, or incidental, resulting from the incorrect attachment, improper use, inadequate maintenance, or neglect of this carrier.

OFFICIAL WARRANTY TERMS:

Saris Equipment LLC, parent company of Saris Racks, warrants our product to the original consumer to be free from defects in materials and workmanship. Please retain your sales slip for your records, as proof of purchase will be required.

WARRANTY TERM:

Note: No damage to mounting surfaces is covered.

Any product or part thereof found to be defective within the term as set forth above will be replaced without charge provided that: (1) its failure resulted from a defect in material or workmanship and not from normal wear and tear expected in the use of the product; (2) the product was not misused, improperly assembled, improperly maintained or damaged by accident; (3) there was no failure to follow instructions or warnings in **Owner's Manual**; (4) no alterations or modifications were made; and (5) the product or part is delivered, freight prepaid, to Saris Equipment LLC or an authorized service center. Please call 1-800-783-7257 to obtain return authorization prior to return. Saris Equipment LLC reserves the right to inspect any product before issuing a replacement. Saris Equipment LLC's only obligation shall be to replace such products or parts that it determines are defective.

LIMITATIONS:

The foregoing warranties are in lieu of and exclude all other warranties not expressly set forth herein, whether expressed or implied by operation of law or otherwise. Other than as set forth above, Saris Equipment LLC makes no warranty, whether express, implied or statutory, with respect to any product, including, but not limited to, warranties of reliability, merchantability fitness for a particular purpose, or those arising from any course of performance, dealing, usage or trade. Saris Equipment LLC shall not be liable for incidental or consequential losses, damages or expenses in connection with its products. Saris Equipment LLC's liability hereunder is expressly limited to the replacement of goods not complying with this warranty or, at Saris Equipment LLC's election, to the repayment of an amount of the purchase price of the product in question. Some states do not permit the exclusion or limitation of implied warranties or incidental or consequential damages, so the preceding limitations and exclusions may not apply to you.

EXCLUSIONS :

- If consumer does not heed cautions listed in Instruction Manual, damage is not covered under warranty
- Impact/collision damage is not covered under warranty
- Cradles and strap damage due to improper arm placement are not covered under warranty
- Rust is wear and tear and is preventable with rack maintenance
- Weather impact (UV, salt air/water)