





# MHS Cargo Roof Attachment Kit #4692

Assembly Instructions | Instrucciones de montaje | Instructions d'assemblage



## WHAT'S IN THE BOX

| LETTER | QTY | PART DESCRIPTION |
|--------|-----|------------------|
| A      | 4   | Upper Bracket    |
| B      | 4   | Plastic Spacer   |
| C      | 4   | Rubber Spacer    |
| D      | 4   | Lower Bracket    |
| E      | 8   | Knob             |
| F      | 8   | Carriage Bolt    |

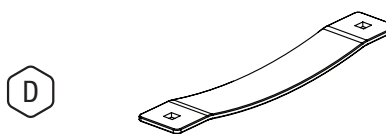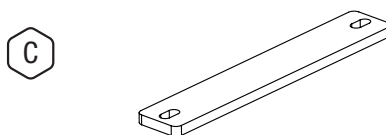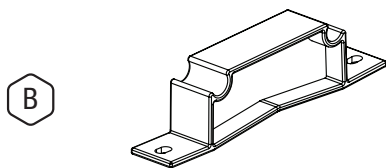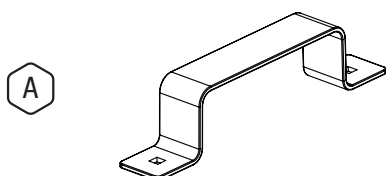

## FOLLOW INSTRUCTIONS



## ASSEMBLY/INSTALLATION VIDEO

<https://saris.com/pages/videos>



## REGISTER YOUR PRODUCT

<https://saris.com/pages/product-registration>



## SPECIFICATIONS

Permitted load capacity: 200 lbs.

Weight: 20 lbs.


Fits most aftermarket and factory roof rack cross bars spaced between 24" and 39" apart.

LOT CODE

Refer to vehicle or aftermarket rack manufacturer's instructions to ensure the vehicle's cross bars are secure.

## INSTALLATION:

1

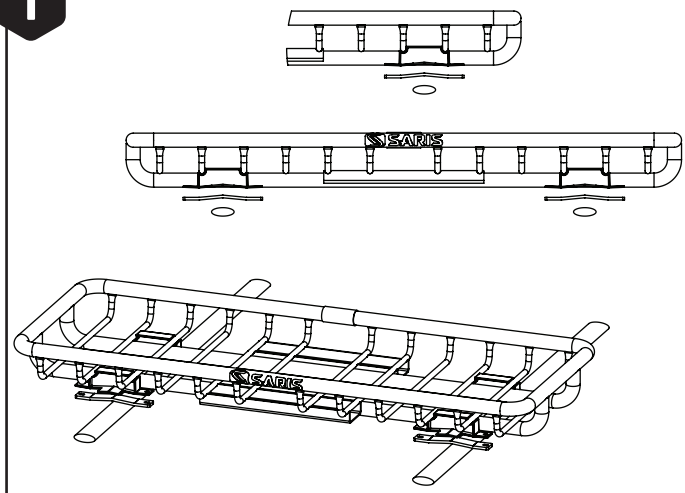

Lift the cargo basket and gently rest it on the vehicle cross bars.


Shift the basket so that the cross bars line up roughly with the open spaces between the  $\frac{1}{2}$ " tubes of the cargo basket.

If adjustable, center your vehicle cross bars in the open spaces between the  $\frac{1}{2}$ " tubes of the cargo basket.

Fit the plastic spacer under and between the  $\frac{1}{2}$ " tubes in the locations that best match up with the vehicle's cross bar spacing. The plastic tab that protrudes from one side of the spacer should be oriented away from the center of the cargo basket. The tabs should not sit below the 1.25" support tubes of the basket.


Once all plastic support brackets are in place, put the 6mm protective rubber spacer between the plastic spacer and the vehicle's cross bars.

2

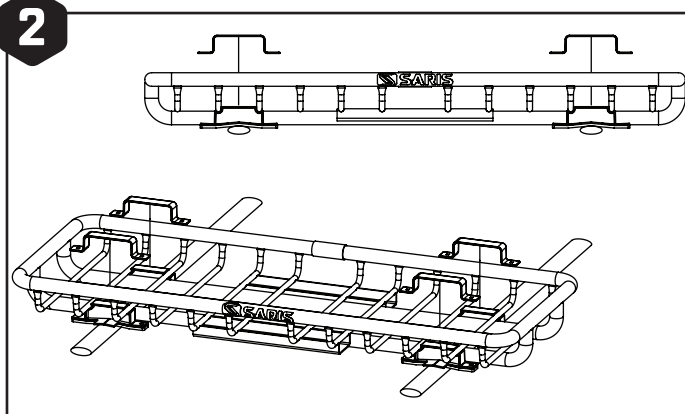


Set the upper spacer over the top of the  $\frac{1}{2}$ " tubes and the plastic brackets.

3

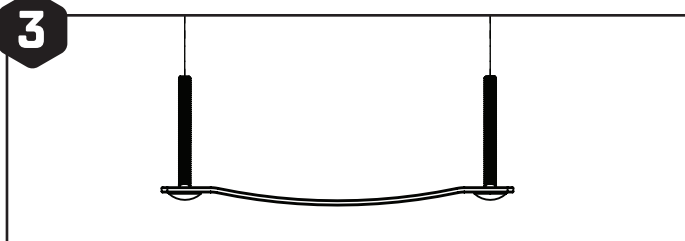


Assemble the M6 screws into the lower brackets.

4

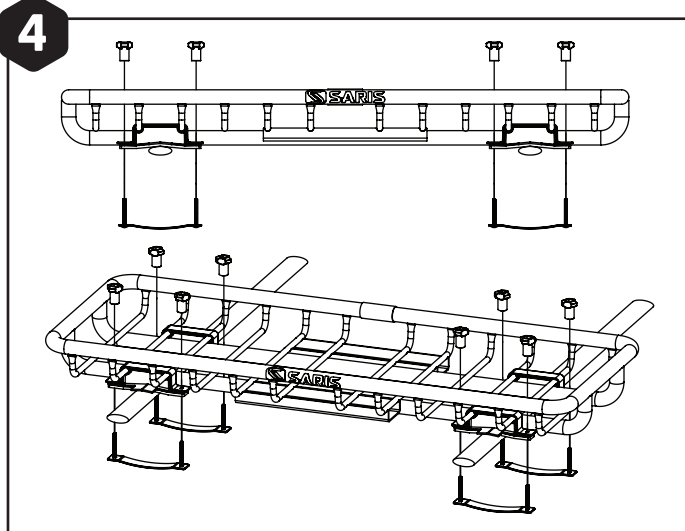


From below the cross bars, line up the carriage bolts with the holes in the end of the rubber spacer, plastic spacer, and upper bracket. Push the lower bracket and carriage bolts up so that the threads of the carriage bolts protrude far enough that the knobs can be installed from above.

5

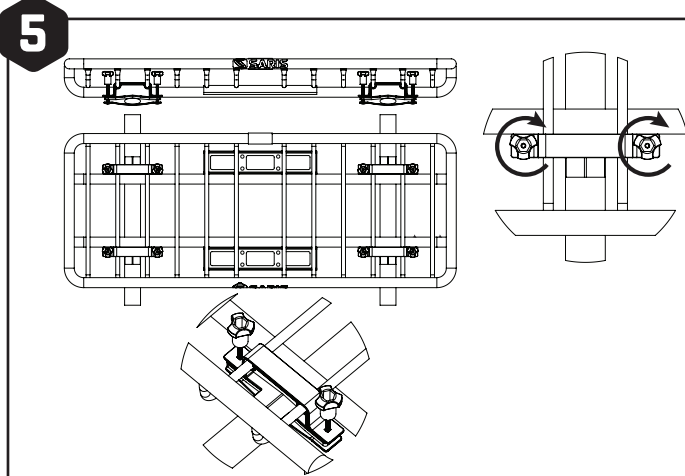

When tightening the knobs down, be sure to tighten the two knobs evenly on each bracket. The gap between the brackets should be roughly even once the knobs have been fully tightened.

6

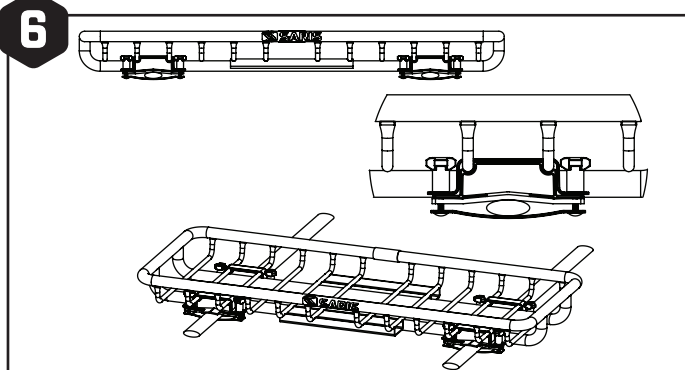

Once all the brackets are fully assembled and tightened, check that the rack is secure by pushing side to side. If the cargo basket moves, the knobs must be tightened further to be secure.

## RECOMMENDED MAINTENANCE:

Each use:

- Check for loose bolts

Every 90 days

- Clean with water and mild soap
- Check for scratches in paint
- Repair with touch-up paint as needed

## CAUTIONS:

- All requirements for compatibility/fit as stated in the current Saris vehicle/carrier compatibility guide must be followed. (Available at any Saris dealer or [www.saris.com](http://www.saris.com)). If your vehicle is not listed or you have any questions, please call our customer service at 800-783-7257 or visit [www.saris.com](http://www.saris.com).
- Read and follow instructions carefully. Save owner's manual for future reference or parts information. Ensure that any other users of the bicycle carrier are familiar with their content.
- Drive slowly over speed bumps, 5 to 10 mph max speed.
- It is the end user's responsibility to ensure that use of this product meets all local and state laws.
- When cleaning vehicle and rack, use only water-soluble cleaners. Do not take rack through car wash.
- This carrier is not recommended for off-road use or for use at speeds exceeding 70 mph (113 km/h).
- The handling characteristics of a vehicle will change when a cargo rack is fitted and especially when it is loaded (in particular, crosswind sensitivity, handling on bends and breaking). Driving techniques should be altered to allow for these changes, reduce speed, especially on bends, and allow for longer braking distances.
- Remove carrier from vehicle when not in use.
- Replace any mounting strap at the first sign of wear. Replacement parts are available through your local Saris dealer or call 1-800-783-7257
- Tighten straps regularly during the journey.
- Do not exceed maximum load capacity of carrier (200 lbs.). Check vehicle roof/roof rack manufacturer's maximum load. Keep in mind that the cargo basket itself is 20 lbs.
- Saris absolves itself of responsibility for any personal injuries or consequential damage to property or wealth caused by incorrect fitting or use.

## OFFICIAL WARRANTY TERMS:

Saris Cycling Group, Inc (SCG), parent company of Saris Racks, warrants our products to the original consumer to be free from defects in materials and workmanship. Your purchase includes the following warranty which is in lieu of all other express warranties. This warranty is extended only to the initial consumer purchaser. This warranty gives you specific legal rights. You may have other legal rights which vary from state to state. Please retain your sales slip for your records, as proof of purchase will be required.

## WARRANTY TERM:

Car Racks: Limited Lifetime\* | Home Storage/Bike Racks: Limited Lifetime\* | Parking Racks: 1 year

\*Warranty only valid for original purchaser. Limited lifetime warranty available in North America only.

Manufacturing defects are most likely to be identified on new products or early in the product's lifespan. Each warranty claim is unique, and it is solely up to SCG to determine if a product can be covered by the limited lifetime warranty due to defects, or if the product has suffered wear and tear.

Any product or part thereof found to be defective within the term as set forth above will be replaced without charge provided that: (1) its failure resulted from a defect in material or workmanship and not from normal wear and tear expected in the use of the product; (2) the product was not abused, misused, improperly assembled, improperly maintained or damaged by accident or installation of parts or accessories not originally intended or compatible with the racks as originally sold; (3) there was no failure to follow instructions or warnings in Owner's Manual; (4) no alterations or modifications were made; and (5) the product or part is delivered, freight prepaid, to Saris Cycling Group or an authorized service center. Please call 1-800-783-7257 to obtain return authorization prior to return. Any other claims not included in the statements above are void and will not be honored. SCG reserves the right to inspect any product before issuing a replacement. SCG's only obligation shall be to replace such products or parts that it determines are defective.

## LIMITATIONS:

THE FOREGOING WARRANTIES ARE THE ONLY WARRANTIES MADE BY SCG. THERE ARE NO OTHER WARRANTIES. ANY WARRANTY THAT MIGHT OTHERWISE BE IMPLIED BY LAW INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED STRICTLY TO THE APPLICABLE LENGTH OF THIS LIMITED WARRANTY.

SCG shall not be liable for incidental or consequential losses, damages, or expenses in connection with its products. SCG's liability hereunder is expressly limited to the replacement of goods not complying with this warranty or, at SCG's election, to the repayment of an amount of the purchase price of the product in question.

consequential losses, damages or expenses in connection with its products. Saris Equipment LLC's liability hereunder is expressly limited to the replacement of goods not complying with this warranty or, at Saris Equipment LLC's election, to the repayment of an amount of the purchase price of the product in question. Some states do not permit the exclusion or limitation of implied warranties or incidental or consequential damages, so the preceding limitations and exclusions may not apply to you.

## EXCLUSIONS:

- If consumer does not comply with all warnings, cautions, or instructions listed in Instruction Manual, damage is not covered under warranty
- Impact/collision damage is not covered under warranty
- Cradles and strap damage due to improper arm placement are not covered under warranty
- Paint damage – chipping, cracking, or fading is not covered under warranty
- Rust is wear and tear and is preventable with rack maintenance
- Weather impact (UV, salt air/water)
- Damage to mounting surface
- Damage or loss resulting from failure to replace/maintain consumable items not covered
- Not following Recommended Rack Maintenance
- Consumable items not covered by warranty. Including but not limited to:
  - Arm and wheel tray adjustment knobs
  - Frame and wheel straps
  - Vehicle attachment straps
  - Molded wheel trays
  - Frame cradles
  - Threaded assemblies
  - Ratcheting assemblies