

SONY

SONY®

**Multi Format
Switcher System**
MVS-8000X System (With CCP-8000 Series)

Multi Format Switcher System

MVS-8000X System
(With CCP-8000 Series Center Control Panel)

User's Guide
Volume 1
1st Edition (Revised 1)

English

User's Guide

English

Volume 1
1st Edition (Revised 1)

4-177-898-02 (1)

SONY®

MVS-8000X System

(With CCP-8000 Series Center Control Panel)

User's Guide

Multi Format Switcher System

Volume 1 English

1st Edition (Revised 1)

Software Version 10.00 and Later

NOTICE TO USERS

© 2010 Sony Corporation. All rights reserved. This manual or the software described herein, in whole or in part, may not be reproduced, translated or reduced to any machine readable form without prior written approval from Sony Corporation.

SONY CORPORATION PROVIDES NO WARRANTY WITH REGARD TO THIS MANUAL, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN AND HEREBY EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE WITH REGARD TO THIS MANUAL, THE SOFTWARE OR SUCH OTHER INFORMATION. IN NO EVENT SHALL SONY CORPORATION BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, WHETHER BASED ON TORT, CONTRACT, OR OTHERWISE, ARISING OUT OF OR IN CONNECTION WITH THIS MANUAL, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN OR THE USE THEREOF.

Sony Corporation reserves the right to make any modification to this manual or the information contained herein at any time without notice.

The software described herein may also be governed by the terms of a separate user license agreement.

<Organization of This User's Guide>

The User's Guide for this system comprises Volumes 1 to 3.

Volume 1

This book. For the contents of this volume, see “Table of Contents” at the front.

Chapter 1 MVS-8000X Functions

Chapter 2 Menus and Control Panel

Chapter 3 Signal Selection and Transitions

Chapter 4 Keys

Chapter 5 Wipes

Chapter 6 DME Wipes

Chapter 7 Frame Memory

Chapter 8 Color Backgrounds, Copy and Swap, and Other Settings

Chapter 9 Color Corrector

Chapter 10 Special Functions

Appendix (Volume 1)

- Wipe Pattern List
- DME Wipe Pattern List
- Resizer DME Wipe Pattern List
- Menu Tree

Index

Volume 2

The volume comprises the following chapters.

Chapter 11 DME Operations

Chapter 12 External Devices

Chapter 13 Keyframe Effects

Chapter 14 Snapshots

Chapter 15 Utility/Shotbox

Chapter 16 Macros

Chapter 17 Files

Appendix (Volume 2)

- SpotLighting
- Functional Differences With Models of DME
- Macro File Editing Rules
- About the Macro Attachment List Display
- Menu Operations Not Recorded in a Menu Macro

Index

Volume 3

The volume comprises the following chapters.

Chapter 18 System Setup (System)

Chapter 19 Control Panel Setup (Panel)

Chapter 20 Switcher Setup (Switcher)

Chapter 21 DME Setup (DME)

Chapter 22 DCU Setup (DCU)

Chapter 23	Setup Relating to Router Interface and Tally (Router/Tally)
Chapter 24	Simple Connection of the MKS-8080/8082 AUX Bus Remote Panel
Chapter 25	DIAGNOSIS
Appendix (Volume 3)	• Data Saved by [Setup Define] and [Initial Status Define] • Error Messages
Index	

Functions Newly Supported in Version 10.00

The functions newly supported in the MVS-8000X system version 10.00 are as follows.

Functions relating to operability

Classification	Functions supported	Menu No.	See page		
			Vol.1	Vol.2	Vol.3
Control panel	Assignment of keys 1 to 8 to region selection buttons in the device control block (trackball/joystick)	7321.17	60, 64	—	73
	Selection of keys 1 to 8 in the independent key transition control block (simple type)	7321.25	88	—	80

Functions relating to the switcher

Classification	Functions supported	Menu No.	See page		
			Vol.1	Vol.2	Vol.3
Signal inputs and outputs	Format converter	—	142	—	20
	Premium inputs	—		—	—
	Increased number of primary inputs	—		—	—
Wipe	Random / diamond dust wipes (pattern numbers 273 and 274), and dust mix	1151	287, 491	—	—
Frame Memory	Support for 1080P format	—	370	—	—
	Extended clips	—	371	—	—
	Reposition function	2531	376	—	—
	Support for external hard disk drives	2561, 2562	410	—	—
	FM Data Port support	7312.2	—	—	17
M/E capacity expansion	Use of the M/E-4 bank	—	532	—	—
Key availability expansion	Use of keys 5 to 8	—	534	—	—

Functions relating to setup

Classification	Functions supported	Menu No.	See page		
			Vol.1	Vol.2	Vol.3
System	Support for SD format	7313	–	18	18
	Support for 1080PsF/24, 1080PsF/25, and 1080PsF/29.97 formats	7313	–	–	18
	Support for switcher Resume mode	7314	–	–	25
	DME input/output signal format setting	7316.8	–	–	42
Control panel	Assigning functions to transition control block buttons (standard type)	7321.9 7321.33 7311.34	49	–	63
	Assigning functions to key control block buttons	7321.29	56	–	71
Switcher	Setting the re-entry button operation mode	7336.4	–	–	170
Tally	Additional matrix size	7361	–	–	216
	Selecting the serial tally data size	7367	–	–	231

Functions Not Supported in Version 10.00

The following functions are not supported in the MVS-8000X system version 10.00.

Classification	Functions not supported	Menu No.	See page		
			Vol.1	Vol.2	Vol.3
Control panel	CCP-6224 2M/E Control Panel	–	97	–	–
	CCP-6324 3M/E Control Panel	–	97	–	–

Table of Contents

Chapter 1 MVS-8000X Functions

Introduction	18
Features of the MVS-8000X Multi Format Switcher System.....	20
Basic Video Processing.....	22
Transitions	22
Keys	26
Wipes	27
DME Wipes	28
Frame Memory	28
Color Backgrounds.....	28
Copy and Swap.....	29
Video Process	29
Color Corrector.....	29
Side Flags	30
Multi Program 2	30
Creation of Special Effects and Management of Data and Operations...32	
Digital Multi Effects (DME)	32
External Devices.....	33
Keyframes	33
Snapshots.....	34
Utility.....	35
Shotbox.....	35
Macros	35
Files	36
Setup	37

Chapter 2 Menus and Control Panel

Names and Functions of Parts of the Control Panel	40
Control Panel: Example Configuration 1 (With Standard Transition Modules)	40
Control Panel: Example Configuration 2 (With Simple Transition Modules)	42
Control Panel: Example Configuration 3 (With Compact Transition Modules)	44
Cross-Point Control Block	45

Transition Control Block (Standard Type).....	49
Flexi Pad Control Block (Standard Type)	53
Key Control Block.....	56
Device Control Block (Trackball)	60
Device Control Block (Joystick)	64
Device Control Block (Search Dial).....	65
Keyframe Control Block	68
Numeric Keypad Control Block	71
Fade to Black Control Block	73
Auxiliary Bus Control Block (for AUX Buses)	74
Auxiliary Bus Control Block (for Router Control)	76
Menu Control Block	79
Memory Card/USB Adaptor Block	80
“Memory Stick”/USB Connections Block	81
Utility/Shotbox Control Block	82
Transition Control Block and Flexi Pad Control Block (Simple Type).....	83
Independent Key Transition Control Block (Simple Type)	88
Downstream Key Control Block	90
Downstream Key/Fade-to-Black Control Block	92
Transition Control Block (Compact Type)	94
CCP-6224 2M/E Control Panel.....	97
CCP-6324 3M/E Control Panel.....	97
Cross-Point Control Block (CCP-6224/6324) in the AUX Operating Mode	98
Multifunction Flexi Pad Control Block.....	100
Basic Menu Operations.....	103
Menu Organization.....	103
About the Top Menu List	103
Accessing Menus.....	104
Displaying a Menu	113
Interpreting the Menu Screen	114
Menu Operations	116
Operation With a Mouse	122
Switching Between the Main Menu Site and Subsidiary Menu Site ..	129
Shortcut Menu	129

Chapter 3 Signal Selection and Transitions

Video Processing Flow	134
Signal Selection	136

Basics of Signal Selection	137
Bus Selection	137
AUX Panel-less Function	141
Signal Assignment and Selection	142
Signal Name Display	146
Transitions.....	147
Selecting the Next Transition	147
Transition Types	147
Procedure for Basic Transition Operation.....	150
Key Priority Setting.....	153
Setting the Key Priority in the Transition Control Block.....	153
Setting the Key Priority by a Menu Operation.....	156
Display of the Key Output Status and Key Priority	157
Selecting the Transition Type by a Menu Operation	160
Super Mix Settings	161
Color Matte Settings.....	162
Executing a Transition	165
Transition Indicator Function	165
Setting the Transition Rate	166
Pattern Limit.....	171
Executing an Auto Transition.....	174
Executing a Transition With the Fader Lever (Manual Transition)	175
Combinations of Auto and Manual Transitions	176
Non-Sync State	176
Fader Lever Operation in Bus Fixed Mode	177
Transition Preview	179
Independent Key Transitions	181
Basic Independent Key Transition Operations.....	184
Setting the Independent Key Transition Type by a Menu Operation..	186
Setting the Independent Key Transition Rate.....	187
Fade to Black.....	191
Fade to Black Operation	191
Setting the Fade to Black Transition Rate	192
Simple Transition	193
Basic Operations for Simple Transitions.....	193
Display of the Key Output Status and Key Priority	195
Split Fader	195
Independent Key Transitions With a Simple Transition Module.....	196

Chapter 4 Keys

Overview.....	200
Key Types.....	200
Key Modifiers.....	202
Key Memory.....	205
Key Default	206
Key Setting Operations Using Menus.....	207
Key Setting Menus	207
Key Type Setting.....	208
Chroma Key Composition.....	211
Chroma Key Adjustments	212
Selecting Key Fill and Key Source	218
Key Edge Modifications.....	222
Masks.....	229
Applying a DME Effect to a Key	233
Specifying the Key Output Destination.....	236
Key Modify Clear.....	236
Blink Function.....	237
Video Processing	237
Key Setting Operations With the Key Control Block	239
Operations in the Key Control Block	240
Key Edge Modifications.....	243
Masks.....	247
Applying a DME Effect to a Key	248
Other Key Setting Operations	250
Key Adjustment Operations With the Multifunction Flexi Pad Control Block.....	253
Resizer	260
Two-Dimensional Transformations of Keys	260
Resizer Interpolation Settings	264
Resizer Crop/Border Settings	265
Applying Resizer Effects.....	268
Key Snapshots.....	274
Key Snapshot Operations	274
Key Snapshot Operations Using a Simple Transition Module.....	277

Chapter 5 Wipes

Overview.....	282

Types of Wipe Pattern	282
Basic Procedure for Wipe Settings	283
Wipe Settings Menu	283
Wipe Pattern Selection	283
Pattern Mix	285
Setting Wipe Modifiers	290
Wipe Modify Clear.....	308
Wipe Settings for Independent Key Transitions	309
Basic Procedure for Independent Key Transition Wipe Settings.....	309
Setting Independent Key Transition Wipe Modifiers	310
Wipe Snapshots.....	314
Wipe Snapshot Operations With the Flexi Pad	314
Wipe Snapshot Operations With the Menus	317
Wipe Pattern Operations in the Multifunction Flexi Pad Control Block	320
Recalling a Wipe Snapshot.....	320
Selecting the Wipe Pattern	321
Editing the Wipe Pattern	321
Saving, Canceling, and Deleting Edited Wipe Patterns	324

Chapter 6 DME Wipes

Overview.....	328
Types of DME Wipe Pattern	328
DME Wipe Pattern Variation and Modifiers.....	336
Relation Between DME Wipes and Other Effects	337
Basic Procedure for DME Wipe Settings	339
DME Wipe Settings Menu	339
DME Wipe Pattern Selection	339
Setting DME Wipe Modifiers	342
DME Wipe Modify Clear	349
DME Wipe Settings for Independent Key Transitions	350
Basic Procedure for Independent Key Transition DME Wipe Settings	350
Setting Independent Key Transition DME Wipe Modifiers.....	351
Resizer DME Wipe Setting	354
DME Wipe Snapshots	356
DME Wipe Snapshot Operations With the Flexi Pad	356
DME Snapshot Operations With the Menus	357
Creating User Programmable DME Patterns	358

User Programmable DME Transition Mode	358
DME Wipe Pattern Operations in the Multifunction Flexi Pad Control	
Block	363
Recalling a DME Wipe Snapshot.....	363
Selecting the DME Wipe Pattern	363
Editing the DME Wipe Pattern	364
Saving, Canceling, and Deleting DME Wipe Snapshots	367

Chapter 7 Frame Memory

Overview.....	370
Still Image Operations	373
Preparations	373
Interpreting the Frame Memory Menu	374
Selecting an Input Image	378
Selecting Outputs and Target Frame Memory	378
Capturing and Saving an Input Image	379
Recalling Still Images	383
Image Output	385
Continuously Capturing Still Images (Record)	387
Recalling a Continuous Sequence of Still Images (Animation)	389
Frame Memory Clip Function	392
Frame Memory Clip Operations.....	393
Preparations for Operation	393
Recalling Clips	393
Clip Playback	395
Clip Creation	399
Creating and Handling Frame Memory Folders.....	401
Clip Output	402
Clip Transition Operations.....	403
Image Data Management.....	406
Pair File Processing	406
Moving Files.....	407
Deleting Files	408
Renaming Files	409
External Hard Disk Drive Access	410
Hard Disk Formatting	410
Saving Files	411
Recalling Files	412
Managing Images Using a DDR/VTR.....	414

Using a DDR/VTR for High-speed Backup and Restoring.....	414
Extracting Images from Video Tape	416

Chapter 8 Color Backgrounds, Copy and Swap, and Other Settings

Color Background	420
Color Background Settings Menu	420
Basic Color Background Setting Operations.....	420
Copy and Swap	424
Copy and Swap Operations	428
Copy and Swap Menu Operations	428
Copy by Button Operation	429
Misc Menu Operations.....	431
Port Settings for Control From an External Device	431
Editing Keyboard Settings.....	432
Safe Title Settings	433
Displaying a List of Transition Rates and Changing the Settings.....	434
AUX Menu Operations	436
AUX Bus Settings	436
Status Menu	437
Router Control Menu Operations.....	438
Checking the List of Inputs for Each Destination	438
Switching the Source for Each Destination.....	439
Video Process	440
Video Process Adjustments for Each Input Signal	440
Video Process Adjustments on a Particular Bus	440
Video Process Memory	441
Video Process Settings.....	442

Chapter 9 Color Corrector

Preparations	444
Overall Color Corrector Operations	446
Enabling Color Corrector	446
Copy and Swap Operations	446
Color Corrector Functions	448
Input Video Processing Operations	448
Primary Color Correction Operations	449
Secondary Color Correction Operations	453
Luminance Processing Operations	453
Spot Color Adjustment	456

Output Video Processing Operations	458
YUV Clip Operations	459
RGB Clip Operations	460

Chapter 10 Special Functions

Side Flags.....	464
Overview	464
Side Flag Settings	464
Wipe Action on Images With Side Flags	466
DME Wipe Action for an Image With Side Flags	467
Multi Program 2	469
Overview	469
Sequence of Operations in Multi Program 2	470
Basic Operations (Required)	471
Examples of Operations in the Multi Program 2 Mode (When Sharing a Switcher Bank).....	475
Optional Operations	476
Functions Added in Multi Program 2 Mode	480
Differences Between Multi Program 2 Mode and Standard Mode	481
Restrictions on Using Multi Program 2 Mode	482

Appendix (Volume 1)

Wipe Pattern List	486
Standard Wipes.....	486
Enhanced Wipes	487
Rotary Wipes	488
Mosaic Wipes	489
Random/Diamond Dust Wipes.....	491
DME Wipe Pattern List	492
DME Wipe Patterns Available in One-Channel Mode	492
DME Wipe Patterns Available in Two-Channel Mode.....	500
DME Wipe Patterns Available in Three-Channel Mode.....	505
Resizer DME Wipe Pattern List	506
Menu Tree	508
Recalling Menus	508
M/E-1 to M/E-4 Menus	508
PGM/PST Menu	511
Frame Memory Menu	513
Color Bkgd Menu	514

AUX Menu	514
CCR Menu	515
Copy/Swap Menu	516
Misc Menu	516
Status Menu	517
DME Menu	518
Global Effect Menu	519
Device Menu	519
Macro Menu	520
Key Frame Menu	521
Effect Menu	522
Snapshot Menu	523
Shotbox Menu	524
File Menu	525
Engineering Setup Menu	526
Diagnostic Menu	531
Using the M/E-4 Bank	532
Assigning a Button for M/E-4 Selection in the Setup Menu	532
Using Keys 5 to 8	534
Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu	534
Selecting Keys 5 to 8 for Next Transition	535
Selecting Input Signals for Keys 5 to 8 in the Cross-Point Control Block	536
Index	538

Chapter 1 MVS-8000X Functions

Introduction

This manual is the User's Guide for the MVS-8000X Multi Format Switcher system.

This manual describes principally the operation of the system using the CCP-8000 of center control panels.

The User's Guide for this system comprises three volumes.

For the contents of each volume, see the section "Organization of This User's Guide" at the front of this volume.

Devices and system nomenclature

In this manual, when discussing the principal components of the MVS-8000X system, in place of the formal product names, abbreviated names characterizing the functions and features are sometimes used. When distinctions between system configurations must be drawn, the terms in the following table are used.

Principal components and naming

The formal product names of the principal components of the MVS-8000X system, and the terms used in this manual are as follows.

Formal product name	Term used in this manual
MVS-8000X Multi Format Switcher Processor	Switcher or switcher processor
MVE-8000A Multi Format DME Processor	DME or DME processor or MVE-8000A
MVE-9000 Multi Format DME Processor	DME or DME processor or MVE-9000
CCP-8000, CCP-6224, CCP-6324 Center Control Panel	Control panel or center control panel
DCU-8000 (MKS-8700) Device Control Unit	DCU or MKS-8700
DCU-2000 (MKS-2700) Device Control Unit	DCU or MKS-2700

System nomenclature

The following terms are used for systems, depending on the combination of installed options, and the signal format.

System configuration and features	Term for system
System with installed option boards and settings to support HDTV format	HD system
System with installed option boards and settings to support SDTV format	SD system

System configuration and features	Term for system
A system in which the center control panel has five M/E banks	5M/E system
A system in which the center control panel has four M/E banks	4M/E system
A system in which the center control panel has three M/E banks	3M/E system
A system in which the center control panel has two M/E banks	2M/E system

Related manuals

MVS-8000X-C Switcher Processor Pack

- MVS-8000X-C Operation Manual
- MVS-8000X-C Installation Manual

MVE-8000A DME Processor Pack

- MVE-8000A Operation Manual
- MVE-8000A Installation Manual

MVE-9000-C DME Processor Pack

- MVE-9000-C Operation Manual
- MVE-9000-C Installation Manual

CCP-6000/8000 Center Control Panel Pack

- CCP-6000/8000 Operation Manual
- CCP-6000/8000 Installation Manual

DCU-8000 Device Control Unit Pack

- DCU-8000 Operation Manual
- DCU-8000 Installation Manual

DCU-2000 Device Control Unit Pack

- DCU-2000-C Operation Manual
- DCU-2000-C Installation Manual

Features of the MVS-8000X Multi Format Switcher System

The MVS-8000X Multi Format Switcher system boasts extensible high performance and multifunctionality. The following are some of the principal features of this system.

System configuration flexibility

Multiformat support

This system supports both HDTV and SDTV signal formats. The format selection can be switched by a simple control panel operation.

Extensible system configuration

By suitable combination of options, the switcher can be configured with various inputs and outputs, and different numbers of M/E banks. The system offers the flexibility to change and expand as required.

You can connect up to two MVE-8000A or MVE-9000 extensible DME processor, which provides any number from one to eight channels, for a maximum of four channels of DME functionality.

When the signal format is 1080P, you can also connect up to four MVE-8000A units, which provides a maximum of eight channels of DME functionality.

Powerful external device interfaces

By connecting to a Sony routing switcher or similar, a large system can be built. From the control panel, it is also possible to operate other equipment, including VTRs and disk recorders.

Powerful tally system

The complete system including routing switcher provides an all-inclusive tally system. The system can be adapted to different applications and settings, using multiple tally outputs, including both on-air and recording tallies.

Comprehensive video manipulation

M/E banks

Each mix/effects bank (M/E bank) is equipped with four keyers, and each keyer is capable not only of chroma keying, but also independent key transitions separate from the background transitions. The four keys can be freely combined, to carry out four different program outputs.

Powerful frame memory functions

The frame memory can hold approximately 1000 frames in an HDTV system (approximately 2000 frames in 720P/59.94 format), or approximately 5000 frames in an SDTV system in 480i/59.94 format, or approximately 4000 frames in 576i/50 format, and allows eight frames (four frames in 1080P format) to be recalled simultaneously.

Link operation with DME

By means of the dedicated DME interface, a range of DME functions including DME wipes and processed keys can be handled as switcher functions.

By connecting two MVE-8000A or MVE-9000 unit, you can interface to a maximum of eight DME channels.

When the signal format is 1080P, you can also connect up to four MVE-8000A units, which enables a maximum of eight channels to be interfaced.

Designed for use in a live broadcasting environment

Flexible control panel layout

Because of its modular design, the various sections of the control panel can be laid out as required. This allows a flexible layout appropriate to the system operation.

High-performance user interface

The menu control block provides a large color LCD panel, with rapid touch-panel menu selection.

The source name displays and buttons in the Flexi Pad™ and shotbox control blocks have color backlit LCD displays. The signal names, and graphical representations of the patterns associated with buttons provide intuitive feedback, and allow the immediate decisions that are required in a live operating environment.

Basic Video Processing

This section introduces basic functions used for video processing on the switcher.

Transitions

In the M/E banks and PGM/PST bank, the switch from the current video stream (appearing on the corresponding program monitor) to a new video stream is referred to as a transition.

In the M/E banks and PGM/PST bank, you can change one of the images, the background, and keys 1 to 8 (downstream keys 1 to 8 in the PGM/PST bank), and also vary combinations of these simultaneously.


The following are examples of transition.

Notes

When the signal format is 1080P, four keys can be used (keys 1 to 4).

Changing the background


A background transition switches from the video currently selected on the background A bus (the current video) to the video selected on the background B bus (the new video).

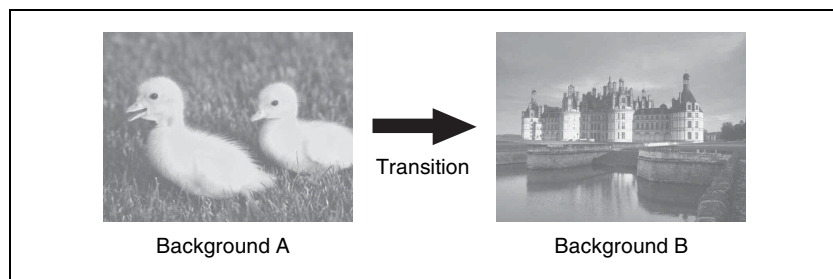


In the default selection of flip-flop mode (*see page 177*), the background always switches in the direction from the A bus to the B bus. When the transition completes, the cross-point selections on the A and B buses are interchanged.

Inserting and deleting a key

You can insert one or more of the eight keys (downstream keys on the PGM/PST bank).
If you select a key which is already inserted, the transition will delete the key.
A simultaneous combination of deleting and inserting keys is also possible.

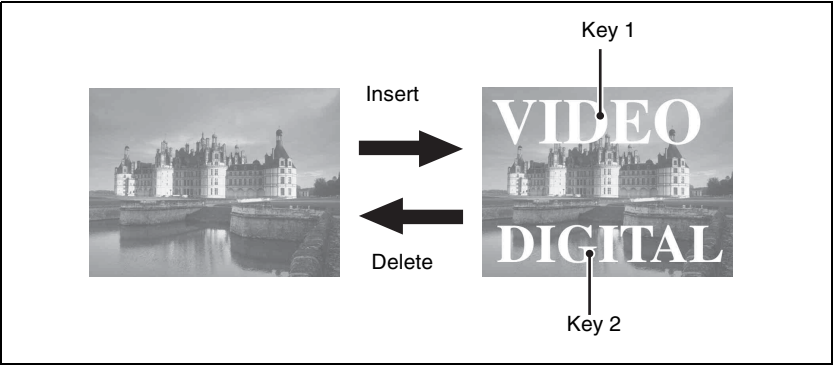


Inserting or deleting key 1 and key 2

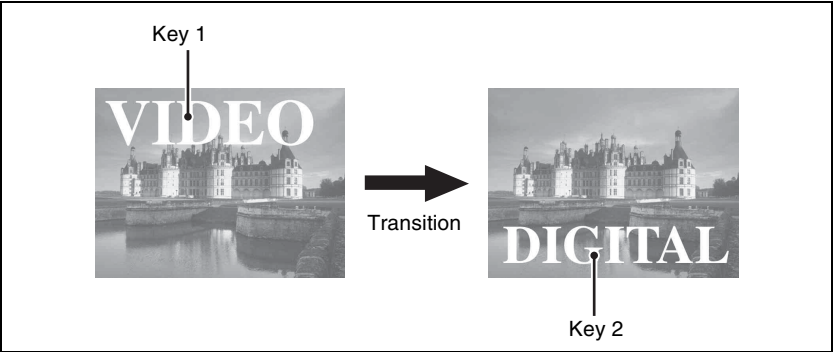


Deleting key 1 and inserting key 2

Simultaneously changing the background and keys

You can change any of the eight keys (downstream keys on the PGM/PST bank) and the background at the same time.

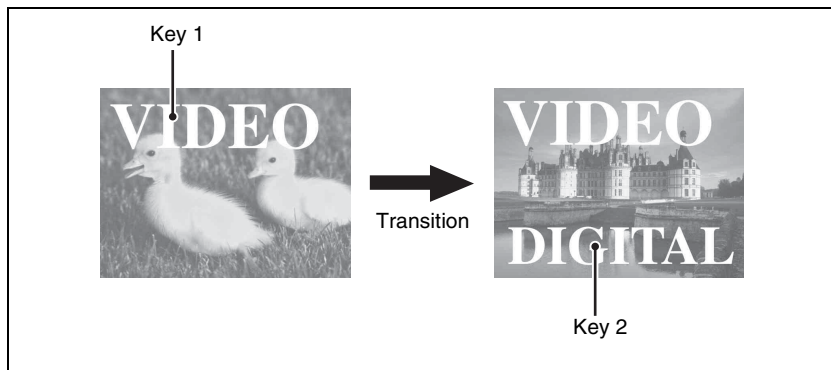

Changing the background and key 2 simultaneously

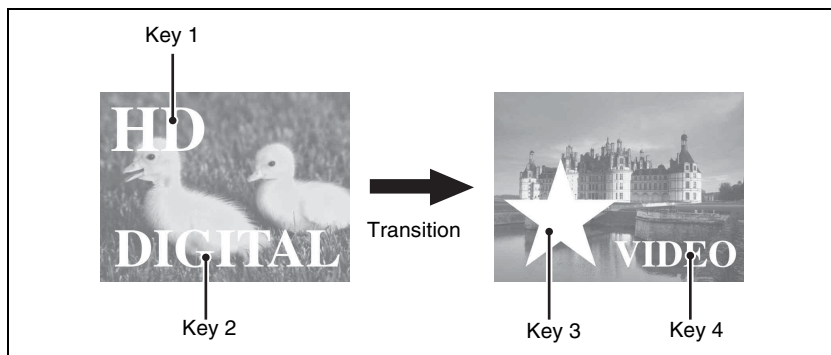

Changing the background and keys 1 to 4 simultaneously

Selecting the transition type determines the way in which the transition occurs. The following are the transition type.

- Mix
- NAM (non-additive mix)
- Super mix
- Preset color mix (color matte)
- Wipe
- DME wipe
- Clip transition
- Cut


There are two modes for carrying out a transition: auto transitions are carried out by a button operation, and manual transitions are carried out using the fader lever. It is also possible to combine these two modes.

Independent Key Transitions

In addition to common transitions, it is possible to carry out independent transitions on the keys of the M/E banks and PGM/PST bank. These are called “independent key transitions.”


By carrying out an independent key transition in combination with a common transition, different transition types can be used for the background and keys. The following description compares the independent key transition with a common transition, taking a simultaneous change of the background and key as an example.

Video used in the transition

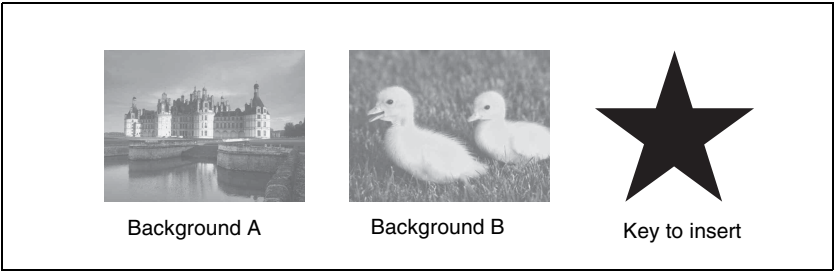

Effect of a common transition


In the case shown in the previous illustration, carrying out a common transition produces the following change in the image.

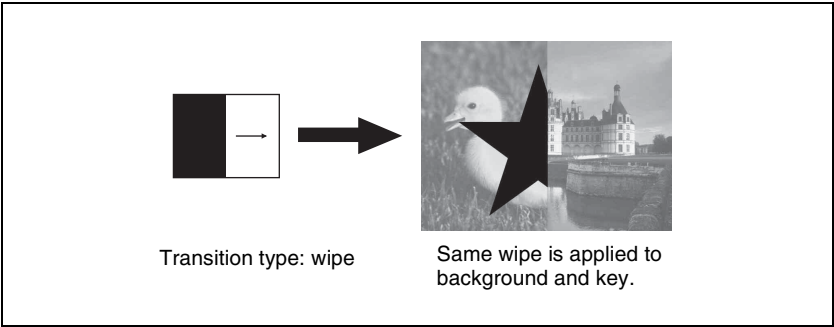

Effect of a common transition

Effect of use with an independent key transition

The key is inserted with an independent key transition as the background changes with a common transition, providing the following result.

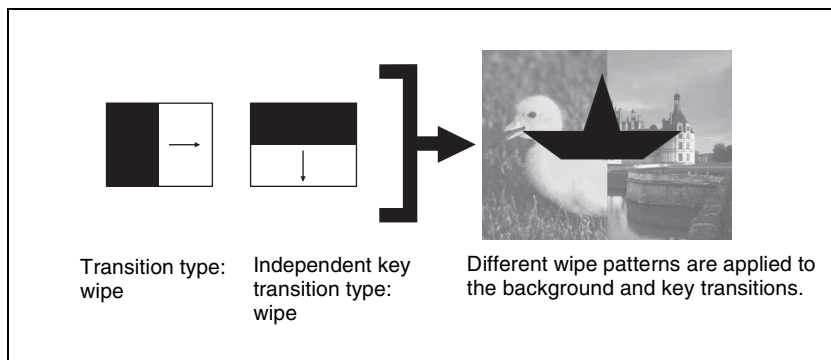

Effect of a background transition and independent key transition

For details of transitions, see Chapter 3 “Signal Selection and Transitions” (page 133).

Keys

A key is an effect in which a part of the background image is replaced by an image or superimposed text. The signal determining how the background is cut out is termed “key source,” and the signal that replaces the cut-out part is termed “key fill.” The system component responsible for processing a key is referred to as a keyer.

Each switcher bank has eight keyers, each providing the same functionality.

On each switcher bank, you can use the following key types (methods of processing the key source).

- Luminance key
- Linear key
- Color vector key
- Chroma key
- Wipe pattern key
- Key wipe pattern key

Key modifiers

You can apply borders and other modifiers to the edge of the key image.

Masks

A mask allows a part of the image to be replaced by the background or a key. To prevent unwanted holes in the background, or if a key is not the desired shape, you can correct this with a mask.

Resizer

This function allows you to apply effects, similar to a DME, such as zoom, movement, or aspect ratio change to a part of a created key. You can use the following operations.

- Two-dimensional transform of a key
- Resizer interpolation settings
- Resizer crop/border settings
- Resizer effect settings (wide key border, drop shadow, edge enhancement, mosaic, defocus, mask)

For details, see Chapter 4 “Keys” (page 199).

Wipes

A wipe is a transition from the current video stream to a new video stream, using a wipe pattern.

Changing the background by means of a wipe is referred to as a “background wipe,” and inserting or deleting a key with a wipe is termed a “key wipe.”

There are two types of wipe: those that can be selected in a common transition, and those that can be selected in an independent key transition.

The patterns that can be used for a wipe are as follows.

- Standard wipe patterns
- Enhanced wipes
- Rotary wipes
- Mosaic wipe pattern
- Random and diamond dust wipe patterns

You can combine two selected patterns (referred to as “main” and “sub”) to create a new pattern (pattern mix).

You can also specify the wipe direction, or set the pattern position, applying various changes and modifiers to the selected wipe pattern.

For details, see Chapter 5 “Wipes” (page 281).

DME Wipes

A DME wipe is a wipe transition that uses a DME effect to change from one video image to the next.

There are two types of DME wipe: those which can be selected for a normal transition, and those which can be selected for an independent key transition.

The patterns that can be used for a DME wipe are as follows.

Slide, Squeeze, Split, Door, Flip tumble, Mirror, Sphere, Character trail, Wave, Ripple, Page turn, Page roll, Frame in-out, Picture-in-picture, 2D trans, 3D trans, Sparkle, Split slide, Mosaic, Defocus, Brick, and User programmable DME

You can also specify the wipe direction, or set the pattern position, applying various changes and modifiers to the selected DME wipe pattern.

Resizer DME wipes

Using the resizer, you can carry out key DME wipes.

For details, see Chapter 6 “DME Wipes” (page 327).

Frame Memory

Frame memory is a function for using a still image or video (frame memory clip) as material for editing.

You can create a still image by capturing a frame of input video or a clip by specifying a range of input video. The created images and clips can be written to memory for playback, editing, and output.

For details, see Chapter 7 “Frame Memory” (page 369).

Color Backgrounds

This function can be used to obtain color background video.

Two color signals generated from the dedicated generators can be switched or mixed, and then output.

For details, see “Color Background” (page 420).

Copy and Swap

This function can be used to copy and swap the settings among the M/E-1 to M/E-3, and PGM/PST banks or between keyers.

The following settings can be copied or swapped.

- Overall settings for the M/E and PGM/PST banks
- Keyer settings
- Wipe settings in a transition control block
- Wipe settings in an independent key transition control block
- DME wipe settings in a transition control block
- DME wipe settings in an independent key transition control block
- Matte color settings (color 1, color 2, and how to compose them)
- Color settings
- DME channel settings
- Format converter input settings (copy only)
- Format converter output settings (copy only)

For details, see “Copy and Swap” (page 424).

Video Process

The term “video process” is applied to adjustments to the gain, hue, black level of the input video signal. There are two types of adjustment; adjustment of an individual input signal and adjustment as image effects on a particular bus.

For details, see “Video Process” (page 440).

Color Corrector

The color corrector enables video signal color correction (black balance/white balance adjustment, gamma correction, knee correction, etc.).


The color corrector includes the following adjustments.

- Input video processing
- Primary color correction
- Secondary color correction
- Luminance processing
- Spot color adjustment
- Output video processing
- YUV/RGB clip

For details, see Chapter 9 “Color Corrector” (page 443).

Side Flags


The term “side flags” refers to the areas to left and right of an image with aspect ratio 4:3 embedded within a 16:9 frame, when these areas are filled with a separate image selected from the utility 1 bus.

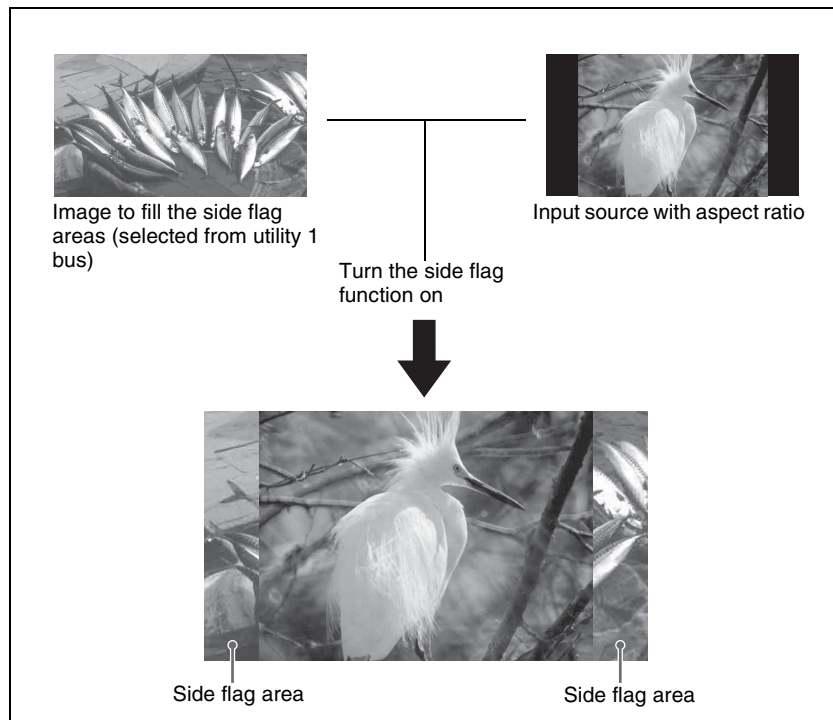

For details, see “Side Flags” (page 464).

Multi Program 2

By operating the switcher in Multi Program 2 mode, a single switcher mix/effects bank can be used to create two separate video outputs, referred to as “main” and “sub.” You can set backgrounds, keys, and transitions for each of main and sub. For example, immediately after a score in baseball two versions of the scene can be provided as shown below, and switched simultaneously.

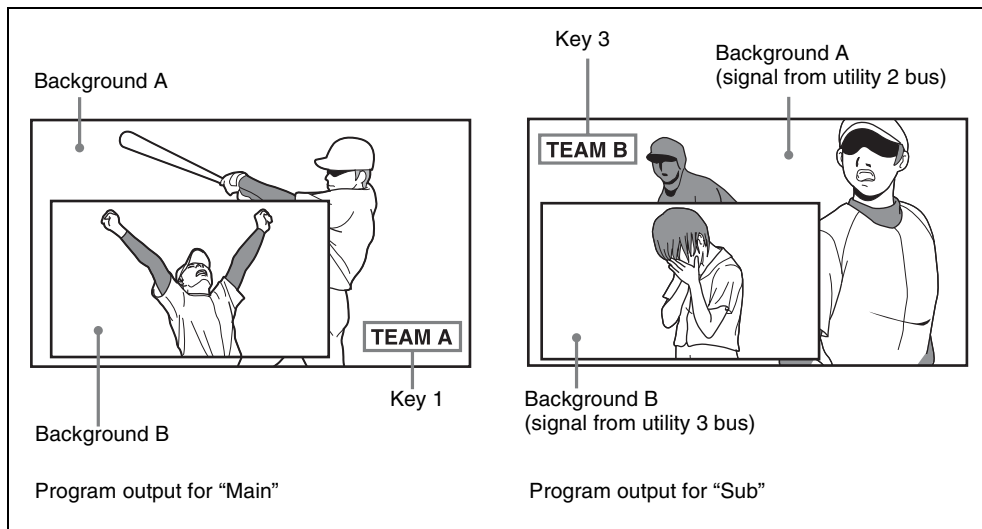

For details, see "Multi Program 2" (page 469).

Creation of Special Effects and Management of Data and Operations

This section introduces functions used for creation of special effects, control of external devices or switcher operations, and data management.

Digital Multi Effects (DME)

When used with the switcher, DME allows you to add three-dimensional effects such as image movement, rotation, magnification and shrinking, as well as a wide variety of special effects.

Each channel can be used on its own or in combination with other channels, which allows you to create advanced effects with more complexity.

The following types of DME special effects are available.

- **Edge effects:** Border, Crop, Beveled Edge, Key Border, Art Edge, Flex Shadow
- **Effects for entire image:** Defocus, Blur, Multi Move
- **Effects for video image:** Sepia, Mono, Posterization, Solarization, Nega, Contrast, Mosaic, Mask, Sketch, Metal, Dim and Fade, Glow
- **Freeze effects**
- **Nonlinear effects:** Wave, Mosaic Glass, Flag, Twist, Ripple, Rings, Broken Glass, Flying Bar, Blind, Split, Split Slide, Mirror, Multi Mirror, Kaleidoscope, Lens, Circle, Panorama, Page Turn, Roll, Cylinder, Sphere, Explosion, Swirl, Melt, Character Trail
- **Lighting effects:** Lighting, Spotlighting
- **Recursive effects:** Trail, Motion Decay, Keyframe Strobe
- **Background color**
- **Separate Sides** (effects for front and back sides)
- **Signal inversion** (Invert effect)
- **Key density adjustment**
- **Key source selection**

Global effects

Global effects are special effects created by combining the images of successive channels. The following types of global effects are available.

- Combiner
- Brick
- Shadow

For details, see Chapter 11 “DME” (Volume 2).

External Devices

In this system, you can operate while controlling the following types of external device:

- Devices supporting P-Bus (Peripheral II protocol)
- Devices supporting GPI
- VTRs
- Disk recorder (Sony disk 9-pin protocol and video disk communications protocol)
- Extended VTR (Abekas A53 protocol)

For details on the devices that can be connected, consult your Sony representative.


You can control an external device by previously registering timeline keyframes.

For details, see Chapter 12 “External Devices” (Volume 2).

Keyframes

A keyframe represents an instantaneous state of an image; it can be saved in a register (see “Registers” in Chapter 13 (Volume 2)) and recalled for reuse. By arranging a number of keyframes on the time axis, and interpolating between successive keyframes, you can create a “key frame effect” in which there is a continuous change from each keyframe to the next.

The following figure shows three keyframes created with a wipe pattern (the circle) in different positions. This is interpolated to create the effect shown.

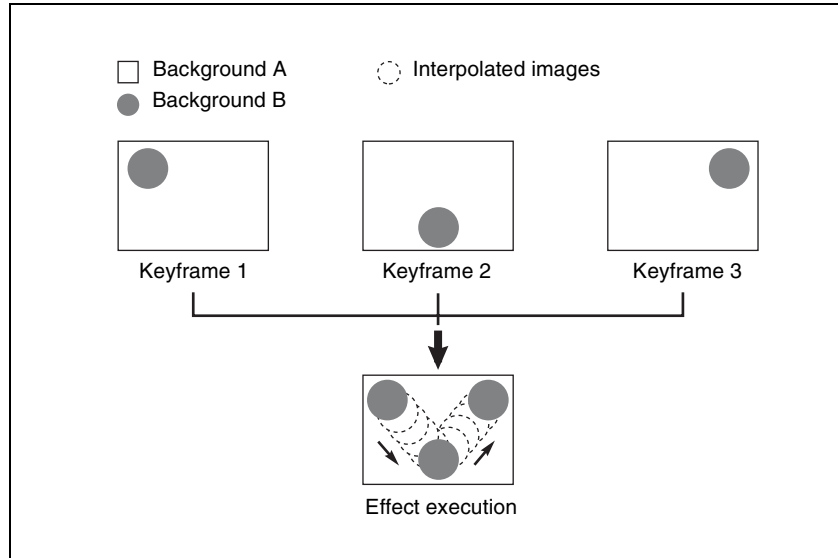

Example of keyframes and effect execution

You can save the sequence of keyframes representing a single effect in a register. Then by recalling this register, you can replay the same effect.

For details, see Chapter 13 “Keyframe Effects” (Volume 2).

Snapshots

The term “snapshot” refers to a function whereby the various settings required to apply a particular effect to an image are saved in a register as a set of data, for recall as required, to recover the original state.

Snapshots are divided as follows.

- Snapshots applying to a particular region (functional block of the switcher or DME)
- Master snapshot
- Key snapshot
- Wipe snapshot
- DME wipe snapshot

An individual snapshot may also have attached special conditions relating to switcher or DME operation when the snapshot is recalled.

These conditions are called “attributes” of the snapshot, and can be added when the snapshot is saved or recalled.

For details, see Chapter 14 “Snapshots” (Volume 2).

Utility

The utility function refers to a function whereby you can assign an arbitrary action or a shortcut for frequently used menu to a particular button, then instantly recall the action or menu by pressing the button.

For details, see “Utility Execution” in Chapter 15 (Volume 2).

Shotbox

The term “shotbox” refers to a function whereby for each specified region (*see “Regions” in Chapter 13 (Volume 2)*) any snapshot or keyframe effect can be recalled simultaneously.

For details, see “Shotbox” in Chapter 15 (Volume 2).

Macros

The term “macro” refers to the function whereby a sequence of signal selections and other operations on the control panel is saved as data in memory, so that it can be recalled as required to automatically execute the same sequence of operations.

The individual control panel operations constituting a macro are termed “events.”

Macros also provide the following functions.

Menu macros

The term “menu macro” refers to the function whereby a sequence of menu operations is saved as data in memory, so that it can be recalled as required to automatically execute the same sequence of operations.

Macro timeline

By recording macro recall and execute action on a timeline, in the same way as for keyframes in an effect, you can automatically execute them in a sequence.



Macro attachment

Macro attachment is a function whereby a macro register is assigned to a control panel button or a particular position of a fader lever, linking the execution of the button function or a fader lever operation with a macro execution.

For details, see Chapter 16 “Macros” (Volume 2).

Files

You can save register data, including setup information and snapshot information, as a file on a hard disk or memory card, and recall it as required. You can operate on individual files or registers, or together in a batch. Regarding frame memory, it is possible to capture image data stored in an external device into frame memory.

The following files can be saved and recalled.

- Operation mode setup data for system as a whole and individual devices
- Device status data for system startup
- Key memory setting data
- Video process memory setting data
- Keyframe effect setting data
- Snapshot setting data
- Wipe snapshot setting data
- DME wipe snapshot setting data
- Key snapshot setting data
- Shotbox setting data
- Macro setting data
- Macro attachment data
- Menu macro setting data
- Frame memory image data

For details, see Chapter 17 “Files” (Volume 2).

Setup

Various settings are required, in order to operate the switcher, control panel, DME, external devices, and so on, connected together in a single system. This is referred to as “setup,” and you can carry out the setup operations from the Engineering Setup menu.

The settings in the Engineering Setup menu are grouped under the following headings.

System setup (System)

For details, see Chapter 18 “System Setup” (Volume 3).

Panel setup (Panel)

For details, see Chapter 19 “Control Panel Setup (Panel)” (Volume 3).

Switcher setup (Switcher)

For details, see Chapter 20 “Switcher Setup (Switcher)” (Volume 3).

DME setup (DME)

For details, see Chapter 21 “DME Setup (DME)” (Volume 3).

DCU setup (DCU)

For details, see Chapter 22 “DCU Setup (DCU)” (Volume 3).

Router/tally setup (Router/Tally)

For details, see Chapter 23 “Setup Relating to Router Interface and Tally (Router/Tally)” (Volume 3).




Chapter 2 Menus and Control Panel

Names and Functions of Parts of the Control Panel


Control Panel: Example Configuration 1 (With Standard Transition Modules)

The MVS-8000X system control panel comprises a number of modules. The following illustration shows a typical 32-button, 4-M/E configuration, with

standard transition modules used in the transition control block.

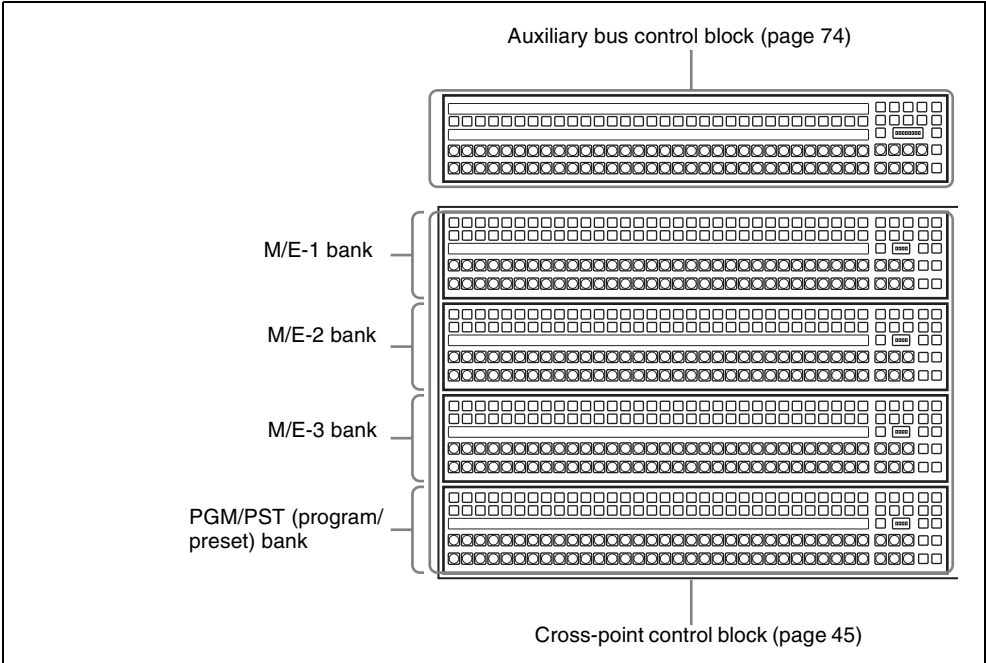


Control panel configuration 1 (left side)
(with standard transition modules)

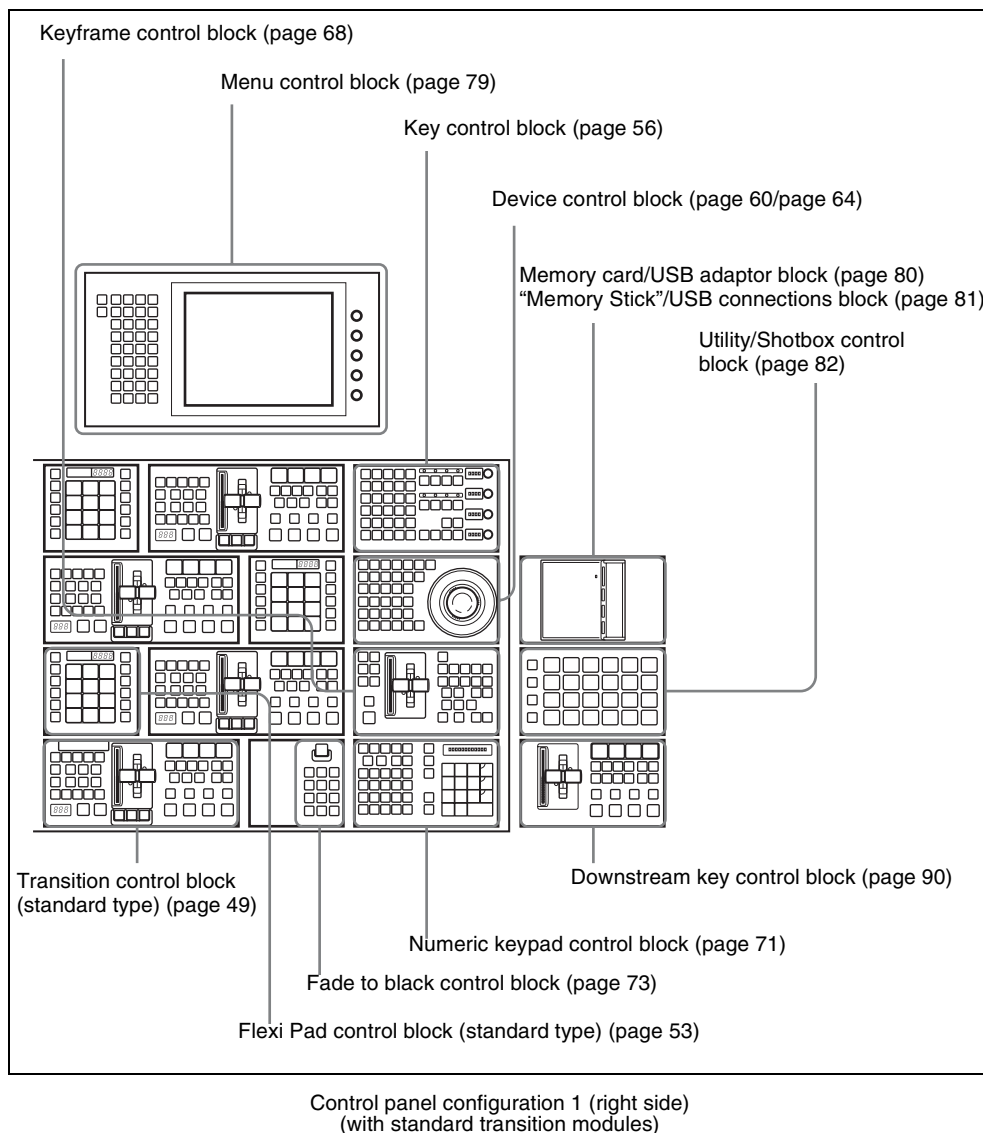

Control Panel: Example Configuration 2 (With Simple Transition Modules)

The following illustration shows a typical configuration, with simple transition modules used in the transition control block.


Except for the simple modules, this is the same configuration as in example configuration 1.

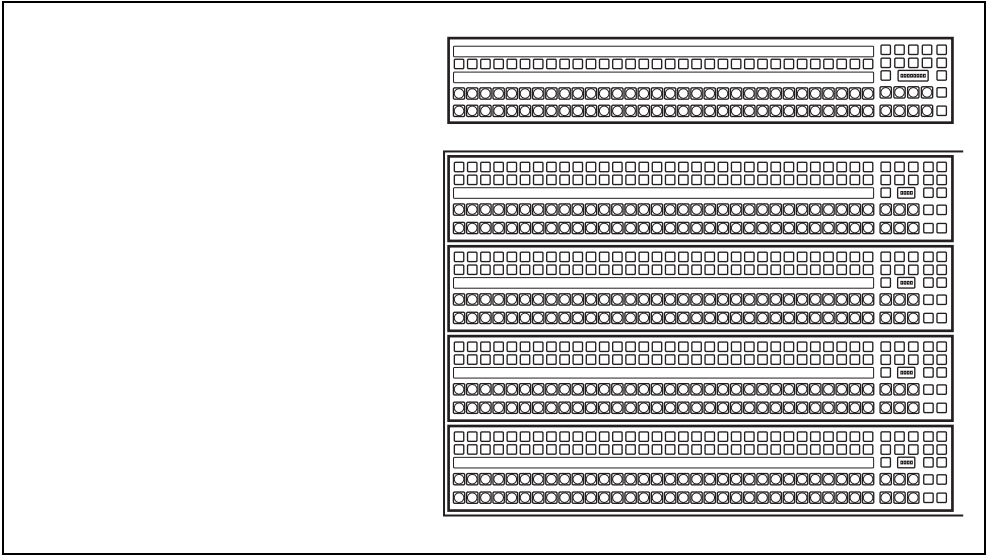

Control panel configuration 2 (left side)
(with simple transition modules)

Transition control block and Flexi Pad control
block (simple type) (page 83)


Independent key transition control block
(simple type) (page 88)

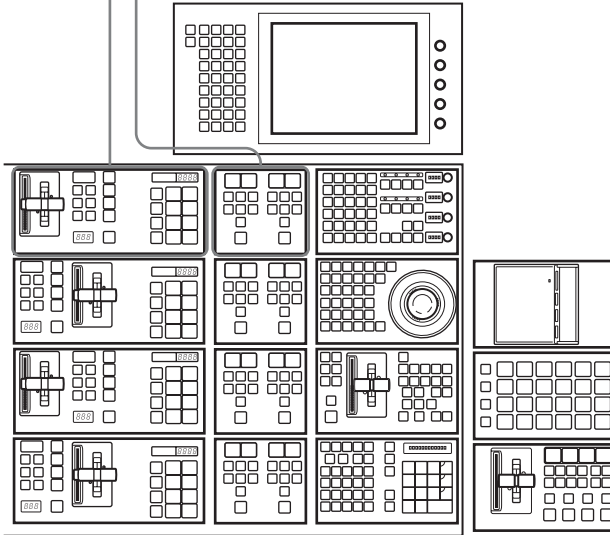

Control panel configuration 2 (right side)
(with simple transition modules)

The following illustration shows a typical configuration, with compact transition

modules used in the transition control block.

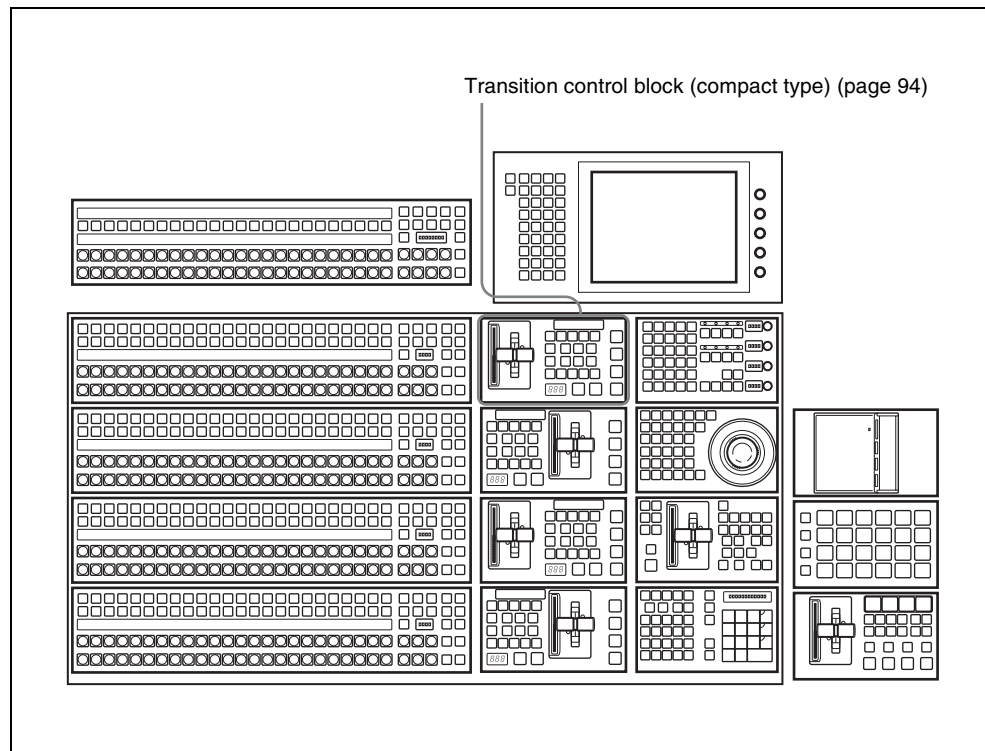

Control panel configuration 3 (with compact transition modules)

Cross-Point Control Block


In the cross-point control block, you can select the signals to be used in this M/E bank or PGM/PST bank.

There are also modules without the source name displays shown in the following figure.

All operations except those of the [SHIFT] button are the same as for a module with source name displays.

Notes

In the M/E-4 bank, the only signals which can be selected as key signals are the premium inputs (inputs to the switcher PREMIUM INPUTS connectors 1 to 20).

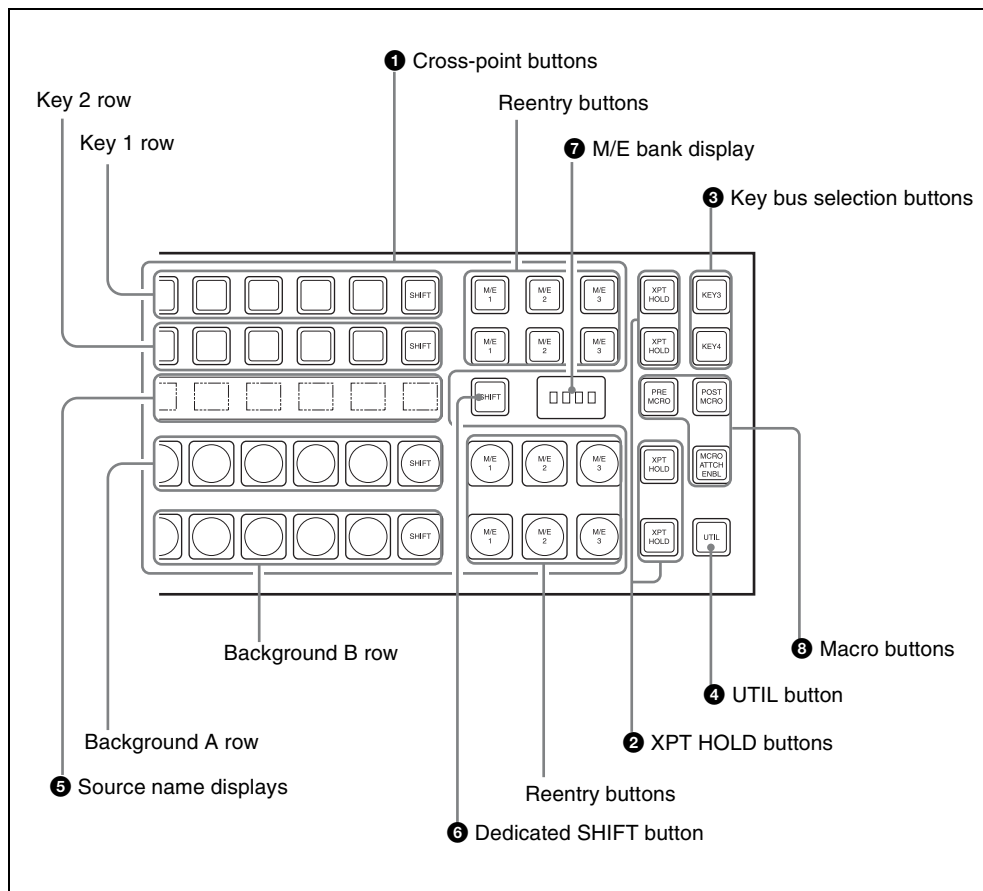

1 Cross-point buttons

These buttons select the signals used for video creation on this M/E bank or PGM/

PST bank. Each row of buttons corresponds to one or more signal buses within the switcher.

For details of assignment and selection of keys 5 to 8, see the following sections in Appendix (Volume 1): “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534) and “Selecting Input Signals for Keys 5 to 8 in the Cross-Point Control Block” (page 536).

Key 1 row: The buttons in this row select the key 1 or key 3 signals to be inserted into the video on this M/E bank or PGM/PST bank.

To select the key 1 fill signal, check that the right-hand [KEY3] button in the M/E bank (or the [DSK3] button in the PGM/PST bank) is off, then press the button assigned to the desired signal. To select the key 3 fill signal, press the [KEY3] button, turning it on. While the [UTIL] button on the right hand side is held down, these buttons are assigned to the DME external video bus allowing you to select the signal on that bus.

Key 2 row: The buttons in this row select the key 2 or key 4 signals to be inserted into the video on this M/E bank or PGM/PST bank.

To select the key 2 fill signal, check that the right-hand [KEY4] button in the M/E bank (or the [DSK4] button in the PGM/PST bank) is off, then press the button assigned to the desired signal. To select the key 4 fill signal, press the [KEY4] button, turning it on. While the [UTIL] button on the right hand side is held down, these buttons are assigned to the DME utility 1 or 2 bus as follows.

- **When the [KEY 4] button is off:**
DME utility 1 bus
- **When the [KEY 4] button is on:**
DME utility 2 bus

Background A row: Press the desired button to select the signal as the current

background video on this M/E bank or PGM/PST bank.

While the [UTIL] button on the right hand side is held down in Hold mode, these buttons are assigned to the utility 1 bus, and can be used to select the signal on that bus.

Background B row: Press the desired button to select the signal as the background video after the transition on this M/E bank or PGM/PST bank. While the [UTIL] button on the right hand side is held down in Hold mode, these buttons are assigned to the utility 2 bus, and can be used to select the signal on that bus.

Reentry buttons: These allow you to select the video created on another bank as background A or B or one of the keys 1 to 8. For example, to use the video created on the M/E-1 bank as background B on the M/E-2 bank, press the reentry button [M/E 1] in the background B row of buttons on the M/E-2 bank.

Cross-point button numbers

Cross-point button and reentry buttons are respectively numbered.

For details, see “Cross-point button control block button numbers” (page 142).

Assigning signals to button

You can assign a signal to each button using the Setup menu.

For details on the operation, see “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).

Visual indications on cross-point buttons

For details on the operation, see “Colors of lit cross-point buttons” (page 146).

② XPT (cross-point) HOLD buttons

Turning one of these buttons on enables you to recall a keyframe or snapshot while keeping the current cross-point selection unchanged.

Function of this button varies depending on the operation mode selected in the Setup menu.

For details, see “Selecting the Bank to Make the Settings” in Chapter 20 (Volume 3).

③ Key bus selection buttons

KEY3 button: Press this button, turning it on, to assign the key 1 cross-point buttons to the key 3 fill bus.

KEY4 button: Press this button, turning it on, to assign the key 2 cross-point buttons to the key 4 fill bus.

Pressing one of the key delegation buttons [KEY1] to [KEY4] in the transition control block (standard type) twice in rapid succession changes the state of the corresponding one of these buttons, so that you can make cross-point selections on the key bus (*see page 52*).

Using these buttons and the dedicated SHIFT button, you can assign keys 5 to 8 to cross-point buttons.

For details, see “Selecting Input Signals for Keys 5 to 8 in the Cross-Point Control Block” (page 536).

④ UTIL (utility) button

While this button is held down, the cross-point buttons are assigned to the following buses, respectively.

Background A row: utility 1 bus

Background B row: utility 2 bus

Key 1 row: DME external video bus

Key 2 row: DME utility 1 bus when the [KEY4] button is off, or DME utility 2 bus when the [KEY4] button is lit.

In a Setup menu, you can select either of the following two modes for these buttons.

- The button takes effect while being held down.
- Every time the button is pressed, it toggles between the on and off states for key 1 and key 2 rows. For background A and background B rows, utility buses remain disabled.

⑤ Source name displays

These show the names of the signals which can be selected on the cross-point buttons, in two or four characters, or in auto mode. While the [SHIFT] button on the right hand side or the [SHIFT] button assigned to the column of cross-point buttons is enabled, the source name of the signal assigned to the column of cross-point buttons in shift mode appears. You can select green, orange, or yellow for the background color of the source name display, for each source separately. You can set the source name display mode and background color in a Setup menu.

⑥ Dedicated SHIFT button

This button has the following three functions.

Selection buttons for key 5 to 8 signals:

When this button is enabled, you can select key 5 and 7 signals in the key 1 row, and key 6 and 8 signals in the key 2 row. Each time you press the button toggles between enabled and disabled.

Source name display shift button: When this button is enabled, the source name display shows the shifted signal name. Each time you press the button toggles between enabled and disabled. In a module with no source name display, this button is disabled.

Bus shift button: When this button is enabled, it acts as a shift button for all buses on this M/E (PGM/PST) bank. Each time you press the button toggles between enabled and disabled.

You can select the mode in a Setup menu.



7 M/E bank display

This indicates the notional mix/effect bank name to which the particular M/E bank is assigned, as a four-character identifier.

8 Macro buttons

PRE MCRO (pre macro) button: Use this button to set a macro attachment in pre macro mode. For setting in macro only mode, use this in combination with a macro only set button assigned to the utility/shotbox control block or a user preference button. Alternatively, without using the button, you can make the selection simply, by pressing simultaneously with the [PRE MCRO] button.

Function of this button varies as follows depending on the operation mode selected in the Setup menu.

- Switching dual background bus mode
- Switching utility/shotbox mode
- Disabling cross-point button operations

For details, see “Setting the Assignment of Macro Operation Buttons” in Chapter 19 (Volume 3).

Notes

For the CCP-6224/6324, [AUX CTRL] is assigned to this button.

For details, see “Cross-Point Control Block (CCP-6224/6324) in the AUX Operating Mode” (page 98).

POST MCRO (post macro) button: Use this button to set a macro attachment in post macro mode. For setting in macro only mode, use this in combination with a macro only set button assigned to the utility/shotbox control block or a user preference button. Alternatively, without using the button, you can make

the selection simply, by pressing simultaneously with the [PRE MCRO] button.

This button is disabled when some operation modes are selected in the Setup menu.

For details, see “Setting the Assignment of Macro Operation Buttons” in Chapter 19 (Volume 3).

Notes

For the CCP-6224/6324, [AUX DSPLY] is assigned to this button.

For details, see “Cross-Point Control Block (CCP-6224/6324) in the AUX Operating Mode” (page 98).


MCRO ATTCH ENBL (macro attachment enable) button: When this button is on, the macro attachments set for the buttons of the M/E bank are enabled.

You can make a setup setting such that enabled buttons light.

Transition Control Block (Standard Type)

In the transition control block, you can modify the output of the M/E bank or PGM/ PST bank, and perform transitions. Both

common transition and independent key transition operations are possible.

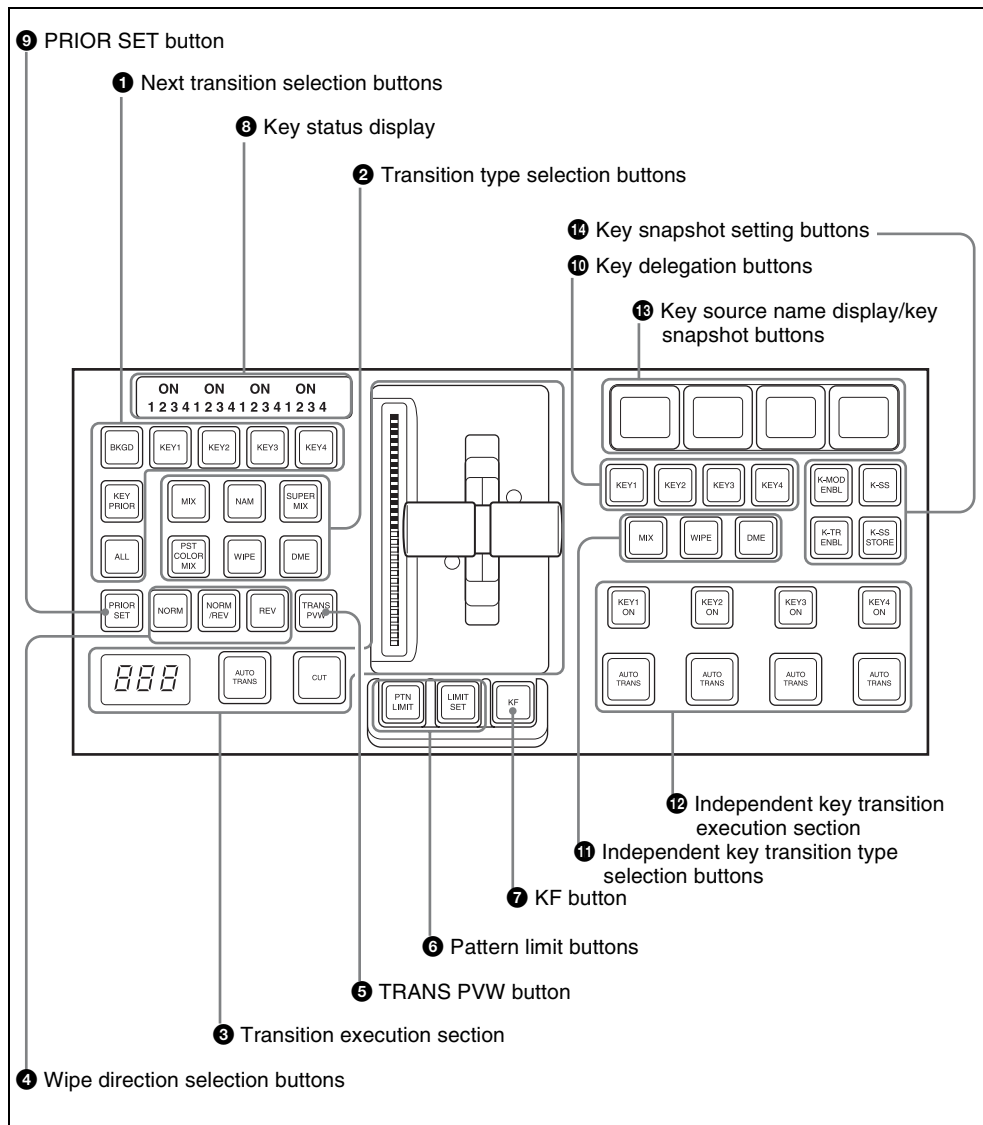

❶ Next transition selection buttons

Press these buttons, turning them on, to determine what the next transition will apply to.

BKGD: Next transition changes the background.

KEY1 to KEY8 (DSK1 to DSK8 in the PGM/PST bank): Press this button, turning it on, to make the next transition insert or remove the corresponding key (keys 1 to 8). If a key is currently inserted it will be removed, and vice versa. In the PGM/PST bank, this inserts or removes downstream keys 1 to 8.

For details of assignment and selection of keys 5 to 8, see the following sections in Appendix (Volume 1): “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534) and “Selecting Keys 5 to 8 for Next Transition” (page 535).

KEY PRIOR (priority): When this button is lit, the setting of the key priority after the next transition is enabled. The key priority after the next transition appears in the key status display.

ALL: Pressing this button turns on a preselected set of the [BKGD], [KEY1] to [KEY8], and [KEY PRIOR] buttons. Make this setting in a Setup menu.

❷ Transition type selection buttons

You can assign these buttons in setup to any transition type (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

Press one of these buttons, turning it on, to determine the type of the next transition. When multi-program mode is selected in the Setup menu (see “Settings for Switcher Configuration (Config Menu)” in Chapter 20 (Volume 3)), two or more of the following buttons may light.

You can also assign a function to these buttons to select whether or not the fader levers are used as keyframe faders.

MIX: In a background transition, the new video fades in as the current video fades out. During the transition, the overall signal level is maintained at 100%.

In a key transition, the key fades in (for insertion) or out (for removal).

NAM (non-additive mix): The current and new video signals are compared, and the signal with the higher luminance level is given priority in the output. The current video is maintained at 100% output for the first half of the transition as the new video increases progressively to 100%, then the current video is progressively reduced from 100% to zero in the second half while the new video is maintained at 100%.

SUPER MIX: The current video is maintained at 100% output for the first half of the transition as the new video is mixed while increasing progressively to 100%. The current video is then progressively reduced from 100% to zero in the second half while the new video is maintained at 100%.

PST (preset) COLOR MIX: In the first transition, the current video is replaced by the color matte in a mix (dissolve), then in the second transition the color matte is replaced by the new video also in a mix (dissolve).

In place of a color matte, you can select any signal on the utility 2 bus.

WIPE: The current video is replaced by the new video, using the wipe pattern selected in the Wipe menu.

DME: A wipe type of transition is carried out, using the DME effect selected in the DME Wipe menu.

**FM1&2CLIP, FM3&4CLIP,
FM5&6CLIP, FM7&8CLIP:** A

recorded clip is played back together with the transition. At this point, you can also carry out a transition (wipe or mix (dissolve)) simultaneously together with the clip.

KF (keyframe): Press this button, turning it on, to enable using the fader lever as a keyframe fader.

③ Transition execution section

Transition indicator: This comprises multiple LEDs, which show the progress of the transition.

Fader lever: Move up or down to carry out the transition. When the [KF] button or a transition type selection button to which the KF button function has been assigned is lit, you can use this as a keyframe fader.

Transition rate display: This shows the “transition rate” (the time from the beginning of a transition to its completion) set for an auto transition, in frames.

You can set the transition rate using the numeric keypad control block, Flexi Pad control block, or menu.

AUTO TRANS (transition) button:

Pressing this button carries out an auto transition of the set transition rate (duration). The transition starts immediately, and the button lights amber. When the transition completes, the button goes off.

CUT button: Pressing this button carries out the transition as a cut (i.e. instantaneously).

④ Wipe direction selection buttons

When you have selected a wipe or DME wipe as the transition type, press one of these buttons, turning it on, to select the wipe direction.

NORM (normal): The wipe proceeds in the direction from black to white as shown on the pattern in the lists of

patterns *see* “Wipe Pattern List” (page 486) and “DME Wipe Pattern List” (page 492), or in the direction of the arrow.

REV (reverse): The wipe proceeds in the opposite direction to that when the [NORM] button is pressed.

NORM/REV (normal/reverse): The wipe direction alternates between normal and reverse every time a transition is executed.

⑤ TRANS PVW (transition preview) button

When this button is lit, you can check in advance the video changes during the transition, on the preview output from the M/E or PGM/PST bank.

During the preview, you can use the fader lever, [AUTO TRANS] button, and [CUT] button. One of the following functions of this button can be selected in a Setup mode.

- When the transition completes, the system returns to the normal mode.
- The transition preview mode is maintained while this button is pressed.
- Switching is made between the transition preview mode and normal mode every time this button is pressed.

⑥ Pattern limit buttons

PTN (pattern) LIMIT: Pressing this button, turning it on, enables the pattern limit function.

LIMIT SET: Use this button to set a pattern limit when the [PTN LIMIT] button is off.

Move the fader lever to the position of a particular pattern size, and stop it there, then press this button to set the pattern limit range.

⑦ KF (keyframe) button

Pressing this button to turn it on allows you to use the fader lever as a keyframe fader.

8 Key status display

For each of the next transition selection buttons, [KEY1] to [KEY4], the corresponding ON indicator lights when the key is inserted. It also shows the priority (1 to 4) of each key.

9 PRIOR (priority) SET button

While this button is held down, you can set the key priority.

The setting mode when this button is pressed depends on whether or not the [KEY PRIOR] button is lit, as follows.

- When the [KEY PRIOR] button is off, the current key priority is set.
 - When the [KEY PRIOR] button is lit, the key priority after the next transition is set.
- Press the [KEY PRIOR] button as required, to switch between these two modes.

In either mode, hold down the [PRIOR SET] button, and press the button ([KEY1] to [KEY8]) corresponding to the key you want to bring to the front.

Notes

The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups. For example, it is not possible to set a priority sequence of keys 1, 5, and 2.

For details, see “Setting the Key Priority in the Transition Control Block” (page 153).

The following controls are used as the independent key transition control block.

10 Key delegation buttons

These buttons delegate this independent key transition control block to a desired keyer. Press one of the [KEY1] to [KEY8] buttons ([DSK1] to [DSK8] in the PGM/PST bank), turning it on.

You can press more than one button to select two or more keyers.

While these buttons are held down, you can select a key source with the cross-point buttons for the key bus.

Pressing one of these buttons twice in rapid succession changes its state so that you can make cross-point selections on the corresponding key bus.

For details of assignment of keys 5 to 8, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534) in Appendix (Volume 1).

11 Independent key transition type selection buttons

Press one of the following buttons, turning it on, to select the independent key transition type.

You can assign any transition types to these buttons in setup (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

MIX: Faded in or out.

WIPE: Inserted or deleted with a wipe.

DME (DME wipe): Inserted or deleted with a DME wipe.

CUT: Instantaneously insert or remove the key selected with the delegation buttons.

12 Independent key transition execution section

KEY1 ON to KEY8 ON (DSK1 ON to DSK8 ON in the PGM/PST bank)

buttons: Press the corresponding one of these buttons to cut key 1 to key 8 in or out instantaneously. When the key corresponding to the button appears in the final program output, the button lights red, and otherwise lights amber.

AUTO TRANS (transition) buttons:

These correspond to keys 1 to 8 from left to right; press one to carry out an auto transition. The transition rate for

an independent key transition can be set in the numeric keypad control block, in the Flexi Pad control block, or in a menu.

For details of assignment of keys 5 to 8, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534) in Appendix (Volume 1).

13 Key source name display/key snapshot buttons

These display the source name selected on the corresponding keyer. In key snapshot mode, press these buttons, corresponding to registers 1 to 8 for the selected keyer, to save or recall a key snapshot.

14 Key snapshot setting buttons

K-SS (key snapshot): This enables key snapshot mode.


K-SS STORE (key snapshot store): To save a key snapshot, hold down this button, and press the key source name display/key snapshot button corresponding to the register you want to save.

K-MOD ENBL (key modifier enable): To recall key adjustment values and key modifier settings when recalling a key snapshot, press this button, turning it on.

K-TR ENBL (key transition enable): To recall independent key transition settings when recalling a key snapshot, press this button, turning it on.

Flexi Pad Control Block (Standard Type)

The Flexi Pad control block is used for saving and recalling wipe snapshots, DME wipe snapshots, and snapshots, for recalling effects, and shotbox content, and for entering the transition rate.

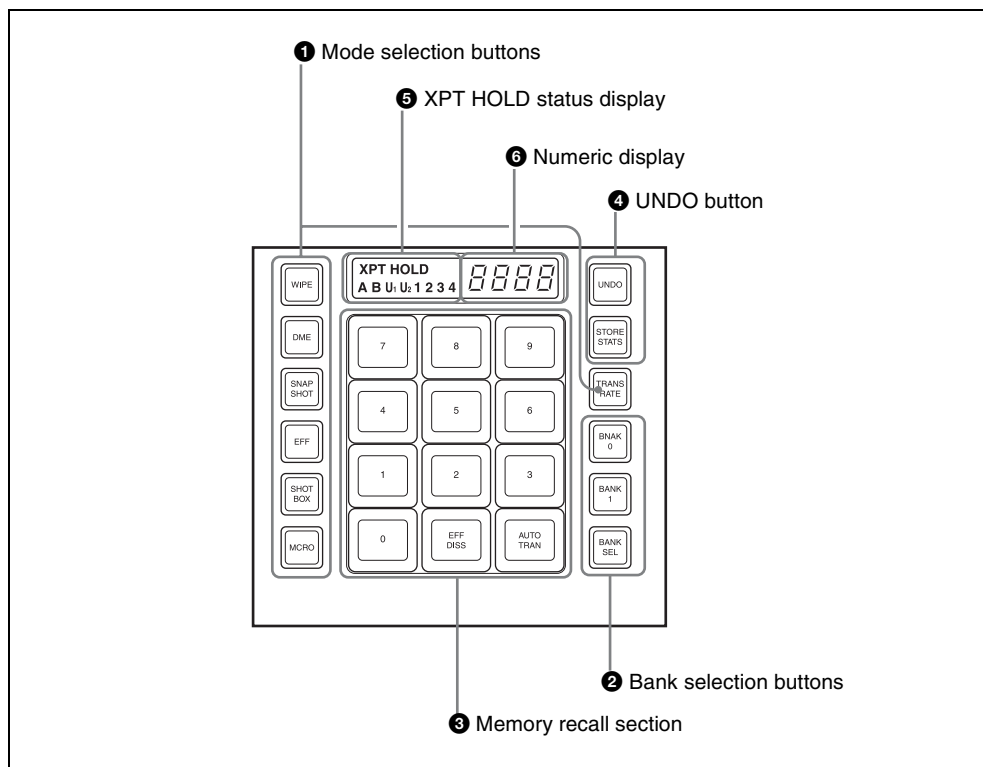

1 Mode selection buttons

WIPE: To save or recall a wipe snapshot, or recall the pattern number of a wipe pattern, use this in combination with the buttons of the memory recall section.

DME: To save or recall a DME wipe snapshot, or recall the pattern number of a DME wipe pattern, use this in combination with the buttons of the memory recall section.

SNAPSHOT: To save or recall a snapshot, use this in combination with the buttons of the memory recall section.

EFF (effect): To recall the master timeline or run an effect, use this in combination with the buttons in the memory recall section.

SHOTBOX: To recall or execute a shotbox, use this in combination with the buttons of the memory recall section.

MCRO (macro): To save, recall or edit a macro, use this in combination with the buttons of the memory recall section.

TRANS RATE (transition rate): To enter the transition rate, press this button, turning it on. To enter the independent key transition rate, hold down this button, and press the key delegation button in the independent key transition control block. To select whether the value is entered in frames or as a timecode value, switch the [TC] button in the memory recall section on or off.

② Bank selection buttons

BANK0 (bank 0): Assigns the memory recall section to bank 0, of registers 1 to 10.

BANK1 (bank 1): Assigns the memory recall section to bank 1, of registers 11 to 20.

BANK SEL (bank selection): After pressing this button, press a button in the memory recall section to select banks 0 to 9.

DME wipe, a bank number, a register number, a transition rate, and so on in up to four digits.

③ Memory recall section

This consists of 12 buttons with LCDs. These display changes, according to various operation modes.

④ UNDO button

UNDO: After recalling a register, press this button to return to the state before recalling the register.

When contents have been saved to a register, hold down the [STORE STATS] button and press this button to return the register to its state before the save operation.

STORE STATS (store status): When a save or delete operation has been carried out on a register, this button lights amber. After saving to a register, hold down this button and press the relevant register button to delete the data in the register. Again, after a save operation on a register, hold down this button and press the [UNDO] button to restore the register to its state before the save operation.

⑤ XPT HOLD (cross-point hold) status display

A bus for which cross-point hold is set appears as a green light.


⑥ Numeric display

Depending on the operation mode, this shows the pattern number of a wipe or

Key Control Block

Each of the M/E banks and the PGM/PST bank includes eight keys (for keys 1 to 8), and you can delegate this control block to

any desired keyer. In this control block, you can adjust and modify keys.

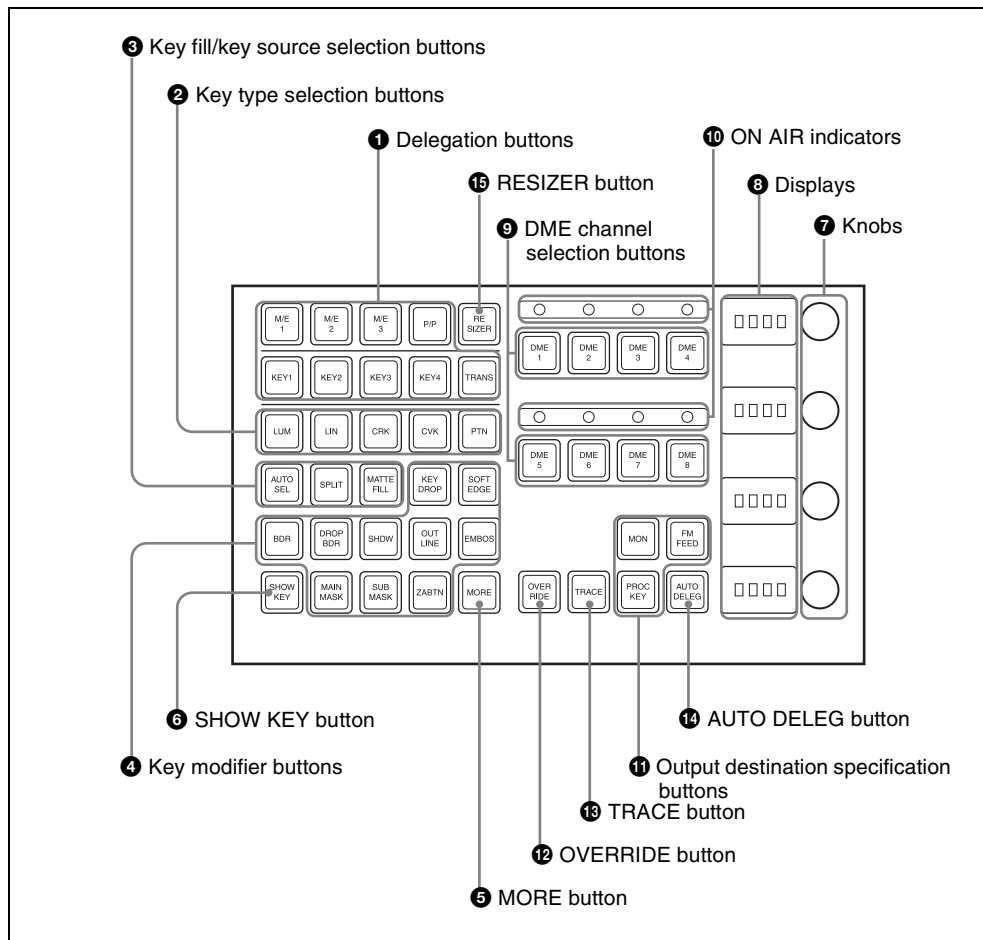

1 Delegation buttons

Key delegation: Press one of the [KEY1] to [KEY8] buttons to delegate the key control block to the corresponding keyer.

For details of assignment of keys 5 to 8, see “Assigning Buttons for Selection of

Keys 5 to 8 in the Setup Menu” (page 534) in Appendix (Volume 1).

M/E delegation: Press one of the [M/E 1] to [M/E 4], and [P/P] buttons to select the bank (an M/E bank or the PGM/

PST bank) to which the key control block is delegated.

For details of [M/E 4] button assignment, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532) in Appendix (Volume 1).

TRANS: By pressing this button, you can check the DME channel used for DME wipes on the M/E or PGM/PST bank. Also, by pressing this button, then pressing one of the DME channel selection buttons, you can preset the DME channel to be used when a DME wipe is selected as the transition type for the transition. When presetting the DME channel for an independent key transition, hold down this button, then press one of the [KEY1] to [KEY8] buttons, turning the two buttons on, beforehand.

② Key type selection buttons

Press one of these buttons, turning it on, to select the desired key type.

Depending on the selected key type, various parameters are displayed, and you can set the values with the knobs.

The following key types can be selected.

LUM: luminance key

LIN: linear key

CRK: chroma key

CVK: color vector key

PTN: key wipe pattern key

For details, see “Key Types” (page 200).

③ Key fill/key source selection buttons

AUTO SEL (selection): Use the signal selected on the key fill bus, and the paired key source signal. The setting of key fill and key source pairs is carried out in a Setup menu.

SPLIT: To use the signal selected on the key fill bus as key fill, and a signal separate from the signal assigned in a

pair with key fill for key source, press this button, turning it on.

To select the signal on the key source bus, hold down this button, and press a button in the key 1 or key 2 row in the cross-point control block.

To use the signal selected on the key fill bus as key source (self keying), press the [AUTO SEL] button and [SPLIT] button at the same time, so that both are off.

MATTE FILL: To use a color matte from the internal generator as key fill, press this button, turning it on. You can adjust the color matte using the knobs. When this button is off, the signal selected on the key fill bus is used as key fill.

④ Key modifier buttons

To add an edge modifier to the key, press one of these buttons, turning it on.

Depending on the edge type selected, parameters appear in the displays, and you can set the values with the knobs.

KEY DROP: When drop border or shadow is selected, turning this button on lowers the key fill and key source position by four or eight scan lines as set in the key menu.

To select 4H or 8H, use the Key menu. When the selected edge type is “normal” and soft edge is selected or when border, outline, or emboss is selected, this button lights automatically.

BDR (border): Apply a border of a uniform thickness to the whole key.

DROP BDR (drop border): Apply a border to two sides of the key (for example, below and to the right, or below and to the left).

SHDW (shadow): Apply a shadow to two sides of the key (for example, below and to the right, or below and to the left).

OUTLINE: Use the outline of the key.

EMBOS (emboss): Apply an embossing effect to the periphery of the key.

- To select a “normal” as the edge type (that is, a plain edge), set all five of the above buttons off.
- When border, drop border, or shadow is selected, you can use a special color matte or a signal selected on the utility 1 bus for the edge.
- When emboss is selected, you can use the dedicated color matte signal for the emboss function.
- When outline is selected, the signal selected on the key fill bus is used to fill the edge.

MAIN MASK: Press this button, turning it on, to enable the key mask using the main pattern. It also enables you to set the parameters with the knobs.

SUB MASK: Press this button, turning it on, to enable the key mask using the sub pattern. It also enables you to set the parameters with the knobs.

ZABTN (zabton): When this is pressed, turning it on, a translucent pattern is inserted behind the key. With the knobs, you can adjust the color, size, density, and softness parameters.

SOFT EDGE: Soften the edge of the key.

5 MORE button

When there are more than four parameters, this button lights amber. When it is pressed, it changes from amber to green and the fifth and subsequent parameters are assigned to the knobs, allowing them to be adjusted.

6 SHOW KEY button

While this button is held down, a key processed key source signal is output from the specified output port. You can make the output specification independently for each of edit preview and the preview of each M/E or PGM/PST bank in a Setup menu.

7 Knobs

Turn the knobs to adjust the parameter values.

8 Displays

Each display shows the initial letters of the parameter name and the parameter value (maximum three digits including a minus sign for a negative value).

9 DME channel selection buttons

Press one of these buttons, turning it on, to delegate a DME channel to the keyer. The number of valid DME channel selection buttons depends on the number of channels installed in the DME processor. A maximum of four consecutively numbered DME channels from the two sets, DME 1 to 4 and DME 5 to 8, can be assigned to one keyer.

When the signal format is 1080P only, the consecutive channel combinations that can be selected are any of DME1 and DME2, DME3 and DME4, DME5 and DME6, or DME7 and DME8.

DME channel assigned to a keyer cannot be selected on another keyer.

However, using the override function it is possible to allocate a channel already allocated to another keyer to the currently selected keyer. If DME channel allocations have been made in a Setup menu, these buttons cannot be used to make DME channel allocations. Using the trace function, it is possible to check which keyer a DME channel is allocated to.

10 ON AIR indicators

These light red when the corresponding DME channels are included in the final program output.

11 Output destination specification buttons

MON (DME monitor): Hold down this button and press the selection button

for the DME channel you want to assign to the monitor output; you can then monitor the output signal on the DME monitor output.

While this button is held down, the DME channel selection buttons light as follows, allowing you to check the monitor assignment.

Lit amber: DME channel that can currently be monitored

Lit green: DME channel currently assigned to the monitor output

FM FEED (frame memory feed): When you press this button, it lights momentarily amber, then for the currently selected keyer, the key processed signals are selected for frame memory sources 1 and 2. If a DME is selected on the currently selected keyer, the key fill and key source signals to which a DME effect is applied are assigned; otherwise the key fill and key source are assigned. Carrying out a frame memory feed causes the [PROC KEY] button to light amber.

PROC KEY (processed key): When this button is on, the key fill/source signal subjected to key processing or signal subjected to a DME effect on the currently selected keyer can be selected as a reentry signal (PROC V or PROC K) for the M/E or PGM/PST bank, on the auxiliary bus or the like. If a DME is selected on the currently selected keyer, the key fill and key source signals to which a DME effect is applied are assigned; otherwise the key fill and key source are assigned.

12 OVERRIDE button

To select a DME channel already allocated to another keyer or transition to the currently selected keyer (or transition), hold down this button, and press the DME channel selection button.

13 TRACE button

When a DME channel is already allocated to another keyer or transition, hold down this button, and press the corresponding DME channel selection button, to switch to the state in which the keyer (or transition) to which the DME channel is allocated is currently selected.

14 AUTO DELEG (auto delegation) button

When this button is on, the key delegation selection state of the key control block is linked to the key delegation selection state of the independent key transition control block.

15 RESIZER button


Enables or disables resizer.

For details on resizer, see page 260.

Device Control Block (Trackball)

The device control block is used for three-dimensional transform operations using a DME, for wipe pattern position setting, and

for VTR/disk recorder/frame memory clip operation.

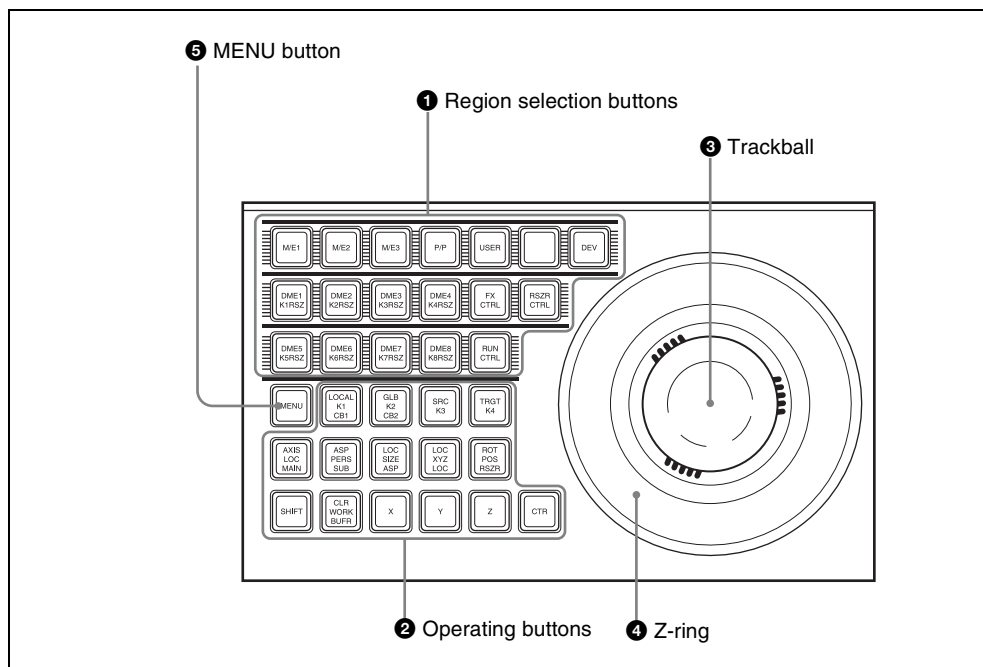

1 Region selection buttons

The operation mode allocated to the device control block depends on the selection state of the region selection buttons.

For details of [M/E 4] button assignment, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532) in Appendix (Volume 1).

When the [M/E 1], [M/E 2], [M/E 3], [M/E 4], and [P/P] buttons are selected: This enables the wipe pattern position setting (positioner) operation mode in the device control block. You can select multiple buttons simultaneously.

When the [USER] button is selected: This enables pattern position setting used for color backgrounds.

When the [DME1] to [DME8] buttons are selected: This enables the three-dimensional transform operation mode in the device control block. Press a button, turning it on, to select a DME channel. You can select multiple buttons simultaneously. The number of valid buttons depends on the number of DME processor channels installed.

When the [DEV] button is selected: This enables the VTR/disk recorder/frame memory operation mode in the device

control block. Each button functions as follows.

(From upper left to right in the above figure)

[M/E1] to [M/E3]: DEV1 (device 1) to DEV3 (device 3)

[P/P]: DEV4 (device 4)

[USER]: FM1CLIP (frame memory clip 1)

[Unused]: FM2CLIP (frame memory clip 2)

[DME1] to [DME4]: DEV5 (device 5) to DEV8 (device 8)

[Unused]: FM LOOP (frame memory loop)

[DME5] to [DME8]: DEV9 (device 9) to DEV12 (device 12)

To exit from this mode, press the [DEV] button again, turning it off.

When the [RUN CTRL] button is selected: This enables the effect run control mode in the device control block.

When the [RSZR CTRL] button is selected: This enables the resizer control mode in the device control block.

In resizer control mode, select the key with the region selection button [K1RSZ] to [K8RSZ].

The functions of the operation buttons, trackball, and Z-ring vary with the operation mode as follows.

[FX CTRL] button: Leave this button off for operation.

Alternatively, for details of operation of this button, refer to the help information for the MPES-FX01 Programmable Effector software.

② Operation buttons

When the positioner operation mode is enabled

K1 CB1: Press this button to enable wipe pattern position setting for key 1 (DSK1).

When the [USER] button is selected, pattern position setting for color background 1 is enabled.

K2 CB2: Press this button to enable wipe pattern position setting for key 2 (DSK2).

When the [USER] button is selected, pattern position setting for color background 2 is enabled.

K3: Press this button to enable wipe pattern position setting for key 3 (DSK3).

K4: Press this button to enable wipe pattern position setting for key 4 (DSK4).

MAIN: Press this button to enable main wipe pattern position setting for normal transitions.

SUB: Press this button to enable sub wipe pattern position setting for normal transitions.

Among the [K1 CB1] button, [K2 CB2] button, [K3] button, [K4] button, [MAIN] button, and [SUB] button, you can select multiple buttons.

By setting the operation mode in setup, you can select keys 5 to 8 with the [K1 CB1], [K2 CB2], [K3], and [K4] buttons. In this case, it is not possible to select more than one of keys 1 to 8.

For details of assignment of keys 5 to 8, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534) in Appendix (Volume 1).

POS: Press this button to enable pattern movement in the x-axis and y-axis directions with the trackball.

When the [USER] button is selected, this enables the trackball to move the pattern in the x-axis and y-axis directions, and the Z-ring to adjust the size of the pattern.



X, Y: These restrict the axes affected by the trackball and Z-ring to the x- or y-axis.

Z: This restricts the axes affected by the trackball and Z-ring to the z-axis.

CTR (center): When this button is pressed, the pattern position returns to the center. When the [USER] button is selected, the pattern size also returns to 50.00.

SHIFT/CLR WORK BUFR: Press this button twice in rapid succession to reset all parameters on the target M/E or PGM/PST to their initial values.

When the three-dimensional transform operation mode is enabled

The buttons are used for three-dimensional DME transformations.

For details, see “Basic Operations” in Chapter 11 (Volume 2).

When the VTR/disk recorder/frame memory operation mode is enabled

The buttons are used for VTR control or playback of frame memory clips.

For details, see “Controlling the Tape/Disk Transport” in Chapter 12 (Volume 2).

When the resizer control mode is enabled

LOC SIZE (ASP: aspect): Pressing this button and operating the trackball or Z-ring changes the aspect ratio of a key to which the resizer function is applied to. When this button is held down, the trackball or Z-ring operation is switched to a finer control. (fine mode)

LOC XYZ (LOC: location): Pressing this button and operating the trackball or Z-ring moves, shrinks, or magnifies a key to which the resizer function is applied to. When this button is held down, the trackball or Z-ring operation is switched to a finer control. (fine mode)

ROT (RSIZE: resizer): Press this button, turning it on, to enable the resizer.

CLR WORK BUFR (clear work buffer):

Pressing this button once returns the two-dimensional transformation settings to the defaults. Pressing twice in rapid succession returns all resizer parameter values to the defaults.

X, Y: These restrict the axes affected by the trackball and Z-ring to the x- or y-axis.

Z: This restricts the axes affected by the trackball and Z-ring to the z-axis.

CTR (center): Pressing this button once changes the two-dimensional transformation settings to the closest detent values. Pressing twice in rapid succession returns the two-dimensional transformation settings to the defaults.

③ Trackball

When the positioner operation mode is enabled

By moving this, you can move the pattern in the x-axis and y-axis directions.

When the three-dimensional transform operation mode is enabled

Move the trackball to control the x- and y-axes in a three-dimensional transform.

When the [SRC] or [TRGT] button is held down, the trackball operation is switched to a finer control. (fine mode)

When the resizer control mode is enabled

By turning the trackball, you can move in the x- and y-directions of the key to which the resizer is applied, and change the aspect ratio.

When the [LOC SIZE] or [LOC XYZ] button is held down, the trackball operation is switched to a finer control. (fine mode)

④ Z-ring

When the positioner operation mode is enabled

When the [USER] button is selected, by turning the ring you can adjust the size of the pattern.

When the three-dimensional transform operation mode is enabled

Turn this ring to control the z-axis in a three-dimensional transform.

When the [SRC] or [TRGT] button is held down, the Z-ring operation is switched to a finer control. (fine mode)

When the effect run control mode is enabled

By turning the Z-ring, you can run the keyframe effect, independent of the STOP NEXT KF, EFF LOOP, and similar settings in the keyframe control block. Turn clockwise to run the effect in the normal direction, and counterclockwise for the reverse direction.

When the resizer control mode is enabled

By turning the ring, you can zoom the key to which the resizer is applied, and change the aspect ratio.

When the [LOC SIZE] or [LOC XYZ] button is held down, the Z-ring operation is switched to a finer control. (fine mode)

When the VTR/disk recorder/frame memory operation mode is enabled

Turning the Z-ring controls the tape transport/disk drive/frame memory clip operations, at a speed determined by the operating buttons. Turn clockwise for the normal direction, and counterclockwise for the reverse direction.

⑤ MENU button

Press this button, turning it on, to enable adjusting the parameters allocated to the

knobs in the menu using the trackball and Z-ring.


In the case of the DME menu, the operation applies to the selected DME channel.

In VTR/disk recorder/frame memory operation mode, press this button, setting it to On. This makes it possible to carry out timeline start/stop point setting operation for the device selected with the device selection buttons.

Device Control Block (Joystick)

All functions of the joystick type device control block are equivalent to the functions of the trackball type, except that the

trackball and Z-ring operations are carried out with the joystick.

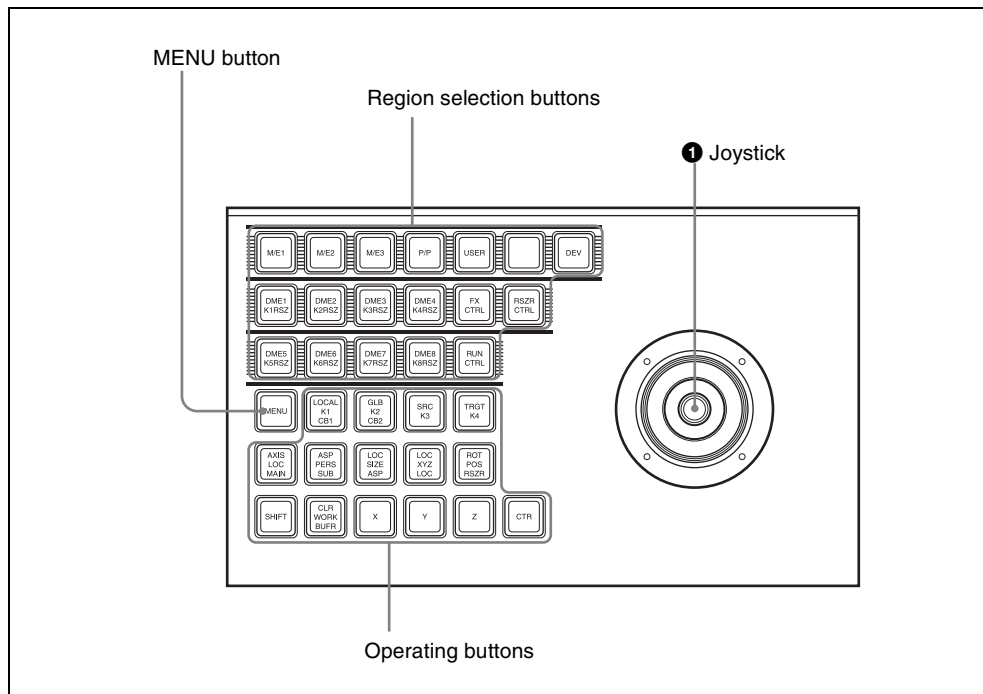

1 Joystick

When the positioner operation mode is enabled

By moving this, you can move the pattern in the x-axis and y-axis directions.

When the three-dimensional transform operation mode is enabled

By moving this, you can carry out operations in the x-, y-, and z-axes.

When the following buttons are held down, the joystick operation is switched to a finer control. (fine mode)

- The button on the end of the joystick
- [SRC] button

• [TRGT] button

Depending on the settings made in the Setup menu, the operation speed multiple can be changed.

When the effect run control mode is enabled

By moving the joystick sideways, you can run the keyframe effect, independent of the STOP NEXT KF, EFF LOOP, and similar settings in the keyframe control block.

Move to the right to run the effect in the normal direction, and to the left for the reverse direction.

When the VTR/disk recorder/frame memory operation mode is enabled

Moving the joystick sideways controls the tape transport/disk drive/frame memory clip operation, at a speed determined by the operating buttons.


When the resizer control mode is enabled

Move for operations in the x-, y-, and z-axes. Hold down the button on the tip of the joystick to switch the joystick operation to a finer control. (fine mode)

Device Control Block (Search Dial)

Using the device control block (search dial), you can directly operate an XDCAM, disk recorder, VTR, other external device,

frame memory clip, or shotbox. The device control block (trackball) and device control block (joystick) can be used together.

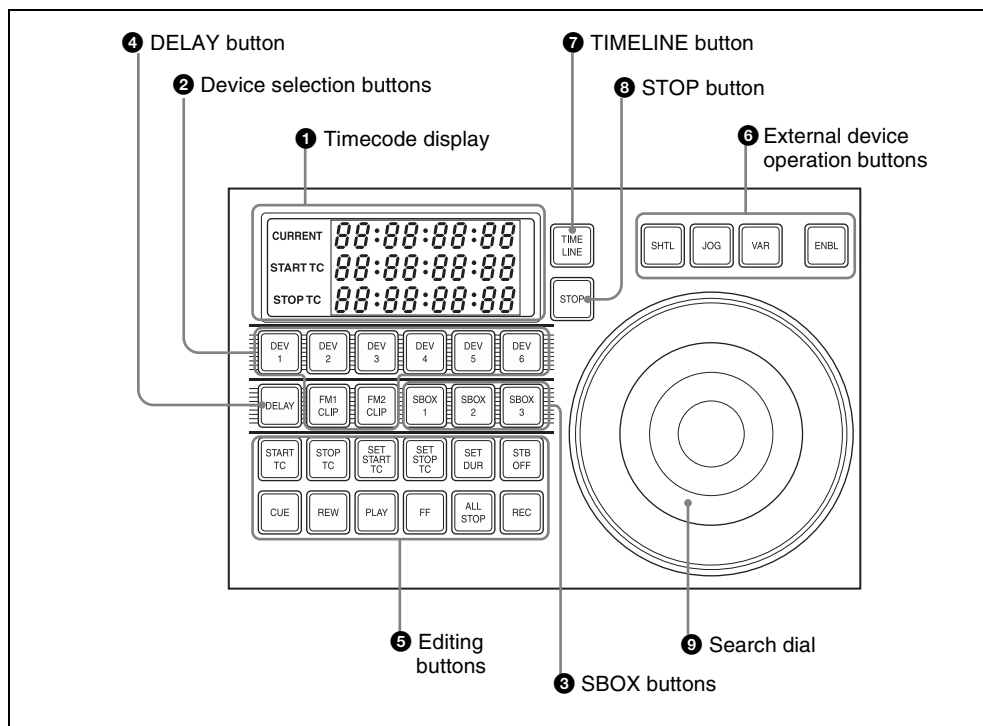

1 Timecode display

This shows the current time (CURRENT) and the start and stop point timecode values for the current reference device (START TC, STOP TC). When you press a device selection button, the button lights, selecting

the assigned device as the reference device, and displaying its setting value.

In the case of the [SBOX] buttons, the display does not change. When the operation applies to a VTR/disk recorder, the displayed setting value depends on

whether the [TIMELINE] button is on or off, as follows.

When the [TIMELINE] button is on:

Displays the start and stop points of the last set keyframe on the timeline. When the keyframe number is changed and the last register and keyframe change, the display also changes. (timeline setting mode)

When the [TIMELINE] button is off:

Displays the Cueup & Play (rewind action) start and stop points.

② Device selection buttons

These buttons are used for selecting assigned external devices or frame memory clips.

Each button can only be assigned to a single device. Carry out the assignment in the Setup menu (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)). To select an assigned device, press the corresponding button, which lights green. To select more than one device simultaneously, hold down the button for the first selection, while pressing the buttons for the other selections in turn. The second and subsequent selected buttons light amber. If you press another button without holding down the first selected button, the second button will be the reference device and light green.

DEV: Assign external devices DEV1 to DEV12.

FM CLIP: Assign frame memory clips FM1 to FM8.

Device selection buttons can be set as SBOX buttons or DELAY button in the Setup menu.

③ SBOX (shotbox) buttons

Assign a shotbox saved in registers 1 to 99. When you press a button, the assigned shotbox is selected, and executed. Carry out the assignment in the Setup menu (see

“Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

SBOX buttons can be set as device selection buttons or DELAY button in the Setup menu.

④ DELAY button

When pressed, this button lights green, the numeric keypad control block display changes to DELAY__ : , and you can set the start delay time for the selected device. The setting range is from 00:00 to 59:29 (depends on the video format). This button goes off when another timecode setting button ([START TC], [STOP TC], [SET START TC], [SET STOP TC], or [SET DUR]) is pressed.

The DELAY button can be set as a device selection button or an SBOX button in the Setup menu. Carry out the assignment in the Setup menu (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

⑤ Editing buttons

These buttons set start and stop points. These operations are only valid while a device is selected with the device selection buttons.

START TC: Press this button to set the timecode of the start point at that time. The timecode of the start point is updated to the current time each time this button is pressed.

When the device the operation applies to is a VTR/disk recorder, the start point updated by the setting of the [TIMELINE] button is as follows.

When the [TIMELINE] button is

On: start point of the timeline

When the [TIMELINE] button is

Off: start point of Cueup & Play

STOP TC: Press this button to set the timecode of the stop point at that time. The timecode of the stop point is updated to the current time each time

this button is pressed.

When the device the operation applies to is a VTR/disk recorder, the stop point updated by the setting of the [TIMELINE] button is as follows.

When the [TIMELINE] button is

On: stop point of the timeline

When the [TIMELINE] button is

Off: stop point of Cueup & Play

SET START TC, SET STOP TC, SET

DUR: When pressed, these buttons light green, “START TC”, “STOP TC” or “DUR” appears in the numeric keypad control block display, and you can enter a timecode from the numeric keypad. If you enter a numeric value and press the [ENTER] button, the button goes off, whereas if you press the [ENTER] button without entering a numeric value the numeric keypad control block display shows “--:--:--:--”. To exit the numeric value entry mode, either repeat pressing the same button, or press a different numeric keypad control block linked button, or a mode selection button such as the [EFF] and [SNAPSHOT] buttons in the numeric keypad control block. If the timecode has been set correctly, the entered numeric value appears in the timecode display.

STB (standby) OFF: When pressed, this button flashes amber, and the device selected with the device selection buttons exits from the standby mode. This button cannot be used for frame memory clip operations.

CUE: When pressed, this button flashes amber together with the [ALL STOP] button, and the device selected with the device selection button is cued up to the start point of the material. When more than one device is selected, the amber flashing continues until the reference

device is cued up, and when the cueing up is finished, this button lights green.

REW: When pressed, this button lights amber, and material of the device selected with the device selection buttons is rewound. To stop during the rewind, press the [STOP] button or [ALL STOP] button.

PLAY: When pressed, this button lights amber, and the device selected with the device selection buttons plays. The playback stops not only if the [STOP] button is pressed, but also if any of the [STB OFF], [SHTL], [JOG], [CUE], [REW], [PLAY], [FF], and [ALL STOP] buttons is pressed. When the [VAR] button is pressed while the device is playing back, the device plays at one times normal speed in variable mode.

FF: When pressed, this button lights amber, and the material of the device selected with the device selection buttons is fast forwarded. To stop during the fast-forward, press the [STOP] button or [ALL STOP] button.

ALL STOP: When pressed, all device material playback and other operations stop. During cueing up of any of the devices, this button flashes amber, and when all cueing up operations are completed, it lights green.

REC: When pressed simultaneously with the [PLAY] button, this button lights red (the [PLAY] button lights amber), and the image from the selected device is recorded. This button cannot be used for frame memory clip operations.

⑥ External device operation buttons

ENBL (enable): When this is pressed, turning it on, the search dial [VAR], [JOG], and [SHTL] button operations are enabled.

VAR (variable): Sets the search dial to variable mode.

JOG: Sets the search dial to jog mode.

SHTL (shuttle): Sets the search dial to shuttle mode.

7 TIMELINE button

Press to switch the device selected with the device selection buttons to timeline setting mode.

8 STOP button

When pressed, this lights amber, and operation of the device selected with the device selection buttons stops.


9 Search dial

Use this for search and other operations on the material of an external device.

For details of the method of use, see “Controlling Tape/Disk Transport” in Chapter 12 (Volume 2).

Keyframe Control Block

In the keyframe control block, you can carry out effect editing and execution.

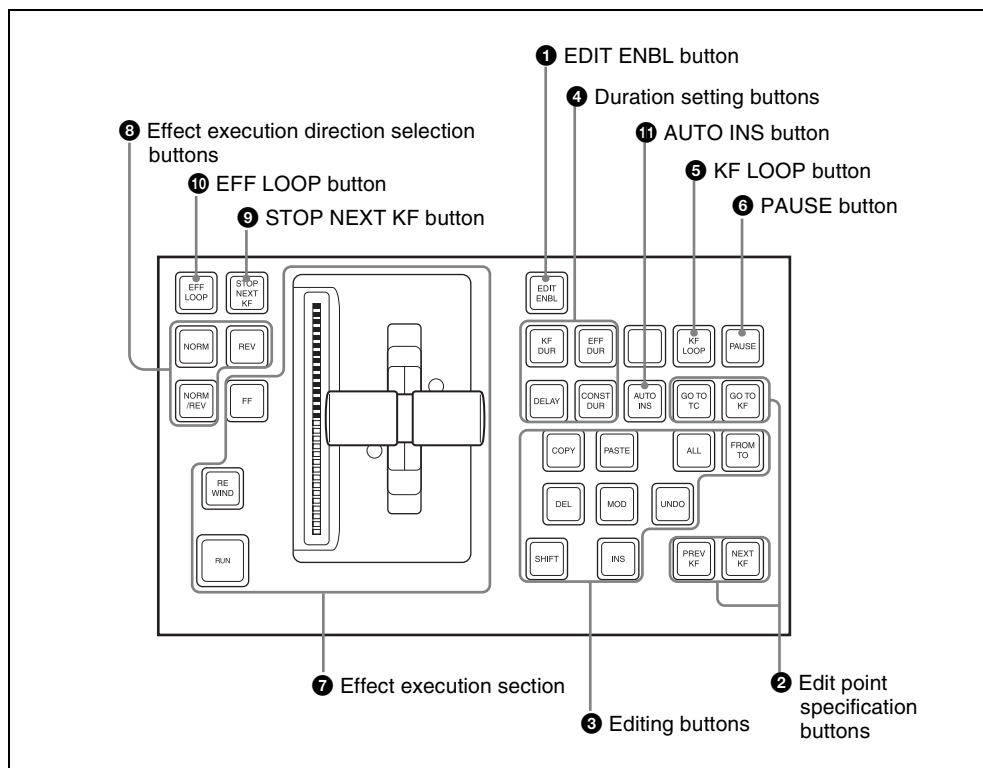

1 EDIT ENBL (edit enable) button

Press this button, turning it on, to enable effect editing operations with the keyframe control block.

When macro editing is carried out, this button lights red.

2 Edit point specification buttons

GO TO TC (Go to timecode): Press this button, turning it on, to enter a numeric value from the numeric keypad control block, and move the edit point to the specified timecode position.

GO TO KF (Go to keyframe): Press this button, turning it on, to enter a numeric value from the numeric keypad control block, and move the edit point to the specified keyframe.
During macro editing, pressing this button moves the edit point to the event number specified by numeric entry with the numeric keypad control block.

PREV KF (previous keyframe): When this button is pressed, the edit point moves to the keyframe immediately before the current time (the position where the effect is currently stopped). During macro editing, pressing this button moves the edit point to the event immediately before the current event.

NEXT KF (next keyframe): When this button is pressed, the edit point moves to the keyframe immediately after the current time.
During macro editing, pressing this button moves the edit point to the event immediately after the current event.

3 Editing buttons

ALL: Press this button, turning it on, to select all keyframes (during macro editing, all events) in the effect.

FROM TO: Press this button, turning it on, to enter numeric values from the numeric keypad control block, and select a specified range of keyframes

(during macro editing, the specified range of events).

INS (insert): When this button is pressed, a new keyframe is inserted after the current keyframe. Pressing this button while holding down the [SHIFT] button inserts a new keyframe before the current keyframe.

During macro editing, pressing this button registers an event after the current event.

MOD (modify): When this button is pressed, the selected keyframe is modified with the values of the current keyframe. When the edit point is between two keyframes, the immediately preceding keyframe is modified. You can also select multiple keyframes, and modify them in a single operation. At this time, pressing this button while holding down the [SHIFT] button modifies all selected keyframes with the changed values taken as relative values.

During macro editing, pressing this button amends the selected event.

DEL (delete): When this button is pressed, the selected keyframe is deleted. When the edit point is between two keyframes, the immediately preceding keyframe is deleted. During macro editing, pressing this button deletes the selected event. You can also select multiple keyframes or macro events, and delete them in a single operation.

COPY: When this button is pressed, the selected keyframe (during macro editing, macro event) is copied. You can also select multiple keyframes or macro events, and copy them in a single operation.

PASTE: When this button is pressed, the deleted or copied keyframe (during macro editing, macro event) is inserted after the current keyframe (during

macro editing, macro event). Pressing this button while holding down the [SHIFT] button inserts the deleted or copied keyframe (during macro editing, macro event) before the current keyframe (during macro editing, macro event).

SHIFT: Hold down this button, and press the [INS] button, [MOD] button, or [PASTE] button, to obtain the shifted function for the button.

UNDO: When this button is pressed, the last executed keyframe (during macro editing, macro event) insertion, modification, or deletion, or paste operation is canceled.

4 Duration setting buttons

KF DUR (keyframe duration): Press this button, turning it on, to set the keyframe duration of the selected keyframe, by numeric value entry from the numeric keypad control block.

EFF DUR (effect duration): Press this button, turning it on, to set the effect duration from the numeric keypad control block.

DELAY: Press this button, turning it on, to enter a delay value from the numeric keypad control block.

CONST DUR (constant duration): Select the duration mode. When this is lit, the mode is constant duration mode, and when off, variable duration mode.

5 KF LOOP (keyframe loop) button

Press this button, turning it on, to execute the effect the specified number of times through the keyframes in the specified range.

6 PAUSE button

When this button is pressed, a pause is applied to the selected keyframe. When editing a macro, press this button, turning it on, to include a pause event in the

macro. The pause length can be set in the numeric keypad control block.

7 Effect execution section

RUN: When this button is pressed, the effect is run from the first keyframe to the last keyframe. However, if a pause is set on a keyframe, the effect stops at that point. Press this button again to resume execution, and continue to the next pause point or the end of the effect.

Effect indicator: This comprises multiple LEDs, which show the progress of the effect.

Fader lever: Moving this up or down manually runs the effect.

REWIND: When this button is pressed, the currently recalled effect is rewound to the first keyframe.

FF (fast forward): When this button is pressed, the currently recalled effect is advanced to the last keyframe.

8 Effect execution direction selection buttons

NORM (normal): When this button is lit, effect execution runs from the first keyframe to the last keyframe.

REV (reverse): When this button is lit, effect execution runs from the last keyframe to the first keyframe.

Pressing one of these buttons automatically turns the other off.

NORM/REV (normal/reverse): Press this button, turning it on, to reverse the direction of the effect when it reaches the last keyframe or first keyframe.

9 STOP NEXT KF (stop next keyframe) button

When this button is pressed, turning it on, the effect execution range is from the current time to the next keyframe.

10 EFF LOOP (effect loop) button

When the effect reaches the last keyframe with this button on, it returns to the first keyframe and repeats.


11 AUTO INS (auto insert) button

When editing a macro, press this button, turning it on, to enable the auto insert function, so that every control panel operation you carry out is added to the macro as an event.

Numeric Keypad Control Block

The numeric keypad control block is used for region selection, for saving and recalling snapshots, effects and shotboxes,

for entering numeric values for trackball operation and keyframe operation, and for transition rate entry.

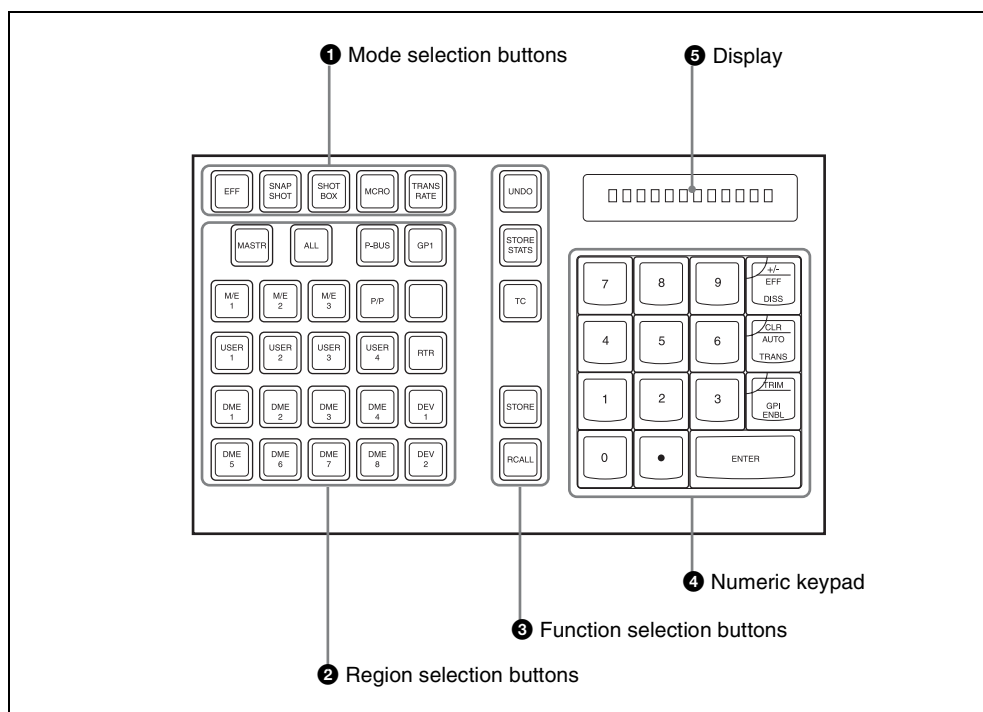

1 Mode selection buttons

EFF (effect): Press to save or recall an effect.

SNAPSHOT: Press to save or recall a snapshot.

SHOTBOX: Press to save or recall a shotbox.

MCRO (macro): Press to save, recall or edit a macro.

TRANS RATE (transition rate): Press to set the transition rate.

Hold down this button, and press one of the key delegation buttons [KEY1] to [KEY8] in the transition control block

to set an independent key transition rate.

② Region selection buttons

These select the functional block (“region”) of the control panel to which operations apply.

You can select more than one region at the same time.

The first button you press is taken as the reference region, and lights green, while the next pressed button lights amber.

With the exception of the [MASTER] and [ALL] buttons, you can change the region assignment to the buttons as desired in the Setup menu.

MASTR: Press this, turning it on, to save region information in a master snapshot register or master timeline register, or to recall such region information.

ALL: Select all regions. When any region is already selected, pressing this button makes all regions unselected.

M/E 1 to M/E 4, P/P: Select the corresponding regions, M/E-1, M/E-2, M/E-3, M/E-4, and PGM/PST.

For details of [M/E 4] button assignment, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532) in Appendix (Volume 1).

USER 1 to USER 8: Select a User region.

DME1 to DME8: Select a DME channel.

P-Bus: Select the P-Bus region.

GPI: Select the GPI region.

RTR: Select the router region.

DEV1 to DEV12: Select the Device 1 to Device 12 regions respectively.

MCRO: Select the macro region.

③ Function selection buttons

UNDO: After recalling a register, press this button to return to the state before recalling the register.

STORE STATS (store status): This lights amber when data is stored in a register. After saving data to a register, hold down this button and press the [UNDO] button to return the register to the state before the data was saved.

TC (timecode): Press this button, turning it on, to switch transition rate entry to the timecode entry mode.

STORE: Press this button to switch to the mode for saving a snapshot, effect, shotbox or macro in a register.

RCALL (recall): Press this button to switch to the mode for recalling a snapshot, effect, shotbox or macro from a register.

[STORE] button or [RCALL] button flashes amber when one or more of the regions assigned to the Region selection buttons are not selected by the Region Select menu.

④ Numeric keypad

In addition to the buttons for numeric input, this includes buttons for adding attributes to snapshots.

0 to 9: Used to input numeric digits.

. (period): Enters the decimal point.

When the [TRANS RATE] button is lit, enters “00.” When the [EFF] button, [SNAPSHOT] button or [SHOTBOX] button is lit, this is used to find an empty register.

+/- EFF DISS (effect dissolve): Invert the sign, negative or positive. When the [SNAPSHOT] button is lit, applies the effect dissolve attribute to a snapshot.


CLR/AUTO TRANS (clear/auto transition): Clear an input value, returning to the previous state. When the [SNAPSHOT] button is lit, applies the auto transition attribute to a snapshot.

TRIM/GPI ENBL (enable): After entering a difference value to be added

to an existing setting, press this button to confirm the change.
ENTER: Confirm an entered value.

5 Display
 This shows the selected region name and entered numeric values.

Fade to Black Control Block

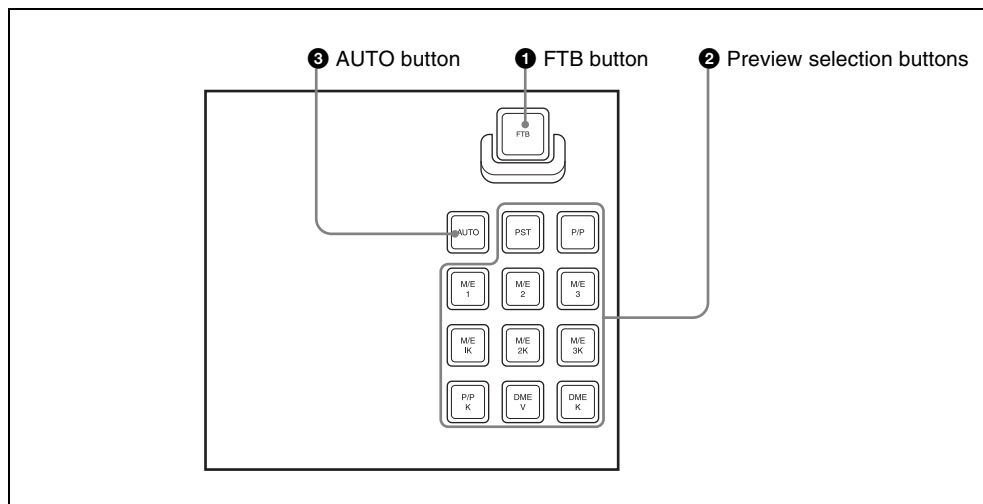

1 FTB (fade to black) button
 Press this button to fade to black the program output of the PGM/PST bank, at the set transition rate. You can set the fade to black transition rate in the menu.

2 Preview selection buttons
 Press one of these buttons to select a signal on the edit preview bus. Each button can be assigned to any preview output in setup (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

PST (preset): When this button is pressed, the signal selected on the background B row of the PGM/PST bank is selected on the edit preview bus.

M/E 1 to M/E 4, P/P (M/E1 to M/E 4, P/P preview): The preview signal (M/E-1 PVW, M/E-2 PVW, M/E-3 PVW, M/E-4 PVW, P/P PVW) of the M/E or

PGM/PST bank corresponding to the pressed button is selected on the edit preview bus.

For details of [M/E 4] button assignment, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532) in Appendix (Volume 1).

M/E1 K to M/E4 K, P/P K (M/E1 to M/E 4, P/P key preview): The key preview signal (M/E-1 K-PVW, M/E-2 K-PVW, M/E-3 K-PVW, M/E-4 K-PVW, P/P K-PVW) of the M/E or PGM/PST bank corresponding to the pressed button is selected on the edit preview bus.

For details of [M/E 4] button assignment, see “Assigning a Button

*for M/E-4 Selection in the Setup Menu”
(page 532) in Appendix (Volume 1).*

DME V (DME monitor video): When this button is pressed, the DME monitor output video signal (DME MON V) is selected on the edit preview bus.

DME K (DME monitor key): When this button is pressed, the DME monitor

output key signal (DME MON K) is selected on the edit preview bus.


③ AUTO button

When this button is pressed, the M/E or PGM/PST bank preview signal selected on the edit preview bus is automatically switched to the program signal depending on the on-air status.

Auxiliary Bus Control Block (for AUX Buses)

There are also models without the selected source name displays and source name displays shown in the following figure. All operations except those of the [DEST] button and [SHIFT] button are the same as for a model with selected source name displays and source name displays.



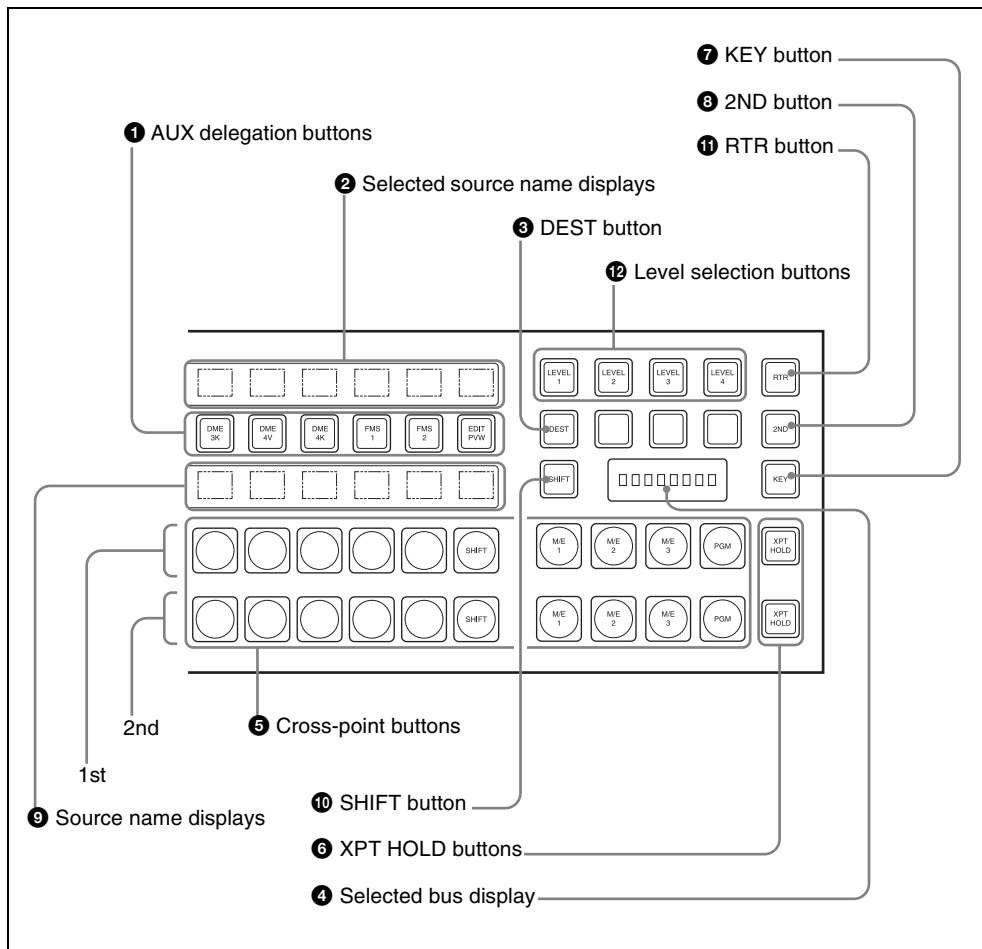

1 AUX delegation buttons

Press one of these buttons, turning it on, to select the bus to which to assign the cross-point buttons in the auxiliary bus control block.

For buses that can be selected, see “Bus Selection” (page 137).

2 Selected source name displays

These show the name of the currently selected signal (source) on the bus corresponding to the delegation button.

3 DEST (destination) button

Press this button, turning it on, to display the names of buses allocated to the delegation buttons in the selection source name displays.

In the case of a module without selected source name displays, this button is invalid.

4 Selected bus display

This shows the name of the bus selected by the auxiliary bus delegation buttons.

5 Cross-point buttons

The cross-points in the auxiliary bus control block are arranged in two rows: an upper row (1st row) and a lower row (2nd row), and are allocated to the buses selected with the AUX delegation buttons. The 1st row contains the cross-point buttons for unshifted buses, and the 2nd row contains the cross-point buttons for shifted buses. When the DME 1V/K to 8V/K buses are selected with the AUX delegation buttons, the 1st row cross-point buttons are for the currently showing side of DME, and the 2nd row are for the reverse side.

By holding down the [2ND] button and making an AUX delegation selection, you can allocate the 2nd row to a different bus from the 1st row.

In this case, if the 32nd button is set to be a [SHIFT] button (in a 32-button system), the cross-point buttons switch to the shifted allocation while the [SHIFT] button is enabled.

6 XPT HOLD (cross-point hold) buttons

Press one of these buttons, turning it on, to enable cross-point hold.

7 KEY button

While this button is held down, you can use the cross-point row of buttons to select key signals.

8 2ND button

After selecting a bus with an AUX delegation button, hold down this button, and select another AUX delegation, thus

allocating a different bus in the 2nd row from the 1st row.

9 Source name displays

These show the names of the source signals which can be selected by the cross-point buttons. While the [SHIFT] button is enabled, the shifted signal name is displayed. If a different bus is allocated to the 2nd row, while the [2ND] button is held down, the 2nd row signal name is displayed.

While the [KEY] button is held down, the source name of the key signal assigned to the cross-point buttons appears.

10 SHIFT button

While this button is enabled, the shifted signal names appear in the source name display. Pressing this button toggles the source name display between the shifted signal names and unshifted signal names. In the case of a module without source name displays, this button is invalid.

11 RTR (router) button

Press this button, turning it on, to assign the auxiliary bus control block to router control.


For details of the names and functions of parts for router control, see the next section.

12 Level selection buttons

Used when the auxiliary bus control block is carrying out router control.

Auxiliary Bus Control Block (for Router Control)

Press the [RTR] button, turning it on, to assign the auxiliary bus control block to router control.

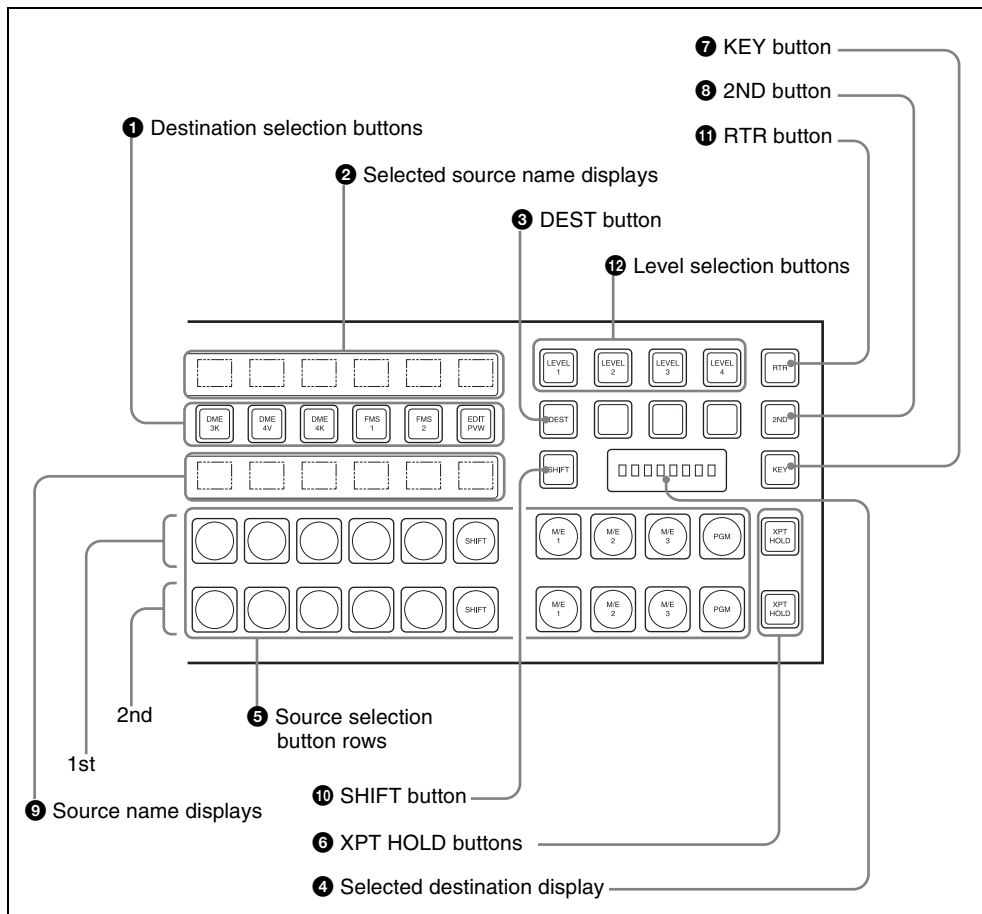

❶ Destination selection buttons

Press a button, turning it on, to select the destination to which the router source is assigned.

The button pressed to assign a destination to a source selection button in the 1st row lights amber. When another button is pressed to assign a different destination to a source selection button in the 2nd row, it lights green.

❷ Selected source name displays

These show the source name selected for the destination.

If the source names and destination names are set in the Setup menu to “SW’er Local” mode, then the description names appear here.

❸ DEST (destination) button

Press this button, turning it on, to display the names of the destinations assigned to the destination selection buttons in the selected source name displays.

❹ Selected destination display

This shows the name of the destination selected by the destination selection buttons. If a protected destination is

selected, the indication “PROTECT” appears.

5 Source selection button rows

The destination selected with a destination selection button is assigned to a source selection button. Press a source selection button to select a source. The 1st row of buttons are source selection buttons for the unshifted destinations, and the 2nd row are shifted source selection buttons. By holding down the [2ND] button, and selecting a destination, you can assign a different destination from the 1st row to the 2nd row. In the 1st row, the button to which a destination is assigned lights amber. If a different destination is assigned to a button in the 2nd row, the button lights green. When the 32nd button is set as a [SHIFT] button (in a 32-button system), while the [SHIFT] button is active, these switch to the shifted source selection buttons. By using the [KEY] button, you can expand the source selection as follows.

Source selection	[SHIFT]	[KEY]	Selection operation
1 to 31	Off	Off	Press the source selection button.
32 to 62	On	Off	Press the [SHIFT] button, then press the source selection button.
63 to 93	Off	On	Hold down the [KEY] button, and press the source selection button.

Source selection	[SHIFT]	[KEY]	Selection operation
94 to 124	On	On	Hold down the [KEY] button, and press the [SHIFT] button, turning it on (the [SHIFT] button locks here, even when in Hold mode), then press the source selection button.

6 XPT HOLD (cross-point hold) buttons

Not used in router control mode.

7 KEY button

When this button is enabled by a setting in the Setup menu, by holding it down during a source selection you can expand the function of the [SHIFT] button.

See “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).

8 2ND button

After selecting a destination with the destination selection buttons, hold down this button and make another destination selection to assign a different destination from the 1st row to the 2nd row.

9 Source name displays

These display the names of signals (sources) that can be selected with the cross-point buttons. While the [SHIFT] button is active, the shifted signal names appear. While the [KEY] button is held down, the expanded signal names appear. When a different destination is assigned to the 2nd row, the 2nd row signal names appear only while the [2ND] button is held down.

10 SHIFT button

While this button is active, the source name displays show the shifted signal names. Press this button to toggle between the shifted and unshifted states.


11 RTR (router) button

Press this button, turning it on, to assign the auxiliary bus control block to router control.

12 Level selection buttons


To each of the four buttons, plural S-Bus levels are assigned in the Setup menu. Press a button, turning it on, to make operations apply to those S-Bus levels.

Menu Control Block

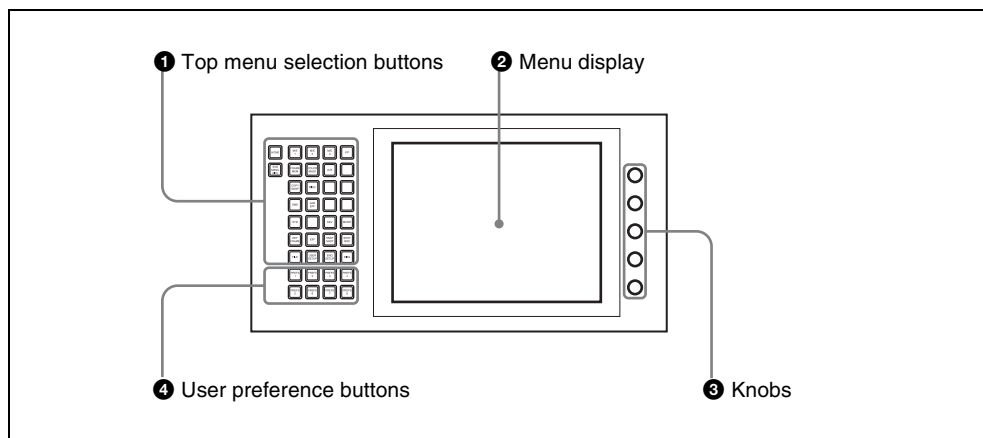**1 Top menu selection buttons**

These select the menu appearing in the menu display. It is also possible to change the assignment of these buttons in setup.

For details, see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).

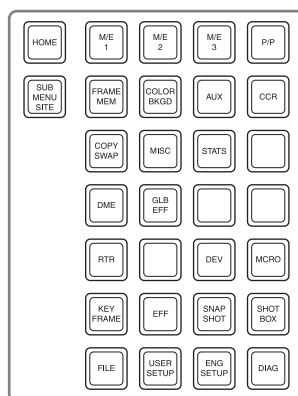

❷ Menu display

This shows the menu currently in use.

❸ Knobs

These adjust the parameter values appearing in the menu.

❹ User preference buttons


These recall the functions or menus assigned to them in the Setup menu. In the default setup, nothing is assigned to the [PREFS 1] to [PREFS 7] buttons.

It is also possible to change the assignment of these buttons in setup.

For details, see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).

PREFS 8 button: When this button is on, control of an editor from the Remote1 port on the rear panel of the switcher is possible. However, even when it is off, control of the Edit PVW bus is always possible.

Memory Card/USB Adaptor Block

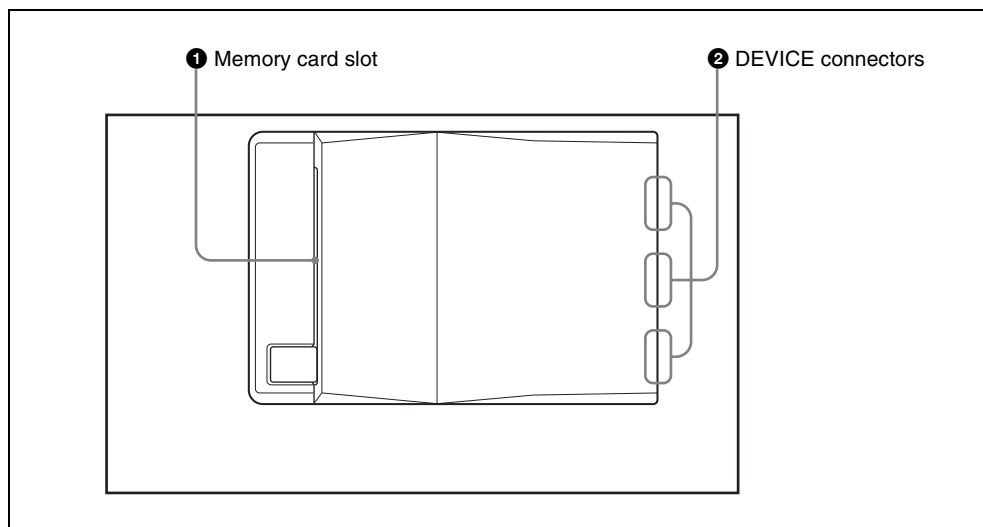

❶ Memory card slot

This slot accepts a PCMCIA Type II compliant memory card. You can use it in software installation, and for saving and reading in data, such as snapshot, keyframe, effect, and setup data.


❷ DEVICE connectors

There are three USB connectors.

You can connect a device such as a mouse, keyboard, USB storage, and so on, that is equipped with a USB interface to any of these connectors.

For details on the devices that can be connected, consult your Sony representative.

“Memory Stick”/USB Connections Block

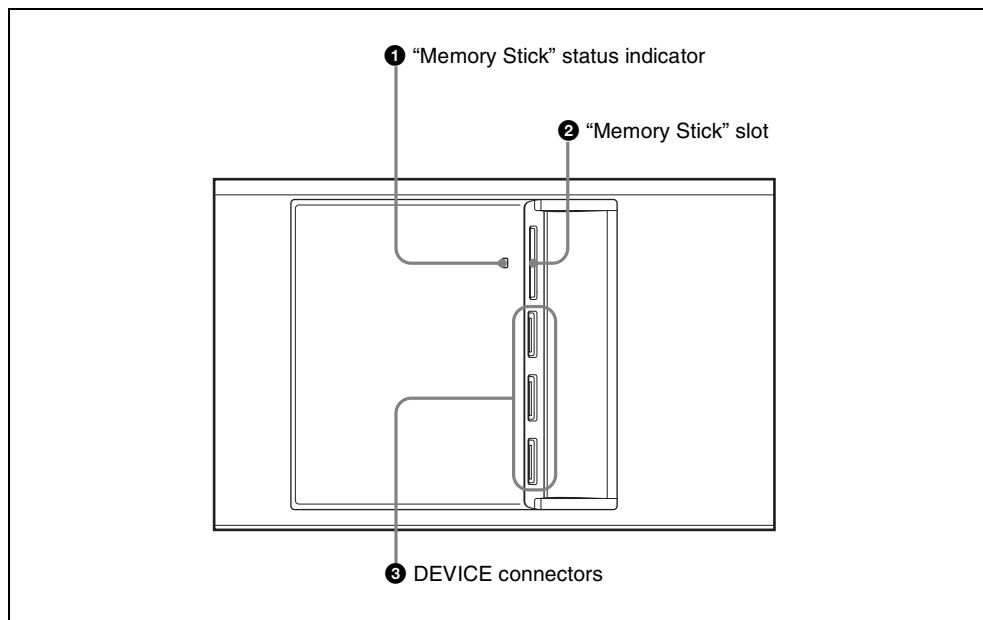

❶ “Memory Stick” status indicator

Lights in red during access to a “Memory Stick.”

Notes

Do not power the unit off or remove a “Memory Stick” when the “Memory Stick” status indicator is lit.

❷ “Memory Stick” slot

Insert “Memory Sticks.” You can use it in software installation, and for saving and reading data, such as snapshot, keyframe, effect, and setup data.

See the next item, “Memory Sticks” for more information about the usable “Memory Sticks” and their handling.

❸ DEVICE connectors

There are three USB connectors.

You can connect a device such as a mouse, keyboard, USB storage, and so on, that is equipped with a USB interface to any of these connectors.

For details on the devices that can be connected, consult your Sony representative.

About “Memory Sticks”

Usable “Memory Sticks”

This unit has been confirmed to operate with those of the following “Memory Sticks” that have a capacity of 8 GB (gigabytes) or less. However, operation with all “Memory Sticks” is not guaranteed.

- “Memory Stick”
- “Memory Stick PRO”
- “Memory Stick Duo”
- “Memory Stick PRO Duo”

Notes

- When using a “Memory Stick PRO,” high-rate data transfer using parallel interface is not supported.
- A “MagicGate Memory Stick” can also be used, but this system does not support the MagicGate function.
- When using a “Memory Stick Duo,” be sure to use it with a “Memory Stick Duo Adaptor” (MSAC-M2 or equivalent). If you insert a “Memory Stick Duo” without using the adaptor, there is the possibility that the stick cannot be removed, resulting in a serious accident.


Handling “Memory Sticks”

When using “Memory Sticks,” pay attention to the following points.

- Do not touch the connector of the “Memory Stick” with anything, including your finger or metallic objects.

- Do not attach anything other than the supplied label to the “Memory Stick” labeling position.
- Attach the label so that it does not stick out beyond the labeling position.
- Carry and store the “Memory Stick” in its case.
- Do not strike, bend, or drop the “Memory Stick.”
- Do not disassemble or modify the “Memory Stick.”
- Do not allow the “Memory Stick” to get wet.
- Do not use or store the “Memory Stick” in a location that is:
 - Extremely hot, such as in a car parked in the sun
 - Under direct sunlight
 - Very humid or subject to corrosive substances

Utility/Shotbox Control Block

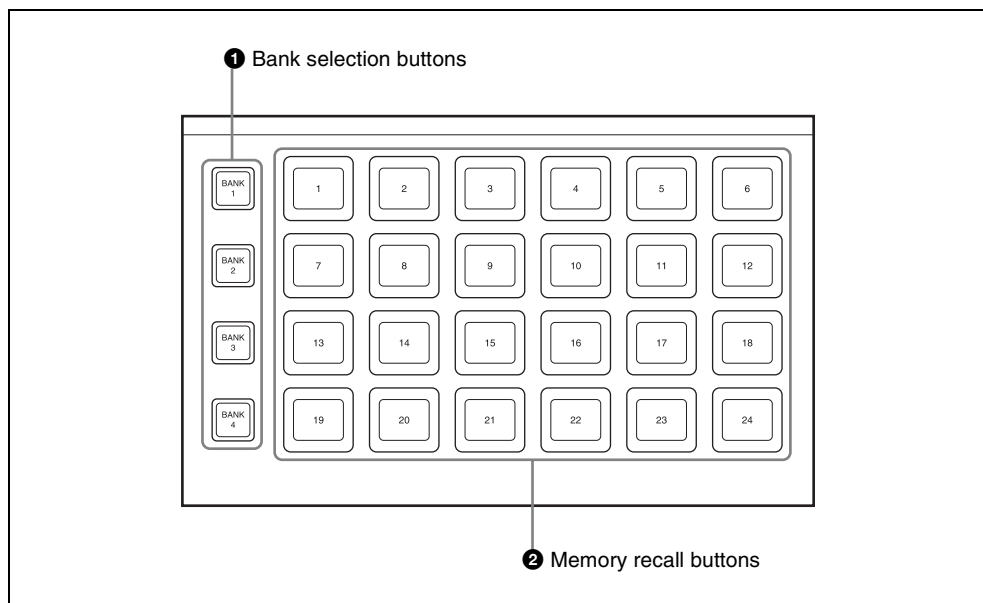

❶ Bank selection buttons

Press any of the [BANK1] to [BANK4] buttons to select a bank of 24 memory recall buttons. The selected button lights amber.

❷ Memory recall buttons

You can use these buttons to recall frequently used menus, utility functions, shotbox registers, or macro registers that you have assigned.

When a utility function is allocated to a button, the button lights orange (or green depending on the status), and the allocated function name appears. Pressing the button executes the allocated function. When the function constitutes a switching on/off operation, the button lights green; otherwise, it only momentarily lights green. When a shotbox register or macro register recall is assigned to a button, the button


lights orange, and the assigned register name appears. (If the register is empty, the button goes off.) In the case of a shotbox function, pressing the button executes the assigned shotbox function, and the button lights yellow. In the case of a macro register, pressing the button executes the assigned macro, and the button flashes yellow.

You can also assign enabling and disabling of macro attachment to use as the MCRO ATTCH ENBL button. You can make a setup setting such that when MCRO ATTCH ENBL is On, the buttons for which a macro attachment is set light.


For details, see “Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block” in Chapter 19 (Volume 3).

Transition Control Block and Flexi Pad Control Block (Simple Type)

The simple versions of the transition control block and Flexi Pad control block shown in the following figure is designed to allow simplified operations than with the standard type. The transitions carried out using these simple-type control blocks are also referred to as “simple transitions” in this User’s guide.

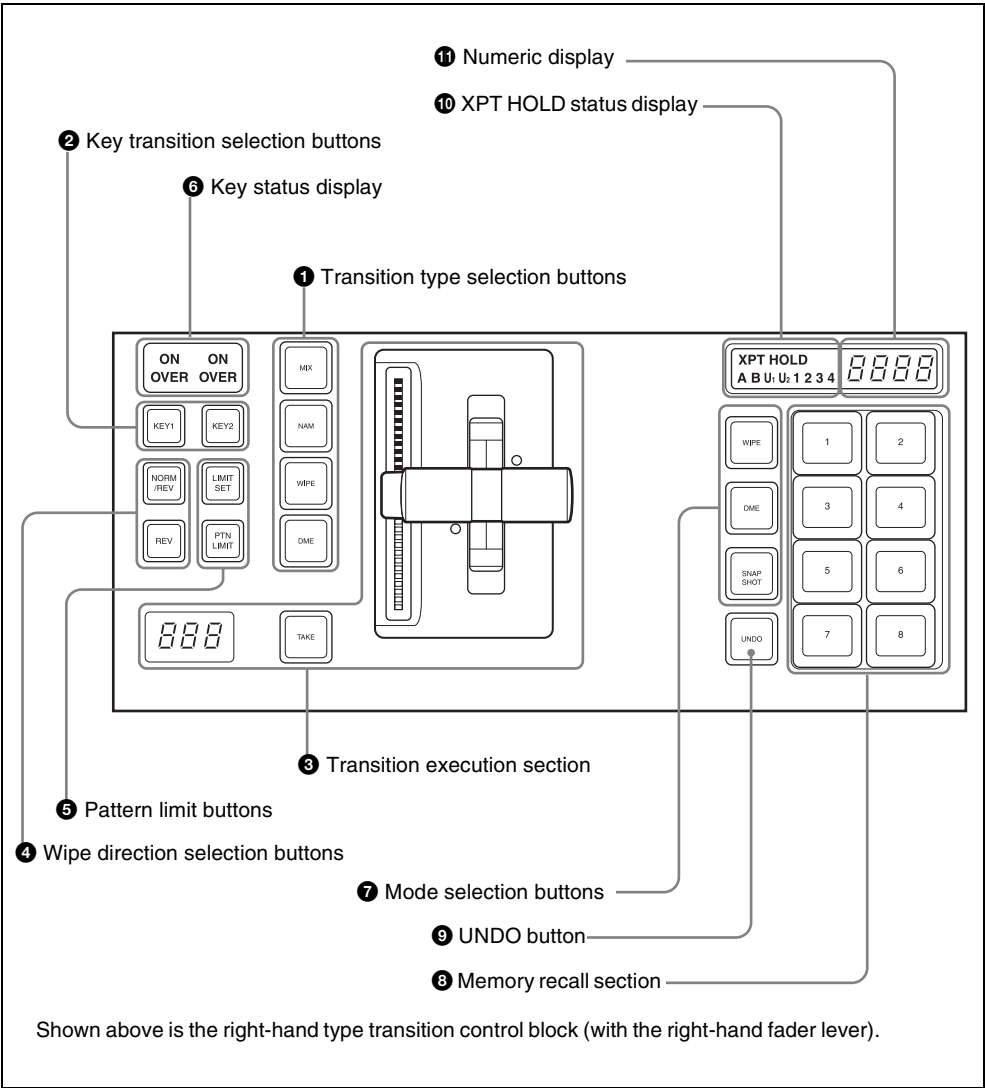

Transition Control Block and Flexi Pad Control Block (with INH button)

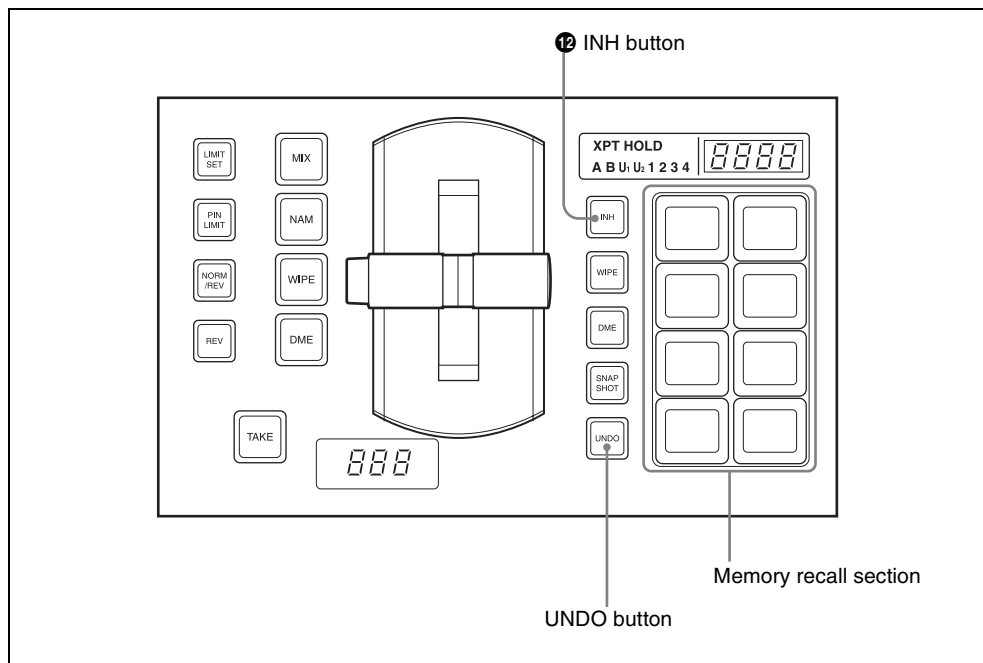

1 Transition type selection buttons

You can assign these buttons in setup to any transition type (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)). Press any of the following buttons, turning it on, to select the transition type.

Press one of these buttons, turning it on, to determine the type of the next transition for a background.

To select the key transition type, hold down the [KEY1] or [KEY2] button, and press one of the following buttons, turning it on. When multi-program mode is selected in the Setup menu (see “Settings for Switcher Configuration (Config Menu)” in Chapter 20 (Volume 3)), two or more of the following buttons may light.

You can also assign a function to these buttons to select whether or not the fader levers are used as key frame faders.

MIX: In a background transition, the new video fades in as the current video fades out. During the transition, the overall signal level is maintained at 100%.

In a key transition, the key fades in (for insertion) or out (for removal).

NAM (non-additive mix): The current and new video signals are compared, and the signal with the higher luminance level is given priority in the output. The current video is maintained at 100% output for the first half of the transition as the new video increases progressively to 100%, then the current video is progressively reduced from

100% to zero in the second half while the new video is maintained at 100%.

WIPE: The current video is replaced by the new video, using the wipe pattern selected in the Wipe menu.

DME: This applies a wipe-like transition, using the DME effect selected in the DME Wipe menu.

FM1&2CLIP, FM3&4CLIP, FM5&6CLIP, FM7&8CLIP: A recorded clip is played back together with the transition. At this point, you can also carry out a background transition (wipe or mix (dissolve)) simultaneously together with the clip.

KF (key frame): Press this button, turning it on, to enable using the fader lever as a key frame fader.

2 Key transition selection buttons

To insert or delete key 1 on the next transition, hold down the [KEY1] button, and select the type of transition using the transition type selection buttons. If the key is currently not inserted, the transition will insert it, and if the key is currently inserted, the transition will delete it. You can use the [KEY2] button in a similar way.

While these buttons are held down, you can select a key source with the cross-point buttons on the key bus.

Pressing one of these buttons twice in rapid succession changes the state of the corresponding key bus so that a cross-point can be selected.

3 Transition execution section

Fader lever: Move this vertically to carry out a transition.

When the [KF] button or a transition type selection button to which the KF button function has been assigned is lit, you can use this as a key frame fader. When the split fader function is enabled, by pressing the projection on the left side of the grip you can release

the lock and separate the two halves of the fader lever. With the split fader lever, in a background mix transition, you can control the background A and B buses independently.

Transition indicator: This comprises multiple LEDs, which show the progress of the transition.

Transition rate display: This displays the transition rate (the time from the beginning of the transition to its completion) set for an auto transition, in frames.

You can set the transition rate using the numeric keypad control block or menu.

TAKE button: Pressing this button carries out an auto transition of the set transition rate. The transition starts immediately, and the button lights amber. When the transition completes, the button goes off.

4 Wipe direction selection buttons

For details, see “Wipe direction selection buttons” (page 51).

5 Pattern limit buttons

LIMIT SET: Move the fader lever to the position of a particular pattern size, and stop it there, then press this button to set the pattern limit range. This button is enabled when the [PTN LIMIT] button is off.

PTN (pattern) LIMIT: When a wipe or DME wipe is selected, pressing this button, turning it on, enables the pattern limit function.

6 Key status display

For each of keys 1 and 2, when the key is inserted, the corresponding ON indicator lights. The OVER indicators show the priority between keys 1 and 2, by lighting when the corresponding key is on top. For example, when key 1 appears over key 2 on

the program monitor, the OVER indicator for key 1 lights.

The following is the Flexi Pad control block.

7 Mode selection buttons

WIPE: When saving or recalling a wipe snapshot, use this in combination with the buttons of the memory recall section.

DME: When saving or recalling a DME wipe snapshot, use this in combination with the buttons of the memory recall section.

SNAPSHOT: When saving or recalling a snapshot, use this in combination with the buttons of the memory recall section.

8 Memory recall section

This consists of eight buttons with LCDs, whose display changes according to the operation mode. Use these in combination with the mode selection buttons to save or recall wipe snapshots, DME wipe snapshots, or snapshots.

9 UNDO button

After recalling a register, press this button to return to the state before recalling the register.

With a setup setting, this can be switched to a mode selection button for macro setting, and used in combination with the buttons in the memory recall section for recalling and executing a macro.

10 XPT HOLD (cross-point hold) status display

A bus for which cross-point hold is set appears as a green light.

11 Numeric display

Depending on the operation mode, this shows a wipe or DME wipe pattern number, or a register number in up to four digits. In macro mode, this provides indications for macro editing.

12 INH (inhibit) button

Pressing this button, turning it on, disables the buttons in the memory recall section and the [UNDO] button.


Independent Key Transition Control Block (Simple Type)

The left side of this control block controls key 3, and the right side controls key 4. The control block for key 3 only is described as an example, but the operations on the key 4 control block are the same.

In setup you can assign any key to either side of this control block. For details, see “Assigning Keys to the Independent Key Transition Control Block (Simple Type)” in

Chapter 19 (Volume 3).

You can also assign the key selection function (key delegation) for keys 1 to 8 to any buttons in this control block. For details, see the section “Assigning Functions to the Independent Key Transition Control Block (Simple Type)” in Chapter 19 (Volume 3).

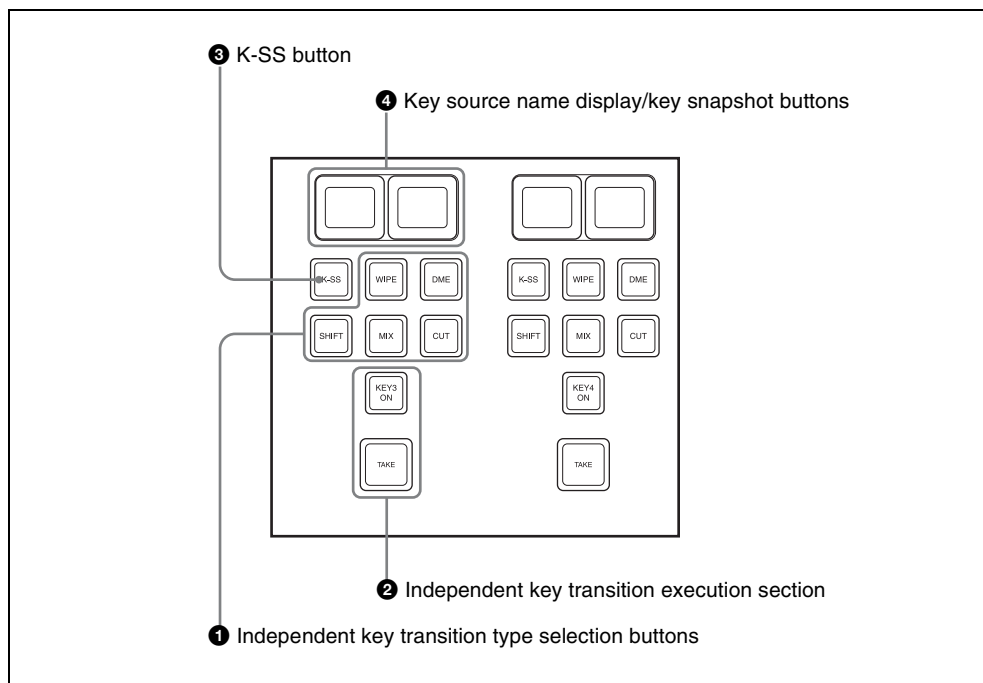

1 Independent key transition type selection buttons

Press one of the following buttons, turning it on, to select the independent key transition type.

MIX: Faded in or out.

WIPE: Inserted or deleted with a wipe.

DME: Switches the key with a DME wipe.

CUT: Inserted or deleted instantaneously.

SHIFT: This has the following functions.

- When setting is made in the Setup menu to allow a different transition type for inserting or deleting a key, it is possible to display and set the transition type after the next

transition while this button is held down.

- While this button is held down, you can select a key source with the cross-point buttons for the key bus.
- If you press this button twice in rapid succession, the key bus selection button [KEY3] in the cross-point control block lights, and a key 3 key bus cross-point can be selected.
- If you press this button, while holding down [TRANS RATE] button in the numeric keypad control block, you can set the independent key transition rate on the control block.

② Independent key transition execution section

KEY3 ON button: This inserts or deletes key 3 instantaneously. When key 3 is present in the final program output from the switcher, this lights red, and otherwise lights amber.

TAKE button: This carries out an auto transition on key 3.

③ K-SS (key snapshot) button

This enables key snapshot mode. In key snapshot mode, it is possible to save and recall key snapshots.

④ Key source name display/key snapshot buttons


These show the signal name of the key fill selected for key 3 and the transition rate on two buttons. In key snapshot mode, these correspond to registers 1 and 2 for key 3; press to save or recall a key snapshot.

To save a key snapshot, with the [K-SS] button lit amber, hold down [SHIFT] button and press one of the key snapshot buttons. This saves a key snapshot in the button you pressed, which lights yellow.

By assigning [K-SS 3/4] to a key in the Setup menu, you can press the button to

switch between key snapshot registers 1/2 and 3/4. For details, see the section “Assigning Keys to the Independent Key Transition Control Block (Simple Type)” in Chapter 19 (Volume 3).

Downstream Key Control Block

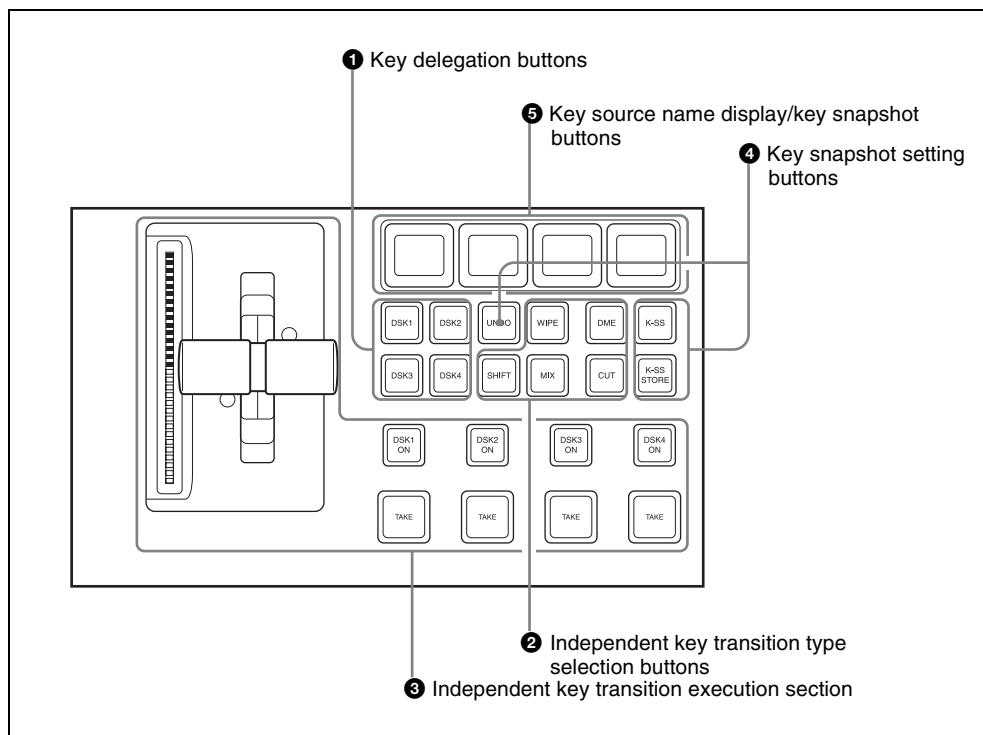

1 Key delegation buttons

Press one of the [DSK1] to [DSK4] buttons to delegate this control block to the corresponding keyer.

Using the Setup menu, it is possible to assign these to DSK5 to DSK8 or M/E keys 1 to 8.

While these buttons are held down, you can select a key source with the cross-point buttons for the key bus.

Pressing one of these buttons twice in rapid succession changes its state so that you can make cross-point selections on the corresponding key bus.

2 Independent key transition type selection buttons

Press one of these buttons, turning it on, to select the downstream key transition type.

MIX: Carry out a dissolve with the key selected with the key delegation buttons.

WIPE: Carry out a wipe with the key selected with the key delegation buttons.

DME: This switches the key selected with the key delegation buttons, using a DME wipe.

CUT: Instantaneously insert or delete the key selected with the key delegation buttons.

SHIFT: When setting is made in the Setup menu to allow a different transition type for inserting or deleting a key, it is possible to display and set the transition after the next transition while this button is held down.

③ Independent key transition execution section

DSK1 (downstream key 1) ON to DSK4

ON buttons: Press these to instantaneously cut the downstream keys 1, 2, 3, and 4 in or, when the downstream keys are already inserted, cut them out. When the key corresponding to the button appears in the final program output, the button lights red, and otherwise lights amber.

TAKE buttons: These correspond to downstream keys 1, 2, 3, and 4 from left to right; press to execute an auto transition. The transition starts immediately, and the button lights amber. When the transition completes, the button goes off.

Fader lever: Move this to carry out a manual downstream key transition.

Transition indicator: This comprises multiple LEDs, which show the progress of the downstream key transition.

④ Key snapshot setting buttons

K-SS (key snapshot): This enables key snapshot mode.


K-SS STORE (key snapshot store): To save a key snapshot, hold down this button, and press the key source name display/key snapshot button for the register you want to save.

UNDO (key snapshot recall undo): This undoes the last key snapshot recall.

⑤ Key source name display/key snapshot buttons

These display the selected source name for each corresponding keyer. In snapshot mode, they correspond to registers 1 to 4 of the selected keyer, and pressing the button saves or recalls a key snapshot.

Downstream Key/Fade-to-Black Control Block

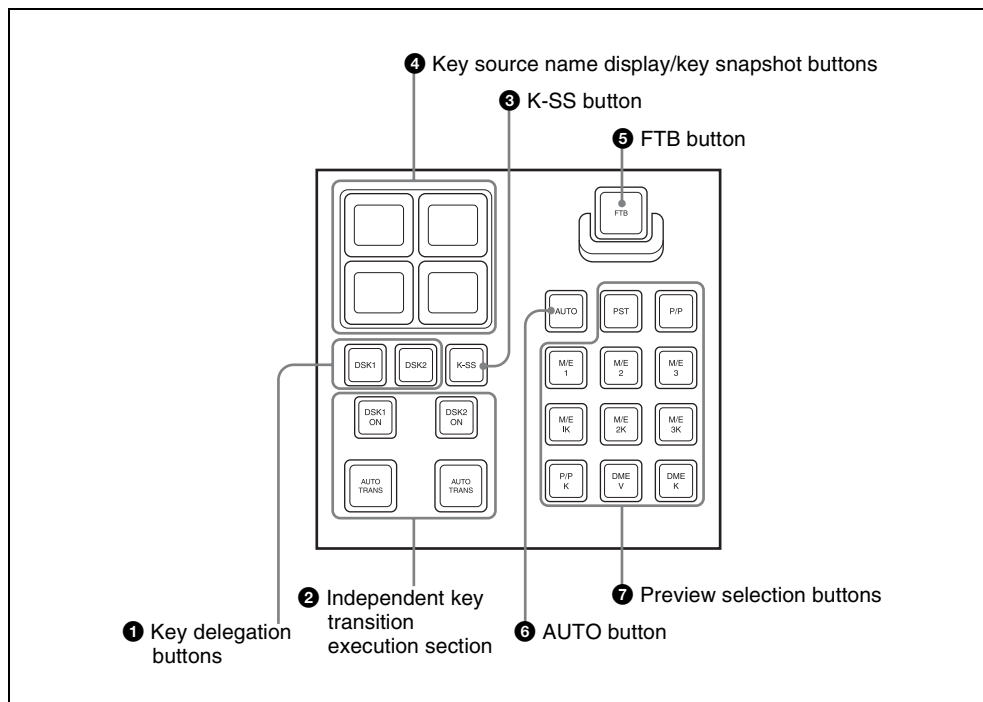

1 Key delegation buttons

Press DSK1 or DSK2, to select the keyer. Each button can be assigned to any key in setup (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)). While these buttons are held down, you can select a key source with the cross-point buttons on the key bus.

Pressing one of these buttons twice in rapid succession changes its state so that you can make cross-point selections on the corresponding key bus in the PGM/PST bank.

2 Independent key transition execution section

DSK1 ON, DSK2 ON buttons: Press these to cut in the corresponding downstream key 1 or 2. When the key is already

inserted, pressing the button cuts it out. Each button lights red when the corresponding key is inserted in the program output (final output from the switcher), and lights amber at other times.

AUTO TRANS buttons: The left button applies to DSK1 and the right button to DSK2; press these buttons to carry out an auto transition. The transition immediately starts, and the button lights amber. When the transition completes, the button goes off.

3 K-SS (key snapshot) button

Pressing this button, turning it on, enables the key snapshot mode. In this mode, you can save and recall key snapshots.

④ Key source name display/key snapshot buttons

Each column of two buttons relates to the corresponding downstream key 1 or 2. The upper button displays the name of the key fill signal selected for the key, and the lower button shows the transition rate. In key snapshot mode, these buttons correspond to registers 1 to 4 of the keyer selected with the key delegation buttons, and pressing a button recalls the key snapshot. To save a key snapshot, hold down the [STORE] button in the numeric keypad control block, and press the button for the desired register.

⑤ FTB (fade to black) button

Press this button to fade to black the program output of the PGM/PST bank, at the set transition rate. You can set the fade to black transition rate in the menu.

⑥ AUTO button

When this button is pressed, the M/E or PGM/PST bank preview signal selected on the edit preview bus is automatically switched to the program signal depending on the on-air status.

⑦ Preview selection buttons

Press one of these buttons to select a signal on the edit preview bus. Each button can be assigned to any preview output in setup (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

PST (preset): When this button is pressed, the signal selected on the background B row of the PGM/PST bank is selected on the edit preview bus.

M/E 1 to M/E 4, P/P (M/E1 to M/E 4, P/P preview): The preview signal (M/E-1 PVW, M/E-2 PVW, M/E-3 PVW, M/E-4 PVW, P/P PVW) of the M/E or PGM/PST bank corresponding to the pressed button is selected on the edit preview bus.

For details of [M/E 4] button assignment, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532) in Appendix (Volume 1).

M/E1 K to M/E4 K, P/P K (M/E1 to M/E 4, P/P key preview): The key preview signal (M/E-1 K-PVW, M/E-2 K-PVW, M/E-3 K-PVW, M/E-4 K-PVW, P/P K-PVW) of the M/E or PGM/PST bank corresponding to the pressed button is selected on the edit preview bus.

For details of [M/E 4] button assignment, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532) in Appendix (Volume 1).


DME V (DME monitor video): When this button is pressed, the DME monitor output video signal (DME MON V) is selected on the edit preview bus.

DME K (DME monitor key): When this button is pressed, the DME monitor output key signal (DME MON K) is selected on the edit preview bus.

Transition Control Block (Compact Type)

The compact version of the transition control block shown in the following figure has fewer buttons than the standard type.

Independent key transition operations can also be controlled with the compact transition control block.

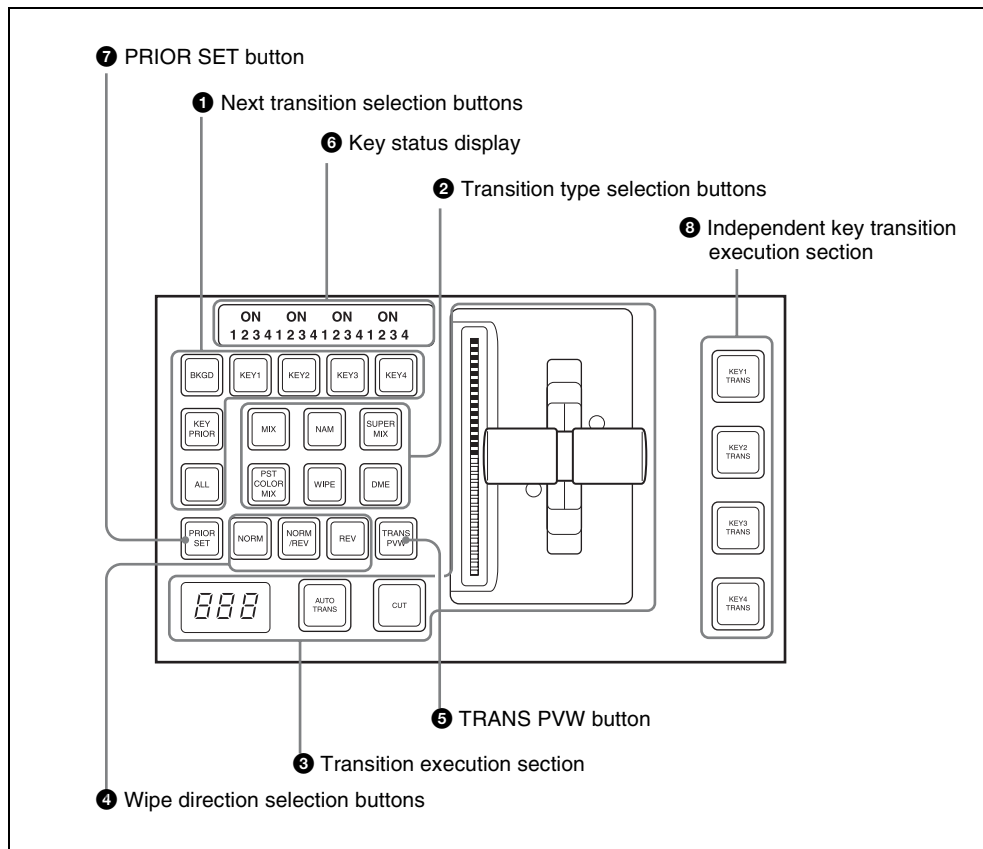

1 Next transition selection buttons

Press these buttons, turning them on, to determine what the next transition will apply to.

BKGD: Next transition changes the background.

KEY1 to KEY8 (DSK1 to DSK8 in the PGM/PST bank): Press this button, turning it on, to make the next transition insert or remove the

corresponding key (keys 1 to 8). If a key is currently inserted it will be removed, and if it is not currently inserted, it will be inserted.

In the PGM/PST bank, this inserts or removes downstream keys 1 to 8.

For details of assignment and selection of keys 5 to 8, see the following sections in Appendix (Volume 1): "Assigning Buttons for Selection of Keys 5 to 8 in

*the Setup Menu” (page 534) and
“Selecting Keys 5 to 8 for Next
Transition” (page 535).*

KEY PRIOR (priority): When this button is lit, the setting of the key priority after the next transition is enabled. The key priority after the next transition appears in the key status display.

ALL: Pressing this button turns on a preselected set of the [BKGD], [KEY1] to [KEY4], and [KEY PRIOR] buttons. Make this setting in a Setup menu.

② Transition type selection buttons

You can assign these buttons in setup to any transition type (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

Press one of these buttons, turning it on, to determine the type of the next transition. When multi-program mode is selected in the Setup menu (see “Settings for Switcher Configuration (Config Menu)” in Chapter 20 (Volume 3)), two or more of the following buttons may light.

You can also assign a function to these buttons to select whether or not the fader levers are used as keyframe faders.

MIX: In a background transition, the new video fades in as the current video fades out. During the transition, the overall signal level is maintained at 100%.

In a key transition, the key fades in (for insertion) or out (for removal).

NAM (non-additive mix): The current and new video signals are compared, and the signal with the higher luminance level is given priority in the output. The current video is maintained at 100% output for the first half of the transition as the new video increases progressively to 100%, then the current video is progressively reduced from

100% to zero in the second half while the new video is maintained at 100%.

SUPER MIX: The current video is maintained at 100% output for the first half of the transition as the new video is mixed while increasing progressively to 100%. The current video is then progressively reduced from 100% to zero in the second half while the new video is maintained at 100%.

PST (preset) COLOR MIX: In the first transition, the current video is replaced by the color matte in a mix (dissolve), then in the second transition the color matte is replaced by the new video also in a mix (dissolve).

WIPE: The current video is replaced by the new video, using the wipe pattern selected in the Wipe menu.

DME: A wipe type of transition is carried out, using the DME effect selected in the DME Wipe menu.

FM1&2CLIP, FM3&4CLIP,

FM5&6CLIP, FM7&8CLIP: A

recorded clip is played back together with the transition. At this point, you can also carry out a transition (wipe or mix (dissolve)) simultaneously together with the clip.

KF (key frame): Press this button, turning it on, to enable using the fader lever as a key frame fader.

③ Transition execution section

Transition indicator: This comprises multiple LEDs, which show the progress of the transition.

Fader lever: Move this to carry out a manual transition. When the [KF] button or a transition type selection button to which the KF button function has been assigned is lit, you can use this as a keyframe fader.

Transition rate display: This shows the “transition rate” (the time from the beginning of a transition to its

completion) set for an auto transition, in frames.

You can set the transition rate using the numeric keypad control block, Flexi Pad control block, or menu.

AUTO TRANS (transition) button:

Pressing this button carries out an auto transition of the set transition rate (duration). The transition starts immediately, and the button lights amber. When the transition completes, the button goes off.

CUT button: Pressing this button carries out the transition as a cut (i.e. instantaneously).

4 Wipe direction selection buttons

For details, see “Wipe direction selection buttons” (page 51).

5 TRANS PVW (transition preview) button

When this button is lit, you can check in advance the video changes during the transition, on the preview output from the M/E or PGM/PST bank.

During the preview, you can use the fader lever, [AUTO TRANS] button, and [CUT] button. One of the following functions of this button can be selected in a Setup menu.

- When the transition completes, the system returns to the normal mode.
- The transition preview mode is maintained while this button is pressed.
- Switching is made between the transition preview mode and normal mode every time this button is pressed.

6 Key status display

For each of keys 1 to 8, the corresponding ON indicator lights when the key is inserted. It also shows the priority (1 to 4) of each key.

7 PRIOR (priority) SET button

While this button is held down, you can set the key priority.

The setting mode when this button is pressed depends on whether or not the [KEY PRIOR] button is lit, as follows.

- When the [KEY PRIOR] button is off, the current key priority is set.
 - When the [KEY PRIOR] button is lit, the key priority after the next transition is set.
- Press the [KEY PRIOR] button as required, to switch between these two modes.

In either mode, hold down the [PRIOR SET] button, and press the button ([KEY1] to [KEY8]) corresponding to the key you want to bring to the front.

Notes

The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups. For example, it is not possible to set a priority sequence of keys 1, 5, and 2.

For details, see “Setting the Key Priority in the Transition Control Block” (page 153).

8 Independent key transition execution section


KEY1 TRANS (transition) to KEY8 TRANS (DSK1 TRANS to DSK8 TRANS in the PGM/PST block)

buttons: Press the corresponding one of these buttons to cut key 1 to key 4 in or out automatically at the set transition rate. When the key corresponding to the button appears in the final program output, the button lights red, and otherwise lights amber. During a transition, the button lights green.

CCP-6224 2M/E Control Panel

In this system, you can use the built-in CCP-6224 2M/E Control Panel. This panel has two cross-point control blocks, two

transition control blocks (compact type), one device control block (track ball), and one Multifunction Flexi Pad control block.

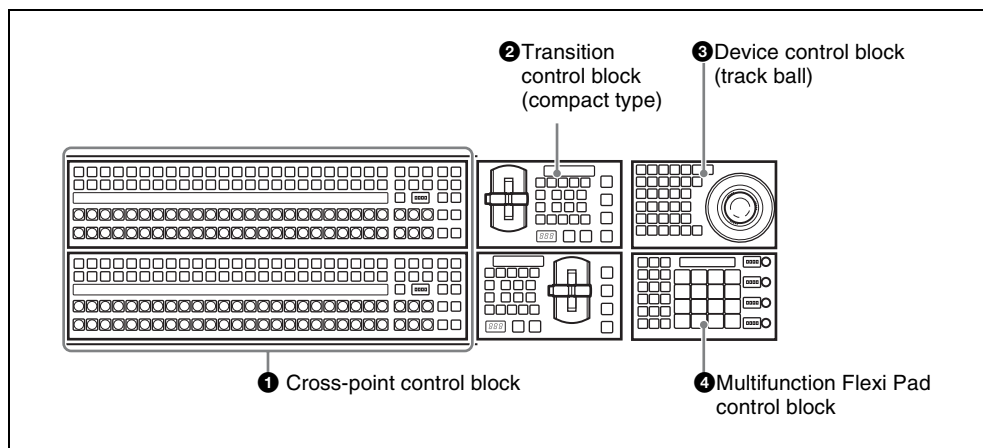

❶ Cross-point control block

For details of cross-point control block operation, see “Cross-Point Control Block” (page 45).

For operations in AUX control mode, see “Auxiliary Bus Control Block (for AUX Buses)” (page 74) and “Cross-Point Control Block (CCP-6224/6324) in the AUX Operating Mode” (page 98).

❷ Transition control block (compact type)

For details of operations, see “Transition Control Block (Compact Type)” (page 94).

❸ Device control block (track ball)

For details of operations, see “Device Control Block (Trackball)” (page 60).


❹ Multifunction Flexi Pad control block

For details of operations, see “Multifunction Flexi Pad Control Block” (page 100).

CCP-6324 3M/E Control Panel

In this system, you can use the built-in CCP-6324 3M/E Control Panel. This panel has three cross-point control blocks, three

transition control blocks (compact type), one device control block (trackball), and one Multifunction Flexi Pad control block.

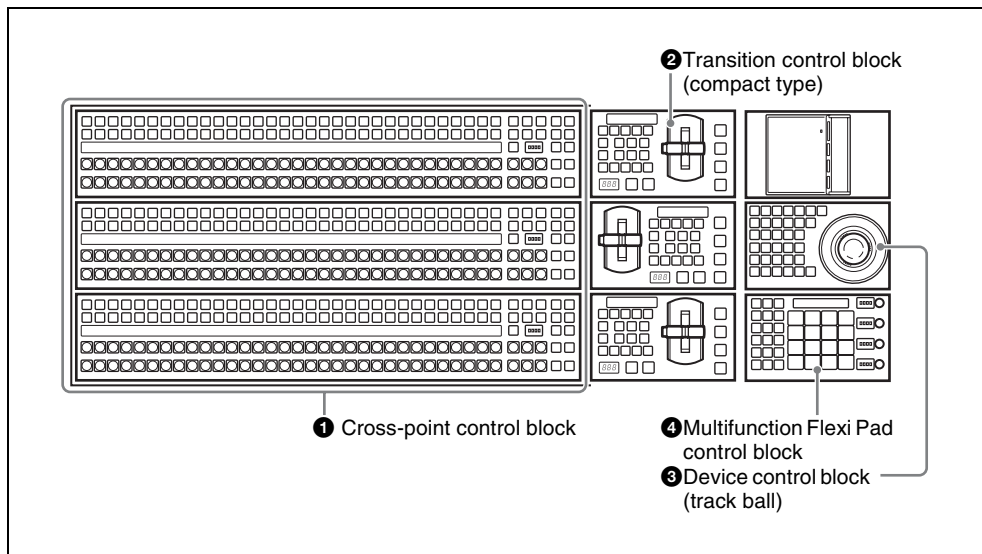

1 Cross-point control block

For details of operations, see “Cross-Point Control Block” (page 45) and “CCP-6224 2M/E Control Panel” (page 97).

2 Transition control block (compact type)

For details of operations, see “Transition Control Block (Compact Type)” (page 94).

3 Device control block (track ball)


For details of operations, see “Device Control Block (Trackball)” (page 60).

4 Multifunction Flexi Pad control block

For details of operations, see “Multifunction Flexi Pad Control Block” (page 100).

Cross-Point Control Block (CCP-6224/6324) in the AUX Operating Mode

On the CCP-6224/6324, when using a [24-column] cross-point control block, if the [PRE MCRO] button is assigned to switch to AUX operating mode, by pressing this button you can switch the control block button functions as follows, and select the AUX bus and its source signals (AUX panel-less function).

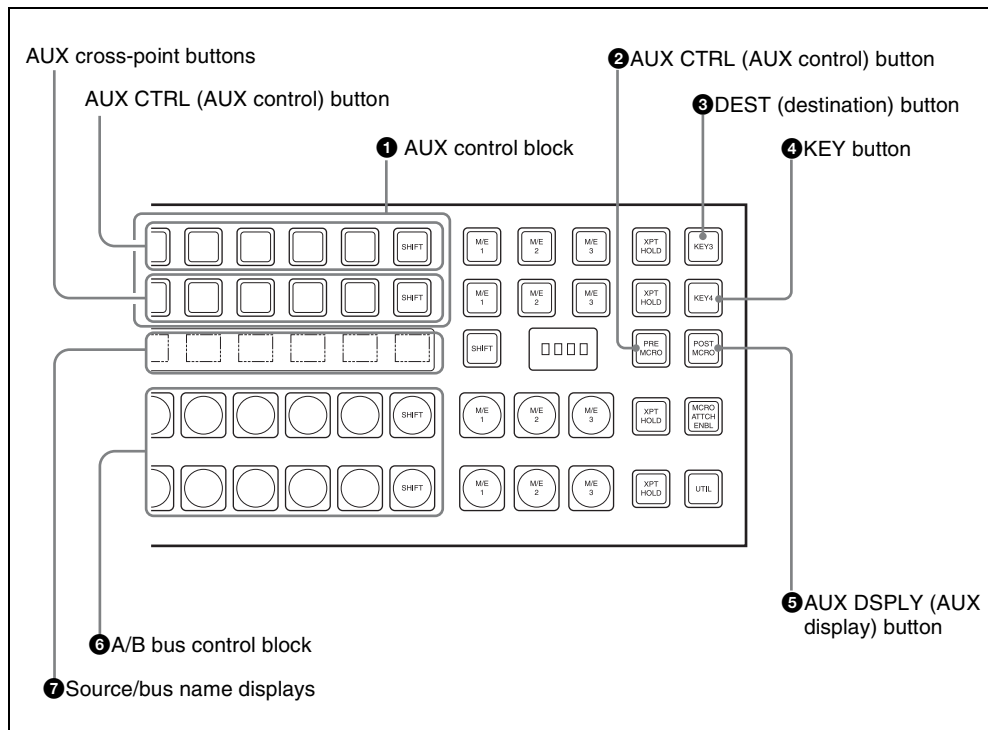

1 AUX control block

This selects the AUX bus and the assigned source signals.

This cross-point control block can be switched to AUX control mode with the [AUX CTRL] button, and the key 1 row used as AUX delegation buttons, and the key 2 row used as AUX bus cross-point selection buttons, with the source name display showing the source names or the bus names (AUX panel-less function). To use this function, the function for switching to AUX control mode must first be assigned to the [PRE MCRO] and [POST MCRO] buttons.

For the method of making this assignment, see Chapter 19 “Control Panel Setup (Panel)” (Volume 3).

AUX delegation buttons: These select the AUX bus. When you press a button, turning it on, this selects the assigned bus as the AUX bus. You can make the rightmost button a [SHIFT] button, in which case each button can be used to select two buses.

For details of the buses that can be selected, see “Bus Selection” (page 137).

AUX cross-point buttons: These select the source signal to be assigned to the AUX bus. When you press a button, turning it on, this selects the assigned video/key source signal and assigns it to the bus selected with the AUX delegation buttons. To select a key, hold down the [KEY] button and press the AUX cross-point button to which the desired key signal is assigned. You

can make the rightmost button a [SHIFT] button, in which case each button can be used to select two video/key source signals.

When one of the DME 1V/K to 4V/K buses is selected with the AUX delegation buttons, this selects the video side currently visible on the DME, and if you hold down [repeatedly press] the AUX delegation button, you can also select the reverse side of the video.

② AUX CTRL (AUX control) button

This switches the cross-point control block to the AUX operating mode. However, using this function requires an assignment to have been made in the Setup menu.

For details of assigning the function for switching to AUX operating mode, see “Assigning the AUX Bus Control Mode Switching Function” in Chapter 19 (Volume 3).

③ DEST (destination) button

When you press this button, turning it on, the source name displays show the names of the buses assigned to the AUX delegation buttons.

④ KEY button

When you press this button, turning it on, the source name displays show the names

of the key source signals assigned to the AUX cross-point buttons, and they are now selectable.

⑤ AUX DSPLY (AUX display) button

This switches the source name displays to the AUX operating mode (by default showing the video source signal names).

⑥ A/B bus control block

Select the source signals for the background A/B buses.


⑦ Source/bus name displays

In the AUX operating mode, these show the information in the following table, according to the states of the [AUX DSPLY], [DEST], and [KEY] buttons.

[AUX DSPLY]	[DEST]	[KEY]	Indication
Off	Off	Off	Background A/B bus source signal names
On	Off	Off	Video source signal names for AUX bus
On	On	Off	Bus names for AUX bus
On	Off	On	Key source signal names for AUX bus

Multifunction Flexi Pad Control Block

You can use the Multifunction Flexi Pad control block for creating, saving, and recalling snapshots, wipe snapshots, and DME wipe snapshot key snapshots, effects, shotbox recall, macro execution, transition rate settings, and key adjustments.

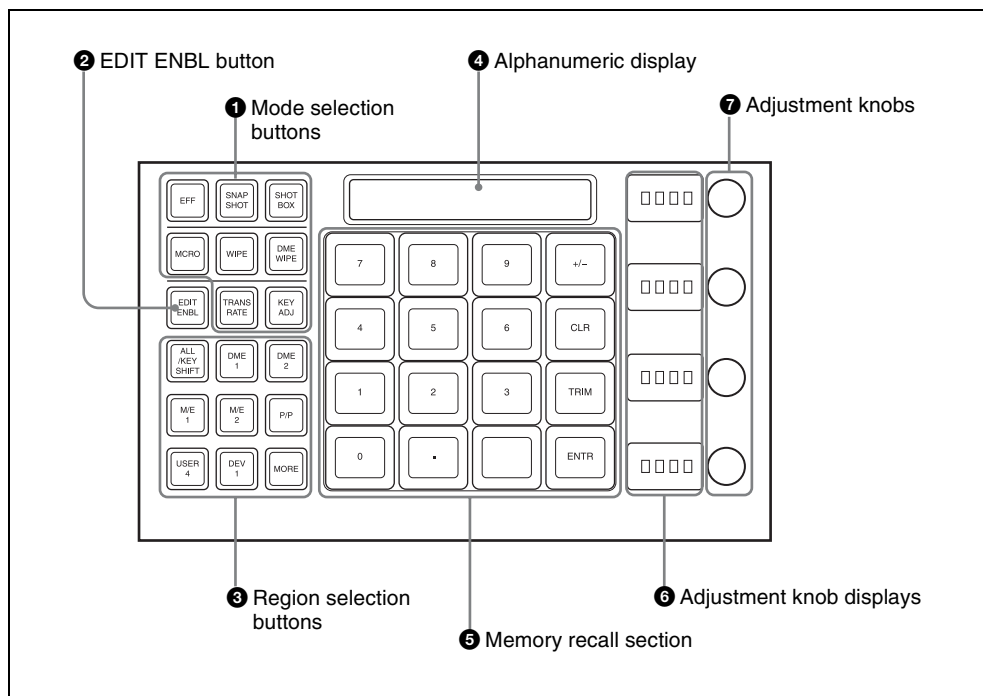

1 Mode selection buttons

EFF (effect): Press this to carry out effect creation/recall/editing/execution/deletion.

SNAPSHOT: Press this to carry out snapshot creation/recall/editing/deletion.

SHOTBOX: Press this to carry out shotbox creation/recall/editing/execution/deletion.

MCRO (macro): Press this to carry out macro creation/editing/execution/deletion.

WIPE (wipe snapshot): Press this to carry out wipe snapshot creation/recall/deletion and wipe adjustments.

DME WIPE (DME wipe snapshot): Press this to carry out DME wipe snapshot creation/recall/deletion and DME wipe adjustments.

TRANS RATE (transition rate): Press this to set the transition rate.

KEY ADJ (key adjust): Press this to carry out key adjustments and set modifiers.

KEY SS (key snapshot): Press this to carry out key snapshot creation/recall/deletion. By default, this is not assigned to a mode selection button, so before use it is necessary to assign to a mode selection button in the Setup menu.

2 EDIT ENBL (edit enable) button

By pressing this, turning it on, you can carry out the following operations.

- Effect creation/editing
- Snapshot attribute setting
- Shotbox creation/editing
- Macro creation/editing
- Wipe adjustments
- DME wipe adjustments

③ Region selection buttons

These select the function block to which operations apply.

When the mode selection button selection is EFF/SHOT/SHOT BOX/MCRO, you can select multiple region selection buttons simultaneously. In this case, the first button pressed lights green as the reference region, and the other buttons pressed light amber (the buttons for the regions shown in the memory recall section are yellow).

ALL/KEY SHIFT: Selects all regions.

When any region is selected, press this button to unset the selection of all regions.

When KEY ADJ (key adjust) or KEY SS (key snapshot) is selected as the function mode, these buttons are for KEY5 to KEY8 selection.

DME1 to DME2: Select DME channels.

M/E1, M/E2, P/P: Select the M/E-1, M/E-2, and PGM/PST regions respectively.

USER4: Selects the USER4 region.

DEV1: Selects the device 1 region.

MORE: Displays buttons in the memory recall section for regions not assigned to a region selection button, so that they can be selected. By default the following regions are shown on the memory recall section buttons.

MSTR (master snapshot, master timeline registers), USER1 to 3, USER5 to 8, MCRO (macro), DEV2 (device 2), PBUS, GPI, RTR(router)

If there is a region selected in the memory recall section, this is indicated by the MORE button lighting green.

To revert the button displays in the memory recall section, press the [MORE] button once more, or press the [EXIT] button that appears in the memory recall section.

Note that except for the [ALL],

[EXIT], and [MORE] buttons, you can freely change the assignment to regions in the Setup menu.

④ Alphanumeric display

This shows the selected region name or register number, and entered numeric values.

⑤ Memory recall section

This comprises 16 LCD buttons, each with a display that changes according to the operating mode.

⑥ Adjustment knob displays

Each of these shows the initial letter of the parameter that can be adjusted with the knob to the right, and the setting value (three digit places, including the minus sign).

⑦ Adjustment knobs

Use these to adjust the parameters selected with the memory recall section buttons.

Basic Menu Operations

Menu Organization

Operations on the MVS switcher system make frequent use of menu operations. This section describes the menus and their interrelationships.

You can also display menus on an external monitor, and use a mouse. The menu operations using a mouse are basically the same as the menu control block operations described here, with mouse clicks in place of button presses. However, since the monitor has no knobs for adjusting the parameters in the menu control block, for details of operations corresponding to these knob operations, see “*Operation With a Mouse*” (page 122).

Overview

All detailed settings for basic operations such as transitions, keys, DME, or wipes, are made in menus. There are also menus for carrying out general system control, managing setting data, and initial setup.

About the Top Menu List

When the control panel is powered on, the top menu list appears as shown below. You can also display this by selecting VF1 ‘Top Menu List’ after pressing the [HOME] button at the upper left in the top menu selection button area of the menu control block.



To display the top menu

In the same way as for the top menu selection buttons in the menu control block, press each button to display the particular top menu in the menu display.

Notes

- The arrangement of buttons in the top menu list and the default arrangement of the top menu selection buttons may be different.
- Changing the top menu selection button assignment in setup has no effect on the top menu list.

To shut down the menus

Press the [Shutdown] button at the lower right.

This operation is the same as the shut down operation in the top menu window.

For details, see “Shutting down the menus” (page 127).

Accessing Menus

You can use any of the following methods to access a menu, and the initially displayed menu page depends on the method used.

- Pressing a top menu selection button in the menu control block.
This displays the page you last accessed in the particular menu. After initially powering on the system, however, the page of VF1 - HF1 of the particular menu is always selected.
- Pressing a button other than a top menu button twice in rapid succession (*see*

page 105).

Depending on the button, this may display a fixed page or the page selected last time you accessed the menu.

- Press the menu page selection button at the top left of the menu display.
The top menu window appears; press the top menu selection button for the particular menu, or enter the menu number with the numeric keypad, and press the Enter button.

For details of the VF buttons and HF buttons, see “Interpreting the Menu Screen” (page 114).

Menus accessed from a top menu selection button

Buttons	Menus	Function	See
HOME	Home	Recalling menus using the top menu list or shortcut menu	Top menu list: page 103 Shortcut menu: page 129
M/E 1	M/E-1	Transition, keys, and wipe settings for the M/E-1 bank	page 160 (transitions), page 201 (keys), page 283 (wipes)
M/E 2	M/E-2	Transition, keys, and wipe settings for the M/E-2 bank	
M/E 3	M/E-3	Transition, keys, and wipe settings for the M/E-3 bank	
M/E 4	M/E 4	Transition, keys, and wipe settings for the M/E-4 bank	
P/P	PGM/PST	Transition, downstream key, and wipe settings for the PGM/PST bank	
FRAME MEM	Frame Memory	Frame memory settings	page 373
COLOR BKGD	Color Bkgd	Color background settings	page 420
AUX	Aux	AUX bus settings	page 436
CCR	CCR	Color corrector settings	page 443
COPY SWAP	Copy/Swap	Copy and swap settings	page 424
MISC	Misc	Safe title settings	page 433
STATS	Status	Status display	page 437
DME	DME	DME special effect settings	Chapter 11 (Volume 2)
GLB EFF	Global Effect	Global effect settings	Chapter 11 (Volume 2)

Buttons	Menus	Function	See
RTR	Router	Destination, source and level selections	page 438
DEV	Device	Settings for external device operation	Chapter 12 (Volume 2)
MCRO	Macro	Macro register settings	Chapter 16 (Volume 2)
KEY FRAME	Key Frame	Keyframe settings	Chapter 13 (Volume 2)
EFF	Effect	Keyframe effect register settings	Chapter 13 (Volume 2)
SNAP SHOT	Snapshot	Snapshot register settings	Chapter 14 (Volume 2)
SHOTBOX	Shotbox	Shotbox register settings	Chapter 15 (Volume 2)
FILE	File	File settings	Chapter 17 (Volume 2)
ENG SETUP	Engineering Setup	Setup functions	Chapter 18 to Chapter 24 (Volume 3)
DIAG	Diagnosis	Status information display	Appendix (Volume 3)

Menus accessed by pressing a button twice

For relevant buttons other than the top menu selection buttons, pressing twice in rapid succession directly recalls a related menu page. The following table lists these

buttons of each control block, together with the menus they recall.
(XX represents the HF menu recalled last in the VF menu.)

Cross-point control block

Buttons	Menus	See
FM1 to 8 signals assigned buttons	Frame Memory >Still >Recall	page 383
Color Bkgd1 signal assigned button	Color Bkgd >Color Bkgd1	page 420
Color Bkgd2 signal assigned button	Color Bkgd >Color Bkgd2	
CCR1 signal assigned button	CCR >CCR1 >XX	Chapter 19 (Volume 3)
CCR2 signal assigned button	CCR >CCR2 >XX	
FMS1	Frame Memory>Still>Recall	
FMS2	Frame Memory>Still>Recall	

Transition control block (standard type, compact type)

Buttons	Menus	See
KEY1 (DSK1) ^{a)}	- M/E-1, 2, 3, 4 >Key1 >XX - PGM/PST >DSK1 >XX	page 207
KEY2 (DSK2) ^{a)}	- M/E-1, 2, 3, 4 >Key2 >XX - PGM/PST >DSK2 >XX	
KEY3 (DSK3) ^{a)}	- M/E-1, 2, 3, 4 >Key3 >XX - PGM/PST >DSK3 >XX	
KEY4 (DSK4) ^{a)}	- M/E-1, 2, 3, 4 >Key4 >XX - PGM/PST >DSK4 >XX	
KEY5 (DSK5) ^{a)}	- M/E-1, 2, 3, 4 >Key5 >XX - PGM/PST >DSK5 >XX	
KEY6 (DSK6) ^{a)}	- M/E-1, 2, 3, 4 >Key6 >XX - PGM/PST >DSK6 >XX	
KEY7 (DSK7) ^{a)}	- M/E-1, 2, 3, 4 >Key7 >XX - PGM/PST >DSK7 >XX	
KEY8 (DSK8) ^{a)}	- M/E-1, 2, 3, 4 >Key8 >XX - PGM/PST >DSK8 >XX	
WIPE	M/E-1, 2, 3, 4, PGM/PST >Wipe >Main Pattern	page 283
DME	M/E-1, 2, 3, 4, PGM/PST >DME Wipe >XX	page 339
SUPER MIX	M/E-1, 2, 3, 4, PGM/PST >Misc >Transition	page 161
PST COLOR MIX	M/E-1, 2, 3, 4, PGM/PST >Misc >Transition	page 162
FM1&2 CLIP, FM3&4 CLIP, FM5&6 CLIP, FM7&8 CLIP	M/E-1, 2, 3, 4, PGM/PST >Misc >Clip Transition	page 403
PRIOR SET	M/E-1, 2, 3, 4, PGM/PST >Misc >Key Priority	page 156
KEY PRIOR	M/E-1, 2, 3, 4, PGM/PST >Misc >Next Key Priority	page 157
WIPE (Independent key transition type selection button (standard type))	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select	page 309
DME (Independent key transition type selection button (standard type))	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select	page 350
K-SS STORE	Snapshot >Key Snapshot >XX	Chapter 14 (Volume 2)

a) Including the key delegation buttons of the transition control block (standard type).

Independent key transition control block (simple type) ^{a)}

Buttons	Menus	See
WIPE	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select	page 309
DME	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select	page 350
SHIFT	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >XX - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >XX	page 207

a) The menu to be recalled depends on the setup of the key assignment.

Flexi Pad control block (standard type)

Buttons	Menus	See
WIPE	M/E-1, 2, 3, 4, PGM/PST >Wipe >Main Pattern	page 283
DME	M/E-1, 2, 3, 4, PGM/PST >DME Wipe >XX	page 339
SNAPSHOT	Snapshot >Snapshot >XX	Chapter 14 (Volume 2)
EFF	Effect >Effect 1-99 >XX	Chapter 13 (Volume 2)
SHOTBOX	Shotbox >Register >Store/Recall	Chapter 15 (Volume 2)
MCRO	Macro >Register >XX	Chapter 16 (Volume 2)

Key control block ^{a)}

Buttons	Menus	See
KEY1	- M/E-1, 2, 3, 4 >Key1 >XX - PGM/PST >DSK1 >XX	page 207
KEY2	- M/E-1, 2, 3, 4 >Key2 >XX - PGM/PST >DSK2 >XX	
KEY3	- M/E-1, 2, 3, 4 >Key3 >XX - PGM/PST >DSK3 >XX	
KEY4	- M/E-1, 2, 3, 4 >Key4 >XX - PGM/PST >DSK4 >XX	
KEY5	- M/E-1, 2, 3, 4 >Key5 >XX - PGM/PST >DSK5 >XX	
KEY6	- M/E-1, 2, 3, 4 >Key6 >XX - PGM/PST >DSK6 >XX	
KEY7	- M/E-1, 2, 3, 4 >Key7 >XX - PGM/PST >DSK7 >XX	
KEY8	- M/E-1, 2, 3, 4 >Key8 >XX - PGM/PST >DSK8 >XX	
LUM	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type	page 208
LIN		
CVK		
PTN		
CRK	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	page 214

a) The menu recalled depends on which of the M/E delegation buttons and key delegation buttons are selected in the key control block.

Numeric keypad control block

Buttons	Menus	See
EFF	- Effect >Effect 1-99 >XX ^{b)} - Effect >Master Timeline >Store ^{c)}	Chapter 13 (Volume 2)
SNAPSHOT	- Snapshot >Snapshot >XX ^{b)} - Snapshot >Master Snapshot >Store ^{c)}	Chapter 14 (Volume 2)
SHOTBOX	Shotbox >Register >Store/Recall	Chapter 15 (Volume 2)
MCRO	Macro >Register >XX	Chapter 16 (Volume 2)
TRANS RATE ^{a)}	Misc >Transition	page 170
STORE RCALL	Key Frame >Region Select ^{d)}	Chapter 13 (Volume 2)

- a) The menu recalled depends on which of the M/E-1 to M/E-4 banks and PGM/PST bank the numeric control block is delegated to.
- b) When other than [MASTR] is selected with the region selection buttons.
- c) When [MASTR] is selected with the region selection buttons.
- d) When the [SNAPSHOT] button or [EFF] button is set to On, or lit green.

Downstream key control block ^{a)}

Buttons	Menus	See
DSK1	- M/E-1, 2, 3, 4 >Key1 >XX - PGM/PST >DSK1 >XX	page 207
DSK2	- M/E-1, 2, 3, 4 >Key2 >XX - PGM/PST >DSK2 >XX	
DSK3	- M/E-1, 2, 3, 4 >Key3 >XX - PGM/PST >DSK3 >XX	
DSK4	- M/E-1, 2, 3, 4 >Key4 >XX - PGM/PST >DSK4 >XX	
WIPE	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select	page 309
DME	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >Pattern Select	page 350
K-SS STORE ^{b)}	Snapshot >Key Snapshot >XX	Chapter 14 (Volume 2)

- a) The menu recalled depends on which of keys 1 to 8 the downstream key control block is delegated to.
- b) Recalling is possible only when the [K-SS] button is On.

Auxiliary bus control block

Buttons	Menus	See
FMS1, FMS2	Frame Memory >Still >Freeze/Store	page 380
FM1 to 8 signals assigned buttons	Frame Memory >Still >Recall	page 383
Color Bkgd1 signal assigned button	Color Bkgd >Color Bkgd1	page 420
Color Bkgd2 signal assigned button	Color Bkgd >Color Bkgd2	
CCR1 signal assigned button	CCR >CCR1 >XX	page 445
CCR2 signal assigned button	CCR >CCR2 >XX	

Device control block (trackball or joystick)

Buttons	Menus	See
DME1 to DME8 ^{a)}	DME >XX	Chapter 11 (Volume 2)
DEV1 to DEV12 assigned buttons	- Device >DDR/VTR >Cueup & Play ^{b)} - Device >DDR/VTR >Timeline ^{c)}	Chapter 12 (Volume 2)
FM1CLIP to FM8CLIP assigned buttons	Frame Memory >Clip >Recall	page 393
K1RSZ to K8RSZ ^{d)}	- M/E-1, 2, 3, 4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Processed Key - PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Processed Key	page 260

a) When the three-dimensional transformation operation mode is enabled.

b) When the [MENU] button is Off.

c) When the [MENU] button is On.

d) When the resizer control mode is enabled.

Device control block (search dial)

Buttons	Menus	See
DEV1 to DEV12	- Device >DDR/VTR >Cueup & Play ^{a)} - Device >DDR/VTR >Timeline ^{b)}	Chapter 12 (Volume 2)
FM1CLIP to FM8CLIP assigned buttons	Frame Memory >Clip >Recall	—

a) When the [TIMELINE] button is Off.

b) When the [TIMELINE] button is On.

Downstream key/fade-to-black control block

Buttons	Menus	See
DSK1, DSK2	PGM/PST >DSK1, 2 >XX ^{a)}	page 207

a) When a key other than DSK1 or DSK2 is assigned, the menu for the corresponding key appears.

Transition control block and Flexi Pad control block (simple type)

Buttons	Menus	See
KEY1 (DSK1)	- M/E-1, 2, 3, 4 >Key1 >XX - PGM/PST >DSK1 >XX	page 207
KEY2 (DSK2)	- M/E-1, 2, 3, 4 >Key2 >XX - PGM/PST >DSK2 >XX	
WIPE	- M/E-1, 2, 3, 4 >Wipe >Main Pattern - PGM/PST >Wipe >Main Pattern	page 283
DME	- M/E-1, 2, 3, 4 >DME Wipe >XX - PGM/PST >DME Wipe >XX	page 339
FM1CLIP to FM8CLIP assigned buttons	- M/E1, 2, 3, 4 >Misc >Clip Transition - PGM/PST >Misc >Clip Transition	

Transition control block and Flexi Pad control block (simple type)

Buttons	Menus	See
SNAPSHOT	Snapshot >Snapshot >XX	Chapter 14 (Volume 2)
MCRO ^{a)}	Macro >Register >XX	Chapter 16 (Volume 2)

a) When the button is assigned to macro function in the Setup menu.

Multifunction Flexi Pad control block

Buttons	Menus	See
WIPE	M/E-1, 2, 3, 4, PGM/PST >Wipe >Main Pattern	page 283
DME WIPE	M/E-1, 2, 3, 4, PGM/PST>DME Wipe>xxx ^{a)}	page 339
SNAPSHOT	When the [MSTR] button is On. Snapshot>Master Snapshot>Store	Chapter 14 (Volume 2)
	When the [MSTR] button is Off Snapshot>Snapshot>xxx ^{a)}	
EFF	When the [MSTR] button is On Effect>Master Timeline>Store	Chapter 13 (Volume 2)
	When the [MSTR] button is Off Effect>Effect 1-99>xxx ^{a)}	
SHOTBOX	Shotbox>Register>Store/Recall	Chapter 15 (Volume 2)
MCRO	Macro>Register>xxx ^{a)}	Chapter 16 (Volume 2)
TRANS RATE	Misc>Transition	page 434
KEY SS	Snapshot>Key Snapshot>xxx ^{a)}	Chapter 14 (Volume 2)

Buttons		Menus	See
KEY ADJ >	KEY1	- M/E1, 2, 3, 4 >Key1 >xxx^{a)} - PGM/PST >DSK1 >xxx^{a)}	page 207
	KEY2	- M/E1, 2, 3, 4 >Key2 >xxx^{a)} - PGM/PST >DSK2 >xxx^{a)}	
	KEY3	- M/E1, 2, 3, 4 >Key3 >xxx^{a)} - PGM/PST >DSK3 >xxx^{a)}	
	KEY4	- M/E1, 2, 3, 4 >Key4 >xxx^{a)} - PGM/PST >DSK4 >xxx^{a)}	
	KEY5	- M/E1, 2, 3, 4 >Key5 >xxx^{a)} - PGM/PST >DSK5 >xxx^{a)}	
	KEY6	- M/E1, 2, 3, 4 >Key6 >xxx^{a)} - PGM/PST >DSK6 >xxx^{a)}	
	KEY7	- M/E1, 2, 3, 4 >Key7 >xxx^{a)} - PGM/PST >DSK7 >xxx^{a)}	
	KEY8	- M/E1, 2, 3, 4 >Key8 >xxx^{a)} - PGM/PST >DSK8 >xxx^{a)}	
LUM LIN WIPE PTN		M/E-1 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	page 208
		M/E-2 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
		M/E-3 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
		M/E-4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
		PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type	
		M/E-1 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
	CRK	M/E-1 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	page 211
		M/E-2 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
		M/E-3 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
		M/E-4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
		PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	

Buttons		Menus	See
KEY SS	KEY1	• M/E1, 2, 3, 4 >Key1 >xxx^{a)} • PGM/PST >DSK1 >xxx^{a)}	page 207
	KEY2	• M/E1, 2, 3, 4 >Key2 >xxx^{a)} • PGM/PST >DSK2 >xxx^{a)}	
	KEY3	• M/E1, 2, 3, 4 >Key3 >xxx^{a)} • PGM/PST >DSK3 >xxx^{a)}	
	KEY4	• M/E1, 2, 3, 4 >Key4 >xxx^{a)} • PGM/PST >DSK4 >xxx^{a)}	
	KEY5	• M/E1, 2, 3, 4 >Key5 >xxx^{a)} • PGM/PST >DSK5 >xxx^{a)}	
	KEY6	• M/E1, 2, 3, 4 >Key6 >xxx^{a)} • PGM/PST >DSK6 >xxx^{a)}	
	KEY7	• M/E1, 2, 3, 4 >Key7 >xxx^{a)} • PGM/PST >DSK7 >xxx^{a)}	
	KEY8	• M/E1, 2, 3, 4 >Key8 >xxx^{a)} • PGM/PST >DSK8 >xxx^{a)}	


a) “xxx” represents the last accessed page of the relevant menu.

Displaying a Menu

To display, for example, the M/E-1 >Key1 >Type menu, use either of the following operations.

- Press the top menu selection button [M/E 1], then press the VF1 ‘Key1’ button and the HF1 ‘Type’ button in that order.
- Press the menu page number button in the upper left corner of the menu screen to display the top menu window, then enter the page number of the M/E-1 >Key1 >Type menu, which is 1111, and press the [Enter] button. *(For details of the menu page numbers, see “Menu Tree” (page 508).)*

The M/E-1 >Key1 >Type menu appears in the menu display as follows.

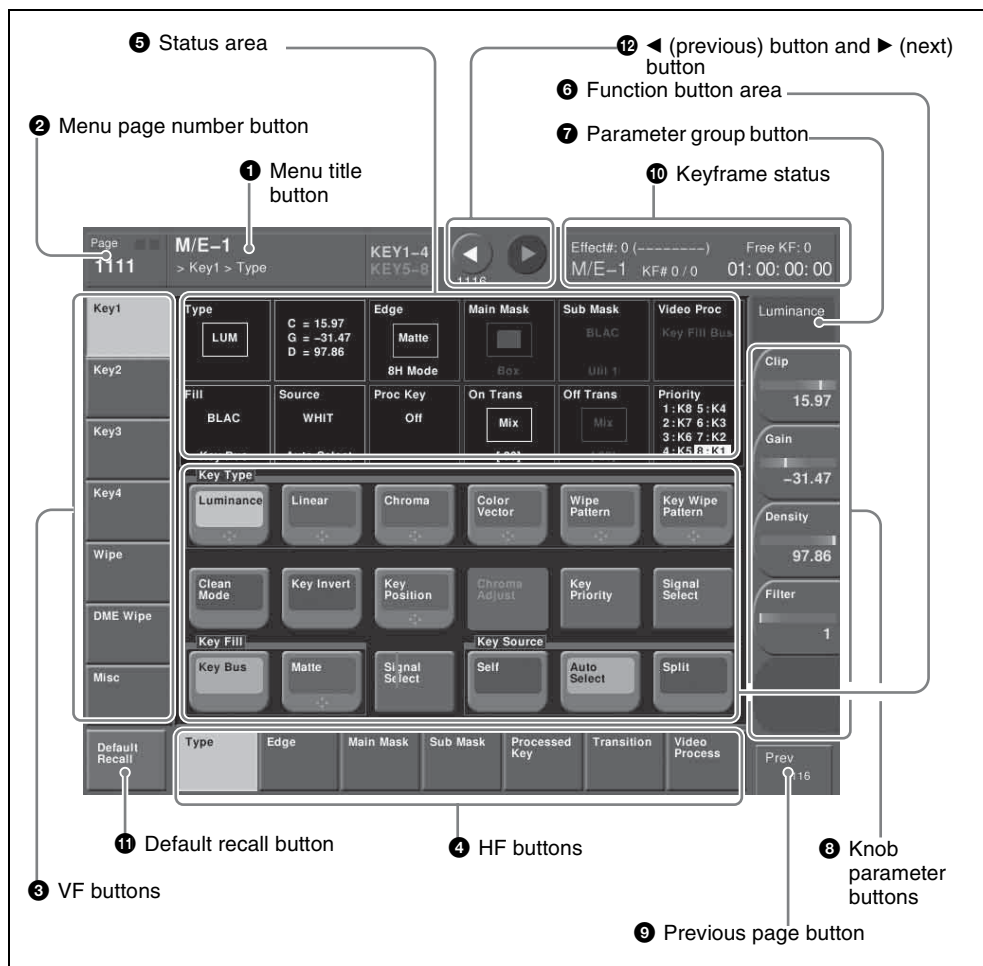

M/E-1 >Key1 >Type menu

Interpreting the Menu Screen

The menu screen consists of the following principal parts.

When buttons on the screen are lit or represented in a depressed state, this indicates that the corresponding item or function is selected (set on).

1 Menu title button

This shows the title of the menu screen. You can set different colors for the main menu site and subsidiary menu site (*see page 129*).

Switching the VF buttons between the Key1 to Key4 and Key5 to Key8 button displays

Switch the displays with the [KEY1-4] and [KEY5-8] menu title buttons.




When [KEY1-4] is lit, Key1 to Key4 buttons appear in VF1 to VF4.

When [KEY5-8] is lit, Key5 to Key8 buttons appear in VF1 to VF4.

2 Menu page number button

This shows the menu screen page number. When you press this button, the top menu window (*see page 126*) appears. You can enter the page number for the desired menu, or press one of the top menu selection buttons in the window, to display that menu.

While the system is accessing the hard disk, the indicator lights red.

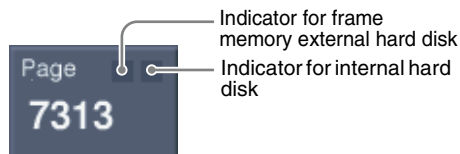

Notes

When the indicator is lit, do not power off the switcher, or disconnect the USB cable ¹⁾.

1) When an external hard disk drive is connected

3 VF buttons


These indicate the larger subdivisions of this menu.

Depending on the selected item, the menu screen contents including the HF button indications change.

4 HF buttons

These indicate the items within the menu. Depending on the selected item, the menu indications change.

Depending on the function, if any one is on, the status is shown by an orange bar, as in the following figure.



5 Status area

This shows the status of the settings items controlled by the selected menu.

An orange frame appears around the parameter area relating to the displayed menu. For each of the twelve areas, pressing the display jumps to the related menu.

6 Function button area

This shows the functions which can be operated in the currently selected menu by means of buttons.

Each function button corresponds to a function which can be set in the currently selected menu. Press it to enable the function, to display a parameter group and adjust the parameters with the knobs, or to execute the function.

These buttons are in groups by function. In the screen example shown on the previous page, the [Key Bus] and [Matte] function buttons constitute the <Key Fill> group.

7 Parameter group button

This displays parameter group names for which the knobs can make adjustments, the current parameter setting page number, and the total number of the parameter setting pages. (Example: Color Vector 1/2)

When there are more than five parameters within the same parameter group, press this button to display the sixth and subsequent

parameters, which can then be controlled by the knobs.

8 Knob parameter buttons

These show the parameters currently controlled by the knobs and their values. Pressing one of these buttons displays the numeric keypad window (*see page 123*), and you can then enter a new value for the corresponding parameter with the numeric keypad.

9 Previous page button

This shows the page number of the previously displayed menu screen. Press it to go back to that page. When the indication [Parent] appears, this displays the parent directory.

10 Keyframe status

This shows the keyframe status of the reference region. Pressing this button switches the menu screen as follows.

When a menu other than the Key Frame menu is currently shown: The menu screen switches to the Key Frame menu.

When the Key Frame menu is currently shown: The menu screen switches to the menu that was on the screen immediately before the Key Frame menu.

In some parts of menus such as the File menu, this functions as a “Region selection area,” for selecting the region to which operations apply.

11 Default recall button

This only appears in those menus for which the default recall function is available. (*See “Menus allowing a return to default settings” (page 118).*)

Press this button, turning it on, then press a VF button or knob parameter button to return the settings to their default values, in the following groupings.

- Function grouping: the functions within an HF menu under the VF button
- Knob parameters (parameters currently controlled by the knobs)

12 ◀ (previous) button and ▶ (next) button

The ◀ button returns to the previous menu. Press the ▶ button to continue to the next menu.

Menu Operations

The method of menu operation is basically the same when using a mouse with an external monitor, but with mouse clicks in place of button presses. There is no difference in the menu control block operation described here.

However, since the monitor has no knobs for adjusting the parameters in the menu control block, *for details of operations corresponding to these knob operations, see the section below, “Operation With a Mouse” (page 122).*

Selecting an item

1 Press the VF button (1 to 7) for the desired group of items.

The HF button (1 to 7) indications change to show the items within the selected group.

2 Press the HF button for the desired item.

The indications in the status area and function button area change, and you can now make various changes to the selected item.

Selecting a function

Press the appropriate function button within the function button area.

Shape and color of the button

Pressing the button turns it on, and it lights, showing the state.



- Lit pale blue:** The function is enabled, and the parameters can currently be adjusted with the knobs.
- Lit orange:** The function is enabled.
- Lit purple:** Execution button. Pressing the button immediately executes the function. (Example: [Auto Start] button in the Chroma Adjust menu)



Pressing a button of this type displays a further menu, allowing more detailed

Example: When wipe pattern key is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00
3	Density	Key density	0.00 to 100.00

When the [MENU] button in the device control block is lit, you can use the trackball and Z-ring to control the parameters.

- Move the trackball on the x-axis to control the parameter for knob 1 or on the y-axis to control the parameter for knob 2. Moving up or to the right increases the parameter value, and moving down or to the left decreases the parameter value.

settings. (Example: [Chroma Adjust] button in the Type menu)

Setting parameters



This marking on a function button indicates that there are parameters which can be adjusted with the knobs.

Pressing this function button assigns parameters to the knobs.

You can set the parameter values by either of the following methods.

- Turn the knob (1 to 5) corresponding to the parameter, to adjust the value.
- Press the knob parameter buttons (1 to 5) corresponding to the parameter. This displays the numeric keypad window allowing you to enter the desired value.

In the description of specific setting procedures, the knob adjustment is described, as follows.

- Use the Z-ring to adjust the parameter for knob 3. Turning clockwise increases the parameter value, and turning counterclockwise decreases the parameter value.

Going back to the previous menu

To return to the last displayed menu, press the previous page button.

Returning to default state in function groupings

- 1 Press the [Default Recall] button, turning it on.

This enters the menu default recall mode.

- 2 Press the VF button you want to return to the default state.

This returns the settings within the function grouping to the default state, and the [Default Recall] button goes off.

Notes

The default state of the settings depends on the setting of the initial status mode, set in the Setup menu of system setup, as follows.

User: The state when [Initial Status Define] is executed.

Factory: Factory default settings

Returning knob parameters to default state

- 1 Press the [Default Recall] button, turning it on.

This enters the menu default recall mode.

- 2 Press the knob parameter button you want to return to the default state.

This returns the knob parameter value to the default state, and the [Default Recall] button goes off.

Notes

- In the following table, “Menus allowing a return to default settings,” the default recall function does not apply to some knob parameters.

For details, see the table, “Knob parameters to which default recall does not apply” on page 120.

- The default recall function does not return the horizontal (H) and vertical (V) position settings to their default state individually. Returning the horizontal (H) position to its default state also returns the vertical (V) position to its default state automatically, and vice versa.

For details, see the table, “Knob parameters subject to restriction on default recall” on page 122.

Menus allowing a return to default settings

Top menu selection button name	VF number (HF number)	Menu number	Menu name
M/E1	VF1 ^{a)}	1110-series/1510-series	Key1/Key5 ^{b)}
	VF2 ^{a)}	1120-series/1520-series	Key2/Key6 ^{b)}
	VF3 ^{a)}	1130-series/1530-series	Key3/Key7 ^{b)}
	VF4 ^{a)}	1140-series/1540-series	Key4/Key8 ^{b)}
	VF5	1150-series	Wipe ^{b)}
	VF6	1160-series	DME Wipe ^{b)}
	VF7	1170-series	Misc ^{b)}

Top menu selection button name	VF number (HF number)	Menu number	Menu name
M/E2	VF1 ^{a)}	1210-series/1610-series	Key1/Key5 ^{b)}
	VF2 ^{a)}	1220-series/1620-series	Key2/Key6 ^{b)}
	VF3 ^{a)}	1230-series/1630-series	Key3/Key7 ^{b)}
	VF4 ^{a)}	1240-series/1640-series	Key4/Key8 ^{b)}
	VF5	1250-series	Wipe ^{b)}
	VF6	1260-series	DME Wipe ^{b)}
	VF7	1270-series	Misc ^{b)}
M/E3	VF1 ^{a)}	1310-series/1710-series	Key1/Key5 ^{b)}
	VF2 ^{a)}	1320-series/1720-series	Key2/Key6 ^{b)}
	VF3 ^{a)}	1330-series/1730-series	Key3/Key7 ^{b)}
	VF4 ^{a)}	1340-series/1740-series	Key4/Key8 ^{b)}
	VF5	1350-series	Wipe ^{b)}
	VF6	1360-series	DME Wipe ^{b)}
	VF7	1370-series	Misc ^{b)}
M/E4	VF1 ^{a)}	8110-series/8510-series	Key1/Key5 ^{b)}
	VF2 ^{a)}	8120-series/8520-series	Key2/Key6 ^{b)}
	VF3 ^{a)}	8130-series/8530-series	Key3/Key7 ^{b)}
	VF4 ^{a)}	8140-series/8540-series	Key4/Key8 ^{b)}
	VF5	8150-series	Wipe ^{b)}
	VF6	8160-series	DME Wipe ^{b)}
	VF7	8170-series	Misc ^{b)}
P/P	VF1 ^{a)}	1410-series/1810-series	DSK1/DSK5 ^{b)}
	VF2 ^{a)}	1420-series/1820-series	DSK2/DSK6 ^{b)}
	VF3 ^{a)}	1430-series/1830-series	DSK3/DSK7 ^{b)}
	VF4 ^{a)}	1440-series/1840-series	DSK4/DSK8 ^{b)}
	VF5	1450-series	Wipe ^{b)}
	VF6	1460-series	DME Wipe ^{b)}
	VF7	1470-series	Misc ^{b)}
COLOR BKGD	VF1	2210	Color Bkgd 1 ^{b)}
	VF2	2220	Color Bkgd 2 ^{b)}
CCR	VF1	2410-series	CCR1 ^{b)}
	VF2	2420-series	CCR2 ^{b)}

Top menu selection button name	VF number (HF number)	Menu number	Menu name
FRAME MEM	VF1	2510-series	Still ^{c)}
	VF2	2520-series	Clip ^{c)}
	VF3	2530-series	Reposition/Lock ^{c)}
	VF4	2540-series	File ^{c)}
	VF5	2550-series	Folder ^{c)}
AUX	VF1	2311	Aux Bus ^{c)}
DME	VF1	4110-series	Edge ^{c)}
	VF2	4120-series	Video Modify ^{c)}
	VF3	4131	Freeze ^{c)}
	VF4	4141	Non-Linear ^{c)}
	VF5	4150-series	Light/Trail ^{c)}
	VF6	4160-series	Input/Output ^{c)}
	VF7	4170-series	Enhanced Video Modify ^{b)}
GLB EFF	VF1	4210-series	Ch1–Ch4 ^{c)}
	VF2	4220-series	Ch5–Ch8 ^{c)}
KEY FRAME	(HF3)	6113	Path ^{c)}

- a) VF1 to VF4 are shared between Key1 (DSK1) to Key4 (DSK4) and Key5 (DSK5) to Key8 (DSK8).
- b) Menu to return to the default settings for particular functions or for particular knob parameters *(for the relevant knob parameters, see page 120)*
- c) Menu to return to the default settings for particular knob parameters *(for the relevant knob parameters, see page 120)*

Knob parameters to which default recall does not apply

Menu number ^{a)}	Menu name	Button name	Knob	Parameter
1111	Type	[Luminance] and [Linear] in <Key Type> group	4	Filter
		[Color Vector] in <Key Type> group	1 2 (Parameter group [2/2])	Y Filter, C Filter
1111.1	Type >CRK Adjust	[Key Active]	5	Filter
		[Color Cancel] in <Color Cancel> group	5	Filter
1112.1	Edge >Matte	[Mix Color] in <Edge Matte> group	5	Pattern
		[Multi]	3	Invert Type

Knob parameters to which default recall does not apply

Menu number ^{a)}	Menu name	Button name	Knob	Parameter
1113	Main Mask	[Pattern]	5	Pattern
		[Multi]	3	Invert Type
1116	Transition	[Wipe] in <ON Transition Type> group	1 5	Transition Rate Pattern
		[Wipe] in <OFF Transition Type> group	1 5	Transition Rate Pattern
		[Key Blink] and [Edge Blink] in <Blink> group	1	Blink Rate
		[Mix] in <Transition Type> group	1	Transition Type
		[Wipe] in <Transition Type> group	1 5	Transition Rate Pattern
1116.1	Transition > Wipe Adjust	[Multi]	3	Invert Type
		[H] and [V] in <Pairing> group	1	Width
		[H], [V], and [Fringe] in <Modulation> group	4	Shape
1154	Edge/Direction	[Split] in <Edge> group	1	Split No
1154.1	Edge/Direction > Matte Adjust	[Mix Color] in <Edge Matte> group	3	Pattern
		[Multi]	3	Invert Type
1155	Main Modify	[H] and [V] in <Pairing> group	1	Width
		[H], [V], and [Fringe] in <Modulation> group	4	Shape
1164	Edge/Direction	[Independent Trans Rate] in <Pattern Limit Release> group	1	Transition Rate
1171	Transition	[Mix], [Nam], [Super Mix], [Preset Color Mix], [Wipe], [DME Wipe], and [FTB] in <Transition Type> group	1	Transition Rate

a) The menu numbers shown by way of example are those for M/E-1: the same applies for M/E-2, M/E-3, M/E-4, and P/P. Also, content applying to Key1 applies equally to Key2 to Key8.

Menu number	Menu name	Button name	Knob	Parameter
1111.1 ^{a)}	Type >CRK Adjust	[Sample Mark] in the <Auto> group	1 2	Position H Position V
1112.1 ^{a)}	Edge >Matte Adjust	[Position]		
1113 ^{a)}	Main Mask	[Position]		
1116.1 ^{a)}	Transition >Wipe Adjust	[Position]		
1116.3 ^{a)}	Transition >DME Wipe Adjust	[Position]	1 2	H V
1154.1 ^{a)}	Edge Direction >Matte Adjust	[Position]	1 2	Position H Position V
1155 ^{a)}	Main Modify	[Position] in the <Position> group		
1155.1 ^{a)}	Main Modify >Multi Adjust	[Position]		
1156 ^{a)}	Sub Modify	[Position] in the <Position> group		
1156.1 ^{a)}	Sub Modify >Multi Adjust	[Position]		
2122.2	Composite >Pattern Adjust	[Position]	1 2	Position H Position V
2131	Reposition	[Normal]		
		[Black&White]		
2210	Color Bkgd1 ^{b)}	[Position]		
2412.1 ^{c)}	Primary CCR >Mask1 Adjust ^{d)}	[Position]		
4116	DME >Edge >Wipe Crop	[Position/Size]	5	Pattern
4127	DME >Video Modify >Mask	[Position/Size]		

a) The menu numbers shown by way of example are those for M/E-1: the same applies to M/E-2, M/E-3, M/E-4, and P/P. Equally, content applying to Key1 applies equally to Key2, Key3, and Key4.

b) The same applies to Color Bkgd2.

c) The menu numbers shown by way of example are those for CCR1: the same applies to CCR2.

d) The sample applies to Mask2 Adjust.

Operation With a Mouse

If you display the menus in an external monitor, operated with a mouse, then you click the mouse instead of pressing a button

as described in the previous section, “Menu Operations.”

However, in the following cases there are special operations with a mouse.

To set parameters

To adjust the value of a knob setting parameter button with the mouse, you can use either of the following three methods.

- Position the cursor over the knob setting parameter button for which you want to adjust the value, and turn the mouse wheel.
- Position the cursor over the knob setting parameter button for which you want to adjust the value, then hold down the right mouse button, and drag the bar showing the setting to the desired value.
- Position the cursor over the knob setting parameter button for which you want to adjust the value, then click the left mouse button to open the numeric keypad window by which you can input the desired value.


To scroll a list

Position the cursor over the list you want to scroll, and turn the mouse wheel.

In the setup menus you can select the direction of mouse wheel rotation that increases the setting value. And you can also switch the functions of the right and left mouse buttons.

For details, see Chapter 19 “Control Panel Setup (Panel)” (Volume 3).

Numeric keypad window

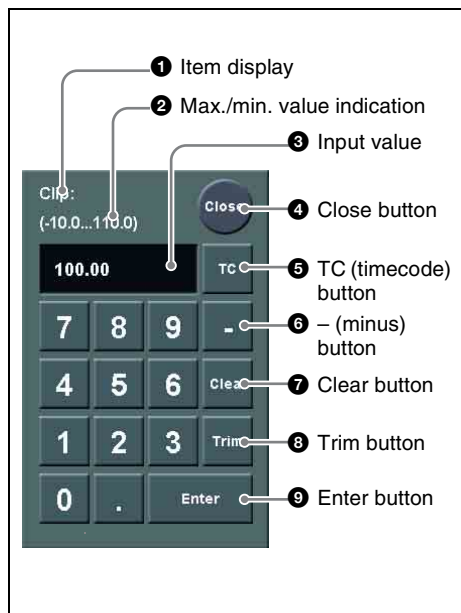

1 Item display

This is the name of the parameter being set in the numeric keypad window.

2 Max./min. (maximum/minimum) value indication

This shows the maximum and minimum settings of the parameter.

3 Input value

This is the value being input into the numeric keypad window.

4 Close button

This closes the numeric keypad window.

5 TC (timecode) button

When the numeric keypad window is opened for a setting requiring a timecode value to be entered, this button appears in a depressed state.

You can enter a timecode value in the range that depends on the signal format (*see*

“Setting the Signal Format (Format Menu)” in Chapter 18 (Volume 3)) as follows:

00:00:00:00 to 23:59:59:nn,
where nn = (number of frames per second) – 1.

⑥ – (minus) button

This toggles the sign of the entered value.
When it is pressed, the value is negative.

⑦ Clear button

This clears the input. It does not change the parameter setting.

⑧ Trim button

After entering the difference from the current value, press this button to confirm the numeric input.

⑨ Enter button


This confirms the entered value.
If correctly set, the numeric keypad window closes.
If not correctly set, the input display changes color.

Keyboard window

Notes

Except when changing source names, the following characters cannot be used.

space, \, /, :, ;, , (comma), . (dot), <, >, *, ?, " , |

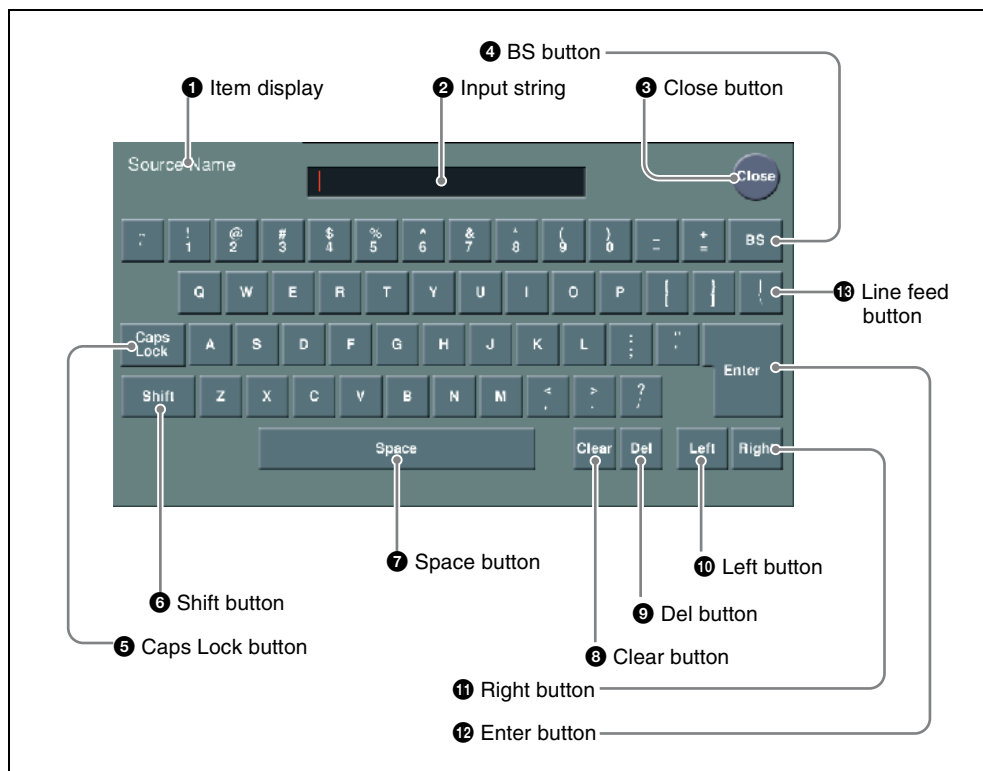

1 Item display

This is the name of the parameter being set in the keyboard window.

2 Input string

This is the character string being input in the keyboard window.

3 Close button

This closes the keyboard window.

4 BS button

This clears the character immediately before the cursor in the input string.

5 Caps Lock button

This enables input of capital letters only.

Notes

You can enter items to be displayed on the control panel LCD using lowercase letters, but these will be converted to capitals for display.

MS-DOS does not distinguish case in filenames, and therefore you are recommended to enter filenames in capital letters.

6 Shift button

This selects the characters on the shift side of the keys. The shift is released when you enter a character.

7 Space button

This enters a space character.

8 Clear button

This clears all of the characters in the input string.

9 Del button

This clears the character immediately after the cursor in the input string.

10 Left button

This moves the cursor one character to the left in the input string.

11 Right button

This moves the cursor one character to the right in the input string.


12 Enter button

This sets the input string as a parameter value, and closes the keyboard window if the value has been entered correctly. If the value has not been entered correctly, the display color changes.

13 Line feed button

After pressing the Shift button, press this button to feed a line. The input string shows “|”.

Function of the top menu window

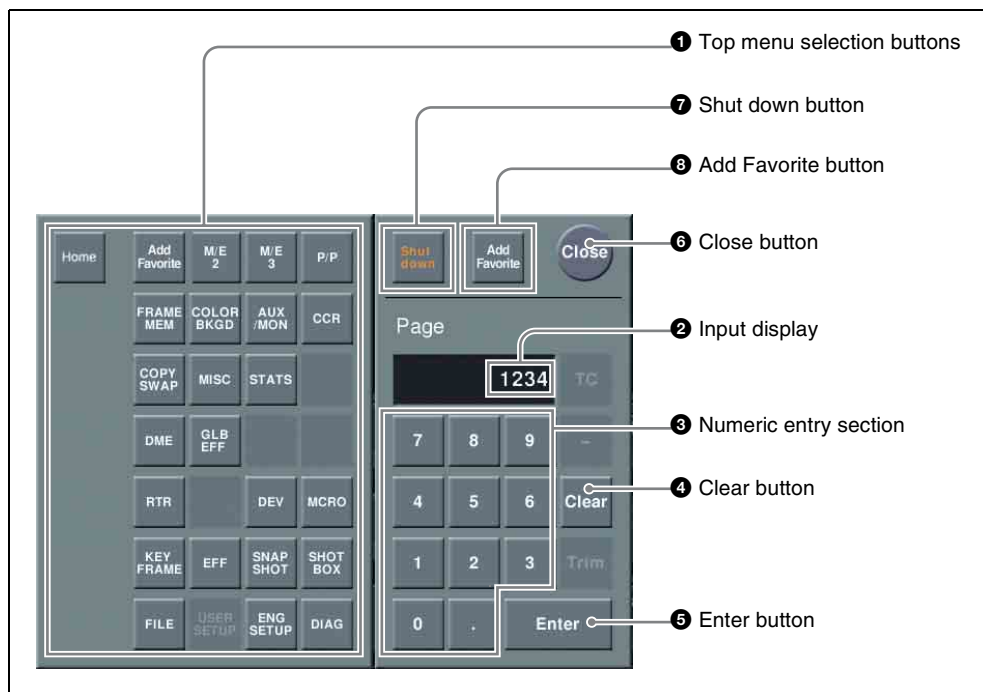

1 Top menu selection buttons

These are the same as the top menu selection buttons in the menu control block. Pressing one of these buttons closes the top menu window and displays the selected menu in the menu display.

2 Input display

This shows the page number entered with the numeric entry section.

3 Numeric entry section

Enter a page number.

4 Clear button

Press this to clear the input display.

5 Enter button

Pressing this button without entering a page number closes the top menu window with the current menu remaining in the menu display.

If you enter a page number then press this button, this confirms the value in the input display. If it is a correct page number, the top menu window closes, and the menu display shows the new menu. If it is not correctly set, the input display changes color.

6 Close button

Press this to close the top menu window.

7 Shut down button

Shuts down the menus.

Notes

Be sure to shut down the menus before powering off the control panel.

Use of the color palette window

When a parameter is assigned to the knobs as a combination of luminance, saturation,

Shutting down the menus

- 1** In the menu screen, press the menu page number button to open the top menu window.

For details of the top menu window, see “Function of the top menu window” (page 126).

- 2** Press [Shut down].

A confirmation message appears.

- 3** Press [Yes].

This shuts down the menu system after a while, and the menu display changes to black. Now power off the system.

To restart menu operations

Power on the control panel once more.

8 Add Favorite button

Pressing this button allows the currently displayed menu to be registered to the Shortcut menu.


Registering a menu to the Shortcut menu

- 1** In the Home >Favorites >Shortcut menu, select the desired group.

- 2** Display the menu you want to register, and then press the [Add Favorite] button.

The currently displayed menu is automatically registered to a blank button.

and hue, pressing a knob parameter button displays a color palette window.

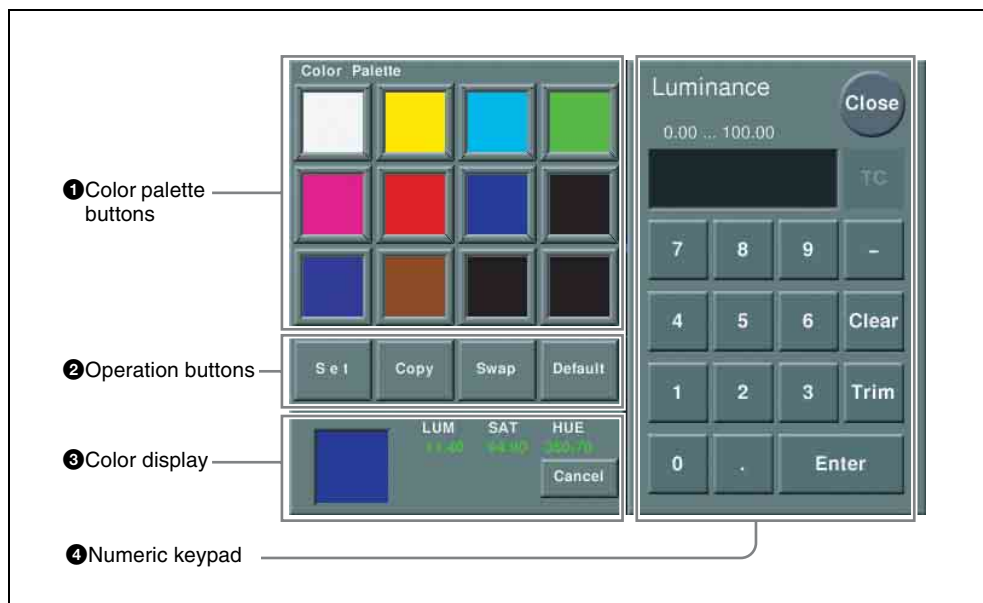

① Color palette buttons

Press one of these to enter the corresponding color in the display. By default the following settings are available.

First row: white, yellow, cyan, green

Second row: magenta, red, blue, black

Third row: all black

② Operation buttons

Set: If you press any color palette button with this button held down, the color shown in the color display is assigned to the color palette button.

Copy: If you press a color palette button with this button held down, the color is used as the source for copying. Next press a different color palette button to copy to that button.

Swap: If you press two color palette buttons in sequence with this button held down, the two colors are swapped.

Default: If you press any color palette button with this button held down, the

color palette button is set to the default color.

③ Color display

This shows the setting color, and the parameters (LUM, SAT, and HUE).

By adjusting the parameters with the knobs, you can create any color.

If a parameter value is outside the permitted range for RGB (0 to 255), the indication “Illegal Color” appears, and this is adjusted to a value in range.

Cancel: Pressing this button returns to the state when the color palette window was opened.

④ Numeric keypad

Use this to enter numeric values for parameters.

For details of use, see page 123.

Switching Between the Main Menu Site and Subsidiary Menu Site

For menu transitions, you can store two separate versions in the main and subsidiary menu sites.

By switching sites, and pressing the ◀ button and the ▶ button you can trace the history in each menu.

To switch the subsidiary menu site on and off

Assign [SUB MENU SITE] to a menu control block top menu selection button or user preference button. To switch to the subsidiary menu site, press this button, turning it on.

For details of the assignment operation, see “Assigning Functions to the Menu Control Block Top Menu and User Preference buttons” in Chapter 19 (Volume 3).

Shortcut Menu

Recalling a menu using the shortcut menu

- 1 In the Home menu, select VF2 ‘Favorites’ and HF1 ‘Shortcut.’

The following menu appears.



- 2 In the [Group Select] box, select the group.

The group buttons appear.

- 3 Press the button for the desired menu.


Creating a shortcut menu

Assign frequently used menus to buttons, to create a “Favorites” menu.

To create a menu group

- 1 In the Home menu, select VF2 ‘Favorites’ and HF1 ‘Shortcut.’

The following menu appears.

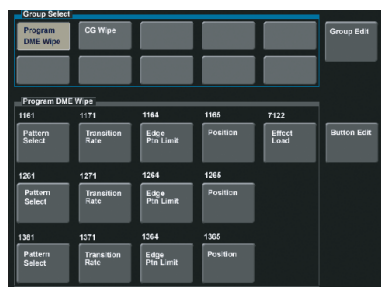

- 2 Press [Group Edit].

The following menu appears.



3 With the cursor, select the group name (in this case a blank button) for the operation.

4 Press [Rename].

A keyboard window appears.

5 Enter a group name (maximum 24 characters), and press Enter.

This confirms the group name.

To copy a menu group

1 In the Home >Favorites >Group Edit menu, press the button for the copy source group.

2 Press [Copy].

3 Press the button for the copy destination group.

4 Press [Paste].

This copies the menu group settings.

To delete menu group settings

1 In the Home >Favorites >Group Edit menu, select the group to be deleted.

2 Press [Clear].

A confirmation message appears.

3 Press [Yes].

This deletes the settings.

To register a menu on a button

You can register 15 buttons in one group.

1 In the Home >Favorites >Shortcut menu, press [Button Edit].



Menu No.



Button name

2 Move the cursor to the position where you want to display the button. To change the content of an already displayed button, press the button to select it.

3 Press [Page Set].

A page number input window appears.

4 Enter the page number for the menu you want to register.

5 Press [Rename].

A keyboard window appears.

6 Enter the button name (maximum 24 characters).

- 7** To change the button color, press [Color Set].

Button color samples appear.

- 8** Press the desired color.

This completes the assignment of the menu to the button.

- 9** Repeat steps **2** to **8** to complete the “Favorites” menu.

To copy button settings

- 1** In the Home >Favorites >Button Edit menu, press the copy source button to select it.

- 2** Press [Copy].

- 3** Press the copy destination button to select it.

- 4** Press [Paste].

This copies the button settings.

To delete button settings

In the Home >Favorites >Button Edit menu, press [Clear].

This deletes the button settings.

Notes

The shortcut menu settings are handled as part of the control panel setup. You can recall and save them in the same way as setup data.

To register a menu macro on a button

See “Recalling a Menu Macro Register and Executing a Menu Macro” in Chapter 16 (Volume 2).

To execute a menu macro with a button

See “Recalling a Menu Macro Register and Executing a Menu Macro” in Chapter 16 (Volume 2).




Chapter 3 Signal Selection and Transitions

Video Processing Flow

The switch from the current video stream (appearing on the corresponding program monitor) to a new video stream is referred to as a transition.

The following illustration shows the flow of operations for carrying out a transition on an M/E bank or the PGM/PST bank.



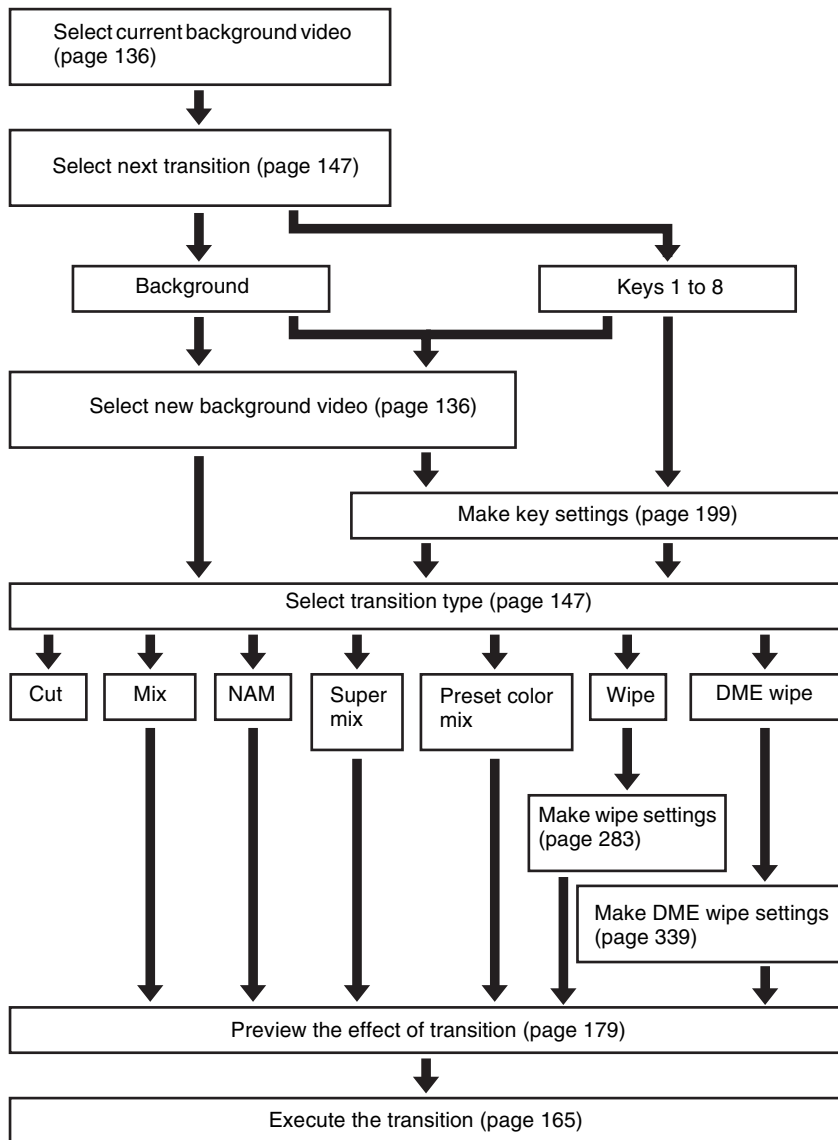

Chapter 3 Signal Selection and Transitions

The number of buttons in each cross-point row may be 16, 24, or 32, but here the description is of the 32-button case as an example.



Basics of Signal Selection

Each of the M/E banks, PGM/PST bank and auxiliary bus control block has 32 cross-point buttons and three reentry buttons (four in the case of the auxiliary bus control block).

These buttons are identified by numbers common to all of the banks and block, and a signal is assigned to each number.

The basis of signal selection is to select, in a cross-point button row, the cross-point button to which is assigned the desired signal.

Reentry buttons

To use the output of one M/E bank as background input to another bank, use the reentry buttons [M/E1], [M/E2], and [M/E3] (on the auxiliary bus control block, [M/E1], [M/E2], [M/E3], and [PGM]) in the cross-point control block of the destination bank.

For example, to feed the output from the M/E-1 bank as the background B input to M/E-2, in the M/E-2 cross-point control block, press the [M/E1] button in the background B row.

Notes

- To select M/E 4, it is necessary to assign M/E 4 to a button.

For details of the assignment, see “Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block” in Chapter 19 (Volume 3).

- For a 5M/E system, a maximum of four re-entry stages are possible. For other restrictions on re-entry, *see page 444*.

Bus Selection

Each row of 32 cross-point buttons is shared by multiple buses.

To assign a bus to the cross-point buttons in the auxiliary bus control block, press one of the AUX delegation buttons to select the bus.

Notes

When using the CCP-6224/6324, buses may be assigned with the cross-point button rows for keys 1 and 2 as the auxiliary bus control block.

The following table illustrates the correspondence between buses and cross-point button rows, and the delegation operations.



Bank	Bus name	Cross-point button row	Delegation operation
M/E-1, M/E-2, M/E-3, M/E-4 ^{a)}	Background A bus ^{b)}	Background A row	–
	Background B bus ^{b)}	Background B row	–
	Key 1 bus	Key 1 row	Turn off the dedicated [SHIFT] button, then turn off the [KEY3] button. ^{d)}
	Key 2 bus	Key 2 row	Turn off the dedicated [SHIFT] button, then turn off the [KEY4] button. ^{d)}
	Key 3 bus	Key 1 row	Turn off the dedicated [SHIFT] button, then turn on the [KEY3] button. ^{d)}
	Key 4 bus	Key 2 row	Turn off the dedicated [SHIFT] button, then turn on the [KEY4] button. ^{d)}
	Key 5 bus ^{e)}	Key 1 row	Turn on the dedicated [SHIFT] button, then turn off the [KEY3] button.
	Key 6 bus ^{e)}	Key 2 row	Turn on the dedicated [SHIFT] button, then turn off the [KEY4] button.
	Key 7 bus ^{e)}	Key 1 row	Turn on the dedicated [SHIFT] button, then turn on the [KEY3] button.
	Key 8 bus ^{e)}	Key 2 row	Turn on the dedicated [SHIFT] button, then turn on the [KEY4] button.

Bank	Bus name	Cross-point button row	Delegation operation
PGM/PST	Program bus ^{b)}	Program row	–
	Preset bus ^{b)}	Preset row	–
	DSK 1 bus	DSK 1 row	Turn off the dedicated [SHIFT] button, then turn off the [DSK3] button. ^{d)}
	DSK 2 bus	DSK 2 row	Turn off the dedicated [SHIFT] button, then turn off the [DSK 4] button. ^{d)}
	DSK 3 bus	DSK 1 row	Turn off the dedicated [SHIFT] button, then turn on the [DSK 3] button. ^{d)}
	DSK 4 bus	DSK 2 row	Turn off the dedicated [SHIFT] button, then turn on the [DSK 4] button. ^{d)}
	DSK 5 bus ^{e)}	DSK 1 row	Turn on the dedicated [SHIFT] button, then turn off the [DSK 3] button.
	DSK 6 bus ^{e)}	DSK 2 row	Turn on the dedicated [SHIFT] button, then turn off the [DSK 4] button.
	DSK 7 bus ^{e)}	DSK 1 row	Turn on the dedicated [SHIFT] button, then turn on the [DSK 3] button.
	DSK 8 bus ^{e)}	DSK 2 row	Turn on the dedicated [SHIFT] button, then turn on the [DSK 4] button.
M/E-1, M/E-2, M/E-3, M/E-4 ^{a)} , PGM/PST	Utility 1 bus	Background A row	When [UTIL] button mode is Hold, hold down the [UTIL] button
	Utility 2 bus	Background B row	
	DME external video bus	Key 1 row	Hold down the [UTIL] button
	DME utility 1 bus	Key 2 row	Hold down the [UTIL] button, and press the [KEY4] button, turning it off
	DME utility 2 bus		Hold down the [UTIL] button, and press the [KEY4] button, turning it on
Auxiliary bus control block ^{c)}	AUX1 to AUX48 buses	1st row, 2nd row	Turn on the appropriate buttons in accordance with the signal assignment made in the Setup menu.
	Frame memory source 1 and frame memory source 2 buses		



Bank	Bus name	Cross-point button row	Delegation operation
Auxiliary bus control block ^{c)}	DME 1 to DME 8 video buses	1st row, 2nd row	Turn on the appropriate buttons in accordance with the signal assignment made in the Setup menu.
	DME 1 to DME 8 key buses		
	Edit preview bus		
	M/E-1 UTILITY 1 and M/E-1 UTILITY 2 buses		
	M/E-2 UTILITY 1 and M/E-2 UTILITY 2 buses		
	M/E-3 UTILITY 1 and M/E-3 UTILITY 2 buses		
	M/E-4 UTILITY 1 and M/E-4 UTILITY 2 buses		
	P/P UTILITY 1 and P/P UTILITY 2 buses		
	M/E-1 Key 1 fill to M/E-1 Key 8 fill buses		
	M/E-1 Key 1 source to M/E-1 Key 8 source buses		
	M/E-2 Key 1 fill to M/E-2 Key 8 fill buses		
	M/E-2 Key 1 source to M/E-2 Key 8 source buses		
	M/E-3 Key 1 fill to M/E-3 Key 8 fill buses		
	M/E-3 Key 1 source to M/E-3 Key 8 source buses		
	M/E-4 Key 1 fill to M/E-4 Key 8 fill buses		
	M/E-4 Key 1 source to M/E-4 Key 8 source buses		
	DSK 1 fill to DSK 8 fill buses		
	DSK 1 source to DSK 8 source buses		
	M/E-1 external DME bus		
	M/E-2 external DME bus		
	M/E-3 external DME bus		

Bank	Bus name	Cross-point button row	Delegation operation
Auxiliary bus control block ^{c)}	M/E-4 external DME bus	1st row, 2nd row	Turn on the appropriate buttons in accordance with the signal assignment made in the Setup menu.
	P/P external DME bus		
	DME UTILITY 1 and DME UTILITY 2 buses		

- a) M/E-4 requires assignment.
b) Dual background bus mode (see below) can be selected.
c) An assignment to the delegation buttons is required in setup, to assign the bus for operations.
d) A dedicated [SHIFT] button operation is required when the dedicated [SHIFT] button operation mode is set in setup to “Key5-8 Select.” For other settings, a dedicated [SHIFT] button operation is not required.
e) Only valid when the dedicated [SHIFT] button operation mode is set in setup to “Key5-8 Select.” For other settings, assignment is not possible.

Dual background bus mode

In this mode, the shifted signal on the background A row can be selected on the key 1 row, and the shifted signal on the background B row can be selected on the key 2 row.

To switch this mode on and off, it is necessary to assign this function to the [PRE MCRO] button in the cross-point control block.

For details of the assignment operation, see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).

Notes

For the following switcher banks, dual background bus mode is not available.

- When set to “Dual M/E Assign”
- When M/E Config is set to “DSK”

AUX Panel-less Function

When using 24-column cross-point control blocks for the CCP-6224/CCP-6324 Control Panel, you can use the key 1 and key 2 rows as the auxiliary bus control block. This is called the panel-less function.

Preparations

Assign the function for switching to the AUX control mode to the [PRE MCRO] and [POST MCRO] buttons. Hereafter this button is called the [AUX CTRL] button.

In the source name display you can display either the source name or the bus name.

For details of how to make the assignment, see Chapter 19 “Control Panel Setup (Panel)” (Volume 3).

Selecting the AUX bus

- 1 Switch the operation mode with the [AUX CTRL] button.
- 2 In the key 1 row, select the AUX bus for the operation.
- 3 In the key 2 row, select the desired signal.

Signal Assignment and Selection

Assigning signals to buttons


Each of the 32 cross-point buttons and reentry buttons has a corresponding button number, to which you assign a signal.

In addition to the signals input to the PRIMARY INPUTS 1 to 144 connectors, the PREMIUM INPUTS 1 to 20 connectors, or the FC INPUTS 1 to 16 connectors on the rear panel of the switcher, you can also select signals generated within the switcher.

Each button has assigned to it a video signal and a key signal, forming a pair. You can set these video and key combinations in a Setup menu.

For details of Setup menu operations, see “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).

Cross-point button control block button numbers

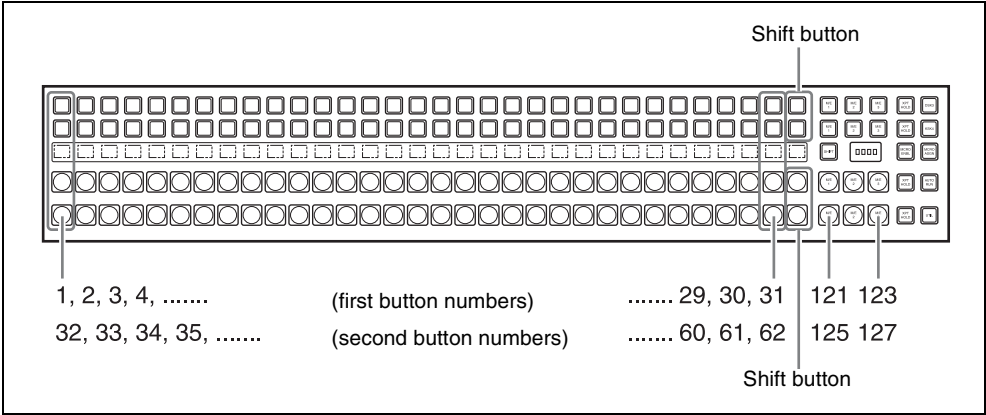

On each M/E bank and the PGM/PST bank, each cross-point button and reentry button has two button numbers, and you use the shift button to switch between these numbers.

In the case of a 32-button layout, the button numbers are as follows.

Cross-point control block button numbers

Button	Number when the shift button is not pressed	Number when the shift button is pressed
From the left end to the 31st button	1 to 31	32 to 62
Reentry buttons	121 to 123	125 to 127

Notes

You can use the rightmost button (number 32) as a [SIDE FLAG] button. In this case, the shift button moves one to the left, to number 31, and the button numbers are offset by one.

For details of the [SIDE FLAG] button, see “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).

Switching button numbers


The rightmost (32nd) button functions as a shift button.

(The shift button function can be disabled in a Setup menu.)

When selecting the signals of button numbers 1 to 31, press the cross-point button for the desired signal.

To select button numbers 32 to 62, hold down the shift button, and press the cross-point button for the desired signal.

Button numbers in the auxiliary bus control block

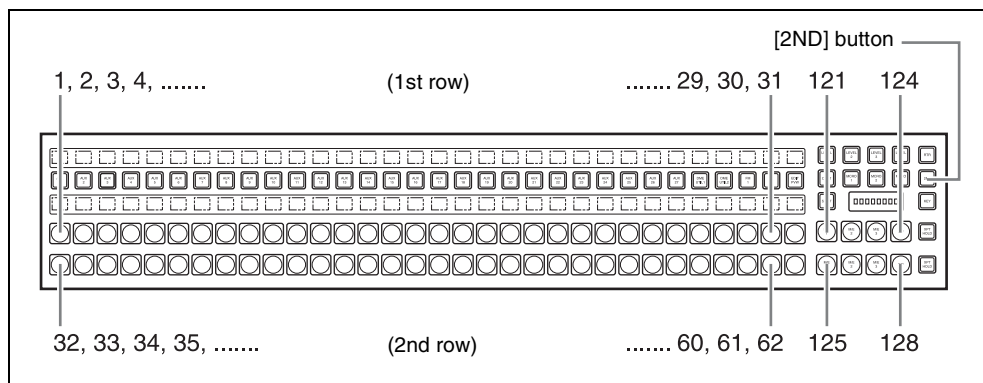



When the [2ND] button is unlit

The cross-point buttons and reentry buttons in the auxiliary bus control block have separate upper (1st row) and lower (2nd row) numbers. In the case of a 32-button layout, the button numbers are as follows.

Auxiliary bus control block button numbers ([2ND] button unlit)

Button	Button	Button numbers
1st row	From the left end to the 31st button	1 to 31
	Reentry buttons	121 to 124
2nd row	From the left end to the 31st button	32 to 62
	Reentry buttons	125 to 128

When the [2ND] button is lit

Different buses can be assigned to the 1st-row buttons and 2nd-row buttons. When the 32nd button is set as a shift button, the 1st-row buttons and 2nd-row buttons both have the following button numbers.

Auxiliary bus control block button numbers ([2ND] button lit)

Button	Number when the shift button is not pressed	Number when the shift button is pressed
From the left end to the 31st button	1 to 31	32 to 62
Reentry buttons	121 to 124	125 to 128

Inhibiting cross-point button operations

For each cross-point button, you can temporarily inhibit operations.

Notes

This setting is cleared when you reset the control panel.

Assigning a button to the function of disabling cross-point button operation

You can assign the button to be used for the operation to the [PRE MCRO] button, in setup. (See “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).)

You can also use the [Inhibit Set] and [Inhibit All Clear] functions, assigned to user preference buttons. (See “Setting Button Assignments (Prefs/Utility Menu)” in Chapter 19 (Volume 3).)

Buses for which operations can be inhibited

This setting applies to the auxiliary bus control block (when using the CCP-8000) and the cross-point buttons in each switcher bank. However, when using

the CCP-6224/6324, buses may be assigned with the cross-point button rows for keys 1 and 2 as the auxiliary bus control block.

For example, if you make the setting for one cross-point button in a switcher bank, this inhibits operation of all cross-point buttons with the same number in the following buses.

The corresponding name also disappears from the source name display.

- Background A, background B
- Keys 1 to 8
- Utility 1, Utility 2
- DME utility 1, DME utility 2
- External DME

To inhibit operation of a cross-point button

Hold down the button which “Inhibit Set” is assigned, and press the cross-point button whose operation you want to inhibit.

The button you pressed flashes amber, and this makes the operation inhibited.

Notes

Even when you inhibit operation of a cross-point button, macro attachment settings are still possible (*see “Setting and Canceling a Macro Attachment” in Chapter 16 (Volume 2)*).

To clear a cross-point button operation inhibit setting

Hold down the button to which “Inhibit Set” is assigned, and press the button whose operation is inhibited (flashing amber).

This clears the operation inhibit setting for the button you pressed.

To clear all operation inhibit settings

Press the button to which “Inhibit Set” is assigned and the button to which “Inhibit All Clear” is assigned simultaneously.

Selection of signals linked with the audio mixer

When you select a signal in a switcher bank background A, key 1 or key 2 row (of the CCP-6224/6324 control panel in AUX control mode) or AUX bus control block (of the CCP-8000), and the bank and signal are set to be linked to the audio mixer, then the program output of the audio mixer follows the signal selection.

For details of the setting, see “Cross-Point Settings (Xpt Assign menu)” in Chapter 19 (Volume 3).

Notes

- For details of audio mixers that can be connected, contact your Sony service or sales representative.
- When the signal is switched with a snapshot, keyframe, and so on, the audio mixer is not linked.
- When bus fixed mode is selected in setup (*see page 177*), the audio mixer program output is linked to the bus output as the background.

Signal Name Display

You can attach a name (source name) to each signal assigned to a cross-point button, with a maximum of 16 characters.

- The source name displays in the cross-point control block and auxiliary bus control block show the source names of the video signals assigned to numbers 1 to 31.
- To display the source names for numbers 32 to 62, press the [SHIFT] button to the right of the source name displays.
- To display the source names of the key signals assigned to buttons, hold down the [SPLIT] button in the key control block or the [KEY] button in the auxiliary bus control block.

When using the AUX panel-less function (*see page 141*) with the CCP-6224/6324 Control Panel, you can use the cross-point control block as an AUX bus control block with the [AUX CTRL] button.

In this case, use the key 1 row as AUX delegation buttons, and the key 2 row as AUX bus cross-point selection buttons; the source name displays show the bus names and source names.

Colors of lit cross-point buttons

In a particular row of cross-point buttons, only the last pressed button is effective, and lights amber or red. The amber indicates the “low tally” state, and the red indicates the “high tally” state, to indicate whether or not the selected signal appears in the final output video.

Significance of colors of lit cross-point buttons

Color	State	Significance
Amber	Low tally	Does not appear in final output video
Red	High tally	Appears in final output video



Transitions

Selecting the Next Transition

To execute a transition, it is first necessary to decide how the image will be changed as a result of the transition. This selection is carried out using the next transition selection buttons (*see page 50*) in the transition control block of each M/E or PGM/PST bank.

For details of operations, see “Procedure for Basic Transition Operation” (page 150).

Transition Types

Selecting the transition type determines the way in which the transition occurs. Carry out the type selection with the transition type selection buttons in the transition control block of each M/E or PGM/PST bank.

For details of this operation, see “Procedure for Basic Transition Operation” (page 150).

The following are the transition types.

Mix

This is a dissolve, in which the new video progressively fades in over the current video, with the sum of the two video outputs maintained constant. At the mid-point of the transition (when the fader lever is in the center position), the output of each is 50%.

This transition type can also be selected for an independent key transition. In this case, the key either dissolves in or dissolves out similarly, with the progress of the transition.

NAM (non-additive mix)

In this dissolve, the current video and new video signals are compared, and the signal with the higher luminance level is given priority in the output. The current video is maintained at 100% output for the first half of the transition as the new video increases progressively to 100%, then the current video is progressively reduced from 100% to zero in the second half with the new video maintained at 100% output.

Notes

This transition type is not available for an independent key transition.

Super mix

In this dissolve, the current video is maintained at 100% output for the first half of the transition as the new video is mixed while increasing progressively to 100%, then the current video is progressively reduced from 100% to zero in the second half with the new video maintained at 100% output.

For details on super mix settings, see page 161.

Notes

This transition type is not available for an independent key transition.

Preset color mix

This is a two-stage dissolve, comprising two transitions, the first a dissolve to a color matte, and the second from the color matte to the new video.

In the first transition, the current video is replaced by the color matte in a mix (dissolve), then in the second transition the color matte is replaced by the new video also in a mix (dissolve).

For details on color matte settings, see page 162.

Notes

This transition type is not available for an independent key transition.

Wipe

A wipe replaces the current video by the new video according to a predetermined pattern. This transition type can also be selected for an independent key transition.

For details, see Chapter 5 “Wipes” (page 281).

DME wipe

Using a DME effect, it is possible to obtain a transition to a new image from the current image, as in a wipe. You can also use this transition type as an independent key transition.

For details, see Chapter 6 “DME Wipes” (page 327).



Clip transitions


Linked to a mix (dissolve) or wipe transition, a frame memory clip (movie) is played back.

Cut

A cut switches instantaneously from the current video to the new video. When the next transition is a key transition, the key cuts in or out instantaneously.

Procedure for Basic Transition Operation

The positions of the principal buttons used for basic transition operation are as follows.

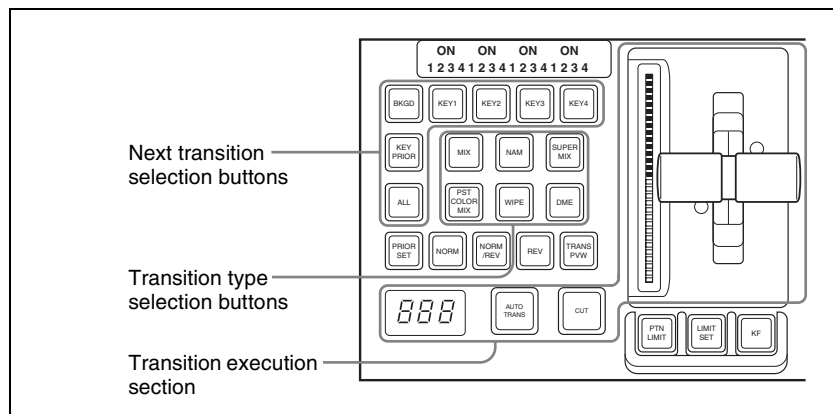

Transition control block (for standard transitions)

- 1 In the cross-point control block, select the background video with the background A row of cross-point buttons.
- 2 Select the way in which the transition will affect the image, using the next transition selection buttons in the transition control block.

For an overview, see “Selecting the Next Transition” (page 147).

To change the background: Press the [BKGD] button, turning it on.

To insert or delete a key: Press one of the [KEY1] to [KEY4] buttons (or [DSK1] to [DSK4] buttons in the PGM/PST bank), turning it on.

(For details of the operation to select [Key5] to [Key8], see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534) in Appendix (Volume 1).

To enable the key priority setting, which determines the key overlay order after the transition: Press the [KEY PRIOR] button, turning it on.

You can press more than one button at the same time.

To change the keys and background presets in Setup menus simultaneously: Press the [ALL] button.

To allocate a particular next transition button to the [ALL] button function, see “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3).

- 3 For the transition to change the key priority, set the priority for after the transition.

When using keys 1 to 8, see “Priority Setting for Keys 1 to 8” (page 158). For details of the key priority setting operation, see “Key Priority Setting” (page 153).

- 4 Select the new video used for the transition.

- In the background B row of cross-point buttons, select the new background video.
- When inserting a key, select the key signal, and make any required settings.

For details of key settings, see Chapter 4 “Keys” (page 199).

To carry out a cut transition, skip to step 7; otherwise continue to step 5.

- 5 Select one of the transition type selection buttons in the transition control block.

To carry out a dissolve to the new video: Press one of the [MIX], [NAM], [SUPER MIX], and [PST COLOR MIX] buttons, turning it on.

To carry out a wipe: Press the [WIPE] or [DME] button, turning it on.

To carry out a transition while playing back a frame memory clip: Press one of the buttons corresponding to the clip to be used (FM1&2CLIP, FM3&4CLIP, FM5&6CLIP, and FM7&8CLIP).

You can also use the Misc >Transition menu to select a desired transition type for the M/E or PGM/PST bank. (See “Selecting the Transition Type by a Menu Operation” (page 160).)

For an overview of the transition types, see “Transition Types” (page 147).

Notes

The transition type selection buttons in the transition control block can be interchanged in the setup menu.

For details, see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).

- 6 Make the required settings, according to the selected transition type.

For details of the settings, see the relevant section.

Super mix: “*Super Mix Settings*” (page 161)

Preset color mix: “*Color Matte Settings*” (page 162)

Wipe: “*Basic Procedure for Wipe Settings*” (page 283)

DME Wipe: “*Basic Procedure for DME Wipe Settings*” (page 339)

Clip transition: “*Clip Transition Operations*” (page 403)

Using the transition preview function (page 179), you can check the transition on the preview monitor.

7 Carry out the transition in the transition execution section.

For a gradual transition such as a mix (dissolve) or wipe: Press the [AUTO TRANS] button, or operate the fader lever.

To execute a transition by pressing the [AUTO TRANS] button, first set the transition rate (specified as the duration of the transition).

(See “*Setting the Transition Rate*” (page 166).)

When you have selected a wipe or DME wipe as the transition type, you can also set the transition range. (See “*Pattern Limit*” (page 171).)

For an instantaneous transition: Press the [CUT] button.

For details, see “Executing a Transition” (page 165).

Transition linked to the audio mixer

If the video signal selected in the background B row is linked to the audio mixer in setup, then the audio mixer sound changes with the transition. That is, pressing the [AUTO TRANS] button gives a cross fade, and pressing the [CUT] button gives an instantaneous sound switch.

For details of setup, see “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).


Notes

- The audio mixer is not linked to a snapshot or key frame transition.
- The audio mixer is not linked to a transition using the fader lever.
- If the bus-fixed mode (see page 177) is selected in the setup menu, and the fader lever is in the lowest position, there is a cross fade from the audio selected on the B row to the audio selected on the A row.
- The audio mixer is not linked to a key transition.
- In the following cases, the audio and video may be out of sync.
 - When carrying out a cross fade in some DME wipes (for example, “picture in picture”)
 - When executing a preset color mix in two-stroke mode
- For details of audio mixers that can be used, contact your Sony service or sales representative.

Key Priority Setting

If a number of keys are already inserted in the current video, you can check or change the key priority, that is to say, the order in which the keys are overlaid. When a key priority ([KEY PRIOR]) is selected as the next transition, you can also change the key priority in the new video.

The key priority values go from 1 to 4, with a higher priority key being “in front” as seen on the screen.



Priority sequence on the screen


There are two ways of setting the priority: either using the [PRIOR SET] button in the transition control block, or using the Misc menu to access the Key Priority menu for the M/E or PGM/PST bank.

Notes

When the operating mode is set to multi program, the key priority setting cannot be made.

Setting the Key Priority in the Transition Control Block

The positions of the buttons used for the operation are as follows.

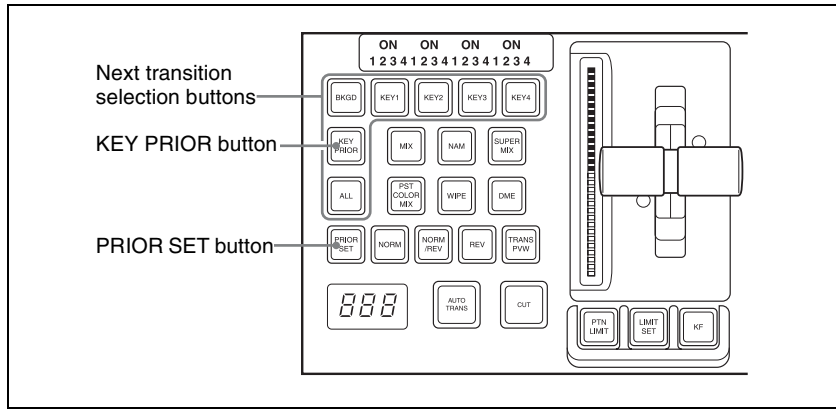

Transition control block (standard type)


Changing the currently inserted key priority

- 1 If the next transition selection button [KEY PRIOR] is on, press another next transition selection button to turn the [KEY PRIOR] button off.
(When the [KEY PRIOR] button is on, the transition control block switches to the mode for changing the key priority for after the transition.)
- 2 Holding down the [PRIOR SET] button, press the one of the next transition selection buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] buttons in the PGM/PST bank) for the key to appear on top.

Notes

- To select [Key5] to [Key8], or [DSK5] to [DSK8] requires an assignment. *For details, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534).*
- The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups. For example, it is not possible to set a priority sequence of keys 1, 5, and 2. *For details, see “Setting the Key Priority in the Transition Control Block” (page 153).*

The selected key now appears on top, on the program monitor.
The priority of keys other than the selected one does not change.

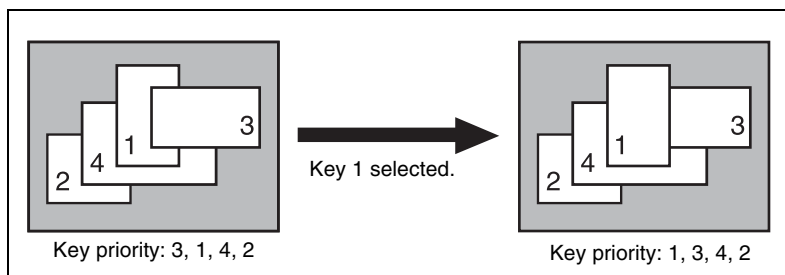

To change the priority of more than one key, repeat this operation as required.

Changing the key priority for after the transition

When executing a transition, turning on the next transition selection button [KEY PRIOR] causes the keys to be rearranged based on the set priority. To set the key priority for after the transition, use the following procedure.

- 1** In the transition control block, hold down the [PRIOR SET] button and press the [KEY PRIOR] button to turn it on. Do not release the [PRIOR SET] button before advancing to step **2**.

The [KEY PRIOR] button lights green, and it becomes possible to change the key priority setting for after the transition.

- 2** Hold down the [PRIOR SET] button, and press the one of the next transition selection buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] buttons in the PGM/PST bank) for the key you want to bring to the front after the transition.

To set the priority to be the same as before the transition, press the [BKGD] button.

Notes

- The [BKGD] button is only effective when in the mode for changing the key priority for after the transition.
- To select [Key5] to [Key8], or [DSK5] to [DSK8] requires an assignment. *For details, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534).*
- The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups. For example, it is not possible to set a priority sequence of keys 1, 5, and 2. *For details, see “Setting the Key Priority in the Transition Control Block” (page 153).*

When the next transition selection button [KEY PRIOR] is on, the selected key appears on top on the preview monitor. The priority of keys other than the selected one does not change.

3 To change the priority of more than one key, repeat the previous operation as required.

4 Execute the transition.

The keys are rearranged based on the set priority.

Setting the Key Priority by a Menu Operation

When using keys 1 to 8, set the priority separately for the two groups. For details, see “Priority Setting for Keys 1 to 8” (page 158).


Changing the priority of the currently inserted keys

1 In the M/E or PGM/PST menu, select first VF7 ‘Misc,’ then HF3 ‘Key Priority.’

The Key Priority menu appears.

2 For each of <Priority1>, <Priority2>, <Priority3>, and <Priority4>, select a key, to determine the key priority sequence.

The keys are inserted in the key priority sequence with priority 1 at the front.

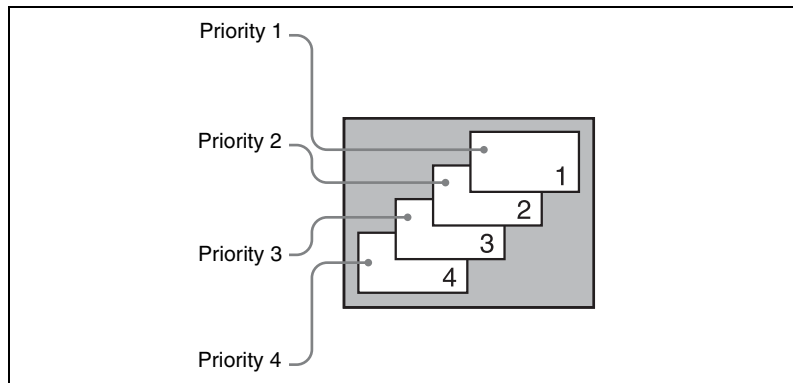

Notes

It is not possible to select the same key for two or more priority numbers.

The keys appear in the set order on the program monitor.

Changing the key priority for after the transition

- 1** In the M/E or PGM/PST menu, select first VF7 ‘Misc,’ then HF4 ‘Next Key Priority.’
The Next Key Priority menu appears.
- 2** For each of <Priority1>, <Priority2>, <Priority3>, and <Priority4>, select a key, to determine the key priority sequence.

For details of the key priority sequence, see the figure shown for step 2 in the previous item (see page 156).

The keys appear in the set order on the preview monitor.

- 3** Execute the transition.

The keys are rearranged in the set order on the program monitor.

Display of the Key Output Status and Key Priority

You can check whether keys are currently output, and the key priority setting, using the key status display in the transition control block of the M/E or PGM/PST bank.

The display is above the next transition selection buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] buttons in the PGM/PST bank).

Notes

You can change the assignment of the next transition selection buttons [KEY1] to [KEY4]. If this is changed, the output status and priority is shown for the assigned key.

Display of the key output status

When a key is included in the output from the M/E or PGM/PST bank, the corresponding ON indicator lights.

Key priority display

The key priority is indicated by numerals 1 to 4 lighting.

The topmost key as seen on the program monitor is priority 1, and the keys underneath are numbered 2, 3, 4 away from the viewer (*see page 156*).


To display the key priority for after the transition, press the [KEY PRIOR] button in the transition control block, turning it on. For keys for which the priority after the transition is different from the current priority, the corresponding numerals 1 to 4 flash. For a key with the same priority, the indication remains on.

Example key status display given when the [KEY PRIOR] button is pressed:

Current key priority: 1, 2, 3, 4

Key priority after the transition: 3, 2, 1, 4

Indicators: 1, 3 (flashing), 2, 1 (flashing), 3, 4

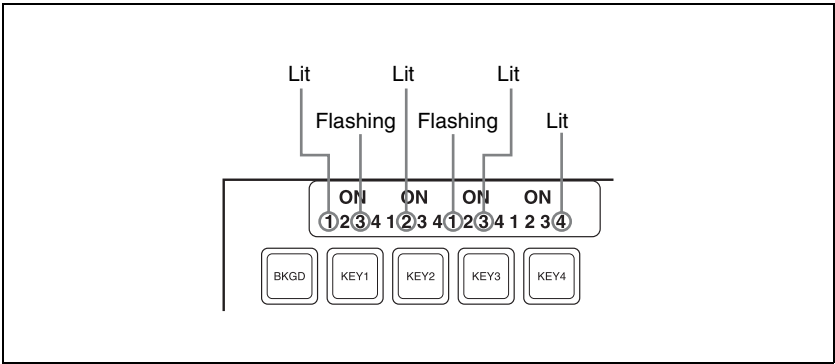

Example key status display (showing the key priority after the transition)

Priority Setting for Keys 1 to 8



Set the priority for each of the groups consisting of keys 1 to 4 and keys 5 to 8.

- 1 In the VF7 'Misc' menu, select HF3 'Key Priority,' to display the Key Priority menu.
- 2 In <Higher Group>, press the button for the group you want to be higher.

The button you pressed lights green, and this becomes the reference group.

- 3** Set the reference group priority.
- 4** In <Higher Group>, select the other group.
- 5** Set the priority for the other group.

Selecting the Transition Type by a Menu Operation

You can also select the required transition type by a menu operation.

- 1** In the M/E or PGM/PST menu, select first VF7 ‘Misc,’ then HF1 ‘Transition.’

The Transition menu appears.

- 2** Select the required transition type in the <Transition Type> group.

The parameter settings can now be adjusted with the knobs according to the selected transition type.

For details, see the following.

- “*Super Mix Settings*” (page 161)
- “*Color Matte Settings*” (page 162)
- “*Setting the Transition Rate*” (page 166)

Notes

When multi-program mode is selected in the Setup menu (see “*Settings for Switcher Configuration (Config Menu)*” in Chapter 20 (Volume 3)), there may be cases in which two or more transition types have been selected.

Super Mix Settings

You can set the output levels of the current and new video signals at the mid-point of the transition, in the range 0 to 100%.

Notes

This transition type is not available for an independent key transition.

- 1 In the M/E or PGM/PST menu, select first VF7 ‘Misc,’ then HF1 ‘Transition.’
The Transition menu appears.

- 2 Select [Super Mix] in the <Transition Type> group.

- 3 Turn the knobs to adjust the output levels.

Knob	Parameter	Adjustment	Setting values
2	A Gain	Background A output level	0.00 to 100.00%
3	B Gain	Background B output level	0.00 to 100.00%

Color Matte Settings

You can specify the color matte by luminance, saturation, and hue values. Also, in place of a color matte you can use an image selected on the utility 2 bus.


Notes

- This transition type is not available for an independent key transition.
- In the multi-program mode, you can use a preset color mix only when selecting the background for the next transition.

One-stroke mode and one-time mode


- You can make a setting such that a preset color mix is carried out in a single transition. This is called “one-stroke mode.”
When the bus fixed mode is selected with a Setup menu setting, a preset color mix is always carried out in the one-stroke mode.
- You can also make a setting such that when a preset color mix is completed, the next transition switches to the previous transition type automatically. This is called “one-time mode.”

When only the background is changed

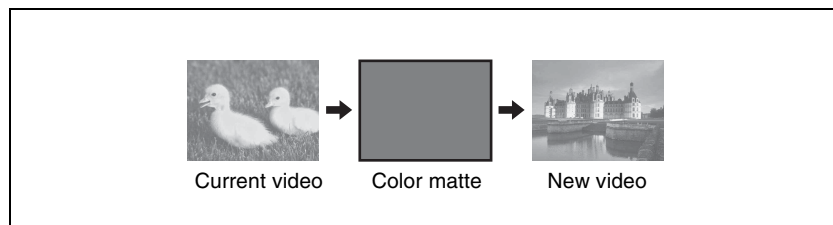

Preset color mix (changing background only)


When a key is inserted

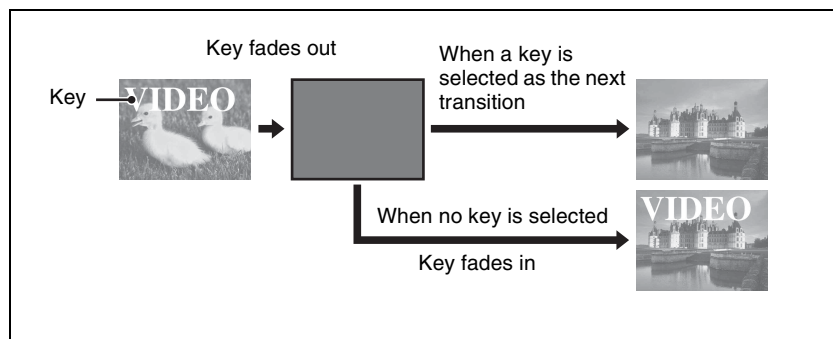

Preset color mix (transition including key)

By means of a Setup menu setting, it is possible to preserve the key state while carrying out the color matte mix.

When, with a key inserted, a key is selected in the next transition

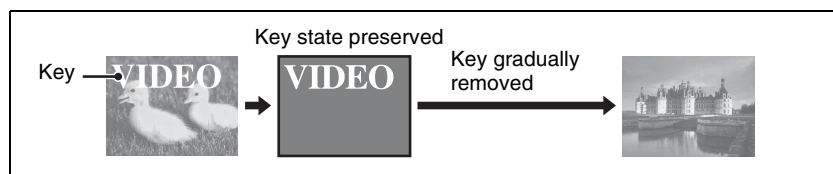

Preset color mix (when set to preserve key state)

Setting the color matte

- 1 In the M/E or PGM/PST menu, select first VF7 'Misc,' then HF1 'Transition.'

The Transition menu appears.

- 2 Select [Preset Color Mix] in the <Transition Type> group.

- 3 In the <Preset Color Mix Fill> group, select one of the following.

Flat Color: monochrome color matte

Utility 2 Bus: signal selected on the utility 2 bus

- 4 When "Flat Color" is selected, turn the knobs to adjust the color matte.

Knob	Parameter	Adjustment	Setting values
2	Luminance	Luminance	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
3	Saturation	Saturation	0.00 to 100.00
4	Hue	Hue	359.99 to 0.00



Executing a Transition

There are two modes of executing a transition: an auto transition by button operation or a manual transition using the fader lever.


It is also possible to combine both methods, taking control with the fader lever of an auto transition which has partly completed, or complete a transition started with the fader lever as an auto transition.

By combining common transitions with independent key transitions, different transition types can be applied to the background and keys, for example allowing a key wipe combined with a background dissolve.

When the audio mixer is linked in setup, you can carry out an auto transition, and also switch the sound with the audio mixer. (*See “Transition linked to the audio mixer” (page 152).*)

Transition Indicator Function

In each of the M/E banks and PGM/PST bank, to the left of the fader lever is a transition indicator composed of multiple LEDs. This indicator shows the state of the transition, whether auto or manual, by which LEDs are lit.

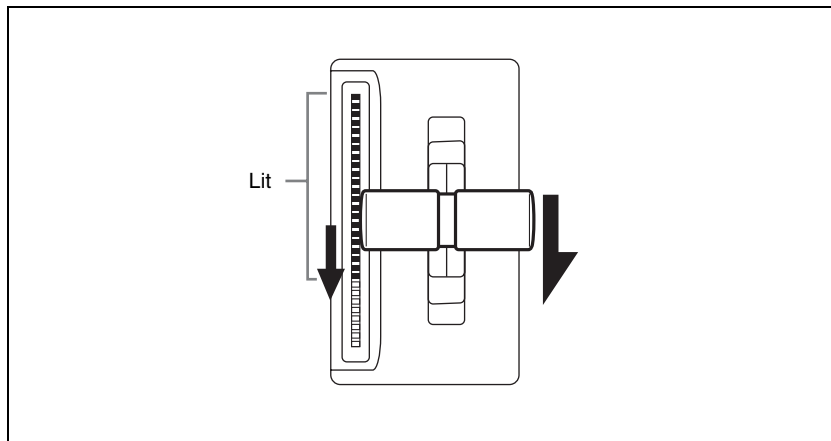

Transition indicator

For example, in the previous illustration, it can be seen that the transition is more than half completed.

When the transition is completed, all of the LEDs go off.

Setting the Transition Rate

There are three ways of setting the transition rate: using the Flexi Pad control block, Multifunction Flexi Pad control block or numeric keypad control block to enter a numeric value, or using the Misc menu to access the Transition menu for the M/E or PGM/PST bank.

You can also display the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and change the settings. (See “*Displaying a List of Transition Rates and Changing the Settings*” (page 434).)

Notes

When a clip transition is selected as the transition type, it is not possible to set the transition rate.

Frame input mode and timecode input mode

For numeric input of the transition rate value, there are two modes: frame input mode and timecode input mode. You select one of these modes using either the Flexi Pad control block (page 167), Multifunction Flexi Pad control block or the numeric keypad control block (page 168).

Frame input mode: The entered value is a number of frames.

Example: Entering 123 constitutes an entry of 123 frames

Timecode input mode: The entered value is a timecode value.

Example: Entering 123 constitutes an entry of 1 second 23 frames.

Notes

Whereas you can enter a value of up to 999 in frame input mode, a value not smaller than 10 seconds cannot be entered in timecode input mode.

Frame display mode and timecode display mode

For the transition rate display in the transition control block, there are two modes: frame display mode and timecode display mode. You can select one of these modes in setup. (See “*Operation Settings (Operation Menu)*” in Chapter 19 (Volume 3).)

Notes

The setting is common to all banks of the switcher.

Frame display mode: Values are shown as from 0 to 999 frames. In this display mode, a value entered in timecode input mode is converted for display as a number of frames.

Timecode display mode: Values are shown as timecode values, consisting of seconds and frames. In this display mode, a value entered in frame input mode is converted for display as a timecode value. If the value consists of four or more digits, the last digit is not shown.

Example: A value of 9 seconds 23 frames appears as “9.23” and a value of 10 seconds 1 frame appears as “10.0.”


Setting the transition rate in the Flexi Pad control block

Notes

When using a simple-type transition control block, you cannot use the Flexi Pad control block to set the transition rate.

- 1 In the M/E bank Flexi Pad control block, press the [TRANS RATE] button.

The memory recall section display is now ready to accept the entered transition rate.

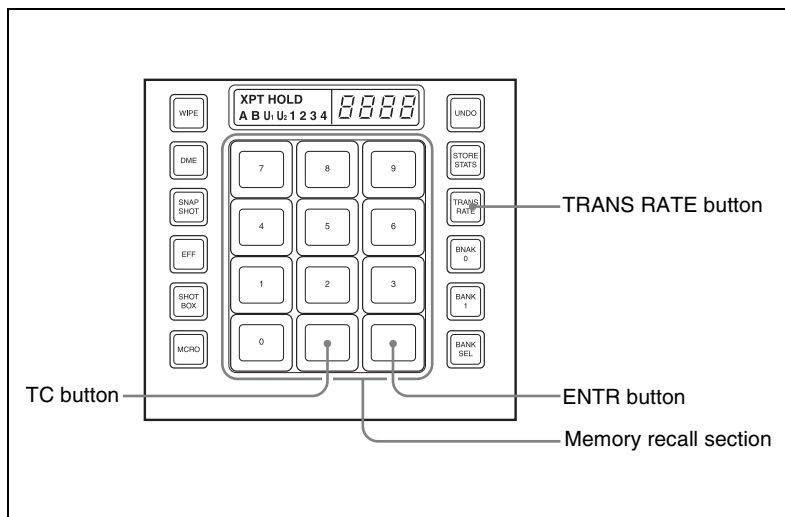


Flexi Pad control block (standard type)

- 2 Enter the desired transition rate with the numeric keypad.
If required, press the [TC] button to toggle the input mode (frame input or timecode input).
 - Enter a value of up to three digits.
 - To cancel the entry, press any of the six buttons in the leftmost column ([WIPE], [DME], ...) or the [TRANS RATE] button.

3 Press the [ENTR] button.

This confirms the entry, and the new setting appears in the transition control block display.

Setting the transition rate in the numeric keypad control block

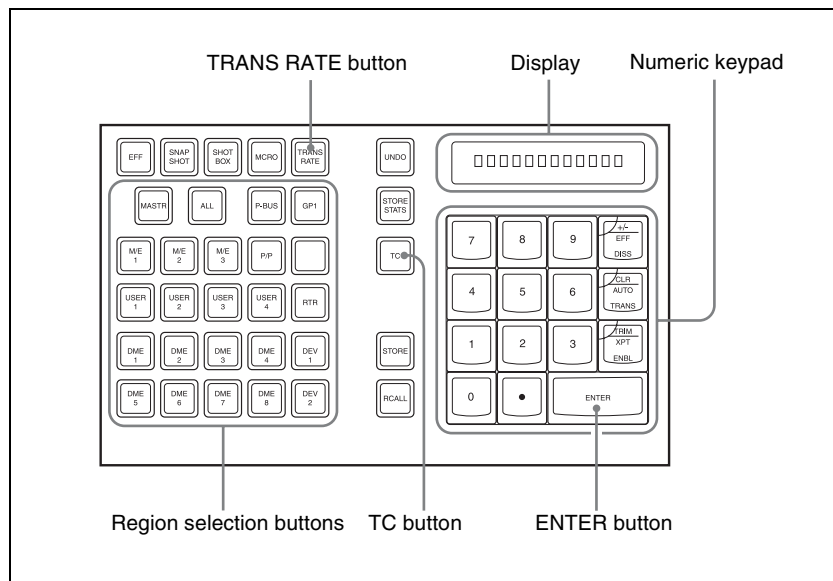

Numeric keypad control block

- 1 In the numeric keypad control block, press the [TRANS RATE] button.
- 2 Press the region selection button for the M/E or PGM/PST bank for which you want to set the transition rate, turning it on.

The numeric keypad control block display now shows the selected region name and the current transition rate setting for the region.

- 3 With the numeric keypad, enter the transition rate.
If required, press the [TC] button to toggle the input mode (frame input or timecode input).

- Enter a value of up to three digits.
- To clear the entry, press the [CLR] button.

- 4 Press the [ENTER] button.

This confirms the entry, and the selected region name and the set transition rate appear in the numeric keypad control block display.

The transition control block display of the same bank (M/E or PGM/PST) also shows the setting.

To enter a difference from the current value


After pressing the [+/-] button, enter the difference and press the [TRIM] button.

To change the sign (+ or -), press the [+/-] button.

Setting the transition rate in the Multifunction Flexi Pad control block


- 1 In the Multifunction Flexi Pad control block, press the [TRANS RATE] button.

The button displays in the memory recall section change as shown in the following illustration, and the Multifunction Flexi Pad control block switches to the transition rate setting mode.

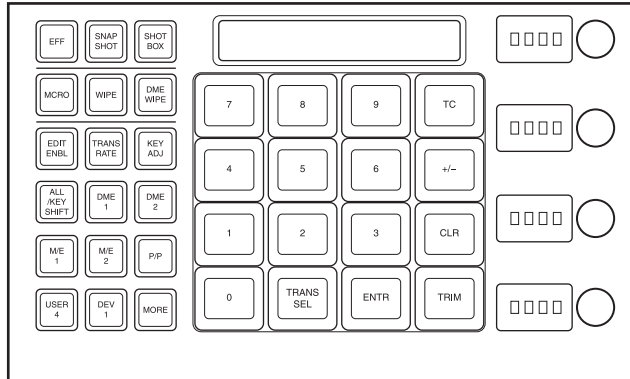

- 2 In the region selection buttons, select the switcher bank.
- 3 Press the [TRANS SEL] button in the memory recall section.

The button displays in the memory recall section change as shown in the following illustration, and you can select the type of transition for which to set the rate.

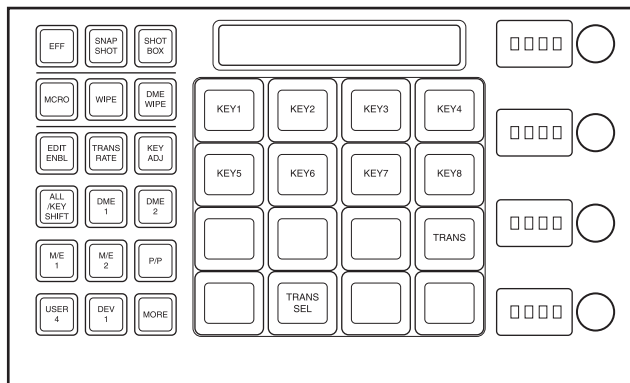

4 Press the [TRANS] button.

You can now set the M/E-1 block background transition rate.

5 Watching the alphanumeric display, enter the transition rate you want to set with the memory recall section button.

If required, press the [TC] button to switch the input mode (frame count input or timecode input).

- Enter a value of up to three digits.
- To cancel the input, press any of the mode selection buttons.

6 Press the [ENTR] button.

Setting the transition rate by a menu operation

1 In the switcher bank, select first VF7 ‘Misc,’ then HF1 ‘Transition.’

The Transition menu appears.

2 Select any transition type in the <Transition Type> group.

3 Turn the knob to set the transition rate.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition Rate	0 to 999 (frame count)

Displaying the transition rates in a menu and changing the settings

For each of the M/E and PGM/PST banks, you can display the transition rate, independent key transition rate and fade-to-black transition rate, and change the settings.

For more details, see “Displaying a List of Transition Rates and Changing the Settings” (page 434).

Pattern Limit

When a wipe or DME wipe pattern is selected for the transition, you can specify the range of movement of the wipe pattern through the course of the transition, for each bank independently.


When the pattern limit function is enabled, carrying out a transition results in the following effect for example settings.

- When the limit value is set to 50%, the effect at the end of the transition is the same as when the fader lever is at the center position in the normal case (with the pattern limit function disabled); the wipe pattern does not complete.
- When the limit value is set to 0%, the wipe effect is completely disabled, and carrying out the transition produces no change in the image.
- When the limit value is set to the maximum 100%, the image changes in exactly the same way as when the pattern limit function is off, but when the transition is completed, the cross-point selections on the background A and B buses do not interchange.

There are two ways of setting a pattern limit: either by operating the fader lever to save the fader position, or by using the Wipe menu or DME Wipe menu to access the Edge/Direction menu for the M/E or PGM/PST bank.

Notes

- A pattern limit only applies when a wipe or DME wipe is selected as the transition type.
- A pattern limit cannot be applied to an independent key transition (*see page 181*).

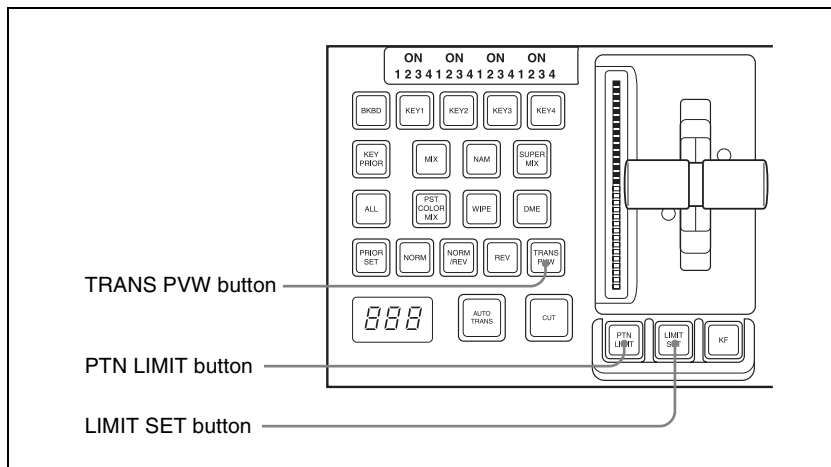

Transition control block (standard type)

Setting the pattern limit with the fader lever

- 1 Move the fader lever to the position corresponding to a particular pattern size.
 - First make sure that the [PTN LIMIT] button is off.
 - To check the pattern size on the preview monitor, first press the [TRANS PVW] button, to select the transition preview mode (*see page 179*).
- 2 Press the [LIMIT SET] button.

This sets the current fader lever position as the pattern limit.

Setting the pattern limit by a menu operation

- 1 When a wipe is selected as the transition type, in the M/E or PGM/PST menu, select first VF5 'Wipe,' then HF4 'Edge/Direction.'
- When a DME wipe is selected as the transition type, in the M/E or PGM/PST menu, select first VF6 'DME Wipe,' then HF4 'Edge/Direction.'
- The Edge/Direction menu appears.
- 2 Press the [Pattern Limit] button, turning it on.

3 Turn the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Pattern Limit	Pattern limit	0.00 ^{a)} to 100.00% ^{b)}

a) 0.00%: Executing the transition does not change the video output at all.

b) 100.00%: The transition is the same as when no pattern limit is set, but the cross-point button selections of the background A and B buses do not interchange when the transition completes.

Executing a pattern limit transition

1 Press the [PTN LIMIT] button, turning it on.

The button you pressed lights amber.

2 Carry out the transition.

The transition progresses as far as the set pattern limit. Even if the transition completes, the cross-point button assignments of the background A and B buses do not interchange.

3 Carry out the transition once again.

The status before the previous transition is restored.

To cancel the pattern limit

To cancel the pattern limit after completion of step **3** in the previous procedure, press the [PTN LIMIT] button, turning it off.

If after carrying out step **2** in the previous procedure, the pattern limit has been reached, carry out the following procedure.

1 Press the [PTN LIMIT] button.

The button you pressed lights green.

2 Carry out the transition.

The [PTN LIMIT] button goes off, and the pattern limit state is released. Depending on the way in which the transition was executed, the action will be as follows.

- When you press the [CUT] button, the pattern limit is immediately released, and the image switches instantaneously.
- When you press the [AUTO TRANS] button, until the state of the next transition, the transition is carried out over the duration given by the transition rate.
- When you move the fader lever, the transition is carried out from the pattern limit state to the state before the pattern limit transition was

carried out.

Moving the fader lever even a little synchronizes the fader lever position with the transition state, and you can move the fader lever either in the forward direction or in the reverse direction.

Depending on the Setup settings, the transition may be executed at the instant you press the [PTN LIMIT] button, and the button goes off. In this case, execution continues for the time specified by the dedicated transition rate in the menu setting, as far as the state of the next transition.

For details of the setting, see “Settings Relating to Keys, Wipes, Frame Memory and Color Correction (Key/Wipe/FM/CCR Menu)” in Chapter 20 (Volume 3).

To set the transition rate when the pattern limit is released

- 1 In the <Pattern Limit Release> group of the Edge/Direction menu, select one of the following.

Auto Trans Rate: Use the transition rate set in the transition rate control block

Independ Trans Rate: Independent transition rate

- 2 If you selected “Independ Trans Rate” in step 1, adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Independent transition rate	0 to 999 (frames)

Executing an Auto Transition

The following two modes can be used for auto transition.


Cut

A cut switches instantaneously from the current video to the new video. When the next transition is a key transition, the key cuts in or out instantaneously.

Auto transition

The transition from the current video to the new video is carried out automatically at a constant rate, using the transition effect selected as the transition type.

You can set the transition rate in advance. (See “Setting the Transition Rate” (page 166).)

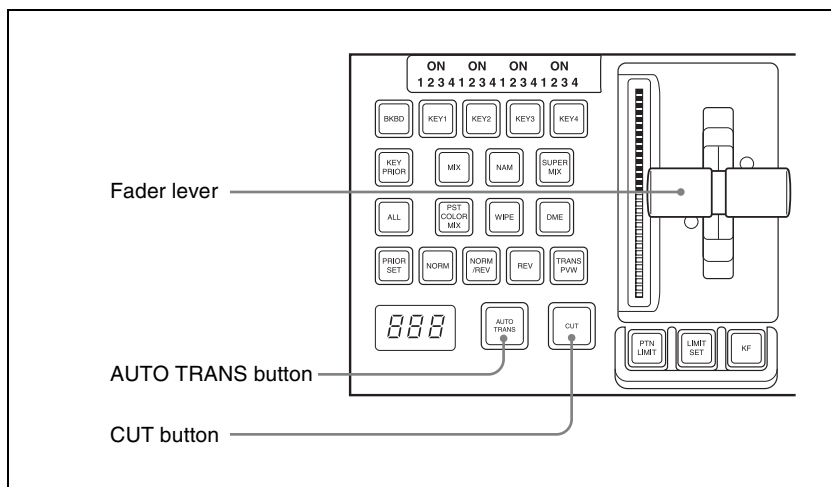

Transition control block (standard type)

To execute a transition on the M/E or PGM/PST bank by a button operation, use the following procedure in the transition control block.

To carry out an instantaneous cut transition: Press the [CUT] button.

To carry out a gradual transition: Press the [AUTO TRANS] button.

This executes the transition at the preset transition rate (*see page 166*).

While the transition is executing, the [AUTO TRANS] button lights amber. When it completes the button goes off.

To complete a partially executed transition instantaneously: Press the [CUT] button.

The [AUTO TRANS] button goes off.

Executing a Transition With the Fader Lever (Manual Transition)

Using the fader lever, you can manually control the progress of the transition. Moving the fader lever from one end of its travel to the other completes the transition.

To execute a manual transition with the transition control block fader lever, use the following procedure.

To carry out the transition completely: Move the lever over the full range of its travel.

To pause a partly executed transition: Stop moving the fader lever.
To resume a paused transition: Resume moving the fader lever.

Combinations of Auto and Manual Transitions

Using the [AUTO TRANS] button, the [CUT] button, and the fader lever, use the following procedures.

Moving the fader lever during an auto transition

During an auto transition started by pressing the [AUTO TRANS] button, operating the fader lever immediately enables the fader lever, and the [AUTO TRANS] button goes off. Thereafter, the fader lever controls the progress of the transition.

Executing an auto transition after partly moving the fader lever

- Press the [CUT] button to instantaneously complete the transition.
- Press the [AUTO TRANS] button to complete the rest of the transition at the preset transition rate.

If the transition rate is set to 100 frames, and the fader lever has moved through $\frac{1}{4}$ of the transition, then the remaining $\frac{3}{4}$ of the transition is carried out in 100 frames.


Non-Sync State

If the fader lever is in an intermediate position when a transition is completed as an auto transition, then the lever position no longer agrees with the transition state. This is termed a non-sync state.

In a non-sync state, two lit LEDs indicate the position from which a normal transition can be carried out. This is either at one end position or both end positions of the fader lever travel.

Moving the fader lever toward the position of the lit LEDs does not carry out a transition, but when the fader lever reaches the end position the non-sync state is released, and it is now possible to carry out the next transition.



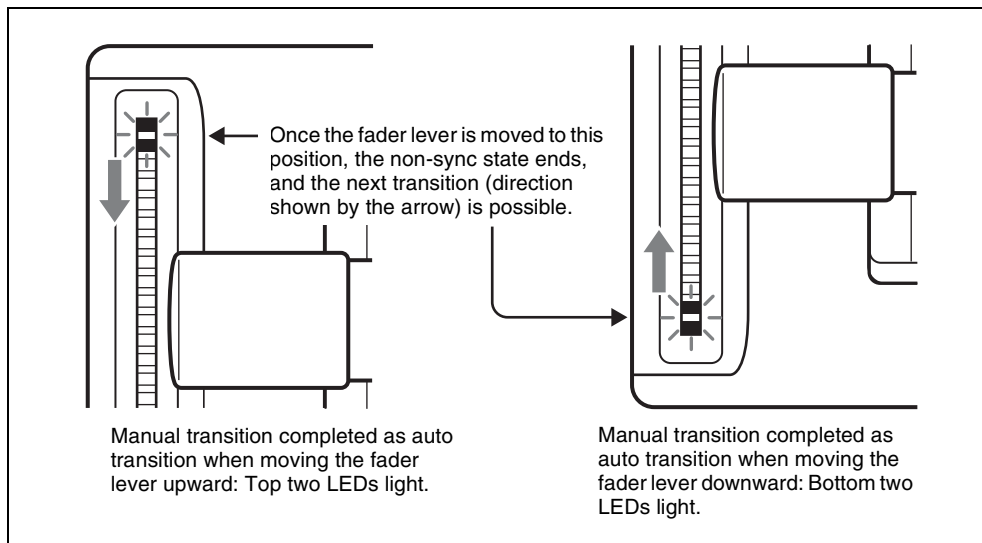

- If the fader lever is moved in the direction away from the lit LEDs, this carries out the next transition, over the remaining part of the fader lever travel.
- Even in a non-sync state, you can carry out an auto transition by pressing the [AUTO TRANS] button. During the auto transition, the indicators show the transition progress in the usual way, but when the transition completes, they once again indicate the non-sync state.


Fader Lever Operation in Bus Fixed Mode

Flip-flop mode and bus fixed mode

The following describes the difference between flip-flop mode and bus fixed mode, taking an M/E bank as an example; the functionality is the same, however, on the PGM/PST bank.

Normally, when a background transition is carried out on an M/E bank, the signals selected on the A and B rows of cross-point buttons are interchanged at the end of the transition. That is to say, except during a transition, the background output is always from the background A bus. This is called “flip-flop mode.”

The alternative is known as “bus fixed mode,” in which there is no bus interchange. In this mode, when the fader lever is at the top of its travel the output from the A bus is always 100%, and when the fader lever is at the bottom of its travel the output from the B bus is 100%.

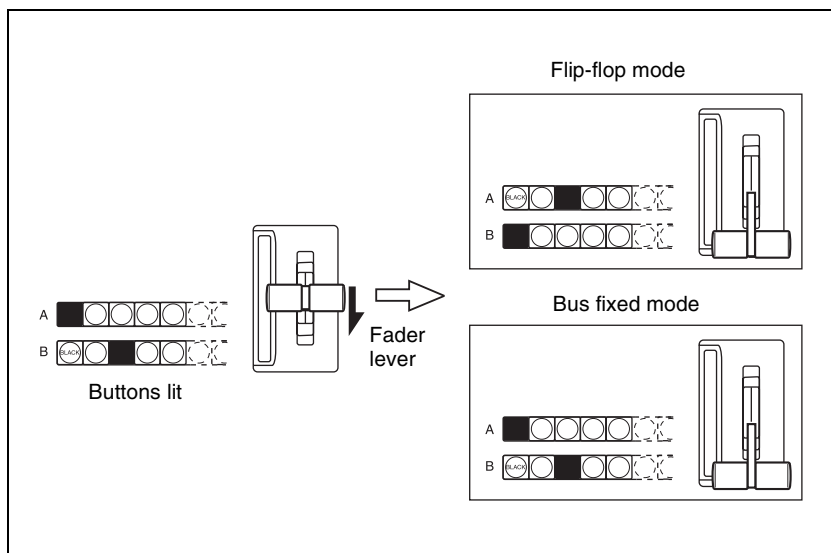

Flip-flop mode and bus fixed mode

In the bus fixed mode there is a fixed relationship between the position of the fader lever and the signal output on each bus. Depending on the direction of the transition, the fader lever must therefore always be moved in a particular direction, as shown in the following table. This does not affect an auto transition, which is executed regardless of the fader lever direction.

Fader lever operating direction in bus fixed mode

Next transition	Transition direction	Fader lever movement
Background	A → B	Downward
	B → A	Upward
Keys 1, 2, 3, 4, 5, 6, 7, and 8	On → Off (deletion)	Downward
	Off → On (insertion)	Upward

- When a transition applies to a combination of more than one of the background and keys 1, 2, 3, 4, 5, 6, 7, and 8, then the transition for all of these must be in the same direction complying with the above table.
- If as a result of an auto transition, for example, the fader lever position does not agree with the signal output, this is a non-sync state (*see page 176*) and LEDs light at both end positions of the fader lever travel. Moving the fader lever does not carry out a transition, but when the fader lever reaches the end position the non-sync state is released, and it is now possible to carry out the next transition. If the fader lever is moved in the direction away from the lit LEDs, this carries out the next transition, over the remaining part of the fader lever travel.

Transition Preview

With the preview output of the M/E banks and PGM/PST bank, you can check the effect of a transition in advance. To carry out a transition preview, press the [TRANS PVW] button in the transition control block.

Notes

In multi-program mode, DSK mode or bus fixed mode (*page 177*), it is not possible to carry out a transition preview.

Carrying out a transition preview

- 1 In the M/E or PGM/PST bank transition control block, press the [TRANS PVW] button.

The [TRANS PVW] button lights green, and the switcher is now in the transition preview mode. At this point, the preview output is the same as the program output before the [TRANS PVW] button was pressed.

- 2 Operate the fader lever, or press the [AUTO TRANS] button or [CUT] button.

On the preview monitor, you can check the effect of the transition.

To terminate a transition preview

There are three modes for a transition preview. To terminate a transition preview, carry out the operation which depends on the mode, and press the [TRANS PVW] button, turning it off.

Lock: Toggling the [TRANS PVW] button on and off switches between the transition preview mode and the normal mode.

Hold: The preview mode obtains only while the [TRANS PVW] button is held down.

One Time: Each time a transition ends, it reverts to the normal mode. Set the transition preview mode in the following combinations.

For details, see Chapter 19 “Control Panel Setup (Panel)” (Volume 3).

Transition Preview mode	Switcher setup (Transition menu) <Transition Preview> group	Panel setup (Operation >Custom Button menu) <Trans Pvw> group
Lock	Normal	Lock

Transition Preview mode	Switcher setup (Transition menu) <Transition Preview> group	Panel setup (Operation >Custom Button menu) <Trans Pvw> group
Hold	Normal	Hold
One Time	One Time	–

Notes

- During a transition, whether executed with the [AUTO TRANS] button or the fader lever, it is not possible to press the [TRANS PVW] button.
- In bus fixed mode (*see page 177*), transition previews are not available.
- When using the simple-type transition control block (*see page 193*), transition previews are not available.

Independent Key Transitions

What is an independent key transition?

In addition to common transitions, it is possible to carry out independent transitions on the keyers of the M/E banks and PGM/PST bank. These are called “independent key transitions.”

By carrying out an independent key transition in combination with a common transition, different transition types can be used for the background and keys. It is also possible to use different transition types for key insertion and key deletion by means of a Setup menu setting.

For details of this operation, see “Basic Independent Key Transition Operations” (page 184).

Combining other transitions with independent key transitions

When you set a common transition and a key independent transition for the same key, you can apply two different effects such as a wipe and mix (dissolve) (*see page 147*) to the key simultaneously.

When carrying out such a combination of transitions simultaneously on a key as auto transitions (*see page 174*), the result depends on the timing of pressing the respective [AUTO TRANS] buttons.


Simultaneous execution

If the [AUTO TRANS] buttons for the two transitions are pressed simultaneously, the following is the result.

Note that in both cases the common transition is a wipe and the independent key transition is a mix (dissolve).


Deleting a key with simultaneous transitions: With the key inserted, it is deleted simultaneously with the two transitions.

When the common transition completes, even if the independent key transition is still not completed, the two end simultaneously.

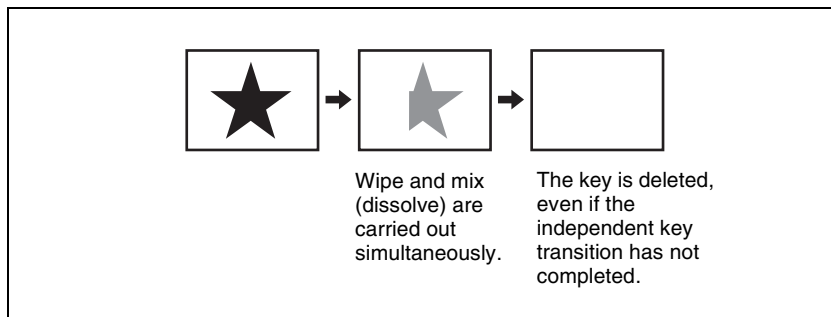

Deleting a key with simultaneous transitions

Inserting a key with simultaneous transitions: With the key not inserted, it is inserted simultaneously with the two transitions. If the common transition or independent key transition ends first, the other continues to completion.

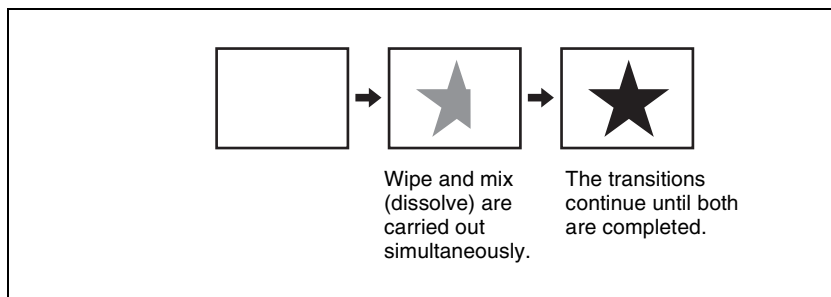

Inserting a key with simultaneous transitions

Time offset execution


If the [AUTO TRANS] buttons for the two transitions are pressed with a time offset, the following is the result.

Note that in both cases the common transition is a wipe and the independent key transition is a mix (dissolve).

Time offset execution with the key inserted: With the key inserted, it is deleted with the two transitions acting with a time offset.

Whichever button is pressed first, when the common transition completes, even if the independent key transition is still not completed, the two end simultaneously.


Example: When the independent key transition [AUTO TRANS] button is pressed later

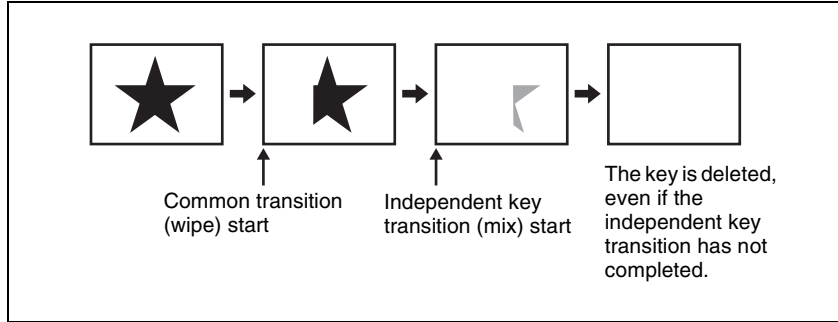

Time offset execution with the key inserted


Time offset execution with the key not inserted: With the key not inserted, it is inserted with the transition whose [AUTO TRANS] button is pressed first.

Since the key is then in the inserted state, with the transition whose [AUTO TRANS] button is pressed later, the key is deleted. When the key is completely deleted, both transitions complete.

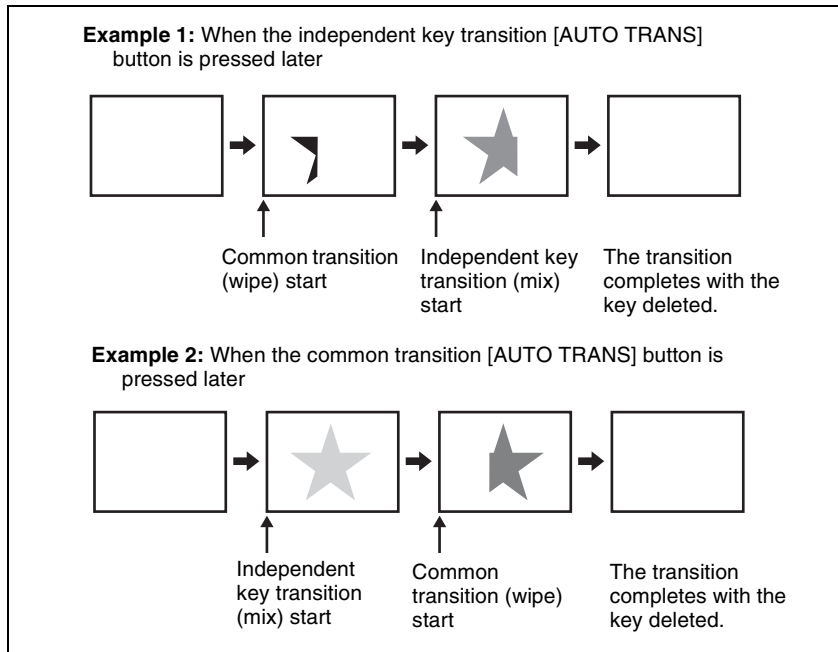

Time offset execution with the key not inserted

Basic Independent Key Transition Operations

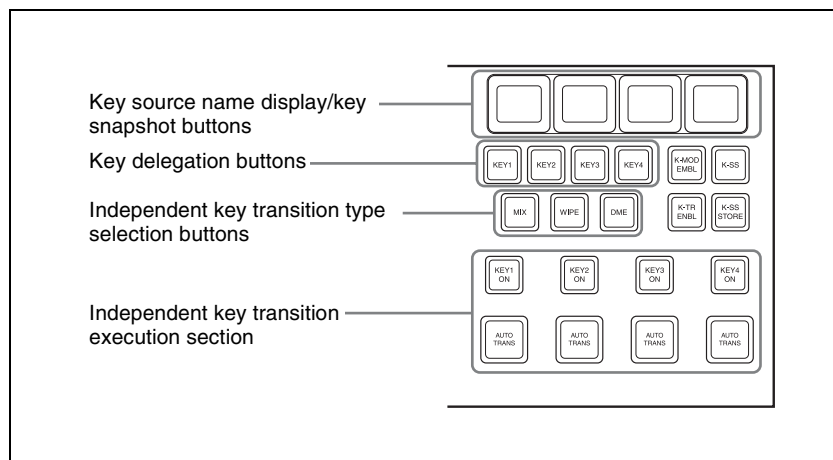

Independent key transition control block (standard type)

To set independent transitions for the keyers on the M/E or PGM/PST bank, use the independent key transition control block.

- 1** Select one or more of the delegation buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] in the PGM/PST bank), turning them on.

You can press more than one button at the same time.

Notes

The buttons for [Key5] to [Key8] and [DSK5] to [DSK8] require previous assignment in the Setup menu. *For details, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534).*

- 2** Select the transition type.

To fade a key in or out: Press the [MIX] button, turning it on.

To insert or delete a key using a dedicated wipe pattern: Press the [WIPE] button, turning it on.

To insert or delete a key using a dedicated DME wipe pattern: Press the [DME] button, turning it on.

To instantaneously insert or remove the key: press the [CUT] button, turning it on.

If, in the Setup menus, you set insertion and deletion as independent modes, make the settings for the next transition in the independent key

transition control block.

Separate settings are required both when inserting a key and when deleting it. For example, with the key not inserted, if you select the transition type and carry out a transition, this will be the setting when inserting a key. You can also use the Transition menu to select a desired independent key transition type for each key (*see the next section*).

For details of the wipe settings, see “Wipe Settings for Independent Key Transitions” (page 309). For details of DME wipe settings, see “DME Wipe Settings for Independent Key Transitions” (page 350).

3 Execute the transition.

To insert or delete the key gradually with a mix or wipe transition:

Press the [AUTO TRANS] button.

For details of the transition rate, see “Setting the Independent Key Transition Rate” (page 187).

For details of operation together with a common transition, see “Combining other transitions with independent key transitions” (page 181).


To cut the key in or out instantaneously: Press the [KEY ON] button on the keyer.

Notes

- In an independent key transition, the pattern limit function is not available.
- When the following DME effects are set, the effects may be applied during wipe transitions. If the effects are not necessary, cancel the settings.
 - Trail
 - Motion Decay
 - Wind

When the Keyframe Strobe effect is set, operating keyframes do the same effect. Cancel the unnecessary settings.

Independent key transition operations when using the CCP-6224/6324 Control Panel

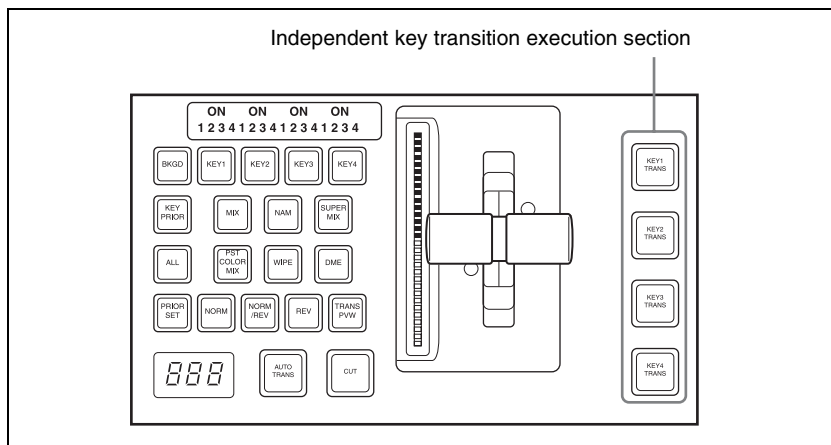

Transition control block (compact type)

To carry out an independent key transition, press the corresponding button in the independent key transition execution section of the transition control block. The color of the button shows the status as follows.

Lit green: transition in progress.

Lit amber: key inserted.

Lit red: key inserted into final program output.

Off: no key inserted.

For details of setting the transition rate, see “Setting the transition rate in the Flexi Pad control block” (page 167).

Notes

The buttons for [Key5] to [Key8] and [DSK5] to [DSK8] require previous assignment in the Setup menu. *For details, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534).*

Setting the Independent Key Transition Type by a Menu Operation

You can also select the required independent key transition type by a menu operation.

- 1 In the M/E or PGM/PST menu, select first the desired one from VF1 'Key1' to VF4 'Key4,' then HF6 'Transition.'

The Transition menu for the selected appears.

- 2 Select the required transition type in the <Transition Type> group.

If, in the Setup menus, you set insertion/deletion as independent modes, make the settings for insertion in the <On Transition Type> group, and the settings for deletion in the <Off Transition Type> group.

Setting the Independent Key Transition Rate

There are two ways of setting the transition rate: using the Flexi Pad control block, Multifunction Flexi Pad control block or numeric keypad control block to enter a numeric value, or using the Key menu to access the Transition menu for the M/E or PGM/PST bank.

You can also display the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and change the settings. (See “*Displaying a List of Transition Rates and Changing the Settings*” (page 434).)

When the setup selection is for separate transition rates for inserting or deleting a key, you can set both rates independently. For example, with the system in the state with the key not inserted, the transition rate setting applies to key insertion.

Setting the independent key transition rate in the Flexi Pad control block

Notes

In the PGM/PST bank or when using a simple-type transition control block, you cannot use the Flexi Pad control block to set the transition rate.

- 1 In the Flexi Pad control block of the M/E bank, hold down the [TRANS RATE] button, and in the independent key transition control block, press the delegation button [KEY1] to [KEY8] for the key for which you want to set the transition rate.

The memory recall section display is now ready to accept the entered independent key transition rate.

- 2 Enter the desired transition rate with the numeric keypad.
 - Enter a value of up to three digits.

- To cancel the entry, press any of the six buttons in the leftmost column ([WIPE], [DME], ...) or the [TRANS RATE] button.

For details of frame input mode and timecode input mode, see page 166.

3 Press the [ENTR] button.

Setting the independent key transition rate in the numeric keypad control block

Notes

You cannot use the numeric keypad control block to set the transition rate for a simple transition.

1 In the numeric keypad control block, hold down the [TRANS RATE] button, and in the independent key transition control block, press the delegation button [KEY1] to [KEY8] ([DSK1] to [DSK8] in the PGM/PST bank) for the key for which you want to set the transition rate.

The numeric keypad control block changes to the mode for inputting the independent key transition rate, and its display now shows the corresponding region name and the current transition rate set for the region.

2 With the numeric keypad, enter the transition rate.

- Enter a value of up to three digits.
- To clear the entry value, press the [CLR] button.

For details of frame input mode and timecode input mode, see page 166.

3 Press the [ENTER] button.

This confirms the entry, and the selected region name and the set transition rate appear in the numeric keypad control block display.

To enter a difference from the current value

After pressing the [+/-] button, enter the difference and press the [TRIM] button.

To change the sign (+ or -), press the [+/-] button.

Setting the independent key transition rate in the Multifunction Flexi Pad control block

For example, to set the independent key transition rate for M/E-1 key1, carry out the following procedures.

- 1** In the Multifunction Flexi Pad control block, press the [TRANS RATE] button.
The Multifunction Flexi Pad control block switches to the transition rate setting mode.
- 2** In the region selection buttons, select the switcher bank.
- 3** Press the [TRANS SEL] button in the memory recall section.
You can select the type of transition for which to set the rate.
- 4** Press the [KEY1] button.
This enables setting of the independent key transition rate for M/E-1 key1.
- 5** Watching the alphanumeric display, enter the transition rate you want to set with the memory recall section button.
If required, press the [TC] button to switch the input mode (frame count input or timecode input).
 - Enter a value of up to three digits.
 - To cancel the input, press any of the mode selection buttons.
- 6** Press the [ENTR] button.

Setting the independent key transition rate by a menu operation

- 1** In the M/E or PGM/PST menu, select first the desired one from VF1 'Key1' to VF4 'Key4,' then HF6 'Transition.'
The Transition menu for the selected key appears.
- 2** Select any transition type in the <Transition Type> group.
If, in the Setup menus, you set insertion/deletion as independent modes, make the settings for insertion in the <On Transition Type> group, and the settings for deletion in the <Off Transition Type> group.
- 3** Turn the knob to set the transition rate.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frame count)

Independent key transition rate display

To check the set independent key transition rate, press the key source name display/key snapshot button above the corresponding delegation button when the [K-SS] button is off.

Displaying the independent key transition rates in a menu and changing the settings

For each of the M/E and PGM/PST banks, you can also display the transition rate, independent key transition rate and fade-to-black transition rate, and change the settings.

For more details, see “Displaying a List of Transition Rates and Changing the Settings” (page 434).



Fade to Black

The PGM/PST bank provides a fade-to-black function, controlled with the [FTB] button in the fade to black control block.


Notes

In multi-program mode or DSK mode, it is possible to carry out a fade-to-black on a number of programs simultaneously.

You can also make a Setup menu setting such that a fade-to-black does not apply to particular programs.

For details of the setting, see “Settings Relating to Video Switching (Transition Menu)” in Chapter 20 (Volume 3).

Fade to Black Operation

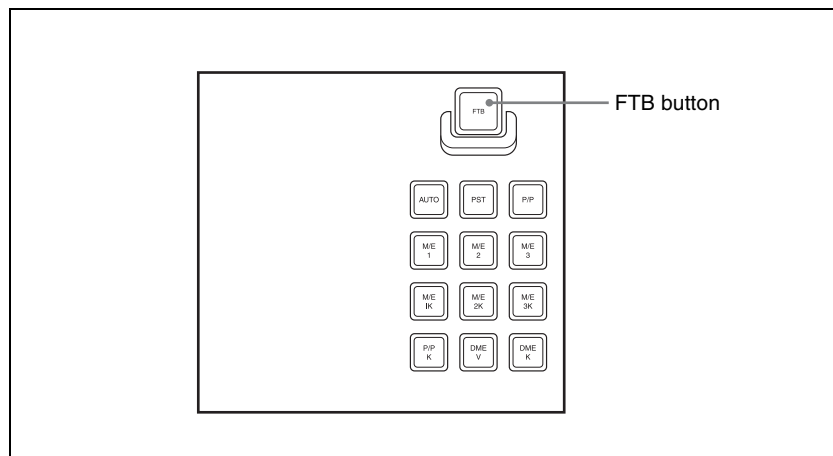

Fade to black control block

Carrying out a fade to black

To carry out a fade to black, press the [FTB] button in the fade to black control block.

The fade to black is carried out with the transition rate set for the program output of the PGM/PST bank.

During the transition, the [FTB] button lights amber. When the transition completes (the video is completely black), the button lit color changes to red.

Setting the Fade to Black Transition Rate

Setting the fade to black transition rate

- 1** In the PGM/PST menu, select first VF7 ‘Misc,’ then HF1 ‘Transition.’
The Transition menu appears.
- 2** Select [FTB].
- 3** Turn the knob to set the fade to black transition rate.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frame count)


Displaying the transition rates in a menu and changing the settings

You can also display the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and change the settings.

For more details, see “Displaying a List of Transition Rates and Changing the Settings” (page 434).

Simple Transition

Basic Operations for Simple Transitions

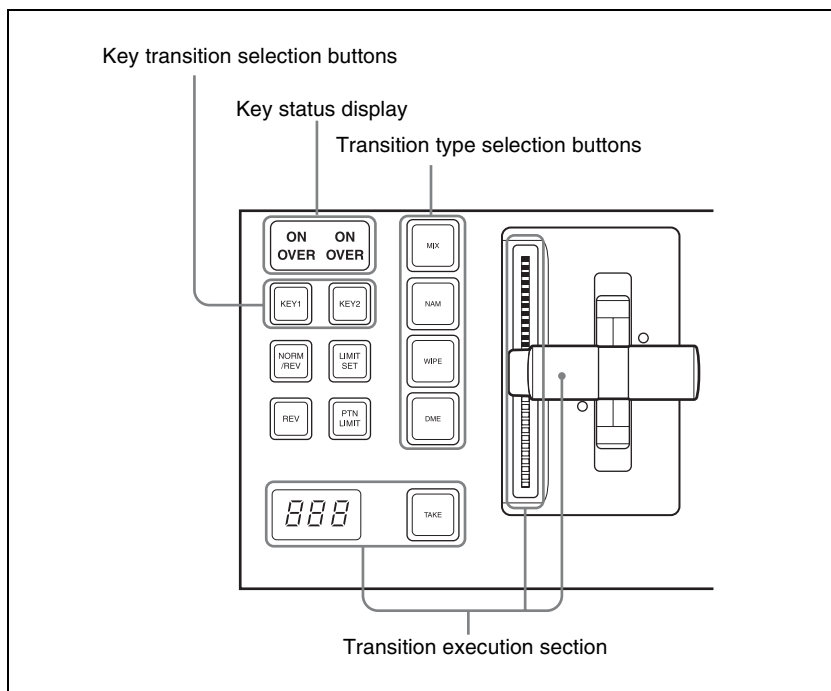

Transition control block (simple right-hand type)

Notes

The simple transition control block cannot be installed in the CCP-6224/6324 Control Panel.

Carrying out a transition using a simple-type transition control block

- 1 With the background A row of cross-point buttons in the cross-point control block, select the background video.



- 2** Using one of the following methods, select the way in which the transition will affect the image.

Use a combination of the transition type selection buttons ([MIX], [NAM], [WIPE] and [DME]) and the next transition selection buttons ([KEY1] and [KEY2]).

For an overview of the mix, NAM, wipe, and DME wipe transition types, see “Transition Types” (page 147).

To change the background only: Press one of the [MIX], [NAM], [WIPE], and [DME] buttons.

The [KEY1] and [KEY2] buttons go off, and the system changes to the background transition mode.

To insert or delete key 1: Hold down the [KEY1] button and press one of the [MIX], [NAM], [WIPE], and [DME] buttons.

To insert or delete key 2: Hold down the [KEY2] button and press one of the [MIX], [NAM], [WIPE], and [DME] buttons.

To insert or delete key 1 and key 2 simultaneously: Hold down the [KEY1] and [KEY2] buttons, and press one of the [MIX], [NAM], [WIPE], and [DME] buttons.

To use a super mix or preset color mix: Select [Super Mix] or [Preset Color Mix] in the Misc > Transition menu for the M/E or PGM/PST bank.

To set the key priority, use the Misc > Key Priority menu for the M/E or PGM/PST bank. For details, see “Setting the Key Priority by a Menu Operation” (page 156).

Notes

The transition type selection buttons ([MIX], [NAM], [WIPE], and [DME]) can be assigned to other transition types in setup.

For details, see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).

- 3** Select the new background for after the transition.

- Select the background video with the background B row of cross-point buttons.
- To insert a key, select the key signal, and make various settings as required.

For details of key settings, see Chapter 4 “Keys” (page 199).

- 4** Depending on the transition type selected in step **2**, make the required settings.

For details of the settings, see the following sections:

Super mix: “*Super Mix Settings*” (page 161)

Preset color mix: “*Color Matte Settings*” (page 162)

Wipe: “*Basic Procedure for Wipe Settings*” (page 283)

DME Wipe: “*Basic Procedure for DME Wipe Settings*” (page 339)

Clip transition: “*Clip Transition Operations*” (page 403)

5 Carry out the transition in the transition execution section.

For a gradual transition such as a mix or wipe: Press the [TAKE] button, or operate the fader lever.

See “Setting the Transition Rate” (page 166) and “Pattern Limit” (page 171) as required.

Display of the Key Output Status and Key Priority

You can check the output status of keys 1 and 2 and the key priority setting, in the key status display in the transition control block.

The key status display includes two ON indicators corresponding to keys 1 and 2.

Display of the key output status

When the key is inserted in the output from the M/E or PGM/PST bank, the indication “ON” lights, and when it is not inserted, the indication goes off.

Key priority display

The key lying in front on the program monitor has an indication “OVER” lit.

To set the key priority, use the Misc >Key Priority menu for the M/E or PGM/PST bank. For details, see “Setting the Key Priority by a Menu Operation” (page 156).

Split Fader

What does “split fader” mean?

The term “split fader” refers to the function of carrying out a transition with the fader lever split into left and right halves, so that the background A and background B buses can be manipulated separately.

To use the split fader, the following conditions must be met.

- The fader lever is in bus fixed mode. (See “Settings Relating to Video Switching (Transition Menu)” in Chapter 20 (Volume 3).)



- The necessary settings have been made in a Setup menu to enable the split fader (See “*Settings Relating to Video Switching (Transition Menu)*” in Chapter 20 (Volume 3).)
- A background is selected for the next transition.
- For the transition type, [MIX] or [NAM] is selected.

Split fader operation

The two halves of the split fader lever correspond to the buses as follows.

Right fader lever: Background A bus

Left fader lever: Background B bus


The relationship between the positions of the two fader levers and the image output in a mix is as follows.

Left lever position	Right lever position	A bus output	B bus output
Top	Top	100%	0%
Bottom	Top	100%	100%
Top	Bottom	0%	0%
Bottom	Bottom	0%	100%
Center	Center	50%	50%

- When the transition type is NAM, the outputs of the A bus and B bus in the above table are the outputs subjected to NAM.
- The transition indicators always show the progress of the background A bus.
- The operation of the left lever and that of the right lever can be swapped. (See “*Operation Settings (Operation Menu)*” in Chapter 19 (Volume 3).)

Independent Key Transitions With a Simple Transition Module

You carry out independent key transition operations using the independent key transition control block (simple type). This controls only keys 3 and 4. However, each key button can be assigned to any key in setup (see “*Overall Control Panel Settings (Config Menu)*” in Chapter 19 (Volume 3)).

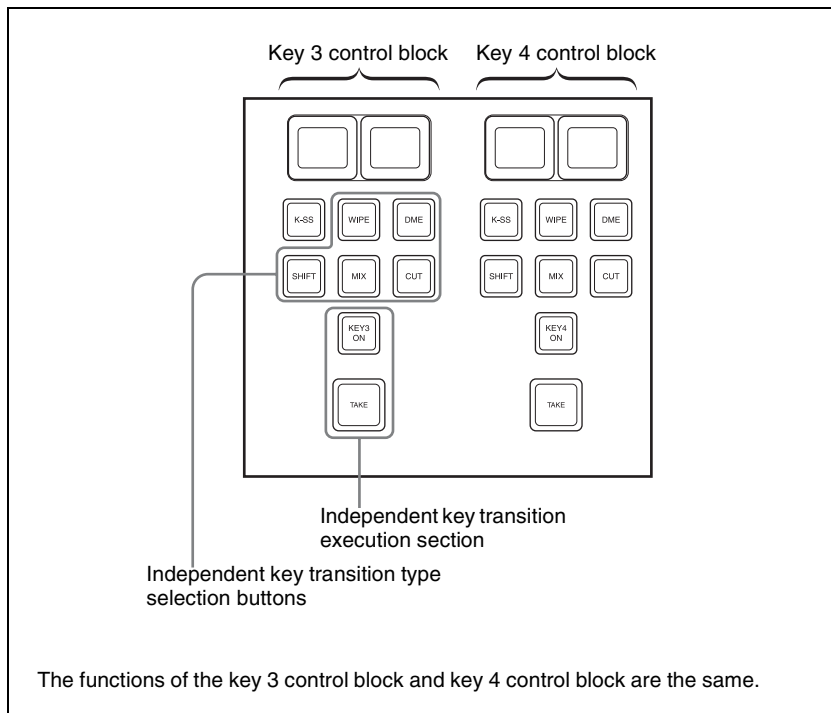

Independent key transition control block (simple type)

Carrying out a transition using a simple-type independent key transition control block

- 1 Select the transition type for key 3 or key 4 using the independent key transition type selection buttons.

To fade a key in or out: Press the [MIX] button, turning it on.

To insert or delete a key using a dedicated wipe pattern: Press the [WIPE] button, turning it on.

To insert or delete a key using a dedicated DME wipe pattern: Press the [DME] button, turning it on.

For details of wipe settings, see “Wipe Settings for Independent Key Transitions” (page 309). For details of DME wipe settings, see “DME Wipe Settings for Independent Key Transitions” (page 350).

To cut the key instantaneously in or out: Press the [CUT] button, turning it on.

If, in the Setup menus, you set insertion and deletion as independent modes, make the settings for the next transition in the independent key transition control block.

Separate settings are required both when inserting a key and when deleting it. For example, with the key not inserted, if you select the transition type and carry out a transition, this will be the setting when inserting a key.

- 2** Carry out the transition in the independent key transition execution section.

To insert or delete the key gradually with a mix or wipe transition:

Press the [TAKE] button.

To set the independent key transition rate using a simple-type transition control block, use the key 3 and key 4 Transition menus. For details, see “Setting the Independent Key Transition Rate” (page 187).

To cut the key in or out instantaneously: Press the [KEY 3 ON] button or [KEY 4 ON] button.

Notes

In an independent key transition, the pattern limit function is not available.

Chapter 4 Keys

Overview

A key is an effect in which a part of the background image is replaced by an image or superimposed text. The signal determining how the background is cut out is termed “key source,” and the signal that replaces the cut-out part is termed “key fill.”

The system component responsible for processing a key is referred to as a keyer.

Each M/E bank and the PGM/PST bank has eight keyers, and all of these keyers provide the same functions.

Notes

When the signal format is 1080P, four keyers can be used (keys 1 to 4).

Key Types

The key type indicates the manner in which the key source signal is used to cut out the background. In each bank, you can use the following key types. You can select the key type using the key type selection buttons in the key control block or Multi function Flexi Pad control block, or by a setting in the Type menu for the keyer. (See “Key Type Setting” (page 208).)

Luminance key

The background is cut out according to the luminance (Y) of the key source signal, and at the same time the key fill signal is cut out and then added to the background signal.

Linear key

This is a type of luminance key, but there is a reduced variability in gain, allowing more precise adjustment.

Color vector key

The key signal is created from a combination of the luminance and chrominance components of the key source signal. When perfect keying is not possible with a luminance key, this allows a key signal to be created even if the luminance level is low, provided that the colors have high saturation.

Clean mode


In a luminance key, linear key or color vector key, you can enable the clean mode. When the clean mode is on, the key source does not affect the key fill, which is added unchanged to the background. This improves the keyed image quality, but means that the part of the key fill signal which is not to be inserted must be completely black, or it will color the background. You set the clean mode with the Type menu of the respective keyer. (See “*Setting the key type in a menu*” (page 208).)

Note that in the following situations, the clean mode goes off, and cannot be turned on.

- When the key type is a pattern key
- When key inversion is on
- When the key fill is a matte
- When the key edge is an outline
- When the key edge is normal with soft edge being on
- When fine key is on
- When the key positioner is on

Chroma key

A key signal based on a particular color is used to cut out the background, and the key fill is then inserted. The inserted signal is also referred to as the foreground, and the composite image is called a chroma key image.

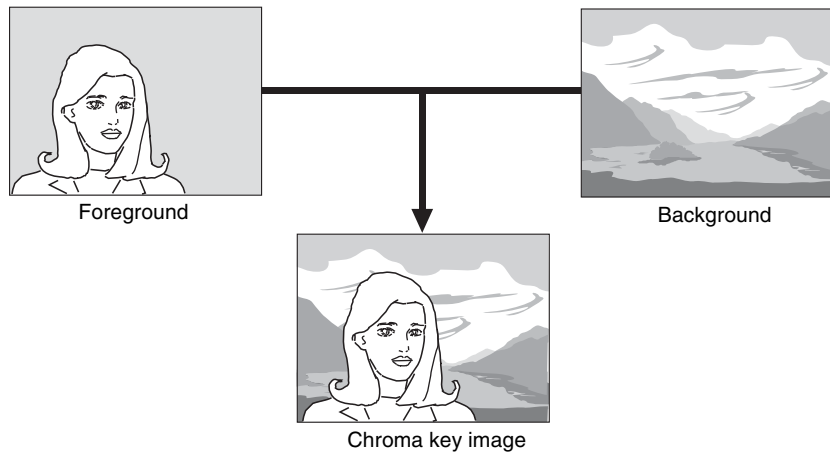

For details of chroma key composition, see “*Chroma Key Composition*” (page 211). For details of video adjustment operations and the adjustment items, see “*Chroma Key Adjustments*” (page 212).

Wipe pattern key

This uses the wipe pattern selected for a transition as the key source.

Key wipe pattern key

This uses the wipe pattern selected for an independent key transition as the key source.

Note on wipe pattern modifiers



In a wipe pattern key or key wipe pattern key, you can apply various modifications, depending on the pattern used, and the modifiers in common with a wipe. However, modifiers which relate to the wipe direction and edge are not reflected.

Key Modifiers

Edge modifiers

You can apply borders and other effects to the edge of the key. (See “Key Edge Modifications” (pages 222 and 243).)

Name	Effect	Image
Normal	This is the state with no key edge modifiers applied.	
Border	This applies a uniform width border to the edge of the key. You can adjust the border width and density. You can also enable the separate edge function, and adjust the top, bottom, left, and right border widths separately.	

Name	Effect	Image
Drop border	This applies a border below and to the right for example, of the key. You can adjust the border width, position, and density.	
Shadow	This applies a shadow below and to the right for example, of the key. You can adjust the shadow width, position, and density.	
Outline	This uses the outline of the original key as the key. You can adjust the width and density of the outline. You can also enable the separate edge function, and adjust the top, bottom, left, and right outline widths separately.	
Emboss	This applies an embossing effect to the outline of the key. You can adjust the width and position of the embossing, and the density. You can adjust the density separately for key fill and key edge. When embossing is on, the Fine Key and zabton functions go off.	—
Soft edge	This softens the edge of the key.	—
Zabton	This inserts a translucent pattern behind a key. You can adjust the pattern size, softness, density and color.	—

Edge type and key fill/key source position

The key edge modification function has two modes: a mode (“key drop ON mode”) in which the key fill/key source position moves downward, and a mode (“key drop OFF mode”) in which it does not move downward.

Key drop ON mode: The key fill/key source position moves downward by eight scan lines or four scan lines. When a drop border or shadow is selected, it is possible to apply a border to the top edge of the key.

Key drop OFF mode: The key fill/key source position does not move. When a drop border or shadow is selected, it is not possible to apply a border to the top edge of the key.

In the key drop ON mode, a menu setting selects between the mode (“4H mode”) in which the key fill/key source position is lowered by four scan lines, and the mode (“8H mode”) in which the key fill/key source position is lowered by eight scan lines.

When Fine Key is on, the edge width is forced to the range 0.00 to 4.00.

Note that in the following situations, the key drop mode is forcibly turned on.

- When the edge type is border, outline, or emboss
- When the edge type is normal with soft edge being on
- When Fine Key is on

To fix key fill / key source in key drop off mode

In the Edge menu, switch frame delay mode on (*see page 226*).

Regardless of the fine key and edge type settings, key fill and key source are fixed in key drop off mode. In this mode key image has a one-frame delay.

Notes

This function uses the resizer, and therefore the normal effect of the setting is not obtained while using DME wipe or other effect that uses the resizer.

Edge fill

When a border, drop border, or shadow modifier is selected, you can select a signal to fill these edge effects.

The edge fill may be either the signal from the dedicated color matte generator, or the signal currently selected on the utility 1 bus.

In the case of an outline, there is no edge fill signal selection, because the key fill signal fills the outline, and the rest of the image remains as the background. For the emboss effect, in place of the edge fill signal, the emboss fill matte 1 and emboss fill matte 2 signals are used.

Masks

A mask is used to inhibit the effect of a key over a part of the image. This allows parts of the background which would otherwise be keyed to be protected, or to correct the key if it is not of the desired shape.


For details of masking operations, see “Masks” (pages 229 and 247).

Key mask and background mask

There are two types of mask: a key mask and a background mask.

Key mask: This masks out a part of the key, which will result in the background appearing.

Background mask: This masks out a part of the background, which will result in the key fill appearing.

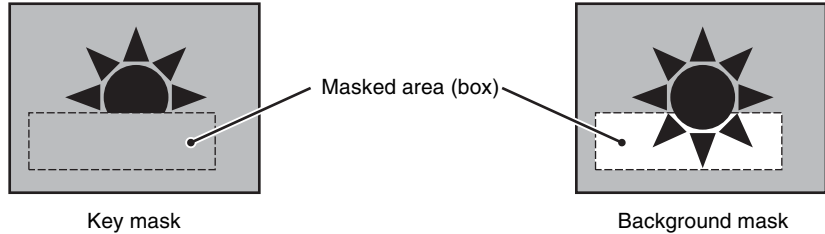

Main mask and subsidiary (“sub”) mask

Each keyer allows two masks to be used simultaneously, and these are referred to as the main mask and the sub mask. The signal that determines the mask shape and size is termed the mask source, and different sources are used for the main mask and sub mask.

Main mask: This uses the signal from the dedicated box generator provided on each keyer, or the signal from the dedicated pattern generator as the mask source.

When the box generator is selected, a rectangular mask is formed. You can adjust the positions of the four sides of the box separately.

When the pattern generator is selected, you can select the pattern and apply modifiers.

Sub mask: This uses the wipe generator signal or the signal selected on the utility 1 bus, as the mask source.

When the wipe generator is selected, the patterns and the pattern modifiers are the same as in a wipe transition.

Key Memory

The key memory function allows the keyer settings on each cross-point button to be automatically stored, so that the next time the same cross-point button is selected these settings are recalled automatically.

There are two modes for key memory: simple mode and full mode.

The parameters stored in each mode are as follows.

Simple mode: key type, clean mode (including the plane setting for chroma keying), key position, key inversion, and adjustment values for the particular key type (Clip, Gain, Density, Filter, etc. This includes color vector key, wipe pattern key, key wipe pattern key, and chroma key.

However, in the case of a chroma key, it excludes color cancel, Y balance, foreground CCR, window, and shadow.)

Full mode: All settings except transition (the same parameters as simple mode, Fine Key, key modifiers, main and sub mask settings, chroma key detailed settings, and so on)

For the settings for these modes, see “Settings Relating to Keys, Wipes, Frame Memory and Color Correction (Key/Wipe/FM/CCR Menu)” in Chapter 20 (Volume 3).

Key Default

With a simple operation you can return the key adjustment values to their defaults.

The adjustment values which can be returned to their default values are as follows.

- Adjustment values for the particular key type (Clip, Gain, Density, Filter, etc.)
In the case of chroma keying, all adjustment values return to their default values.
- Key position
- Key inversion
- Clean mode

For details, see “Returning the key adjustment values to their defaults” (page 251).

For the menu operation to return the key adjustment values to their defaults, see “Returning to default state in function groupings” (page 118).



Key Setting Operations Using Menus

There are two ways of making key settings: either using menus, or using the key control block or the Multifunction Flexi Pad control block.

This section describes basic procedures for making key settings using the menus, taking the M/E-1 >Key1 menu as an example.

Operations in the Key menus are the same for all banks (M/E-1 to M/E-3 and PGM/PST).

For details of the method of using the key control block, see “Key Setting Operations With the Key Control Block” (page 239).

Key Setting Menus

The key setting menus for each bank (M/E-1 to M/E-3 and PGM/PST) are as follows.

Bank	Keys set	Menus
M/E-1	Keys 1 to 8	M/E-1 >Key1 to 8
M/E-2	Keys 1 to 8	M/E-2 >Key1 to 8
M/E-3	Keys 1 to 8	M/E-3 >Key1 to 8
M/E-4	Keys 1 to 8	M/E-4 >Key1 to 8
PGM/PST	Downstream keys 1 to 8	PGM/PST >DSK1 to 8

Notes

When the signal format is 1080P, only keys 1 to 4 can be used.

Accessing a key setting menu

For example, to access the M/E-1 >Key1 menu, carry out any of the following procedures.

- In the menu control block, select the top menu selection button [M/E 1], then press VF1 ‘Key1.’
If VF1 ‘Key5’ is shown, press the [KEY1-4] switching button at the top of the menu, turning it on, then press VF1 ‘Key1.’

Switching button



- In the M/E-1 bank transition control block, press the KEY1 next transition selection button twice in rapid succession.
- In the M/E-1 bank independent key transition control block, press the key delegation button [KEY1] twice in rapid succession.
- In the key control block, press the M/E delegation button [M/E1], then press the key delegation button [KEY1] twice in rapid succession.

Any of the above operations displays the M/E1 >Key1 menu.

Note that you can access the DSK menus by pressing the button for the corresponding key in the downstream key control block twice in rapid succession.

Notes

- To select [M/E 4] with the top menu selection buttons, it is first necessary to assign a button in the Setup menu. *For details, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532).*
- To select [Key5] to [Key8], and [DSK5] to [DSK8] in the key control block, a previous assignment in the Setup menu is required. *For details, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534).*

Key Type Setting

Setting the key type in a menu

- 1 In the M/E-1 >Key1 menu, select HF1 ‘Type.’

The Type menu appears.

- 2 In the <Key Type> group, select the key type.

Luminance: luminance key

Linear: linear key

Chroma: chroma key

Color Vector: color vector key

Wipe Pattern: wipe pattern key

Key Wipe Pattern: key wipe pattern key

For the selected key type, you can now set the parameters.

For an overview of the key types, see “Key Types” (page 200).

3 Carry out the following settings as required, depending on the key type selected in step 2.

To enable clean mode (see page 201) for a luminance key, linear key or color vector key: Select [Clean Mode] so that it is set on.

When clean mode is enabled, key fill is added to the background without cutting out with key source.

When chroma key is selected: Select [Chroma Adjust] to access the Chroma Adjust menu (see page 214), and make the required settings.

When a wipe pattern key is selected: In the M/E-1 >Wipe menu (see page 283), select the pattern and set any modifiers, then return to the M/E-1 >Key1 menu.

When a key wipe pattern key is selected: In the M/E-1 >Key1 > Transition >Wipe Adjust menu (see page 309), carry out pattern selection and modifier setting, then return to the M/E-1 >Key1 >Type menu.

Notes

For a wipe pattern selected for a wipe pattern key or key wipe pattern key, the [Edge] and [Direction] modifier settings are not available.

4 Set the parameters.

• When a luminance key or linear key is selected

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for generating the key signal	+109.59 to -7.31
2	Gain	Key sensitivity	-100.00 to +100.00
3	Density	Key density	0.00 to 100.00
4	Filter	Filter coefficient	1 to 9 ^{a)}

a) Setting this value to 1, produces the “through” state in which no filter is applied. The larger the value, the more strongly the filter applies.

• When a chroma key is selected

Knob	Parameter	Adjustment	Setting values
3	Density	Key density	0.00 to 100.00

• **When a color vector key is selected**

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Y Clip	Reference level for creating luminance signal	+109.59 to -7.31
2	Y Gain	Luminance signal sensitivity	-100.00 to +100.00
3	C Clip	Reference level for creating chrominance signal	100.00 to 0.00
4	C Gain	Chrominance signal sensitivity	-100.00 to +100.00
5	Density	Key density	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Y Filter	Luminance signal filter coefficient	1 to 9
2	C Filter	Chrominance signal filter coefficient	1 to 9

• **When a wipe pattern key or key wipe pattern key is selected**

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of edge softness	0.00 to 100.00
3	Density	Key density	0.00 to 100.00

5 Make the following settings as required.

To invert the black and white sense of the key source: Press [Key Invert], turning it on.

To adjust the horizontal position or key source width for a luminance key, linear key, or chroma key: Press [Key Position], turning it on, and set the parameters.

Knob	Parameter	Adjustment	Setting values
1	H Phase	Key horizontal position	-4.00 to +4.00
2	Left	Key left edge position	-4.00 to +4.00
3	Right	Key right edge position	-4.00 to +4.00

To set the key priority: Press [Key Priority] or select VF7 ‘Misc’ and HF3 ‘Key Priority’ to access the Key Priority menu.

For details, see “Setting the Key Priority by a Menu Operation” (page 156).

Chroma Key Composition

In creating a chroma key image, either a normal mix or an additive mix can be used. To select which, use the Type >Chroma Adjust menu for the keyer.

Normal mix: The foreground is cut out with the key signal, and then combined with the background, which has also been cut out with the key signal.

Additive mix: The background, which has been cut out with the key signal, is combined with the unshaped foreground. This is effective for a natural-looking composite when the scene includes glass or other translucent objects.

Plane function

In an additive mix, the foreground is not shaped by the key signal, and variations in the (blue) background appear in the composite image. To prevent this, it is possible to set a particular luminance level for the background, and any parts below this level are cut forcibly.

Composing an image by chroma keying

There are two types of composition for chroma keying: normal mix, and additive mix.

- 1** In the M/E-1 >Key1 menu, select HF1 'Type.'
- 2** Select [Chroma] in the <Key Type> group.
It becomes possible to adjust the key density (*see page 209*).
- 3** Select [Chroma Adjust].
The Chroma Adjust menu appears.
- 4** Carry out auto chroma key adjustments.
Also carry out manual adjustments if necessary to obtain an optimum chroma key image.
- 5** In the <Mix Mode> group, select [Normal Mix] or [Additive Mix] depending on the desired type of chroma key composition.

When using an additive mix for chroma keying, the (typically blue) background parts of the foreground video must be converted to black. For this, use the color cancel function (*see page 215*).

Using the plane function

In an additive mix, since no key is applied to the foreground, any variations in the (typically blue) background may appear in the composite image. To avoid this, a particular luminance level can be set for the (blue) background, and regions of lower luminance forcibly cut.

- 1 In the Chroma Adjust menu, set [Plane] on.
- 2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance level	0.00 to 100.00

Chroma Key Adjustments

Methods of adjusting the composite obtained from chroma keying include automatic adjustment with the auto chroma key function, and manual adjustment carrying out the necessary processing separately. The optimum results will be obtained by first carrying out adjustments with the auto chroma key function, then making any fine adjustments as required. The following manual adjustments are possible.

Key active

When this function is off, only the foreground is output and you can make adjustments of color cancel (*see the next paragraph*).

Color cancel

If the foreground image includes shades of the background color, turn this function on to remove the color from the foreground image.


Chroma key window

You can adjust the range over which the key signal is determined as matching the specified hue. When this adjustment is off the default ranges are used.

Chroma keying generates a key signal based on a particular color (reference color) in the foreground (typically a plain blue background), and the “window” refers to the range of colors which are regarded as matching this specified reference color to create the key signal.

As seen on a vectorscope (that is, in the hue-saturation color space), the range for this matching corresponds to a truncated sector. This range is specified by two parameters: the “Angle” parameter, which determines the range of the hue

parameter, and the “Crop” parameter, which determines the degree of truncation (*see the following figure*).

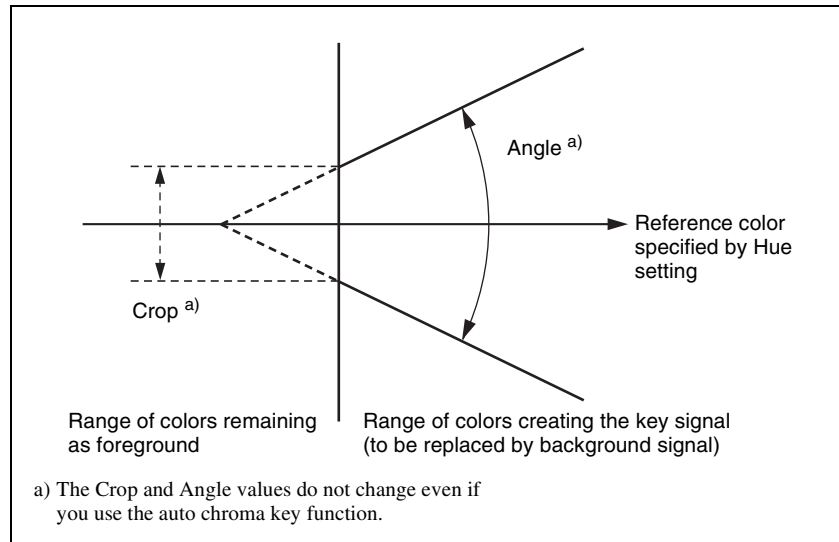

Window adjustment

Y balance

In normal chroma keying, the key signal is based on the chrominance component only, and all elements of the foreground with the same hue are replaced by the background. Using the Y balance function, you can specify a luminance level range within which the key is active, and replace the specified part by the background.

You can use the Y balance function independently on the key signal for the composition and the key signal for the color cancel function. When applied to the key signal for the composition, this produces the foreground with the color cancel effect applied. This can therefore be used to provide an impression of smoke, for example.

When the Y balance function is applied to the color cancel key, the relevant part is output in its original color without canceling, and therefore it is possible to combine colors which are the same color as the background (i.e. typically blue) in the foreground.

Chroma key shadow

This function provides a more realistic treatment when the shadow of an object in the field of view falls on the blue background. Since parts of the blue background darker than a specified intensity are treated as shadows, there is no effect on cutting out of the foreground.

Video signal adjustment

You can vary the foreground signal gain, or change the hue. There are separate adjustments for the gain of the overall video signal, and Y and C components.

Making auto chroma key adjustments

Auto chroma key is an automatic adjustment function which allows you to specify a part of the foreground video (for example, the blue background color) and use it as a reference for creating the chroma key image.

- 1 In the M/E-1 >Key1 menu, select HF1 'Type,' then select [Chroma] in the <Key Type> group.
- 2 Select [Chroma Adjust].
The Chroma Adjust menu appears.
- 3 Select [Sample Mark] in the <Auto> group.
The foreground video only appears on the monitor, with a white box-shaped sample selector.
- 4 Adjust the position and size of the sample selector, to specify the color to be used as the basis of chroma keying (typically a blue background).

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	-100.00 to +100.00 ^{a)}
2	Position V	Vertical position	-100.00 to +100.00 ^{a)}
3	Size	Size	1.00 to 100.00

a) The setting ranges depend on the signal format, screen aspect ratio, and size settings.

- 5 Select [Auto Start] in the <Auto> group.

This executes an auto chroma key based on the color specified by the sample selector, and displays the composite image on the monitor.

Making key active adjustments

When the key active function is on, the composite image is output to the monitor, and you can watch the monitor while manually adjusting the keying. When the key active function is off, only the foreground image appears. Set this off when manually adjusting color cancel (*see the next section*).

- 1 In the Chroma Adjust menu, set [Key Active] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Clip	Chroma key reference level	0.00 to 100.00
2	Gain	Key gain	-100.00 to +100.00
3	Hue	Hue	359.99 to 0.00
4	Density	Density	0.00 to 100.00
5	Filter	Filter coefficient	1 to 9

Making color cancel adjustments

If the background color is leaking into the foreground video, turning the color cancel function on allows you to eliminate this leakage.

- 1 In the Chroma Adjust menu, turn [Key Active] off.
Only the foreground image appears on the monitor.
- 2 In the <Color Cancel> group, set [Color Cancel] on.
- 3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00
5	Filter	Filter coefficient	1 to 9

- 4 Set [Key Active] on.

The chroma key composite image now appears in the monitor.

Making key signal adjustments for color cancel

When the color cancel function is set on, you can adjust the key signal for color cancel.

- 1 In the <Color Cancel> group of the Chroma Adjust menu, set [Color Cancel] on.
- 2 In the <Color Cancel> group, set [Cancel Key] on.

The cancel key is now on, and you can now adjust the key signal for color cancel.

Knob	Parameter	Adjustment	Setting values
1	Clip	Color cancel key reference level	0.00 to 100.00
2	Gain	Color cancel key gain	-100.00 to +100.00

3 Make the following settings, as required, in the <Color Cancel> group.

- When setting [Key Position] on and adjusting the color cancel key edge position

Knob	Parameter	Adjustment	Setting values
1	H Phase	Move left and right edges of the color cancel key simultaneously	Left edge position value shown
2	Left	Move left edge of the color cancel key	-3.00 to +3.00
3	Right	Move right edge of the color cancel key	-3.00 to +3.00

- When setting [Window] on and adjusting the detection range of the color cancel key

Knob	Parameter	Adjustment	Setting values
1	Crop	Crop value	100.00 to 0.00
2	Angle	Angle value	180.00 to 0.00

For details of the crop and angle parameters, see “Chroma key window” (page 212).

- When setting [Y Balance] on and adjusting the ratio in which Y balance is added to the color cancel key

Knob	Parameter	Adjustment	Setting values
1	Mixture	Ratio of Y balance key	0.00 to 100.00

Adjusting the window

Setting the window function on allows you to adjust the detection range used to determine the key signal. When this function is off, the default range is used for the key.

For an overview of the window, see “Chroma key window” (page 212).

After making sure that the values of Clip, Gain, and Hue are adjusted appropriately, use the following procedure to make the window adjustment.

1 In the Chroma Adjust menu, set [Window] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Crop	Crop value	100.00 to 0.00
2	Angle	Angle value	180.00 to 0.00

Adjusting the Y balance

Setting the Y balance on allows you to specify that, even if the hue is the same, only portions of a particular luminance will be replaced by the background.

For an overview of the Y balance, see “Y balance” (page 213).

1 In the Chroma Adjust menu, set [Y Balance] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Clip	Luminance range	0.00 to 100.00
2	Gain	Key gain	–100.00 to +100.00
3	Luminance	Luminance	0.00 to 100.00

Adjusting the chroma key shadow

This function allows a shadow falling on the (typically blue) background color to be rendered more realistically. Since portions of the (blue) background of less than a certain luminance are treated as shadows, there is no effect on cutting out of the foreground.

1 In the Chroma Adjust menu, set [Shadow] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Reference luminance for shadows	0.00 to 100.00
2	Gain	Shadow key gain	–100.00 to +100.00
3	Density	Shadow opacity	0.00 to 100.00
4	Soft	Shadow softness	0.00 to 100.00

Notes

When chroma key shadow is on, key edge is changed to normal, and soft edge is switched off.

Adjusting the video signal

You can change the gain of the foreground signal, or vary the Hue. There are separate adjustments for the gain of the whole video signal, or Y and C individually.

- 1 In the Chroma Adjust menu, set [FRGD CCR] on.
- 2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Overall gain of video signal	−100.00 to +100.00
2	Y Gain	Y signal gain	−100.00 to +100.00
3	C Gain	C signal gain	−100.00 to +100.00
4	Hue	Hue offset amount	−180.00 to +180.00

Selecting Key Fill and Key Source

Notes

The only signals that can be selected as key signals in the M/E-4 bank are premium inputs (inputs to the PREMIUM INPUTS connectors 1 to 20 of the switcher).

Selecting key fill and key source

To select key fill and key source for key 1 on the M/E-1 bank, use the following procedure.

- 1 In the M/E-1 >Key1 menu, select HF1 ‘Type.’
The Type menu appears.
- 2 In the <Key Fill> group, select either of the following for use as key fill.
Key Bus: signal selected on the key 1 fill bus
Matte: signal from the dedicated color matte generator
- 3 If you selected [Key Bus] in step 2, select the key fill signal on the key 1 row in the cross-point control block.

For the CCP-6224/6324 Control Panel, it is necessary to set the [AUX CTRL] button to Off in order to exit the AUX panel-less function (*see page 141*).

- 4** If you selected [Matte] in step **2**, in the same Type menu, press the [Matte Adjust] button to display the Matte Adjust menu, then adjust the single-color or two-color combination color matte. Select whether to use a single-color matte or a two-color combination in the <Fill Matte> group.

Flat Color: Adjust color 1 with the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Mix Color: Carry out a color mix. Adjust color 1 and color 2, and select a mix pattern (*see the next section*).

- 5** In the <Key Source> group, specify the key source selection mode.

Self: The key fill bus signal is automatically selected as the key source.

When the key type is selected as chroma key, select [Self].

Auto Select: The signal allocated, being paired with the key fill bus signal, to a cross-point button is automatically selected as the key source. The setting of key fill and key source pairs is carried out in the Setup menu. (*See “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).*)

Split: You can select a key source signal independently of the key source automatically selected in Auto Select mode.

- 6** When [Split] was selected in step **5**, hold down the [SPLIT] button in the key control block or the Multifunction Flexi Pad Control block, then in the cross-point control block key 1 row, select the key source signal. Alternatively, hold down the key delegation button in the transition control block and press a cross-point button in the key 1 row to select the key source signal.

Notes

- In the above-stated key 1 row operation, you can only select a key signal assigned to a cross-point button. For the method of selecting a video signal, see “To select a video signal assigned to a cross-point button” below.
- When [Split] is selected, the key memory function (*see page 205*) is disabled.

To select a video signal assigned to a cross-point button

By selecting the key source bus with an auxiliary bus control block AUX delegation button, and pressing the cross-point button, it is possible to select the video signal assigned to the cross-point button.

(If you press the cross-point button with holding down [KEY], the key signal assigned to the cross-point button.)

Notes

In the above operation, the following settings must have been made.

- Assigning the key source bus to an AUX delegation button

For details, see “Auxiliary Bus Control Block Settings (Aux Assign Menu)” in Chapter 19 (Volume 3).

- Setting the [KEY] button operating mode

For details, see “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3).

Selecting key source and key fill in the menu

Selecting key source

For example, to select the key source for M/E-1 key 1, use the following procedure.

- 1** In the M/E-1 >Key1 >Type menu, press [Signal Select].

The Signal Select menu appears.



- 2** In the <Target> group, press [Source].

- 3** In the <Key Source> group, select the key source selection mode (Self, Auto Select, or Split).

See step 5 in “Selecting Key Fill and Key Source” (page 219).

- 4** If you selected [Split], using any of the following methods, select the key source signal.

- Press directly on the list on the right.
- Press the arrow keys to scroll the reverse video cursor.

- Turn the knob.

Knob	Parameter	Setting	Values
1	No	Button number	1 to 128

5 In the <Assign> group, select the video signal or key signal from the V/K pair to assign to the key source.

6 Press [Set Xpt].

This selects the key source signal.

Selecting key fill

For example, to select the key fill for M/E-1 key 1, use the following procedure.

1 In the M/E-1 >Key1 >Type menu status area, press “Fill.”

The Signal Select menu appears.

2 In the <Target> group, press [Fill].

3 Select the fill signal from the list on the right.

4 Press [Set Xpt].

This selects the key fill signal.

Carrying out a color mix for key fill

When [Matte] is selected for key fill, you can combine color 1 and color 2. For the combination, you can use not only a key wipe generator pattern, but also the dedicated pattern for key edge color mix.

1 In the <Key Fill> group of the Type menu, select [Matte] and press [Matte Adjust].

The Matte Adjust menu appears.

2 Select [Mix Color] in the <Fill Matte> group.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Softness of the edge of the pattern	0.00 to 100.00

- 4** Select the combining pattern in the <Mix Pattern> group.

Key Wipe: The wipe pattern selected for an independent key transition is used for combination. You can change this pattern by pressing [Pattern Select] to open the menu for key wipe pattern selection (Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Wipe Adjust menu).

Key Edge Pattern: Combine using the dedicated pattern selected for the color mix in the key edge fill. You can change this pattern by pressing [Pattern Select] to open the menu for edge color mix dedicated wipe pattern selection (Mix Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Matte Adjust menu).

For details, see “Carrying out a color mix for the key edge fill matte” (page 226).

- 5** In the Type menu, adjust color 1 and color 2.

To adjust color 1, select [Color1], and to adjust color 2, select [Color2], then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

- 6** To interchange color 1 and color 2, press the [Color Invert] button, turning it on.

Key Edge Modifications

To modify the key edge of key 1 on the M/E-1 bank, use the following procedure.

- 1** In the M/E-1 >Key1 menu, select HF2 ‘Edge.’

The Edge menu appears.

- 2** Select the edge type in the <Edge> group.

For an overview of the key edge modifications, see “Edge modifiers” (page 202).

Normal: unadorned edge

Border: edge with border applied
Drop Border: edge with drop border applied
Shadow: edge with shadow applied
Outline: edge used as outline
Emboss: embossing effect applied to edge

If you select [Normal], skip to step 7.

3 Set the border width and other parameters.

When border or outline is selected: The setting parameters depend on the key type and whether the separate edge function is enabled or not. To enable the separate edge function, press [Separate Edge], setting it on.

• Separate edge off

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 8.00 ^{a)} (0.00 to 100.00) ^{b)}
3	Density	Density	0.00 to 100.00

a) In the “4H mode” and when [Fine Key] (page 225) is on, the setting value range is 0.00 to 4.00.

b) When a wipe pattern key or key wipe pattern key is selected as the key type

• Separate edge on

The left, right, top, and bottom border or outline widths can be adjusted independently. The separate edge function is only valid when a luminance key, linear key, or chroma key is selected as the key type.

Knob	Parameter	Adjustment	Setting values
1	Top	Top edge width	0.00 to 8.00 ^{a)}
2	Left	Left edge width	0.00 to 8.00 ^{a)}
3	Right	Right edge width	0.00 to 8.00 ^{a)}
4	Bottom	Bottom edge width	0.00 to 8.00 ^{a)}
5	Density	Density	0.00 to 100.00

a) In the “4H mode” and when [Fine Key] (page 225) is on, the setting value range is 0.00 to 4.00.

When drop border or shadow is selected: The setting parameter values depend on the on/off setting of key drop and the selection of 4H mode/8H mode (*see page 203*).

• “Key drop OFF” mode

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 8.00 ^{a)}
2	Position	Position	359.99 to 180.00
3	Density	Density	0.00 to 100.00

• “Key drop ON” mode

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 8.00 ^{a)}
2	Position	Position	359.99 to 0.00
3	Density	Density	0.00 to 100.00

a) In the “4H mode” and when [Fine Key] (page 225) is on, the setting value range is 0.00 to 4.00.

When emboss is selected:

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 4.00
2	Position	Position	359.99 to 0.00
3	Density ^{a)}	Density	0.00 to 100.00

a) The Density adjustment only affects the key edge. This can be adjusted separately from Key Density, and if Key Density is set to 0.00, the embossed edge effect only can be applied.

To make edge fill adjustments, carry out the settings in step 6.

4 Select the edge fill signal in the <Edge Fill> group.

Utility 1 Bus: signal selected on the utility 1 bus

Matte: signal from dedicated color matte generator.

It becomes possible to adjust color 1.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

When the edge type is outline, in place of the edge fill signal, the selected key fill signal fills the outline, and elsewhere remains as the background.

5 Carry out the following operation, depending on the selection in step 4.

When [Utility 1 Bus] is selected: Hold down the [UTIL] button in the cross-point control block, and select the signal in the background A bus row.

While the [UTIL] button is held down, the background A bus changes to the utility 1 bus.

Notes

To enable the [UTIL] button, its operation mode must be set to [Hold] beforehand. (See “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3).)

When [Matte] is selected: Press [Matte Adjust] in the same EDGE menu, to display the Matte Adjust menu, and adjust a single color or two-color combination color matte.

You can select whether to use a single color matte or a two-color combination color matte in the <Edge Matte> group.

For the color mix operation, see “Carrying out a color mix for the key edge fill matte” (page 226).

- 6** When emboss is selected for the edge type, adjust the color in the <Emboss Fill> group.

To adjust matte 1 press [Matte1], and to adjust matte 2 press [Matte2], then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

- 7** To make the edge soft, press [Soft Edge] to set it on, and adjust the softness.

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0.00 to 100.00

For a normal edge, when [Soft Edge] is enabled, [Key Drop] is kept on.

- 8** To make separate fine adjustments to the positions of the left, right, top, and bottom of the source edge, press [Fine Key], to set it on, and adjust the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Key top edge position	-2.00 to +2.00
2	Left	Key left edge position	-2.00 to +2.00
3	Right	Key right edge position	-2.00 to +2.00
4	Bottom	Key bottom edge position	-2.00 to +2.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	H Phase	Key horizontal position	Left edge position value shown
2	V Phase	Key vertical position	Top edge position value shown

Notes

In the emboss function it is not possible to set [Fine Key] on.

- When the edge type is normal, drop border or shadow, enabling the [Fine Key] function keeps [Key Drop] on.
- When applying a border to the key edge, enabling the [Fine Key] function halves the border width setting range.

To fix key fill and key source in key drop off mode

1 In the Edge menu, press [Key Delay Mode].

The Key Delay Mode menu appears.

2 Press [Frame Delay], setting it to On.

Notes

This function uses the resizer, and therefore the expected result of the setting may not be obtained if conditions do not allow the resizer to be used.

Carrying out a color mix for the key edge fill matte

When you select 'Matte' for the edge fill of a border, drop border, or shadow, you can create a combination of color 1 and color 2 using a wipe pattern generated by the dedicated pattern generator.

1 In the <Edge Fill> group of the Edge menu, select [Matte], then press [Matte Adjust].

The edge fill Matte Adjust menu appears.

- 2** In the <Edge Matte> group, select [Mix Color], turning it on.
- 3** Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Softness of pattern edge	0.00 to 100.00
3	Pattern	Pattern number	1 to 24 ^{a)}

a) The patterns are the same as standard wipes. (For details, see “Wipe Pattern List” in (page 486).)

To select the pattern, display the Mix Pattern Select menu by pressing [Mix Pattern] in the edge fill Matte Adjust menu. After selecting one of the patterns (standard wipe patterns 1 to 24) displayed in the Mix Pattern Select menu, you can adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Softness of pattern edge	0.00 to 100.00

- 4** Adjust color 1 and color 2.

To adjust color 1 press [Color 1], and to adjust color 2 press [Color 2], turning it on respectively, and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

- 5** If required, set the pattern modifiers.

- **When turning [Position] on and setting the pattern position**

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	-200.00 to +200.00 ^{a)}
2	Position V	Vertical position	-200.00 to +200.00 ^{a)}

a) See page 296.

- When turning [Multi] on and replicating the pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 ^{a)}

a) See page 301.

- When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	-100.00 to +100.00 ^{a)}

a) See page 300.

- When turning [Angle] on in the <Rotation> group and inclining the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	-100.00 to +100.00 ^{a)}

a) See page 298.

- When turning [Speed] on in the <Rotation> group and rotating the pattern at a constant speed

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	-100.00 to +100.00 ^{a)}

a) See page 299.

6 To interchange color 1 and color 2, press [Color Invert], turning it on.

Applying the zabton effects

1 In the Edge menu, press [Zabton], turning it on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Pattern edge softness	0.00 to 100.00
3	Density	Density	0.00 to 100.00

Notes

If in the pattern selection described below you select “Mask Pattern,” and “Box” for the main mask, the “Size” parameter here cannot be adjusted. Set “Size” in the Main Mask menu.

- 3** To adjust the pattern and color, press [Zabton Adjust].

The Zabton Adjust menu appears.

- 4** In the <Zabton Pattern> group, select the pattern.

Key Wipe: Use a key wipe.

You can change this pattern by pressing [Pattern Select] to open the menu for key wipe pattern selection (Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Wipe Adjust menu).

Key Edge Pattern: Use a color mixing pattern for key edge.

You can change this pattern by pressing [Pattern Select] to open the menu for edge color mix dedicated wipe pattern selection (Mix Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Matte Adjust menu).

Mask Pattern: Use the main mask Box or Pattern.

You can also press [Pattern Select], and in the corresponding pattern adjustment menu, change the pattern.

- 5** To adjust the color, press [Zabton Color] and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00
4	Density	Density	0.00 to 100.00

Masks

There are two masks, which can be used to mask off unneeded parts of a key or background, or to remove defects, and these are known as the main mask and subsidiary mask.

You can either use the main mask and subsidiary mask independently, or at the same time.

Using the main mask

For example, to use the main mask for key 1 on the M/E-1 bank, use the following procedure.

- 1 In the M/E-1 >Key1 menu, select HF3 'Main Mask.'

The Main Mask menu appears.

- 2 In the <Mask Type> group, select the mask type.

Key Mask: Masks a part of a key.

Bkgd Mask: Masks a part of a background.

- 3 In the <Mask Source> group, select the mask source.

Box: signal from the dedicated box generator

Pattern: signal from the dedicated pattern generator

- 4 Set the mask source parameters.

• When a box is selected

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	-100.00 to +100.00
2	Left	Left position	-100.00 to +100.00
3	Right	Right position	-100.00 to +100.00
4	Bottom	Bottom position	-100.00 to +100.00
5	Soft	Box softness	0.00 to 100.00

• When a pattern is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00
5	Pattern	Pattern number	1 to 24 ^{a)}

a) The pattern is the same as a standard wipe. (See "Wipe Pattern List" in Appendix (Volume 1) (page 486).)

To select the pattern, display the Mask Ptn Select menu by pressing the [Mask Ptn Select] button in the Main Mask menu.

After selecting one of the patterns (standard wipe patterns 1 to 24) displayed in the Mask Ptn Select menu, you can adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

5 To invert the black and white sense of the mask source, press the [Mask Invert] button, turning it on.

6 When a pattern is selected as the mask source, set the pattern modifiers as required.

• When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	-200.00 to +200.00 ^{a)}
2	Position V	Vertical position	-200.00 to +200.00 ^{a)}

a) See page 296.

• When turning [Multi] on and replicating the pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 ^{a)}

a) See page 301.

• When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	-100.00 to +100.00 ^{a)}

a) See page 300.

• When turning [Angle] on in the <Rotation> group and setting the angle of the pattern rotation

Knob	Parameter	Adjustment	Setting values
1	Angle	Pattern angle	-100.00 to +100.00 ^{a)}

a) See page 298.

- When turning [Speed] on in the <Rotation> group and setting the rate of pattern rotation

Knob	Parameter	Adjustment	Setting values
1	Speed	Rate of pattern rotation	–100.00 to +100.00 ^{a)}

a) See page 299.

Using the subsidiary mask

For example, to use the subsidiary mask for key 1 on the M/E-1 bank, use the following procedure.

- 1 In the M/E-1 >Key1 menu, select HF4 ‘Sub Mask.’
The Sub Mask menu appears.
- 2 In the <Mask Type> group, select the mask type.
Key Mask: Masks a part of a key.
Bkgd Mask: Masks a part of a background.
- 3 In the <Mask Source> group, select the mask source.

Wipe: wipe pattern selected for a transition

If you select [Wipe], select the pattern and make modifier settings in the M/E-1 >Wipe menu (*see page 283*), then return to this M/E-1 >Key1 menu.

In the case of a wipe pattern selected for a mask, the modifier [Edge] and [Direction] settings are not available.

Utility 1 Bus: signal selected on the utility 1 bus

When you selected [Utility 1 Bus], hold down the [UTIL] button in the M/E-1 bank cross-point control block, and select the signal with the background A bus buttons. While the [UTIL] button is pressed, the background A bus switches to the utility 1 bus.

Notes

To enable the [UTIL] button, its operation mode must be set to [Hold] beforehand. (*See “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3).*)

- 4 Set the mask source parameters.

- When wipe is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
2	Soft	Edge softness	0.00 to 100.00

• **When utility 1 bus is selected**

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for creating mask signal	+109.59 to -7.31
2	Gain	Gain	-100.00 to +100.00

- 5** To invert the black and white sense of the mask source, press the [Mask Invert] button, turning it on.

Applying a DME Effect to a Key

Notes

- On keys 1 to 4 of one M/E, a maximum of two DME effects (including DME wipes) can be used simultaneously. However, when using a DME wipe pattern for the background, the restriction depends on the execution mode as follows.
One-channel mode: DME can only be used in one place on keys 1 to 4.
Two-channel mode or three-channel mode: DME cannot be used for keys 1 to 4.
- When the system signal format is 1080P, and the DME input/output signal format is set to dual link mode, the following restrictions apply.
 - On keys 1 to 4 of one M/E, a maximum of one DME effect (including DME wipes) can be used simultaneously.
 - When a DME wipe pattern is selected for the background, DME cannot be used for keys 1 to 4.
- On keys 5 to 8 of one M/E, a maximum of two DME effects (including DME wipes) can be used simultaneously. However, for keys 5 to 8 of the M/E4 block, DME effects cannot be used.

For details, see “Interfacing With External Devices (Device Interface Menu)” in Chapter 19 (Volume 3).

For keys 5 to 8 on the M/E4 bank, DME effects cannot be applied.

Assigning a DME to a key

- 1** In the M/E-1 >Key1 menu, select HF5 ‘Processed Key.’
The Processed Key menu appears.

- 2 In the <DME Select> group, select the DME channel (DME1 to DME8) to be used.

The lit colors of [DME1] to [DME8] indicate the DME assignment.

Lit green: Shows the DME assigned to the currently selected key.

Lit amber: Shows the DME assigned to a key other than the currently selected key.

Off: DME is not assigned.

To select a DME being used by another keyer

Press [Override], turning it on, then select the DME channel.

The later selection is valid, and the button lights green.

Using two or three DME channels on one keyer

Notes

When the signal format is 1080P, the combination of two consecutively numbered DME channels that can be selected is DME1 and DME2, DME3 and DME4, DME5 and DME6, or DME7 and DME8. It is not possible to combine three or more DME channels.

- 1 Select the DME for the first channel (*see the previous item, “Assigning a DME to a key”*), then select the successive channel for the second channel. For the third channel select the channel after that.
- 2 To select the video signal for the second channel, hold down the [UTIL] button in the cross-point control block, and select the signal in the Key1 row (DME external video bus).
- 3 To select the video signal for the third channel, hold down the [UTIL] button in the cross-point control block, and carry out the following operation.
 - If the selected DME is channel 3 or channel 4, turn off the [KEY4] button in the key 2 row, then select the signal in the key 2 row (DME utility 1 bus).
 - If the selected DME is channel 7 or channel 8, turn on the [KEY4] button in the key 2 row, then select the signal in the key 4 row (DME utility 2 bus).

Using four DME channels on one keyer

Notes

When the signal format is 1080P, this operation cannot be carried out.

- 1 Select the DME channel 1 (or channel 5) for the first channel (*see* “Assigning a DME to a key” (page 233)). In the same way, select the DME channel 2 (channel 6) for the second channel, the DME channel 3 (channel 7) for the third channel, and the DME channel 4 (channel 8) for the fourth channel.
- 2 To select the video signal for the second channel, hold down the [UTIL] button in the cross-point control block, and select the signal in the Key 1 row (DME external video bus).
- 3 To select the video signal for the third channel, hold down the [UTIL] button in the cross-point control block, and carry out the following operation.
 - If the selected DME is channel 3, turn off the [KEY4] button in the key 2 row, then select the signal in the key 2 row (DME utility 1 bus).
 - If the selected DME is channel 7, turn on the [KEY4] button in the key 2 row, then select the signal in the key 4 row (DME utility 2 bus).
- 4 To select the video signal for the fourth channel, hold down the [UTIL] button in the cross-point control block, and carry out the following operation.
 - If the selected DME is channel 4, turn on the [KEY4] button in the key 2 row, then select the signal in the key 4 row (DME utility 2 bus).
 - If the selected DME is channel 8, turn off the [KEY4] button in the key 2 row, then select the signal in the key 2 row (DME utility 1 bus).

You can check the DME operating status in the Status menu (*see* page 437).

Assigning a DME output signal as a monitor signal

- 1 In the Processed Key menu, press [Monitor].
The Monitor menu appears.
- 2 Press [Monitor Set], turning it on.
- 3 In the <DME Select> group, select the DME channel (DME1 to DME8) to be used.

This assigns the selected DME output to DME MON V and DME MON K. The colors with which [DME1] to [DME8] are lit show the key assignment status.
Lit green: DME currently being monitored
Lit amber: DME that can be monitored
Off: Unassigned DME

Specifying the Key Output Destination

Using the key processed keyer signals (external processed key)

To select the key processed keyer key fill and key source signals on the AUX bus or edit preview bus, press [Ext Proc Key] turning it on, in the Processed Key menu.

This assigns the key fill and key source signals for M/E-1 key 1 to reentry signals PROC V and PROC K.

When a DME is selected on the keyer, the key fill and key source signals to which a DME effect is applied are assigned.

Notes

You cannot select the PROC V and PROC K signals using the cross-point selection buttons of the M/E or PGM/PST bank.

Using the key processed keyer signals or signals to which a DME effect is applied in frame memory (frame memory feed)

To use the key processed keyer key fill and key source signals on the frame memory source buses, in the Processed Key menu, press [FM Feed]. [Ext Proc Key] turns on, and the key fill and key source signals processed on the currently selected keyer are automatically assigned to frame memory source buses 1 and 2. When a DME is selected on the keyer, the key fill and key source signals to which a DME effect is applied are assigned.

Key Modify Clear

A simple button operation or a menu operation returns the key settings to the initial status settings.

Press [Default Recall] at the lower left of the menu display, turning it on, then press the corresponding VF button (VF1 to VF4) to return the key settings to their initial status.

For details of the initial status, see “Selecting the State After Powering On (Start Up Menu)” in Chapter 18 (Volume 3).

For the menu operation to return the key state to that set in initial status, see “Returning to default state in function groupings” (page 118).

Blink Function

With the blink function, you can obtain the following effects.

Key blink: The key is alternately inserted and deleted at regular intervals. You can set the period of blinking, and the proportion of each cycle for which the key is inserted.

Edge blink: The key fill and key edge fill signals are interchanged at regular intervals. You can set the period of blinking, and the proportion of each cycle for which the original state holds.

The blink settings are in the Transition menu for each key.

Using the blink function

For example, to make the required settings for key 1 on the M/E-1 bank, use the following procedure.

- 1** In the M/E-1 >Key1 menu, select HF6 'Transition.'
The Transition menu appears.
- 2** In the <Blink> group, select [Key Blink] or [Edge Blink] to set it on.
- 3** Set the blink parameters.

- **When key blink is selected**

Knob	Parameter	Adjustment	Setting values
1	Blink Rate	Length of blink cycle	1 to 100
2	Duty	Proportion of cycle for which key inserted	0.00 to 100.00

- **When edge blink is selected**

Knob	Parameter	Adjustment	Setting values
1	Blink Rate	Length of blink cycle	1 to 100
2	Duty	Proportion of cycle for which original state holds	0.00 to 100.00

Video Processing

You can adjust the luminance and hue of the selected key fill signal.

For example, to apply video processing to the signal selected on the M/E-1 bank key 1 fill bus, use the following procedure.

- 1** In the M/E-1 >Key1 menu, select HF7 'Video Process.'
The Video Process menu appears.
- 2** Press [Video Process], turning it on.
- 3** Adjust the following parameters.


Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video gain	-200.00 to +200.00
2	Y Gain	Luminance gain	-200.00 to +200.00
3	C Gain	Chrominance gain	-200.00 to +200.00
4	Hue Delay	Hue delay	-180.00 to +180.00
5	Black Level	Luminance black level	-7.31 to +109.59

To return adjustment values to their defaults
Press [Unity].



Key Setting Operations With the Key Control Block

This section describes the basic procedures for key settings using the key control block.

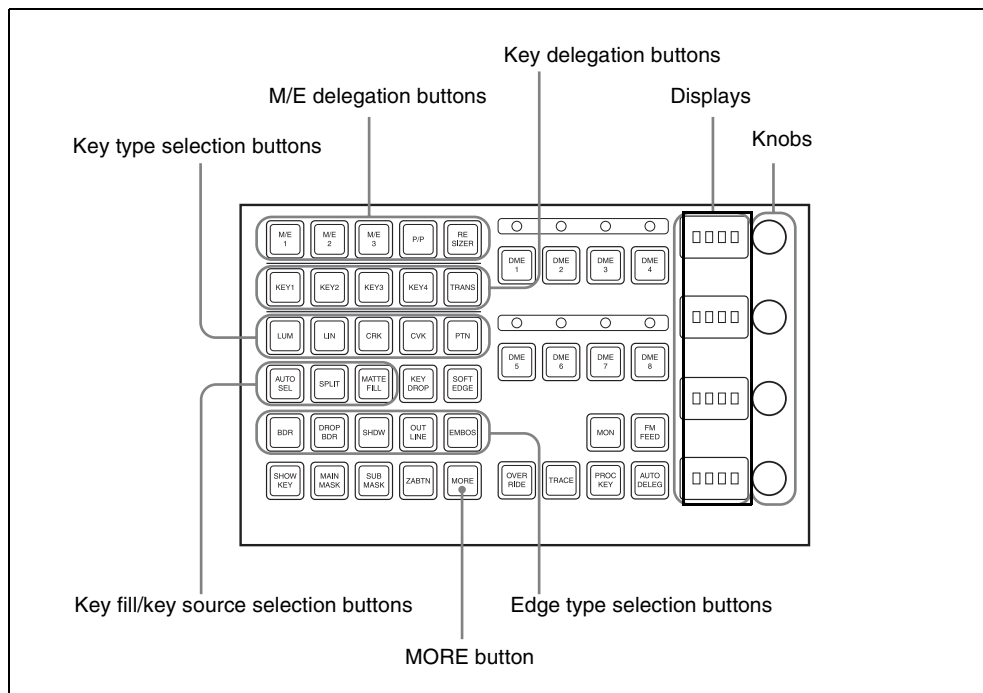

Notes

To select [M/E 4], [Key5] to [Key8], and [DSK5] to [DSK8] in the key control block, a previous assignment in the Setup menu is required. *For details, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534).*

Operations in the Key Control Block

Parameter adjustment with the knobs

When the button for a function requiring parameter settings is pressed (that is, on), you can set the parameters with the four knobs. If there are more than four values to be assigned to the knobs, the [MORE] button lights amber. At this point, press the [MORE] button, which turns green, to assign the fifth and subsequent parameters to the knobs, so that the parameter settings can be made.

Selecting the bank and keyer

To make key settings, first select the bank (from M/E-1 to M/E-3 and PGM/PST) and keyer, then assign them to the key control block.

For example, to set key 1 on M/E-1 with the key control block, use the following procedure.

- 1** Using the M/E delegation buttons in the key control block, press the [M/E1] button, setting it on.
- 2** Using the key delegation buttons in the key control block, press the [KEY1] button, setting it on.

This assigns the key control block to M/E-1 key 1.

Selecting the key type

To select the key type, press one of the key type selection buttons in the key control block.

[LUM] button: luminance key

[LIN] button: linear key

[CRK] button: chroma key

[CVK] button: color vector key

[PTN] button: key wipe pattern key

When using a wipe pattern key as the key type, in the <Key Type> group of the Type menu for the keyer, select [Wipe Pattern] and make the settings.

For an overview of the key types, see “Key Types” (page 200).

The button you pressed lights green, and you can now adjust the parameters with the knobs. The display beside each knob shows the first letter of the parameter name and the three-digit setting value.

• When the [LUM] or [LIN] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for generating the key signal	+109 to -7
2	Gain	Key sensitivity	-100 (shown as -00) to +100
3	Density	Key density	0 to 100
4	Filter	Filter coefficient	1 to 9

• When the [CRK] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Clip	Chroma key reference level	0 to 100
2	Gain	Key sensitivity	-100 (shown as -00) to +100
3	Hue	Hue	0 to 359
4	Density	Key density	0 to 100

- When [Key Active] is off, only the parameters Hue and Density are displayed.
- When both [Key Active] and [Color Cancel] are off, only the parameter Density is displayed.

• When the [CVK] button is lit green

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Y Clip	Reference level for Y signal	+109 to -7
2	Y Gain	Y signal sensitivity	-100 (shown as -00) to +100
3	C Clip	Reference level for chrominance signal	100 to 0
4	C Gain	Chrominance signal sensitivity	-100 (shown as -00) to +100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Y Filter	Y signal filter coefficient	1 to 9
2	C Filter	Chrominance signal filter coefficient	1 to 9
4	Density	Key density	0 to 100

• When the [PTN] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Edge softness	0 to 100
3	Density	Key density	0 to 100

Selecting key fill

Select whether to use a color matte as key fill, or the signal on the key fill bus.

When using a color matte: Press the [MATTE FILL] button, setting it on. The button lights green, and you can now set the parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Color 1 luminance	0 to 100
2	Saturation	Color 1 saturation	0 to 100
3	Hue	Color 1 hue	359 to 0

When [Mix Color] is selected in the key fill Matte Adjust menu, you can further adjust color 2.

When [Mix Color] is on, and the [MORE] button is lit amber

Knob	Parameter	Adjustment	Setting values
1	Luminance	Color 1 luminance	0 to 100
2	Saturation	Color 1 saturation	0 to 100
3	Hue	Color 1 hue	359 to 0
4	Size	Pattern size	0 to 100

When [Mix Color] is on, and the [MORE] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Luminance	Color 2 luminance	0 to 100
2	Saturation	Color 2 saturation	0 to 100
3	Hue	Color 2 hue	359 to 0
4	Soft	Edge softness	0 to 100

When using the key fill bus signal: Press the [MATTE FILL] button, turning it off.

To select the key fill signal, use the key 1 or key 2 bus buttons in the cross-point control block.

For the CCP-6224/6324 Control Panel, it is necessary to set the [AUX CTRL] button to Off in order to exit the AUX panel-less function (*see page 141*).

Selecting key source

- To use the key source paired with the key fill signal selected on the key fill bus, press the [AUTO SEL] button, turning it on. The pairing of the cross-point buttons for key fill and key source is carried out in the Setup menu. (See “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).)
- To select key source independently of the key fill signal selected on the key fill bus and paired with key source, hold down the [SPLIT] button, turning it on, then press the desired Key 1 or Key 2 button in the cross-point control block.
- To use as key source the same signal as the key fill signal selected on the key fill bus, select the SELF mode by pressing the [AUTO SEL] button and [SPLIT] button simultaneously so that both are off. When chroma key is selected as the key type, select the SELF mode.

Key Edge Modifications

To apply a modification to the key edge, press one of the edge type selection buttons in the key control block.

[BDR] button: border

[DROP BDR] button: drop border

[SHDW] button: shadow

[OUTLINE] button: outline

[EMBOS] button: emboss

For an overview of the edge modifications, see “Edge modifiers” (page 202).

The pressed button lights green, and you can now adjust the parameters with the knobs. The display beside each knob shows the first letter of the parameter name and the three-digit setting value.

Setting the border parameters

When the [BDR] button is lit green, the parameter settings depend on the key type and whether the separate edge function is active. To activate the separate edge function, press [Separate Edge], setting it on, in the Edge menu for the key.

- **Separate edge off**

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0 to 8 ^{a)} (0 to 100) ^{b)}
4	Density	Border density	0 to 100

• “Key drop ON” mode

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0 to 8 ^{a)}
2	Position	Position	359 to 0
4	Density	Density	0 to 100

a) In the “4H mode” and when [Fine Key] (page 225) is on, the setting value range is 0 to 4.

To adjust the edge fill color

When [DROP BDR] or [SHDW] is selected, the [MORE] button lights amber. Pressing the [MORE] button to turn it green then allows you to adjust the edge fill color parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0 to 100
2	Saturation	Saturation	0 to 100
3	Hue	Hue	359 to 0
4	Density	Density	0 to 100

Setting the outline parameters

When the [OUTLINE] button is lit green, the parameter settings depend on the key type and whether the separate edge function is active. To activate the separate edge function, press [Separate Edge], setting it on, in the Edge menu for the key.

• Separate edge off

Knob	Parameter	Adjustment	Setting values
1	Width	Outline width	0 to 8 ^{a)} (0 to 100) ^{b)}
4	Density	Outline density	0 to 100

a) In the “4H mode” and when [Fine Key] (page 225) is on, the setting value range is 0 to 4.

b) When a wipe pattern key or key wipe pattern key is selected as the key type

• Separate edge on

The outline width settings can be made independently for left, right, top, and bottom sides. The separate edge function is only available when luminance key, linear key, or chroma key is selected as the key type.

Knob	Parameter	Adjustment	Setting values
1	Top	Top edge width	0 to 8 ^{a)}
2	Left	Left edge width	0 to 8 ^{a)}

Knob	Parameter	Adjustment	Setting values
3	Right	Right edge width	0 to 8 ^{a)}
4	Bottom	Bottom edge width	0 to 8 ^{a)}

a) In the “4H mode” and when [Fine Key] (page 225) is on, the setting value range is 0 to 4.

When [Outline] is selected with separate edge on, the [MORE] button lights amber. Pressing the [MORE] button to turn it green then allows you to adjust the key fill density parameter with a knob.

Knob	Parameter	Adjustment	Setting values
4	Density	Outline density	0 to 100

Setting the embossing parameters

When the [EMBOS] button is lit green, adjust the following parameters.

Knob	Parameter	Setting values
1	Width	0 to 4
2	Position	359 to 0
4	Density	0 to 100

Selecting a normal edge

When all five edge type selection buttons are off, a normal edge is selected. If one of the buttons is lit, press it, turning it off.

Softening the edge

Press the [SOFT EDGE] button, turning it on. The button lights green, and you can now adjust the softness with the knob.

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0 to 100

- For a normal edge, when [SOFT EDGE] is enabled, “Key Drop” mode turns on.
- When a luminance key or linear key is selected as the key type, and clean mode is enabled, enabling [SOFT EDGE] ends the clean mode.

Applying the zabton effects

When the [ZABTN] button is lit green, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Pattern edge softness	0 to 100

Press the [MORE] button lit amber, changing it to green, then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0 to 100
2	Saturation	Saturation	0 to 100
3	Hue	Hue	359 to 0
4	Density	Density	0 to 100

Masks

Using the main mask

In the key control block, press the [MAIN MASK] button, turning it on. The parameter settings depend on the mask source selected as [Box] or [Pattern] in the <Mask Source> group of the Main Mask menu for the key.

- When box is selected

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	–100 (shown as –00) to +100
2	Left	Left position	–100 (shown as –00) to +100
3	Right	Right position	–100 (shown as –00) to +100
4	Bottom	Bottom position	–100 (shown as –00) to +100

When box is selected and the [MORE] button is lit amber, there are more settings. Press the [MORE] button, so that it changes from amber to green to make the extra setting.

Knob	Parameter	Adjustment	Setting values
1	Soft	Box softness	0 to 100

- When pattern is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Edge softness	0 to 100

Knob	Parameter	Adjustment	Setting values
3	Pattern	Pattern number	1 to 24 ^{a)}

a) The pattern is the same as a standard wipe. (See “Wipe Pattern List” (page 486).)

Using the subsidiary mask

In the key control block, press the [SUB MASK] button, turning it on. The parameter settings depend on the mask source selected as [Wipe] or [Utility 1 Bus] in the <Mask Source> group of the Sub Mask menu for the key.

• When wipe is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Edge softness	0 to 100

• When utility 1 bus is selected

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for creating mask signal	+109 to -7
2	Gain	Gain	-100 (shown as -00) to +100

Applying a DME Effect to a Key

Notes

For one M/E bank, DME effects (including DME wipes) can be used in up to two places simultaneously.

For example, if one DME channel wipe pattern is selected for the background, a DME can only be used in one place on keys 1 to 4. If two or more channels are selected, then no DME can be used on keys 1 to 4.

Assigning a DME to a key

- 1 In the key control block, press the delegation buttons [M/E1] and [KEY1].
- 2 Using the DME channel selection buttons, select the DME channel (DME1 to DME8) for applying the effect.

The lit colors of the [DME1] to [DME8] buttons indicate the DME assignment.

Lit green: Shows the DME assigned to the currently selected key.

Lit amber: Shows the DME assigned to a key other than the currently selected key.

Off: DME is not assigned.

To select a DME being used by another keyer

Press [Override], turning it on, then select the DME channel.

The later selection is valid, and the button lights green.

Using two or three DME channels on one keyer

Notes

When the signal format is 1080P, the combination of two consecutively numbered DME channels that can be selected is DME1 and DME2, DME3 and DME4, DME5 and DME6, or DME7 and DME8. It is not possible to combine three or more DME channels.

- 1** Select the DME for the first channel (*see the previous item, “Assigning a DME to a key”*), then select the successive channel for the second channel. For the third channel select the channel after that.
- 2** To select the second channel video signal, hold down the [UTIL] button in the cross-point control block, and select the signal in the Key1 row (DME external video bus).
- 3** To select the third channel video signal, when the selected DME is Ch3 or Ch4, select the signal on the DME utility 1 bus. When the selected DME is Ch7 or Ch8, select the signal on the DME utility 2 bus.

For details of the method of signal selection, see “Bus Selection” (page 137).

Using four DME channels on one keyer

Notes

When the signal format is 1080P, this operation cannot be carried out.

- 1** Select the DME channel 1 (or channel 5) for the first channel (*see “Assigning a DME to a key” (page 248)*). In the same way, select the DME channel 2 (channel 6) for the second channel, the DME channel 3 (channel 7) for the third channel, and the DME channel 4 (channel 8) for the fourth channel.
- 2** For the second channel video signal, select the signal on the DME external video bus.

- 3 To select the third channel video signal, when the selected DME is Ch3, select the signal on the DME utility 1 bus. When the selected DME is Ch7, select the signal on the DME utility 2 bus.
- 4 To select the fourth channel video signal, when the selected DME is Ch4, select the signal on the DME utility 2 bus. When the selected DME is Ch8, select the signal on the DME utility 1 bus.

For details of the method of signal selection, see “Bus Selection” (page 137).

You can check the DME operating status in the Status menu (*see page 437*).

Assigning the DME output signal to a monitor signal

- 1 Holding down the output destination specification button [MON] in the key control block, use the DME channel selection buttons to select the DME channel (DME1 to DME8) you want to use.

The selected DME output is assigned to DME MON V and DME MON K.
- 2 To check the DME assignment status, hold down just the [MON] button.

While it is held down, the lit color of the [DME1] to [DME8] buttons shows the key assignment status.
Lit green: Shows the DME currently being monitored.
Lit amber: Shows a DME which can be monitored.
Off: DME is not assigned.

Other Key Setting Operations

Using an external processed key

You can select and use the key processed keyer key fill and key source signals on the AUX buses.

- 1 Select the keyer to be allocated.
- 2 In the key control block, press [PROC KEY], turning it on.

The button lights amber, and on the currently selected keyer, the key fill and key source are assigned to reentry signals PROC V and PROC K.

When a DME is selected on the currently selected keyer, the key fill and key source signals to which the DME effect is applied are assigned to PROC V and PROC K.

Notes

You cannot select the PROC V and PROC K signals using the cross-point selection buttons of the M/E or PGM/PST bank.

Using a frame memory feed

When you press the [FM FEED] button in the key control block, it lights momentarily amber, then the key fill and key source signals processed in the currently selected keyer are assigned to frame memory sources 1 and 2.

If a DME is selected on the currently selected keyer, then the key fill and key source signals to which a DME effect is applied are assigned to frame memory sources 1 and 2.

Carrying out a frame memory feed causes the [PROC KEY] button to light amber.

Using the show key function

While the [SHOW KEY] button is held down, the key-processed key source signal appears on the specified output. (Show key mode)

Even when the [SHOW KEY] button is released, for a preset time the show key mode is maintained. You can specify the output to which the show key function is applied and set the time for which the show key mode is maintained after releasing the button in a Setup menu.

For details see “Settings Relating to Keys, Wipes, Frame Memory and Color Correction (Key/Wipe/FM/CCR Menu)” in Chapter 20 (Volume 3).

Using the auto delegation function

To couple the selection in the key delegation buttons of the independent key transition control block so that the key control block delegation selection is automatically switched, in the key control block press the [AUTO DELEG] button, turning it on.

Returning the key adjustment values to their defaults

Holding down a key type button ([LUM], [LIN], [CRK], [CVK], or [PTN]) recalls the key default values (*page 206*).

Key modify clear


When an M/E delegation button is held down, holding down a key delegation button together returns the key settings to the initial status settings.

For details of the initial status, see “Selecting the State After Powering On (Start Up Menu)” in Chapter 18 (Volume 3).



Key Adjustment Operations With the Multifunction Flexi Pad Control Block

This section describes basic key adjustment operations when using the Multifunction Flexi Pad control block.

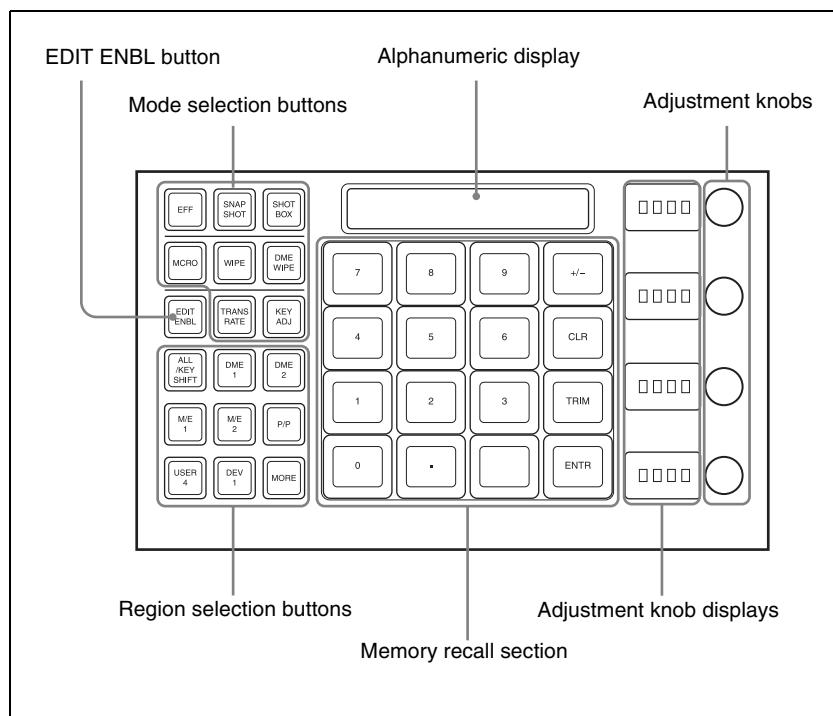

Notes

To select [M/E 4], a previous assignment in the Setup menu is required. *For details, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532).*

Selecting the switcher bank and keyer

Before carrying out key adjustment, first select the key adjust mode, then select the switcher bank and keyer.

For example, to adjust key 1 on M/E-1, proceed as follows.

- 1** In the Multifunction Flexi Pad control block mode selection buttons press [KEYADJ].
- 2** Press the [M/E1] region selection button.
- 3** Press the [KEY SHIFT] button, turning it off.
- 4** In the memory recall section, press the [KEY1] button.




Notes

To select keys 5 to 8, in step **3** press [KEY SHIFT], turning it on, then press one of buttons [KEY5] to [KEY8] in the memory recall section to select the key.

The button displays in the memory recall section now appear as shown in the following illustration.

Pressing the [PAGE 1/3] >[PAGE 2/3] buttons further changes the display as follows, then pressing [PAGE 3/3] returns to the original display shown in the illustration.



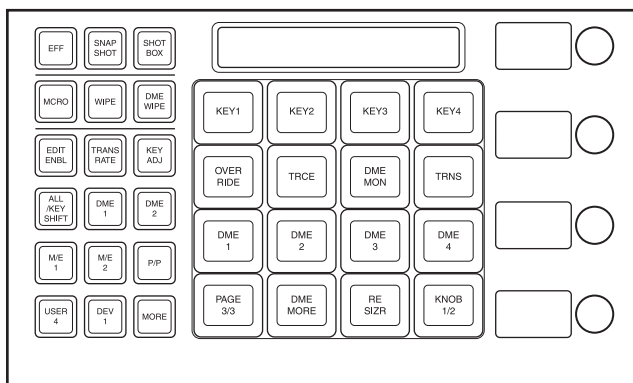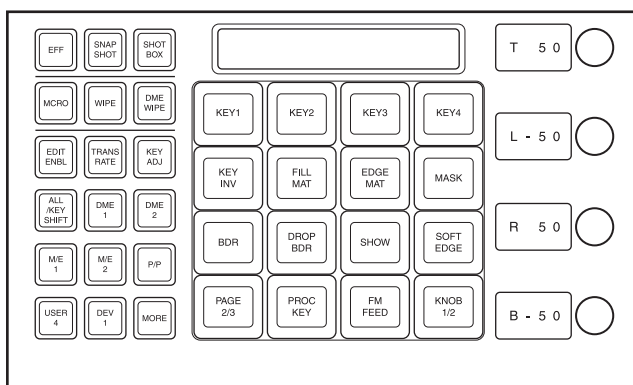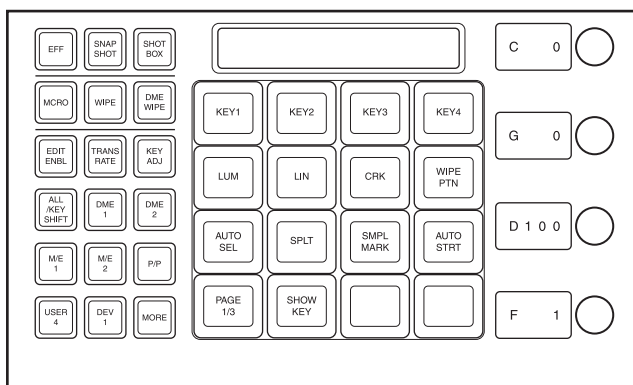

With these buttons in the memory recall section, you can carry out the following key adjustment.

Selecting the key type

[LUM] button: Selects a luminance key.

[LIN] button: Selects a linear key.

[CRK] button: Selects a chroma key.

[WIPE PTN] button: Selects a key wipe pattern key.

Adjust the parameters for each type with the adjustment knobs. For details of the parameters, see the following sections.

Luminance key: “When the [LUM] or [LIN] button is lit green” (page 241)

Linear key: “When the [LUM] or [LIN] button is lit green” (page 241)

Chroma key: “When the [CRK] button is lit green” (page 241)

Key wipe pattern key: “When the [PTN] button is lit green” (page 242)

Selecting the key source

[AUTO SEL] button: The signal assigned as a pair with the key fill bus signal for the key row button in the cross-point control block is automatically selected.

[SPLT] button: Select a different signal manually. To make the selection, hold down this button, and press the button assigned to the signal you want as key source in the cross-point control block.

You can also use the same signal as the key fill selected on the key fill bus as key source (SELF). Press the [AUTO SEL] button and [SPLT] button simultaneously so that both are off, to select the SELF mode.

Setting auto chroma key

[SMPL MARK] button: Toggles the sample mark display on and off. When on, the monitor screen shows the foreground video and a white box sample mark.

[AUTO STRT] button: Automatically adjusts the chroma key. When the [SMPL MARK] button is off, pressing this does not carry out automatic chroma key adjustment.

You can adjust the display position and size of the sample mark with the adjustment knobs.

For details of these parameters, see “Making auto chroma key adjustments” (page 214).

Setting the show key function

[SHOW KEY] button: When this is pressed, the key source signal to which key processing has been applied is output from the specified output port (show key mode).

For details, see “Using the show key function” (page 251).

Setting the resizer function

[RE SIZR] button: Enables and disables the resizer function.

The parameters that can be adjusted with the adjustment knobs are on two pages; to access the second page, press the [KNOB 1/2] button. For details of the parameters, see “Menu operations for key shrinking, magnification and movement” (page 261).

If you press this button at the same time as any of the [KEY1] to [KEY4] buttons, you can switch the trackball and joystick to the resizer setting mode.

Inverting the sense of the key source

[KEY INV] button: When this is set to On, the sense of the key source is inverted.

Selecting the key fill signal

[FILL MAT] button: When this is On, the signal generated by the dedicated color matte generator is selected, and when it is Off, the signal selected on the key 1 fill bus is selected.

For parameters that can be adjusted with the adjustment knobs, see “Selecting key fill and key source” (page 218).

Selecting the key edge signal

[EDGE MAT] button: When this is On, the signal generated by the dedicated color matte generator is selected, and when it is Off, the signal selected on the utility bus is selected.

For parameters that can be adjusted with the adjustment knobs, see step 4 in “Key Edge Modifications” (page 224).

Selecting the mask source

[MASK] button: Selects the mask source (box generated by dedicated generator or pattern) to be selected in the Main Mask menu for each M/E bank.

The parameters that can be adjusted with the adjustment knobs are different for a box or a pattern.

The box parameters are on two pages; to access the second page, press the [KNOB1/2] button.

For details, see step 4 in “Using the main mask”(page 230).

Applying modifiers to the key edge

[BDR] button: Applies a border to the edge.

[DROP BDR] button: Applies a drop border to the edge.

[SHDW] button: Applies a shadow to the edge.

For parameters that can be adjusted with the adjustment knobs, see “Key Edge Modifications” (page 222).

Setting the degree of edge softening

[SOFT EDGE] button: Softens the key edge.

For parameters that can be adjusted with the adjustment knobs, see step 7 in “Key Edge Modifications” (page 225).

Enabling the set key to be used on the AUX bus

[PROC KEY] button: This enables the keyer key fill/key source signal to be subjected to key processing, then used as a reentry signal by selection on the AUX bus.

For details, see “Using an external processed key” (page 250).

Sending a signal subjected to key processing to frame memory

[FM FEED] button: Press this to assign the key fill/key source signal processed on the currently selected keyer to frame memory source 1 or 2.

For details, see “Using a frame memory feed” (page 251).

Using a DME currently used on another keyer

[OVER RIDE] button: When one DME channel is in use, holding down this button and pressing a DME channel button ([DME1] to [DME8]) allows you to forcibly select this channel. The button for the selected DME channel lights green.

Recalling the keyer using the DME channel

[TRCE] button: Holding down this button, press the selection button for the DME channel already assigned to another keyer or transition, to switch the keyer or transition to which the DME channel is assigned to the currently selected state.

Monitoring DME output

[DME MON] button: Holding down this button and pressing the selection button for a DME channel ([DME1] to [DME8]) allows you to monitor the signal for this channel as a reentry signal to DME MON V/K.

However, it is first necessary to assign this channel on the DME to the delegation (keyer or transition) to be monitored.

Selecting the DME channel

[DME1] to [DME8] buttons: Press one of these to select the corresponding DME channel. The number of valid buttons depends on the number of DME channels in use.

[DME MORE] button: If there are more than four DME channels in use, use this to change the DME channel selection buttons displayed.

Returning the key adjustment values to their defaults

Holding down a key type button ([LUM], [LIN], [CRK], [CVK], or [PTN]) recalls the key default values.

Key modify clear

When the [KEY ADJ] button is held down, holding down the region selection button for the selected region together returns all the key settings of the region to the initial status settings.

When the [KEY ADJ] button is held down, holding down the button for the selected key together returns the key settings to the initial status settings.

For details of the initial status, see “Selecting the State After Powering On (Start Up Menu)” in Chapter 18 (Volume 3).

Resizer

Resizer allows you to apply DME-like effects such as image shrinking, magnification and movement, as well as change of the aspect ratio, to the processed key.

The following functions are available.

- Two-dimensional transformations of keys
- Resizer interpolation settings
- Resizer crop/border settings
- Resizer effect settings
(wide key border, drop shadow, edge enhance, mosaic, defocus, mask)

Notes

- The image of the key manipulated by resizer has a one-frame delay.
- Some effects of resizer are different from what you would expect of DME effects.

Restrictions on the use of effects

There are restrictions on combined use of resizer effects themselves and that with DME wipes.

For details, see “Impossibility of simultaneous use within the same keyer” (page 273).

Relation between resizer and other effects

You cannot apply DME effects to a key for which the resizer function is enabled. When one of the three functions – resizer, DME wipe and DME effects – is enabled, the other two are disabled.

Two-Dimensional Transformations of Keys

Notes

When the screen aspect ratio is 4:3 in HD format, when the resizer is used to shrink a video image, this is applied to the 16:9 screen including the added video on the left and right sides. Use the crop function as required to extract the 4:3 image.

Menu operations for key shrinking, magnification and movement

For example, to shrink, magnify or move key1 of the M/E-1 bank, use the following procedure.

- 1** In the M/E-1 >Key1 >Processed Key menu, press [Resizer], turning it on.
- 2** Adjust the following parameters with the knobs.


Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values	
1	Location X	Move key horizontally	HD	–99.9999 to +99.9999
			SD 4:3	–33.3333 to +33.3333
			SD 16:9	–24.9999 to +24.9999
2	Location Y	Move key vertically	HD	–99.9999 to +99.9999
			SD 4:3	–33.3333 to +33.3333
			SD 16:9	–24.9999 to +24.9999
3	Size	Magnify or shrink key	0.0000 to 99.9999	

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Aspect X	Change aspect ratio horizontally	0.0000 to 99.9999
2	Aspect Y	Change aspect ratio vertically	0.0000 to 99.9999
3	Aspect Ratio	Change aspect ratio horizontally and vertically at a time	0.0000 to 2.0000

Key control block operations for key shrinking, magnification and movement

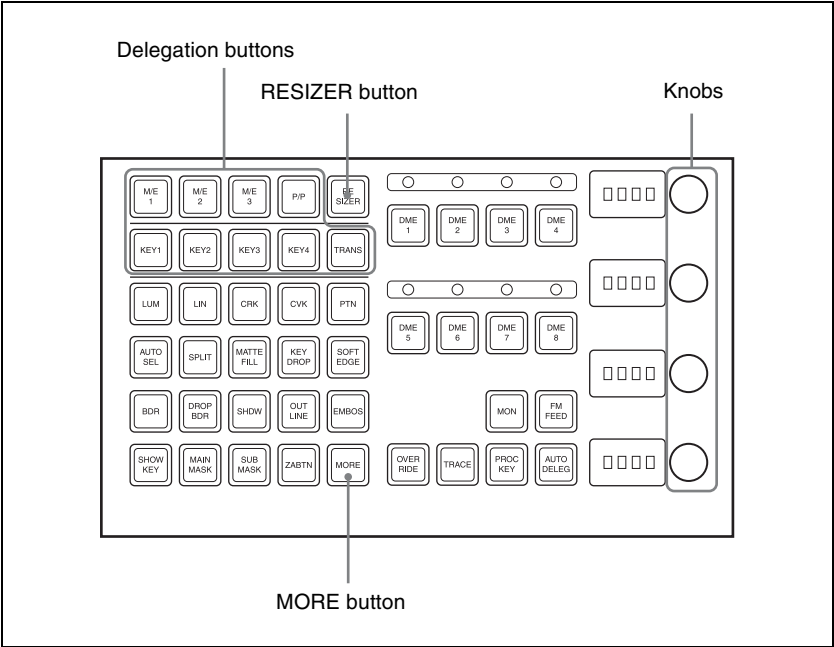


- 1 Use the delegation buttons to select the key to which you want to apply a resizer function.
- 2 Press the [RESIZER] button, turning it on.
- 3 Adjust the following parameters with the knobs.
(To switch between displaying parameter group 1/2 and 2/2, press the [MORE] button.)

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values	
1	X	Move key horizontally	HD	−99 to +99
			SD 4:3	−33 to +33
			SD 16:9	−24 to +24
2	Y	Move key vertically	HD	−99 to +99
			SD 4:3	−33 to +33
			SD 16:9	−24 to +24
3	S	Magnify or shrink key	0.0 to 99	

Knob	Parameter	Adjustment	Setting values
1	X	Change aspect ratio horizontally	0.0 to 99
2	Y	Change aspect ratio vertically	0.0 to 99
3	R	Change aspect ratio horizontally and vertically at a time	0.0 to 2.0

Device control block operations for key shrinking, magnification and movement

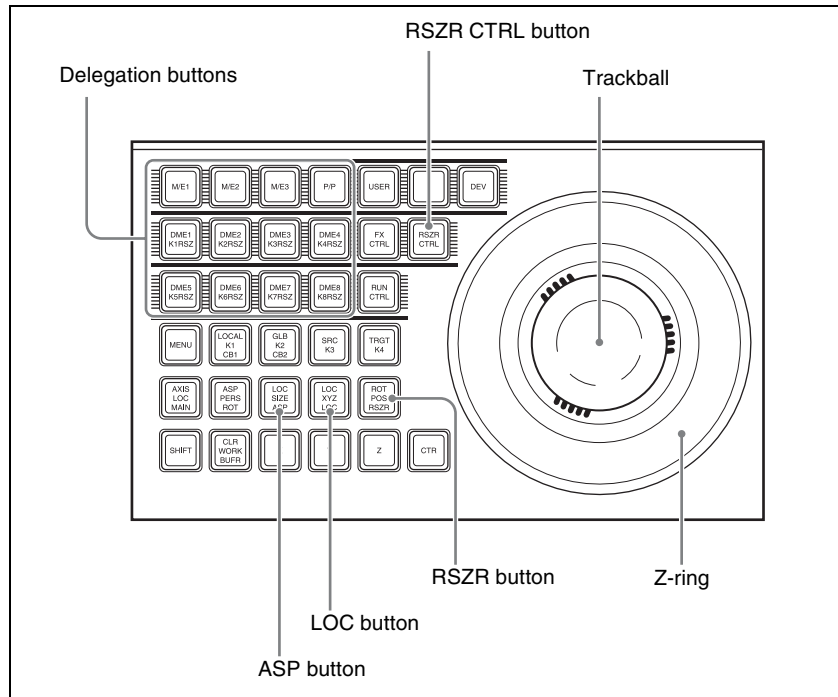

- 1 Press the [RSZR CTRL] button, turning it on.
- 2 Press the delegation button to select the key.
- 3 Press the [RSZR] button, turning it on.
- 4 • To change the aspect ratio, turn on the [LOC SIZE(ASP)].

- To shrink, magnify, or move the key, turn on the [LOC XYZ(LOC)].

Hold these buttons down while carrying out the operation of step **5** to enable fine adjustment (fine mode).

5 Use the trackball and joystick for the operation.

*For details of parameters, see step **3** of “Key control block operations for key shrinking, magnification and movement” (page 262).*

Entering parameters

This operation is the same as DME three-dimensional parameter input.

For details, see “Entering Three-Dimensional Parameter Values” in Chapter 11 (Volume 2).

Resetting parameters

This operation is the same as DME three-dimensional parameter resetting.

For details, see “Entering Three-Dimensional Parameter Values” in Chapter 11 (Volume 2).

Clearing resizer effects

To clear two-dimensional transform parameters only and set the initial state

In the device control block, press the [CLR WORK BUFR] button in the operation buttons.

To clear all resizer parameters, and set the initial state

In the device control block, press the [CLR WORK BUFR] button in the operation buttons, twice in rapid succession.

For the initial state, you can select either the factory default settings or user settings.

For details of how to make this selection, see “Selecting the State After Powering On (Start Up Menu)” in Chapter 18 (Volume 3).

Resizer Interpolation Settings

For example, to make the interpolation settings for key 1 of the M/E-1 bank, use the following procedure.

- 1** In the M/E-1 >Key1 >Processed Key menu, press [Resizer], turning it on.
This enables the resizer function.
- 2** Press [Resizer Process].
The Resizer Process menu appears.
- 3** In the <Video Field/Frame Mode> and other groups, make the interpolation settings.

Resizer Crop/Border Settings

Making a crop setting for a key for which resizer is on

For example, to make the crop settings for key 1 of the M/E-1 bank, use the following procedure.

- 1** In the M/E-1 >Key1 >Processed Key menu, press [Resizer], turning it on.
This enables the resizer function.
- 2** Press [Border/Crop].
The Border/Crop menu appears.
- 3** Press [Crop], turning it on.
This enables the adjustment of crop.
- 4** Set the parameters.

These settings are the same as those for crop of DME. For details, see “Crop Settings” in Chapter 11 (Volume 2).

Notes

If mosaic or defocus is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the crop is disabled.

Applying a border to a key for which resizer is on

For example, to add the border for key 1 of the M/E-1 bank, use the following procedure.

- 1** In the M/E-1 >Key1 >Processed Key menu, press [Resizer], turning it on.

This enables the resizer function.

2 Press [Border/Crop].

The Border/Crop menu appears.

3 Press [Border], turning it on.

This enables the adjustment of crop.

4 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

• SD format

Knob	Parameter	Adjustment Setting	Values
1	H	Simultaneously adjust width of left and right borders	0.00 to 4.00
2	V	Simultaneously adjust width of top and bottom borders	0.00 to 3.00 (4:3) 0.00 to 2.25 (16:9)
3	All	Simultaneously adjust width of all four borders	Value of H shown
5	Density	Density of the borders	0.00 to 100.00

• HD format

Knob	Parameter	Adjustment Setting	Values
1	H	Simultaneously adjust width of left and right borders	0.00 to 12.00 (4:3) 0.00 to 16.00 (16:9)
2	V	Simultaneously adjust width of top and bottom borders	0.00 to 9.00
3	All	Simultaneously adjust width of all four borders	Value of H shown
5	Density	Density of the borders	0.00 to 100.00

To apply color to a border

1 In the <Border Mode> group of the Border/Crop menu, press [Flat Color].

2 Adjust the following parameters.

Knob	Parameter	Adjustment Setting	Values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00

Knob	Parameter	Adjustment Setting	Values
3	Hue	Hue	359.99 to 0.00

To soften the inner edge of a border

- 1 In the Border/Crop menu, press [Border Soft].
- 2 Adjust the following parameters.

Knob	Parameter	Adjustment Setting	Values
1	Inner Soft	Border inner softness	0.00 to 100.00

To apply a beveled light edge

- 1 In the <Border Mode> group of the Border/Crop menu, press [Beveled Light Edge].
- 2 Adjust the following parameters.

Knob	Parameter	Adjustment Setting	Values
1	Top	Top edge	-100.00 to +100.00
2	Left	Left edge	-100.00 to +100.00
3	Right	Right edge	-100.00 to +100.00
4	Bottom	Bottom edge	-100.00 to +100.00
5	All	Four edges	Value of Left shown

- 3 Press [Border Soft].
- 4 Adjust the following parameters.

Knob	Parameter	Adjustment Setting	Values
1	Inner Soft	Border inner softness	0.00 to 100.00
2	Bound Soft	Border boundary softness	0.00 to 100.00

To apply a beveled color edge

- 1 In the <Border Mode> group of the Border/Crop menu, press [Beveled Color Edge].
- 2 In the <Color Adjust> group, select the edges for adjustment among the [Top], [Left], [Right], and [Bottom] edges. To select all the four edges, press [All].

- 3 Set the color parameters.
For details, see “To apply color to a border” (page 266)
- 4 Press [Border Soft].
- 5 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Inner Soft	Border inner softness	0.00 to 100.00
2	Bound Soft	Border boundary softness	0.00 to 100.00

Applying Resizer Effects

For example, to apply effects to key 1 of the M/E-1 bank, use the following procedure.

- 1 In the M/E-1 >Key1 >Processed Key menu, press [Resizer], turning it on.
This enables the resizer function.
- 2 Press [Enhanced Effect].
The Enhanced Effect menu appears.



Applying a wide key border

- 1 In the M/E-1 >Key1 >Processed Key >Enhanced Effect menu, press [Dual Rsrz Effect], turning it on.
- 2 Press [Wide Key Border], turning it on.
- 3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust border width of left and right edges	0.00 to +100.00
2	V	Simultaneously adjust border width of upper and lower edges	0.00 to +100.00
3	All	Simultaneously adjust border width of all four edges	Value of H shown
4	Soft ^{a)}	Softness of border	0.00 to +100.00
5	Density	Density of border	0.00 to +100.00

a) Shared with the drop shadow “Soft” value.

- 4** To add an outline, press [Out Line], turning it on.
- 5** To adjust the border color, press [Border Color].
- 6** Set the color parameters.

For details, see “To apply color to a border” (page 266).

Applying a drop shadow

- 1** In the M/E-1 >Key1 >Processed Key >Enhanced Effect menu, press [Dual Rszr Effect], turning it on.
- 2** Press [Drop Shadow], turning it on.
- 3** Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

• SD format

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position of shadow	−8.00 to +8.00
2	V	Vertical position of shadow	−6.00 to +6.00 (4:3) −4.50 to +4.50 (16:9)
3	Size	Shadow size	0.00 to 2.00
4	Soft ^{a)}	Softness of shadow	0.00 to 100.00
5	Density	Density of shadow	0.00 to 100.00

a) Shared with the wide key border “Soft” value.

• **HD format**

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position of shadow	-24.00 to +24.00 (4:3)-32.00 to +32.00 (16:9)
2	V	Vertical position of shadow	-18.00 to +18.00
3	Size	Shadow size	0.00 to 2.00
4	Soft ^{a)}	Softness of shadow	0.00 to 100.00
5	Density	Density of shadow	0.00 to 100.00

a) Shared with the wide key border “Soft” value.

Edge enhancement

Adjusting the gain sharpens the image.

- 1 In the M/E-1 >Key1 >Processed Key >Enhanced Effect menu, press [Edge Enhance], turning it on.
- 2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal gain adjustment	0.00 to 100.00
2	V	Vertical gain adjustment	0.00 to 100.00
3	All	Both horizontal and vertical adjustment	H value is displayed

Applying a mosaic

- 1 In the M/E-1 >Key1 >Processed Key >Enhanced Effect menu, press [Mosaic], turning it on.
- 2 Set the parameters.
This operation is the same as the DME mosaic setting. For more details, see “Mosaic Settings” in Chapter 11 (Volume 2).
- 3 In the < Mosaic/Defocus Mode > group, select the signal to which to apply the mosaic effect.

Video/Key: Video signal and key signal

Video: Video signal only



Notes

If mosaic is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the crop and mask are disabled.

4 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal defocusing	0.00 to 100.00
2	V	Vertical defocusing	0.00 to 100.00
3	All	Horizontal and vertical defocusing	H value shown

To make the mosaic like a relief pattern

- 1 With [Mosaic] on, press [Relief], turning it on.
- 2 In addition to the mosaic parameters, set the following parameters.

Knob	Parameter	Adjustment	Setting values
3	Gain	Relief depth of mosaic cells	0.00 to 100.00
4	Angle	Light source direction	-8.00 to +8.00

Defocusing

- 1 In the M/E-1 >Key1 >Processed Key >Enhanced Effect menu, press [Defocus], turning it on.
- 2 Set the parameters.

This operation is the same as the defocusing setting when using the DME. However, <Mosaic/Defocus Mode> appears in place of <Defocus Mode>.

For more details, see “Defocus Settings” in Chapter 11 (Volume 2).

Notes

If defocus is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the crop and mask are disabled.

Applying a mask to mosaic or defocus

- 1 In the M/E-1 >Key1 >Processed Key >Enhanced Effect menu, press [Dual Rszr Effect], turning it on.

2 Press [Mask], turning it on.

This enables the mask function.

To make the mask settings, continue with steps **3** and following.

3 Press [Mask Menu].

The Mask menu appears.

4 In the <Mask Source> group, select either of [Box] and [Circle].

Box: Use a box pattern as the mask signal.

Circle: Use a circle pattern as the mask signal.

5 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

The parameters are the same as for drop shadow. For more details, see “Applying a drop shadow” (page 269), except that knobs 3 and 5 are as follows.

Knob	Parameter	Adjustment	Setting values
3	Size	Size	0.00 to 100.00
5	Aspect	Aspect ratio	−100.00 to +100.00

The rotation and inversion operations are the same as for a DME mask setting.

For more details, see Chapter 11 “Mask Settings” (Volume 2).

Notes

- When a mask effect is applied to a border, the boundary becomes discontinuous, giving an unnatural effect. Avoid applying a mask to a border.
- If mosaic or defocus is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the mask is disabled.

Restrictions on resizer effects

Restrictions on the use of effects

Of the resizer effects, using mask, drop shadow, or wide key border requires two units of hardware for the resizer function.

These are called “dual resizer effects”.

In a dual resizer effect, predetermined combinations, key 1 and key 2, key 3 and key 4, key 5 and key 6, key 7 and key 8 are used.

For example, if either of key 1 and key 2 has resizer set to On, the other key cannot be used for a dual resizer effect.

The same restriction applies when using a resizer DME wipe in place of resizer.

Impossibility of simultaneous use within the same keyer

The following combinations of resizer effects cannot be simultaneously on.


- Mosaic and edge enhance
- Defocus and wide key border
- Mask and drop shadow
- Mask and wide key border

Key Snapshots

Key settings other than the key on/off status and the key priority can all be instantaneously saved in a dedicated register, for recall when required. A key snapshot comprises three values: a cross-point button number, key memory full mode, and independent key transition, and can be called in any combination. There are four key snapshot registers for each keyer.

Key Snapshot Operations

Key snapshot operations are carried out in the independent key transition control block downstream key control block or Multifunction Flexi Pad control block. Each keyer is provided with four dedicated key snapshot registers.

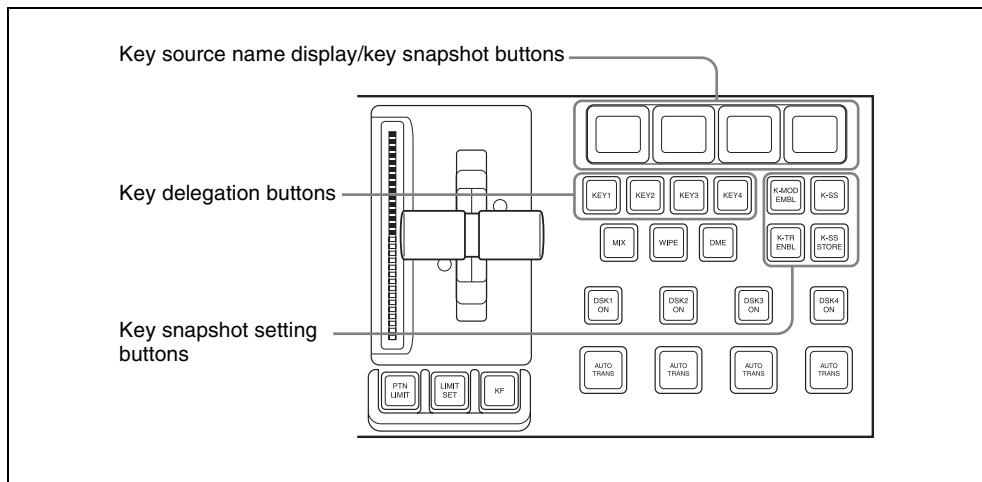

Independent key transition control block (standard type)

Notes

To select [Key5] to [Key8] or [DSK5] to [DSK8] in the independent key transition control block or downstream key control block, a previous assignment in the Setup menu is required.

For details, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” (page 534).

Saving a key snapshot

For example, the following procedure saves the state of the M/E-1 key 1 settings.

1 In the M/E-1 independent key transition control block, press the key delegation button [KEY1], turning it on.

2 Press the [K-SS] button, turning it on.

The system switches to key snapshot mode, and the key source name display/key snapshot buttons show the status of registers 1 to 4 for key 1.

Off: Nothing is saved in the register.

Lit orange: Settings are saved in the register.

For a register holding a snapshot, the register name is shown as up to eight characters.

3 Hold down the [K-SS STORE] button, and press the key source name display/key snapshot button corresponding to the register in which you want to save the snapshot.

The key source name display/key snapshot button which you pressed lights yellow.

Notes

If you save a key snapshot in a register for which the button is lit orange or yellow, the existing contents of the register are overwritten.

Recalling a key snapshot

For example, the following procedure recalls the state of the M/E-1 key 1 settings.

1 In the M/E-1 independent key transition control block, press the key delegation button [KEY1], turning it on.

2 Press the [K-SS] button, turning it on.

3 Set the following buttons on or off, depending on the information you want to recall.

(These buttons are not provided in the downstream key control block.)

[K-MOD ENBL] button: When this is on, the key settings and key modifiers are recalled. When this is off, they are not recalled.

[K-TR ENBL] button: When this is on, the independent key transition settings are recalled. When this is off, they are not recalled.

If both buttons are off, the key memory function is enabled and only the saved selection of key fill and key source signals is recalled.

- 4** Press the key source name display/key snapshot button corresponding to the register you want to recall.

The button you pressed lights yellow, and this recalls the key snapshot.

To cancel a recall carried out in the downstream key control block, press the [UNDO] button in the downstream key control block.

Key snapshot operation on the Multifunction Flexi Pad control block


By default, the [KEY SS] key snapshot mode selection button does not appear in the Multifunction Flexi Pad control block. To carry out key snapshot saving and recall in this control block, it is first necessary in the Engineering Setup >Panel >Config >Link/Program Button >Multi Function >Mode Sel Assign menu to assign the Key Snapshot mode to a mode selection button.

To save a key snapshot

For example, to save a key snapshot for key 1 of M/E-1, select M/E1 and key1, then use the following procedure.

- 1** Press the [K SS] button.

The button displays in the memory recall section change as shown in the following illustration.

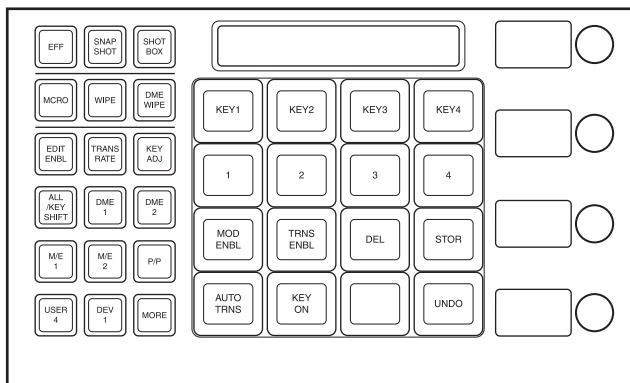

- 2** In the memory recall section, hold down the [STOR] button, and press the button (any of [1] to [4]) for the register in which you want to save the key snapshot.

To recall a key snapshot

For example, to recall a key snapshot for M/E1 key 1 saved in register 1, with the M/E1 region and key 1 selected, proceed as follows.

- 1** Press the [KEY SS] button.
- 2** According to the information you want to recall, set the following buttons On/Off.

[MOD ENBL] button: Recall the key adjustment values and key modifier settings.

[TRNS ENBL] button: Recall independent key transition settings.

If both are Off, then key memory is enabled, and just the saved key fill and key source signal selections are recalled.
- 3** Press button [1] for the register you want to recall.

The [1] button lights yellow, and the key snapshot is recalled.

To cancel the recall operation, press the [UNDO] button.

To delete a key snapshot

For example, to delete a key snapshot for M/E1 key 1 saved in register 1, with the M/E1 and key 1 region selected, proceed as follows.

- 1** Press the [KEY SS] button.
- 2** Holding down the [DEL] button, press the button [1] for the register in which is saved the key snapshot you want to delete.

To carry out an auto transition execution during key snapshot operation

Press the [AUTO TRNS] button.

Instant key insertion/removal


Press the [KEY ON] button.

To remove the key, while the key is inserted press the [KEY ON] button.

Key Snapshot Operations Using a Simple Transition Module

When using a simple transition module, the key snapshots hold the settings for key 3 and key 4. However, each key control block can be assigned to any key in setup (see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3)).

You can carry out key snapshot operations in the independent key transition control block (simple type) and Flexi Pad control block (simple type). There are four dedicated key snapshot registers for each of keys 3 and 4.

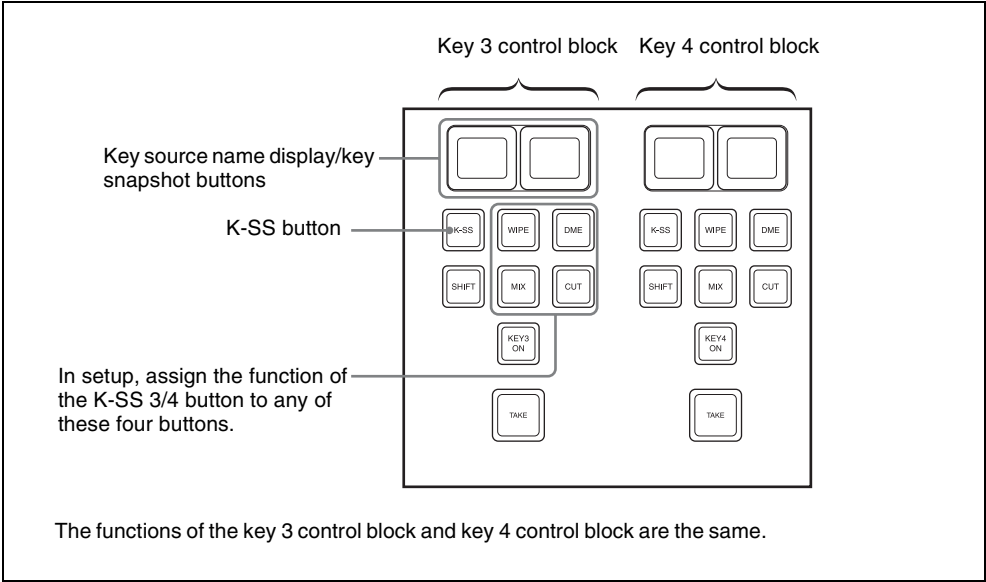

Independent key transition control block (simple type)

Saving a key snapshot

For example, to save the settings of M/E-1 key 3, use the following procedure.

- 1 In the M/E-1 independent key transition control block, press the [K-SS] button in the key 3 control block, turning it on.

This switches to key snapshot mode, and the key source name display/key snapshot button shows the state of registers 1 and 2 for key 3.

Pressing the [K-SS 3/4] button shows the state of registers 3 and 4 for key 3.

Off: Nothing is saved in the register.

Lit orange: Settings are saved in the register.

For a register holding a snapshot, the register name is shown as up to eight characters.

- 2 In the Flexi Pad control block, hold down the [SNAPSHOT] button and press the key source name display/key snapshot button corresponding to the register in which you want to save the snapshot.

The key source name display/key snapshot button which you pressed lights yellow.

Notes

If you save a key snapshot in a register for which the button is lit orange or yellow, the existing contents of the register are overwritten.

Recalling a key snapshot

For example, the following procedure recalls the state of the M/E-1 key 3 settings.

- 1** In the M/E-1 independent key transition control block, press the [K-SS] button in the key 3 control block, turning it on.
- 2** Press the key source name display/key snapshot button corresponding to the register you want to recall.

Press the [K-SS 3/4] button as required, to switch between displaying the key 3 registers 1 and 2 or registers 3 and 4.

The button you pressed lights yellow, and this recalls the key settings (excluding the key insertion state (on/off) and key priority).



Chapter 5 Wipes

Overview

A wipe is a transition from the current video stream to a new video stream, using a wipe pattern.

Changing the background by means of a wipe is referred to as a “background wipe,” and inserting or deleting a key with a wipe is termed a “key wipe.”

There are two types of wipe: those that can be selected in a common transition, and those that can be selected in an independent key transition.

For details of independent key transitions, see page 181.

Types of Wipe Pattern

The patterns that can be used for a wipe are divided into a number of groups, as follows. Note that only the standard wipe patterns can be used for an independent key transition.

For wipe patterns, see “Wipe Pattern List” in Appendix (Volume 1) (page 486).

Standard wipe patterns

Patterns consisting of straight lines vertically, horizontally, or diagonally, and circular patterns.

Enhanced wipes

More complex shapes such as hearts, stars, and round corners.

Rotary wipes

These patterns involve rotation of the image about a point.

Mosaic wipe pattern

This divides the image into small tiles.

Random and diamond dust wipe patterns

These patterns consist of small random tiles, or fine particles.

Basic Procedure for Wipe Settings

You carry out wipe setting operations principally using the Wipe menu for each of the M/E-1 to M/E-3 and PGM/PST banks.

This section describes the basic procedures for wipe settings, taking the M/E-1 >Wipe menu as an example.

For details of independent key transition wipe settings, see “Wipe Settings for Independent Key Transitions” (page 309).

Wipe Settings Menu

Accessing the wipe settings menu

To access the M/E-1 >Wipe menu, use either of the following operations.

- In the menu control block, select the top menu selection button [M/E 1], and press VF5 ‘Wipe.’

Notes

To select [M/E-4], a previous assignment in the Setup menu is required.

- In the transition control block of the M/E-1 bank, press the transition type selection button [WIPE] twice in rapid succession.
Any of the above operations displays the M/E-1 >Wipe menu.

Wipe Pattern Selection

Selecting a wipe pattern by a menu operation

- 1 In the M/E-1 >Wipe menu, select HF1 ‘Main Pattern.’

The Main Pattern menu appears.

- 2 Select the wipe pattern group with the pattern group selection button.

Standard: standard wipes

Enhanced: enhanced wipes

Rotary: rotary wipes

Mosaic1 to Mosaic3: mosaic wipes

Random/Dust: random/diamond dust wipes

The patterns from the selected pattern group appear on the screen.

For details of wipe patterns, see “Types of Wipe Pattern” (page 282) and “Wipe Pattern List” (page 486).

3 Press the button to select the desired pattern.

The selected pattern is displayed on the screen.

4 The parameters change according to the selected pattern, and you can adjust the pattern.

• **When a polygon wipe is selected** (pattern number 49)

Knob	Parameter	Adjustment	Setting values
1	No	Number of points	3 to 64
2	Star Rate	Angularity of star	−100.00 to +100.00 ^{a)}

a) A value of −100.00 completely removes the star “rays,” leaving a circle; at +100.00 the “rays” are at their sharpest.

• **When a mosaic wipe is selected** (pattern numbers 200 to 203, 206 to 213, 224 to 247, 250 to 257, 260 to 269)

Knob	Parameter	Adjustment	Setting values
1	H Tile No	Number of tiles horizontally	2 to 36
2	V Tile No	Number of tiles vertically	2 to 18

• **When a karaoke wipe is selected** (pattern numbers 220 to 223)

Knob	Parameter	Adjustment	Setting values
1	Start	Position of start tile	−100.00 to +100.00 ^{a)}
2	Row No	Number of rows of tiles	1 to 36
3	Phase	Delay for next row	−100.00 to +100.00 ^{b)}

a) At −100.00 tiles appear from the top (or left edge) of the screen; at +100.00 from the bottom (or right edge) of the screen.

b) At −100.00 all rows appear simultaneously; at +100.00 until one row of tiles is completely displayed, the next row does not start to appear.

• **When a random wipe is selected** (pattern number 273)

Knob	Parameter	Adjustment	Setting values
1	H Size	Tile width	0.00 to 100.00
2	V Size	Tile height	0.00 to 100.00
3	Volatility	Rate of tile generation	0.00 to 100.00

- **When a diamond dust wipe is selected** (pattern number 274)

Knob	Parameter	Adjustment	Setting values
1	H Size	Particle width	0.00 to 100.00
2	V Size	Particle height	0.00 to 100.00
3	Flash Rate	Rate of generation of particles	0.00 to 100.00

Notes

When Flash Rate is set to 0.00, you cannot change the pattern. In this state, adjusting H Size or V Size has no effect on the pattern.

For details of a pattern mix, see the next section.

For details of applying pattern modifiers, see “Setting Wipe Modifiers” (page 290).

Pattern Mix

You can create a new pattern by combining two selected patterns (main and “sub”).

Notes

It is not possible to apply a pattern mix to an independent key transition.


Types of pattern mix

There are four ways in which patterns can be combined in a pattern mix, as follows.


Mix: The effect of the sub pattern is applied to the main pattern, modifying the outline or nature of the main pattern.

Positive NAM (+Nam): Creates a pattern with an outline which contains all points within the outlines of either of the main pattern and the sub pattern.

Negative NAM (–Nam): Creates a pattern with an outline which contains all points within the outlines of both of the main pattern and the sub pattern.

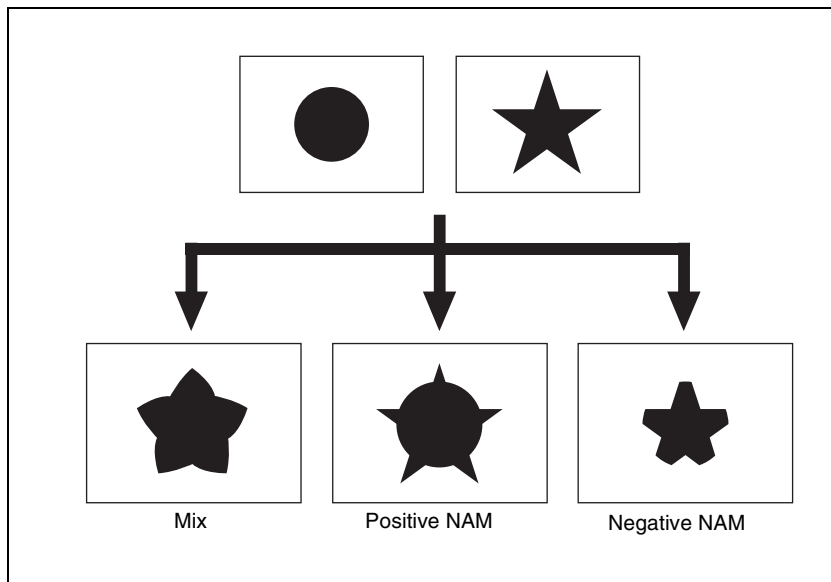

Morphing: As the transition progresses, the pattern morphs from the main pattern, through the “mix” combination, to the sub pattern.

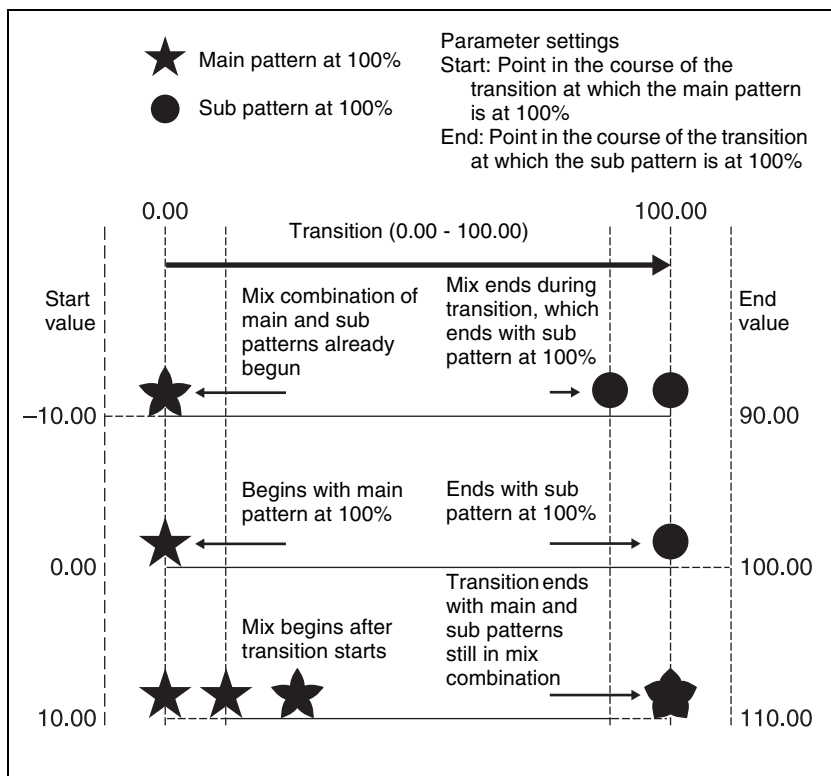

- A value of 0.00 corresponds to the beginning of the transition, and a value of 100.00 to the end of the transition.
- A negative Start value signifies that the main and sub patterns are already combined when the transition starts.
- An End value of 100.00 or more signifies that the main and sub patterns are still combined when the transition complete.
- If the Start and End values are the same, the main and sub patterns are interchanged instantaneously at the corresponding point in the transition.
- If End is less than Start, as the transition proceeds, it changes from the sub pattern to the main pattern.

Dust mix

You can apply the effect of a diamond dust wipe to a selected pattern. You can also apply the diamond dust wipe effect to the pattern resulting from a pattern mix. (See “Applying the effect of a diamond dust wipe to the selected pattern (Dust mix)” (page 290).)

When the pattern mix function is off, turning dust mix on results in the main pattern and the diamond dust pattern being mixed. This state is the same as a pattern mix when the diamond dust pattern is selected for the sub pattern.

Main and sub modifier link function

When carrying out a pattern mix, it is possible to link the modifier settings for the main pattern and sub pattern. There are two modes for this function.

FULL LINK (fully linked) mode

In this mode, all modifier settings are the same for the main pattern and sub pattern.

Changing the modifier settings for one pattern automatically changes the settings for the other.

SEMI LINK (semi-linked) mode

Only the parameter settings of the modifiers are linked. The modifier on/off settings are not linked. When the parameter values for the modifiers of the main pattern and sub pattern are different, then after this link mode is selected, changing the value of a parameter for one pattern changes the value of the parameter for the other pattern to maintain the same difference between the two.

Notes

When carrying out a wipe transition using a pattern mix, it is recommended that you set the modifier link function to FULL LINK mode.

If the link function is off, or SEMI LINK mode is selected, the desired effect may not be obtained at the start or end of the transition.

Combining two patterns

Select a main pattern in the Main Pattern menu, then use the following procedure.

- 1** In the M/E-1 >Wipe menu, select HF3 ‘Sub Pattern.’

The Sub Pattern menu appears.

- 2** In the same way as for the main pattern, select the sub pattern.

The patterns that can be selected for the sub pattern depend on the pattern selected for the main pattern (*see the following table*).

Possible combinations of main pattern and sub pattern

Yes: Combination possible **No:** Combination not possible

Main pattern	Sub pattern				
	Standard	Enhanced	Rotary	Mosaic	Random/ diamond dust
Standard	Yes	Yes	No	Yes	Yes

Main pattern	Sub pattern				
	Standard	Enhanced	Rotary	Mosaic	Random/diamond dust
Enhanced	Yes	Yes	No	Yes	Yes
Rotary	No	No	No	No	No
Mosaic	Yes	Yes	No	No	Yes
Random/diamond dust	Yes	Yes	No	Yes	No

3 Select HF2 'Pattern Mix.'

The Pattern Mix menu appears.

4 In the <Pattern Mix> group, select the type of pattern mix.

Mix: mix

+Nam: positive Nam

–Nam: negative Nam

Morphing: morphing

For an overview of types of pattern mix, see “Types of pattern mix” (page 285).

5 Depending on the selection in step 4, set the following parameters.

• When mix, positive Nam, or negative Nam is selected

Knob	Parameter	Adjustment	Setting values
1	Mix Ratio	Proportion of sub pattern to the main pattern	0.00 to 100.00

• When morphing (see page 286) is selected

Knob	Parameter	Adjustment	Setting values
2	Start	Point in transition at which main pattern is at 100%	–50.00 to +150.00
3	End	Point in transition at which sub pattern is at 100%	–50.00 to +150.00

6 In the <Main/Sub Link> group, make the main/sub modifier link function settings. (See “Main and sub modifier link function” (page 288).)

Full: fully linked mode

Semi: semi-linked mode

Applying the effect of a diamond dust wipe to the selected pattern (Dust mix)

- 1** In the Pattern Mix menu, press [Dust Mix], turning it on.
- 2** Set the following parameters as required.

Knob	Parameter	Adjustment	Setting values
1	Mix Ratio	Proportion of diamond dust pattern in mix	0.00 to 100.00
2	H Size	Particle width	0.00 to 100.00
3	V Size	Particle height	0.00 to 100.00
4	Flash Rate	Rate of generation of particles	0.00 to 100.00

You can also apply the dust mix function to the pattern generated by a pattern mix.

Notes

When a random/diamond dust wipe (pattern numbers 270-274) is selected, the dust mix function is not available.

Setting Wipe Modifiers

You can apply various modifiers to the wipe pattern: setting the wipe direction, pattern position, and so on.

Note that the available modifiers may depend on the pattern you are using. For details, see “Possible combinations of wipe patterns and modifiers” (page 307).

Main pattern and sub pattern modifiers

You can make independent settings of the modifiers for the main pattern and sub pattern.

- To set the modifiers for the main pattern, in the M/E-1 >Wipe menu, select HF5 'Main Modify,' and make the settings in the Main Modify menu.
- To set the modifiers for the sub pattern, select HF6 'Sub Modify,' and make the settings in the Sub Modify menu.

Operations in the Main Modify menu and Sub Modify menu are the same.

Independently set modifiers for the main pattern and sub pattern


- Positioner
- Rotation

- Aspect ratio
- Pattern replication (MULTI)
- Pairing
- Modulation
- Spring
- Spiral

The following sections show examples of modifying the main pattern.

Specifying the wipe direction (Direction)

You can specify the direction of the wipe: the regular direction is referred to as “normal,” and the other direction as “reverse.” You can also select alternating directions each time the transition is completed (normal/reverse mode).

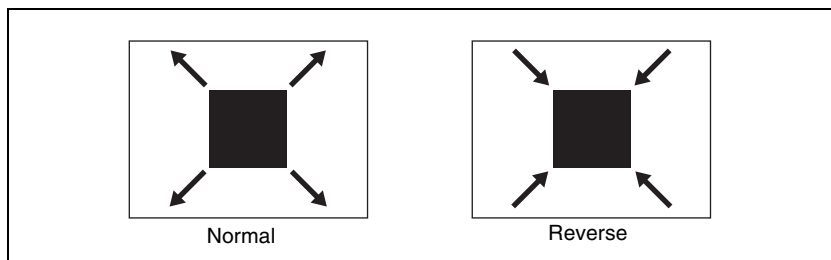

To specify the wipe direction in a menu

- 1 In the M/E-1 >Wipe menu, select HF4 ‘Edge/Direction.’

The Edge/Direction menu appears.

- 2 In the <Direction> group, specify the wipe direction.

Normal: regular direction

Normal/Reverse: alternate between regular and reverse for each transition

Reverse: reverse direction to normal

To specify the wipe direction with a button in the transition control block

In the transition control block of each of the M/E-1 to M/E-3 and PGM/PST banks, press the following direction selection buttons.


NORM: Normal

NORM/REV: Normal/reverse

REV: Reverse

Splitting the wipe pattern (Split)

This splits the pattern, making the parts of the wipe move in opposite directions.

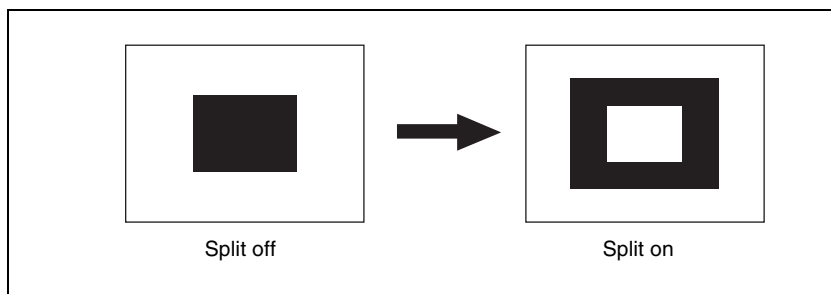

The parameter Split No specifies the number of splits.
The parameter Spacing specifies the spacing between adjacent patterns.

- 1** In the M/E-1 >Wipe menu, select HF4 'Edge/Direction.'
- The Edge/Direction menu appears.
- 2** Press [Split], turning it on.
- 3** Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Split No	Number of splits	1 to 4 (integer)
2	Spacing	Spacing between adjacent patterns	0.00 to 100.00

Modifying the wipe pattern edge (Edge)

You can apply a border to the pattern, soften the edges, or soften the applied border.



Border: You can adjust the border width.
Soft: You can adjust the edge softness.

Soft border: You can adjust the border width, and the softness of the inner and outer edges of the border.

When a border or soft border is selected, the signal filling the border is called edge fill. For the edge fill, you can use a matte generated by the dedicated color matte generator, or the signal selected on the utility 2 bus. A matte can include color 1 and color 2, and a combination of the two colors (a “color mix”).

- 1 In the M/E-1 >Wipe menu, select HF4 ‘Edge/Direction.’

The Edge/Direction menu appears.

- 2 In the <Edge> group, select the edge type.

Border: border

Soft: soft edge

Soft Border: soft border

- 3 Set the parameters according to the selection in step 2.

- **When border is selected**

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00

- **When soft edge is selected**

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0.00 to 100.00

- **When soft border is selected**

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00
2	Inner Soft	Border inner softness	0.00 to 100.00
3	Outer Soft	Border outer softness	0.00 to 100.00

- 4 When you selected border or soft border, select the edge fill signal in the <Edge Fill> group.

Utility 2 Bus: signal selected on the utility 2 bus

Matte: signal from the dedicated color matte generator

- 5 Depending on the operation in step 4, carry out the following operation.

When ‘Utility 2 Bus’ is selected: Hold down the [UTIL] button in the cross-point control block, and select the signal on the background B bus.



While the [UTIL] button is held down, the background B bus changes to the utility 2 bus.

Notes

To enable the [UTIL] button, its operation mode must be set to [Hold] beforehand. (See “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3).)

When ‘Matte’ is selected: In the same Edge/Direction menu, press [Matte Adjust] to display the Matte Adjust menu, then adjust the single-color or two-color combination color matte. Select whether to use a single-color matte or a two-color combination in the <Edge Matte> group.

Flat Color: Adjust color 1 with the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

When you select [Mix Color] for a two-color combination, see the next paragraph.

Carrying out a color mix for the edge fill matte

When you selected [Matte] for the border or soft border edge fill, you can combine color 1 and color 2.

For the combination, you can use not only a normal wipe generator pattern, but also the dedicated color mix pattern.

- 1 In the <Edge Fill> group of the Edge/Direction menu, select [Matte], and press [Matte Adjust].

The Matte Adjust menu appears.

- 2 In the <Edge Matte> group, select [Mix Color], turning it on.

- 3 In the <Mix Pattern> group, make one of the following selections.

Wipe: Use the wipe pattern selected for the transition.

Pattern: Use the dedicated pattern.

- 4 Depending on the selection in step 3, set the following parameters.

- When Wipe is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

- When Pattern is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00
3	Pattern	Pattern number	1 to 24 ^{a)}

a) The patterns are the same as for a standard wipe. See “Wipe Pattern List” (page 486).

If you selected Pattern, you can also carry out the pattern selection by pressing the [Mix Ptn Select] button in the Matte Adjust menu, to display the Mix Ptn Select menu. Select any pattern appearing in the Mix Ptn Select menu (wipe patterns 1 to 24) by pressing the appropriate button, and you can then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

5 If you selected Pattern in step 4, if required, the following modifiers can be added. After selecting a wipe mix, skip to step 6.

- When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	−200.00 to +200.00 ^{a)}
2	Position V	Vertical position	−200.00 to +200.00 ^{a)}

a) See page 296.

- When turning [Multi] on and using replications of the same pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 ^{a)}

a) See page 301.

- When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	−100.00 to +100.00 ^{a)}

a) See page 300.

- When turning [Angle] on in the <Rotation> group and slanting the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	−100.00 to +100.00 ^{a)}

a) See page 298.

- When turning [Speed] on in the <Rotation> group and rotating the pattern at a constant rate

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	−100.00 to +100.00 ^{a)}

a) See page 299.


- 6** To adjust color 1, set [Color 1] on, and to adjust color 2 set [Color 2] on, then adjust the parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

- 7** To interchange color 1 and color 2, press the [Color Invert] button, turning it on.

Setting the wipe position (Positioner)

When you turn on this function, you can move the wipe pattern to any position.

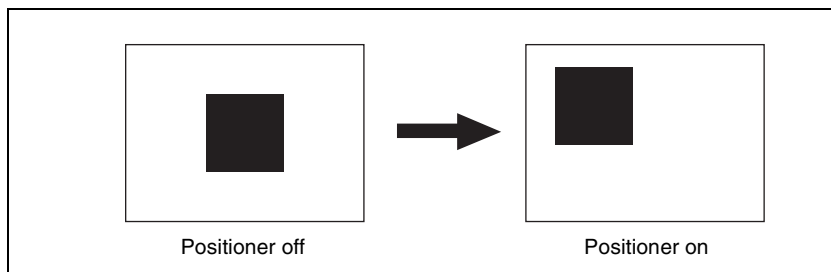

- The parameter H Position controls the horizontal position of the pattern. A negative value moves the pattern to the left, and a positive value moves the pattern to the right.
- The parameter V Position controls the vertical position of the pattern. A negative value moves the pattern down, and a positive value moves the pattern up.

You can set the position independently for the main pattern and sub pattern.

- 1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.

- 2 In the <Position> group, press [Position], turning it on, and set the pattern position.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00
2	Position V	Vertical position	–200.00 to +200.00

To return the pattern position to the center of the screen

In the <Position> group, press [Center].

To move the pattern from its current position to the center through the course of a transition

In the <Position> group, press [Auto Center], turning it on.

To set the wipe position using the trackball or joystick

You can also set the wipe position using the trackball or joystick in the device control block.

- 1 In the device control block, press the [M/E1], [M/E2], [M/E3], [M/E4], or [P/P] button, turning it on.

Notes

The [M/E4] button requires a previous assignment in the Setup menu.

The buttons in the device control block are assigned to the wipe position setting as follows.


Table 1: Buttons and assigned settings

Button name	Setting
MAIN	Wipe position for common transition (main pattern)
SUB	Wipe position for common transition (sub pattern)

- 2** Press the [MAIN] button or [SUB] button, turning it on.
- 3** Press the [POS] button, turning Position on.
- 4** Move the trackball or joystick, to set the wipe position. By pressing the [X] button, turning it on, you can restrict movement to the horizontal direction, and by pressing the [Y] button, turning it on, you can restrict movement to the vertical direction.


You can rotate the pattern. There are three rotation modes, as follows.

This carries out a wipe with the pattern in a fixed angle.

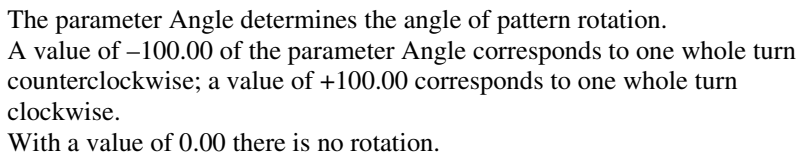

Speed

Through the course of the transition the wipe pattern rotates at a fixed specified speed.




The parameter Speed determines the speed of pattern rotation.

A value of -100.00 of the parameter Speed corresponds to one turn per second counterclockwise; a value of $+100.00$ corresponds to one turn per second clockwise. With a value of 0.00 the pattern is stationary.

Magnitude

Through the course of the transition the wipe pattern rotates through the specified angle.



The parameter Angle determines an angle of pattern inclination at the beginning of the transition.

- A value of -100.00 corresponds to the angle rotated one whole turn counterclockwise.
- A value of $+100.00$ corresponds to the angle rotated one whole turn clockwise.
- With a value of 0.00 the pattern is stationary.

The parameter Magnitude determines an angle of pattern rotation through the course of the transition.

- A value of -200.00 corresponds to a rotation of two turns counterclockwise.
- A value of $+200.00$ corresponds to a rotation of two turns clockwise.
- With a value of 0.00 the pattern is stationary.

You can apply rotation independently to the main pattern and sub pattern.

- 1 In the M/E-1 >Wipe menu, select HF5 'Main Modify.'

The Main Modify menu appears.

2 In the <Rotation> group, select the rotation type.

Angle: Incline the pattern through a fixed angle.

Speed: Rotate at a fixed rate.

Magnitude: Rotate through a particular angle during the course of the transition.

3 According to the selection in step **2**, set the following parameters.

• **When Angle is selected**

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	-100.00 to +100.00

• **When Speed is selected**


Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	-100.00 to +100.00

• **When Magnitude is selected**

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation at start of transition	-100.00 to +100.00
2	Magnitude	Angle of rotation through course of transition	-200.00 to +200.00

Setting the wipe pattern aspect ratio (Aspect ratio)

You can freely change the aspect ratio of the pattern.

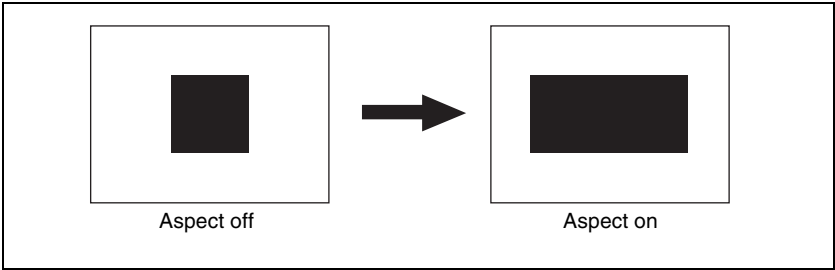

A negative value of the parameter Aspect stretches the pattern vertically; a positive value stretches the pattern horizontally.

You can set the aspect ratio independently for the main pattern and sub pattern.

1 In the M/E-1 >Wipe menu, select HF5 'Main Modify.'


The Main Modify menu appears.

- 2 Press [Aspect], turning it on.
- 3 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	-100.00 to +100.00


Setting the wipe pattern replication (Multi)

The same pattern can be repeated horizontally and vertically or both, up to 63 times. You can also change the orientation of alternate copies, or change the position.

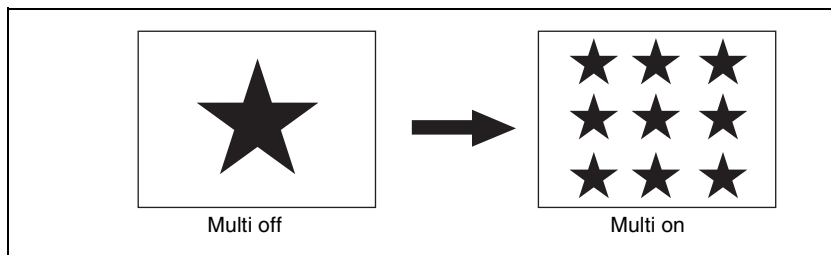

- The parameter H Multi determines the number of pattern replications horizontally, and the parameter V Multi determines the number of pattern replications vertically.
- The parameter Shift determines the manner of replication.
At a value of -100.00, the pattern of the adjacent odd-numbered column on the left lines up with the central coordinate horizontally.
At a value of +100.00, the pattern of the adjacent odd-numbered column on the right lines up with the central coordinate horizontally.

For an independent key transition wipe, you can use the “Invert Type” parameter to select from the following four types of replication pattern.

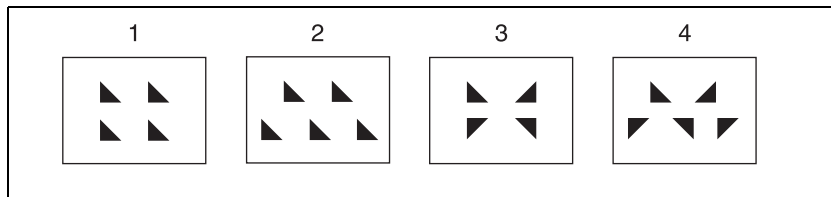

- 1: All replications in the same orientation
- 2: Even-numbered rows staggered
- 3: Even-numbered columns and rows inverted
- 4: Even-numbered columns and rows inverted, and even-numbered rows staggered

You can set pattern replication independently for the main pattern and sub pattern.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.

2 Press the [Multi] button, turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Shift	Replication layout	−100.00 to +100.00

4 To make more adjustments, press the [Multi Adjust] button.

The Multi Adjust menu appears.

5 Make the following settings, as required.

H Invert: When this is on, alternate tiles are inverted left-to-right.

V Invert: When this is on, alternate tiles are inverted top-to-bottom.

Non-Mask: When this is on, even if the positioner function is used to move the pattern position, the pattern is always present on the screen.


Position: By adjusting the following parameters, move the pattern position within the divisions determined in step **3**.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position of pattern	−200.00 to +200.00 ^{a)}
2	Position V	Vertical position of pattern	−200.00 to +200.00 ^{a)}

a) See page 296.

Making a wipe pattern like a Venetian blind (Pairing)

This slits the pattern into multiple strips, making it like a venetian blind.

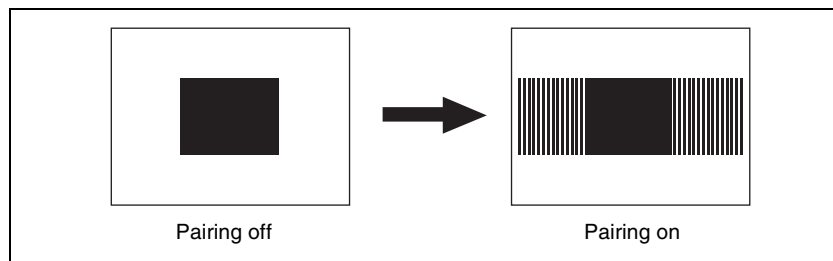

H: Create slits in the horizontal direction.

V: Create slits in the vertical direction.

- The parameter Width determines the width of the slits.
- The parameter H Offset determines the spacing in the horizontal direction. If a negative value is set, the even-numbered pairs of strip and slit move to the left, and the odd-numbered pairs move to the right. (The value -100.00 represents the maximum movement.)
If a positive value is set, the even-numbered pairs of strip and slit move to the right, and the odd-numbered pairs move to the left. (The value $+100.00$ represents the maximum movement.)
- The parameter V Offset determines the spacing in the vertical direction. If a negative value is set, the even-numbered pairs of strip and slit move upward, and the odd-numbered pairs move downward. (The value -100.00 represents the maximum movement.)
If a positive value is set, the even-numbered pairs of strip and slit move downward, and the odd-numbered pairs move upward. (The value $+100.00$ represents the maximum movement.)

1 In the M/E-1 >Wipe menu, select HF5 'Main Modify.'

The Main Modify menu appears.

2 In the <Pairing> group, select the slit direction.

H: Create slits in the horizontal direction.

V: Create slits in the vertical direction.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Width	Width of the slits	1 to 128 (integer)
2	H Offset	Spacing in the horizontal direction	-100.00 to $+100.00$
3	V Offset	Spacing in the vertical direction	-100.00 to $+100.00$

Applying modulation to the wipe pattern (Modulation)

The pattern signal can be modulated, giving waves on the horizontal or vertical edges, or radially.

The parameter Shape determines the form of the modulation.


1: sine wave, 2: triangular wave, 3: rectangular wave

Notes

When using 1080PsF mode in an HD system, the modulation function is not available.

Horizontal modulation

This modulates the pattern, applying waviness in the horizontal direction to edges.




The parameter Speed determines the speed of waves.

A value of -100.00 generates the maximum downward speed of waves, and a value of $+100.00$ the maximum upward speed.

Vertical modulation

This modulates the pattern, applying waviness in the vertical direction to edges.




The parameter Speed determines the speed of waves.

A value of -100.00 generates the maximum leftward speed of waves, and a value of $+100.00$ the maximum rightward speed.

Applying barrel or pincushion distortion to the edge of the wipe pattern (Spring)

As the transition progresses, the edge of the pattern is subjected to barrel or pincushion distortion.

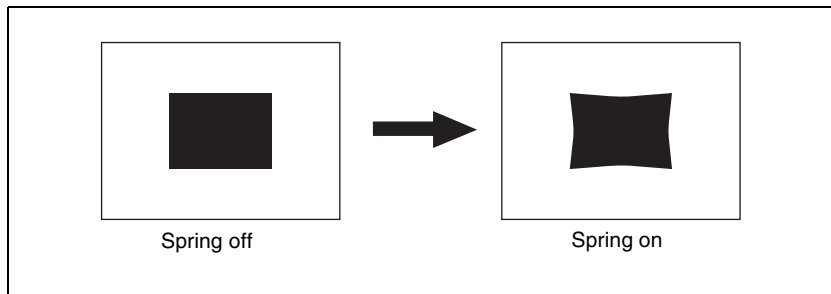

A negative parameter value produces pincushion distortion, and a positive value produces barrel distortion.


You can set the spring function independently for the main and sub patterns.

- 1** In the M/E-1 >Wipe menu, select HF5 'Main Modify.'
The Main Modify menu appears.
- 2** Press [Spring], turning it on.
- 3** Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Gain	Degree of barrel distortion	-100.00 to +100.00

Applying a spiral effect to the wipe pattern (Spiral)

This deforms the pattern spirally.

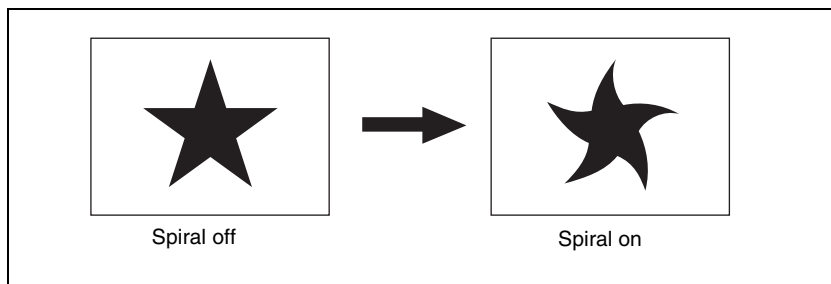

- The parameter Magnitude determines the size and direction of the spiral.
A value of –100.00 represents the maximum movement in the counterclockwise direction, and a value of +100.00 represents the maximum movement in the clockwise direction.
- The parameter Wave Speed determines the speed of the lateral waves.
A value of –100.00 represents the maximum speed to the left, and a value of +100.00 represents the maximum speed to the right.

You can set the spiral function independently for the main and sub patterns.

- 1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’
The Main Modify menu appears.
- 2 Press [Spiral], turning it on.
- 3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Magnitude	Size and direction of the spiral	–100.00 to +100.00
2	Wave Speed	Speed of the lateral waves	–100.00 to +100.00

Possible combinations of wipe patterns and modifiers

Yes: Can be used **No:** Cannot be used

Modifiers	Type of wipe				
	Standard	Enhanced	Rotary	Mosaic	Random/ diamond dust
Direction	Yes	Yes	Yes	Yes	Yes
Split	Yes	Yes	No	Yes	No
Edge	Yes	Yes	Yes	Yes	Yes
Positioner	Yes ^{a)}	Yes ^{b)}	Yes ^{c)}	No	No
Rotation	Yes	Yes	Yes ^{c)}	No	No
Aspect ratio	Yes ^{d)}	Yes	No	No	No
Pattern replication	Yes	Yes	Yes	Yes ^{e)}	No
Pairing	Yes ^{f)}	Yes	No	No	No
Modulation (H/V)	Yes	Yes	Yes	No	No
Modulation (Fringe)	No ^{g)}	Yes	No	No	No
Spring	No ^{g)}	Yes	No	No	No

Modifiers	Type of wipe				
	Standard	Enhanced	Rotary	Mosaic	Random/ diamond dust
Spiral	No ^{h)}	Yes	No	No	No

- a) Not patterns 1 to 16, 19, and 20
- b) Not patterns 300 to 303
- c) Not patterns 100 to 103, 150, 151, 516, 518, 604, and 606
- d) Not patterns 1 to 8, 17, and 18
- e) Not patterns 220 to 223
- f) Not patterns 19 and 20
- g) But patterns 21, 23 and 24 are possible
- h) But patterns 21 and 23 are possible

Wipe Modify Clear

Press [Default Recall] at the lower left of the menu display, turning it on, then press VF5 ‘Wipe’ to return the wipe settings to their initial status.

For details of the menu operation to return the wipe state to that set in initial status, see “Returning to default state in function groupings” (page 118).

Wipe Settings for Independent Key Transitions

You carry out independent key transition wipe setting operations using the Wipe Adjust menu for each keyer.

For an overview of independent key transitions, see “What is an independent key transition?” (page 181).

This section describes the independent key transition wipe settings, taking the M/E-1 >Key1 >Transition >Wipe Adjust menu as an example.

Basic Procedure for Independent Key Transition Wipe Settings

Accessing the independent key transition wipe settings menu

As an example, to access the M/E-1 >Key1 >Transition >Wipe Adjust menu, carry out the following operations.

- In the menu control block, select the top menu selection button [M/E 1] and select VF1 ‘Key1’ and HF6 ‘Transition’ to display the Transition menu for key 1, then press [Wipe Adjust].
If VF1 [Key5] is shown, press the switching button at the top of the menu, so that [Key1-4] appears, and press VF1 [Key1].

Notes

To select [M/E-4], a previous assignment in the Setup menu is required.

- In the independent key transition control block of the M/E-1 bank, press the key delegation button [KEY1], then press the independent key transition type selection button [WIPE] twice in rapid succession.

Carrying out the above operation displays the M/E-1 >Key1 >Transition >Wipe Adjust menu (which will be referred to below as simply the Key1 Wipe Adjust menu).

Selecting the independent key transition wipe pattern

You select the independent key wipe pattern from the list of patterns displayed in the menu.

Notes

In an independent key transition, you can only use the standard wipe patterns (pattern numbers 1 to 24).

To select a wipe pattern for independent key1 on the M/E-1 bank, use the following procedure.

- In the Key1 Wipe Adjust menu, select [Pattern Select].
The Pattern Select menu appears.
- Press the button for the desired pattern.

Setting Independent Key Transition Wipe Modifiers

Available modifiers

You can use the following modifiers with an independent key transition wipe. Note that the available modifiers may depend on the pattern you are using.

- Direction
- Edge
- Positioner
- Rotation
- Aspect ratio
- Pattern replication

Setting the wipe direction (Direction)

In the <Direction> group of the Key1 Wipe Adjust menu, make any of the following selections.

- Normal:** regular direction
- Normal/Reverse:** alternate between regular and reverse for each transition
- Reverse:** reverse direction to normal

Softening the wipe pattern edge (Soft edge)

- Press [Soft] in the Key1 Wipe Adjust menu, turning it on.
- Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0.00 to 100.00

Setting the wipe position (Positioner)

There are two methods of setting the wipe position: using the device control block, or in a menu.

To set the wipe position using the trackball or joystick

You can also set the wipe position using the trackball or joystick in the device control block.

- 1 In the device control block, press the [M/E1], [M/E2], [M/E3], [M/E4], or [P/P] button, turning it on.

Notes

The [M/E4] button requires a previous assignment in the Setup menu. The buttons in the device control block are assigned to the wipe position setting as follows.

Table 1: Buttons and assigned settings

Button name	Setting
K1 CB1	Wipe position for independent key 1 transition
K2 CB2	Wipe position for independent key 2 transition
K3	Wipe position for independent key 3 transition
K4	Wipe position for independent key 4 transition

Table 2: Buttons assigned to functions

Button name	Function
POS	Toggle Position on or off.
X, Y	Fix the operating direction.
CTR	Return the pattern position to the center of the screen.

- 2 Press one of the buttons in Table 1 above, to select the wipe position to which the operation applies. Multiple selection is possible.

Notes

By setting the operation mode in setup, you can also use [K1 CB1], [K2 CB2], [K3], and [K4] to select keys 5 to 8. In this case, press [SHIFT], turning it on, then press [K1 CB1], [K2 CB2], [K3], or [K4] to select one of keys 5 to 8. However, it is not possible to select more than one key.

For details of assignment for keys 5 to 8, see “Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu” in the Appendix (page 534).

- 3 Press the [POS] button, turning Position on.

- 4 Move the trackball or joystick, to set the wipe position. By pressing the [X] button, turning it on, you can restrict movement to the horizontal direction, and by pressing the [Y] button, turning it on, you can restrict movement to the vertical direction.

To set the wipe position by a menu operation

- 1 Press [Position] in the Key1 Wipe Adjust menu, turning it on.
- 2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	-200.00 to +200.00 ^{a)}
2	Position V	Vertical position	-200.00 to +200.00 ^{a)}

a) See page 296.

To move the pattern from its current position to the center through the course of a transition

Press [Auto Center] in the <Position> group, turning it on.

Rotating the wipe pattern (Rotation)

- 1 In the <Rotation> group of the Key1 Wipe Adjust menu, select the rotation type.

Angle: Incline the pattern through a fixed angle.

Speed: Rotate at a speed rate.

Magnitude: Rotate the pattern through a fixed angle during the course of the transition.

- 2 According to the selection in step 1, set the following parameters.

• When Angle is selected

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	-100.00 to +100.00 ^{a)}

a) See page 298.

• When Speed is selected

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	-100.00 to +100.00 ^{a)}

a) See page 299.

- When Magnitude is selected

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation at start of transition	–100.00 to +100.00 ^{a)}
2	Magnitude	Angle of rotation through course of transition	–200.00 to +200.00 ^{a)}

a) See page 299.

Setting the wipe pattern aspect ratio (Aspect ratio)

- 1 Press [Aspect] in the Key1 Wipe Adjust menu, turning it on.
- 2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 ^{a)}

a) See page 300.

Replicating the wipe pattern (Multi)

- 1 Press [Multi] in the Key1 Wipe Adjust menu, turning it on.
- 2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 ^{a)}


a) See page 301.

Wipe Snapshots


You can snapshot and save a wipe pattern together with the current settings of its modifiers and pattern limit in a dedicated register for recall when required. There are 10 wipe snapshot registers on each M/E bank and the PGM/PST bank.

Use the Flexi Pad control block, the Multifunction Flexi Pad block in each switcher bank or the Menu control block to save and recall wipe snapshots. For simple transitions (*see page 193*), there are eight wipe snapshot registers on each M/E bank and the PGM/PST bank.

Wipe Snapshot Operations With the Flexi Pad

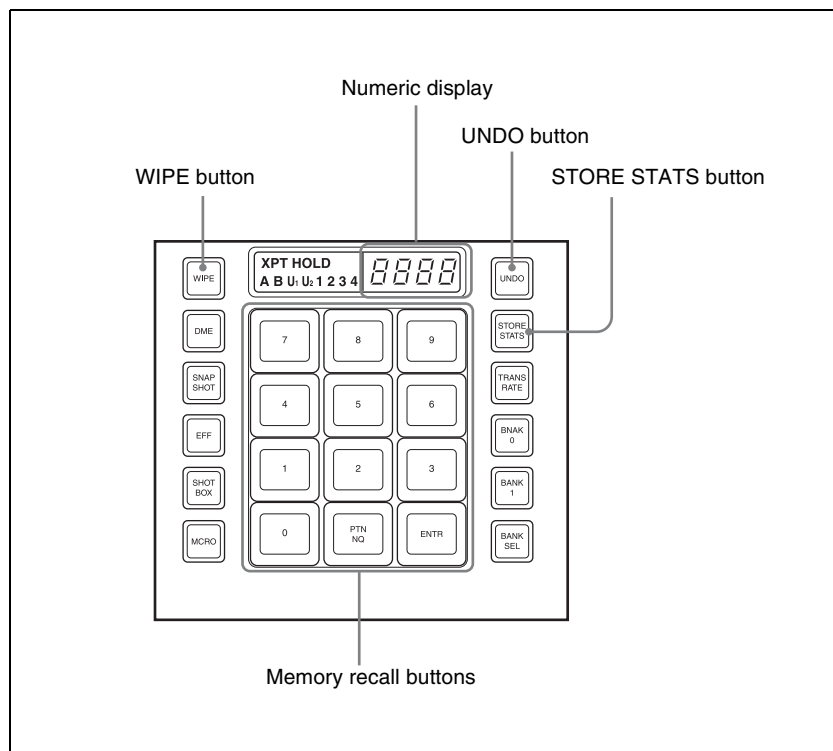

Flexi Pad control block (standard type)

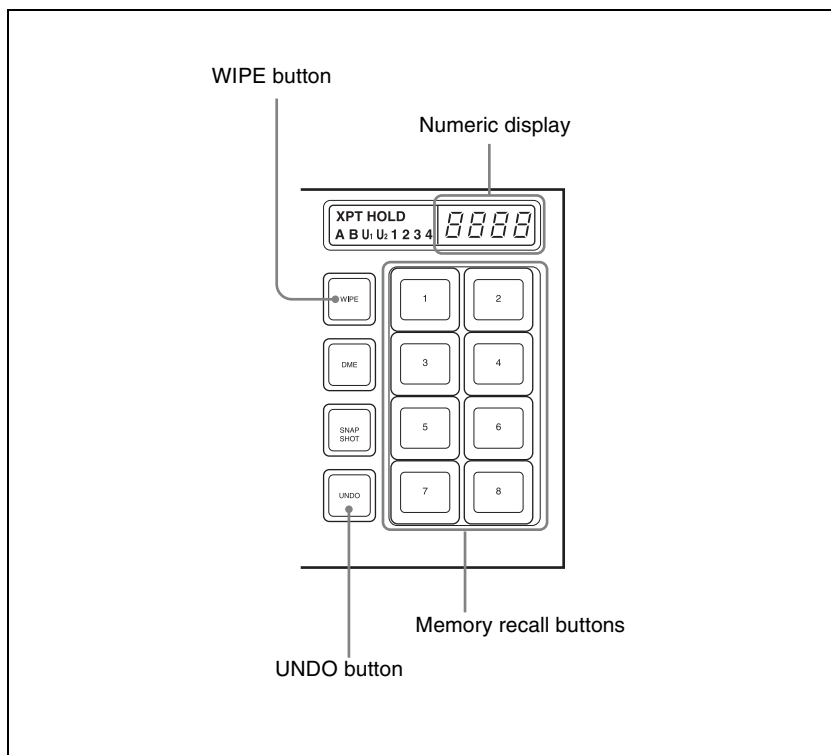

Flexi Pad control block (simple type)

Selecting a wipe pattern in the Flexi Pad control block

To select a pattern with a standard type Flexi Pad control block, use the following procedure. (It is not possible to select a wipe pattern with a simple type Flexi Pad control block.)

- 1** In the M/E-1 Flexi Pad control block, press the [WIPE] button.
This switches the Flexi Pad control block to wipe snapshot mode.
- 2** In the memory recall section, press the [PTN NO] button.
This switches the Flexi Pad control block to wipe pattern number recall mode.
- 3** Use the buttons in the memory recall section to enter the pattern number consisting of up to three digits, and press the [ENTR] button.
The entry is confirmed, and now the numeric display shows the pattern number.

Saving a wipe snapshot

- 1 Make the wipe settings that you want to save.
Make any modifier settings required.
For details, see “Setting Wipe Modifiers” (page 290).
- 2 In the Flexi Pad control block, hold down the [WIPE] button, and press the memory recall button corresponding to the register in which you want to save.

Notes

- If you press a button which is lit orange or yellow, the existing contents of the register are overwritten.
- If you carry out a pattern mix, and both the main pattern and sub pattern are selected, then the memory recall button shows the main pattern.

The pattern appears on the button you pressed, which lights yellow.
The numeric display shows the number of the corresponding pattern.
It is also possible to display the register name using a Setup menu (*see “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3)*).

Meaning of the state of buttons

Off: Nothing is saved in the register.

Lit orange: Settings are saved in the register.

Lit yellow: The most recently recalled register.

Canceling the saving of a wipe snapshot

To cancel the saving of a wipe snapshot immediately after performing it, hold down the [STORE STATS] button, and press the [UNDO] button. The [STORE STATS] button changes from amber to green.

Notes

On a simple type Flexi Pad control block, it is not possible to cancel the saving of a wipe snapshot.

Recalling a wipe snapshot

- 1 In the Flexi Pad control block, press the [WIPE] button.
This switches the Flexi Pad control block to the wipe snapshot mode.

- 2 Press the memory recall button for the register from which you want to recall the wipe snapshot.

The button lights, and the saved wipe snapshot is recalled. At this point, the numeric display shows the pattern number or register name.

Canceling the recall of a wipe snapshot

To cancel the recall of a wipe snapshot, press the [UNDO] button.

Deleting a wipe snapshot

When the [WIPE] button is lit in the Flexi Pad control block, hold down the [STORE STATS] button and press the memory recall button for the register in which you want to delete the wipe snapshot.

The indication of the memory recall button reverts from the wipe pattern or register name to the register number.

Notes


In a simple type Flexi Pad control block, it is not possible to delete a wipe snapshot.

Wipe Snapshot Operations With the Menus

Menus used

As an example, when operating on M/E-1, select M/E-1 >Wipe >Wipe Snapshot.

The Wipe Snapshot menu appears.

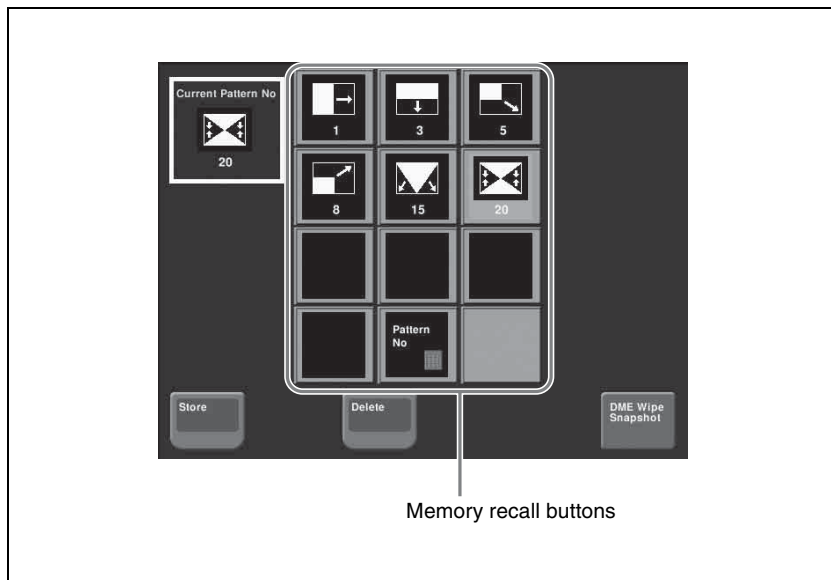

Button displays

In setup you can select whether the memory recall buttons show the pattern number or register name.

See “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3).

Saving a wipe snapshot from the menu

- 1** Set up the wipe you want to save.
- 2** In the Wipe Snapshot menu, press [Store], lighting it amber.
- 3** Press the memory recall button for the register in which you want to save.

Notes

- If you press a button which is already lit, this overwrites the contents of the register.
- When both the main pattern and sub pattern are selected for a pattern mix, the button in the memory recall section shows only the main pattern.

Recalling a wipe snapshot from the menu

In the Wipe Snapshot menu, press the memory recall button for the wipe snapshot you want to recall.

This recalls the wipe snapshot, and the button you pressed lights amber.

In the upper left is shown the currently recalled register name or number.

Notes

The Flexi Pad and menu settings are linked.
A setting in setup determines whether register names or pattern numbers appear.

Deleting a wipe snapshot from the menu


- 1** In the Wipe Snapshot menu, press [Delete].
- 2** Press the memory recall button for the wipe snapshot you want to delete.
This deletes the wipe snapshot.

Wipe Pattern Operations in the Multifunction Flexi Pad Control Block

Recalling a Wipe Snapshot

You can recall a wipe snapshot in the Multifunction Flexi Pad control block. To recall a wipe snapshot, use the operations shown in the following illustration.

- 1 In the Multifunction Flexi Pad control block, press the [WIPE] button.
This sets the Multifunction Flexi Pad control block to wipe snapshot mode, and the button indications appear as follows.

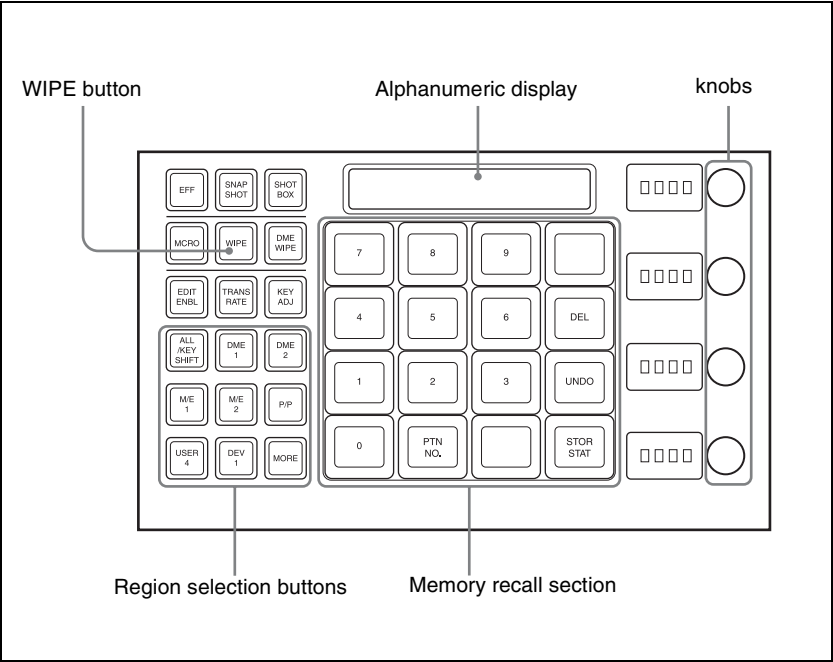

You can change the indications for buttons [0] to [9] in the memory recall section to pattern images, using the Engineering Setup >Panel >Operation >Flexi Pad Mode menu.

- 2 Select the region for the wipe snapshot to be recalled with the region selection buttons.

- 3 Press the numeric button (lit orange) in the memory recall section corresponding to the register in which the desired wipe snapshot is stored.

The button you pressed lights yellow, and this recalls the saved wipe snapshot.
At this point the numeric display shows the register name or pattern number for the pattern.

Selecting the Wipe Pattern

- 1 Press the [WIPE] button, and select the region with the region selection buttons.

Notes

The [M/E4] button requires a previous assignment in the Setup menu.

For details of [M/E 4] button assignment, see “Assigning a Button for M/E-4 Selection in the Setup Menu” (page 532) in Appendix (Volume 1).

- 2 Press the [PTN NO.] button in the memory recall section.


The [PTN No.] button lights green.
- 3 With the buttons in the memory recall section, enter the pattern number of up to three digits, and press the [ENTR] button.

This confirms the input, and the pattern number appears in the alphanumeric display.
The [PTN NO.] button lights orange, and the system returns to wipe snapshot mode.

For pattern numbers, see “Wipe Pattern List” (page 486).

Editing the Wipe Pattern

By pressing the [EDIT ENBL] button to switch the memory recall section to editing mode as shown in the following illustration, you can edit the selected wipe pattern with the following buttons.
To exit from the editing mode, press the [EDIT ENBL] button once more, or press the [EXIT] button.

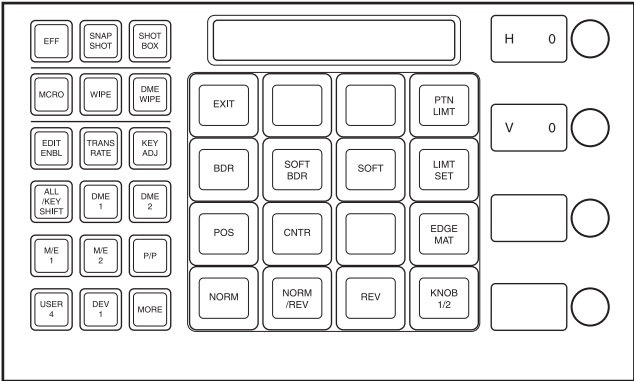

Wipe pattern edge setting buttons

- BDR (border):** Applies a border to the wipe pattern.
- SOFT BDR (soft border):** Softens the applied border.
- SOFT (soft edge):** Softens the edge.
- EDGE MAT (edge matte):** Selects whether to fill the edge with a color matte, or insert an image from the utility bus. By default a color matte is selected.

You can adjust the parameters selected with these buttons using the control knobs, when the button is lit green.

• When border is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	359 to 0

• When soft border is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100
2	I	Degree of softening of inside of border	0 to 100

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
3	O	Degree of softening of outside of border	0 to 100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	359 to 0

- When soft edge is selected

Knob	Parameter	Adjustment	Setting values
1	S	Degree of softening of edge	0 to 100

- When edge matte is selected

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	359 to 0

Buttons for positioning the wipe pattern

POS (position): Adjusts the position of the wipe pattern.

CNTR (center): Returns the wipe pattern position to the center.

When you press the [POS] button, the alphanumeric display first shows the name of the parameter, “H” or “V,” and then the value of the parameter. When the [POS] button is lit green, you can adjust the position of the wipe pattern with the control knobs.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–200 to +200
2	V	Vertical position	–200 to +200

Buttons for setting the wipe direction

NORM (normal): Sets wipe to normal (forward) direction.

NORM/REV (normal/reverse): Sets the wipe direction to alternate between normal and reverse for each transition.

REV (reverse): Sets wipe to reverse direction to normal.

Buttons for setting the wipe pattern limit

PTN LIMT (pattern limit): Enables the following settings for the pattern limit using the control knobs.

LIMIT SET (limit set): If you change the pattern size with the fader lever then press this button, this sets the current size as the pattern limit.

Knob	Parameter	Adjustment	Setting values
1	P	Pattern limit range	0 ^{a)} to +100 ^{b)} (%)

a) At 0%, executing the transition has no effect at all.

b) At 100%, the transition can be executed with the same effect as with no pattern limit set, but when the transition completes, background buses A and B are not interchanged.

Other buttons

EXIT: Exits the editing mode, and returns the memory recall section to wipe snapshot mode.

Knob 1/2: When the control knob adjustments are on two pages, this switches between parameter group [1/2] and parameter group [2/2].

Wipe modify clear

When the [WIPE] button is held down, holding down the region selection button for the selected region together returns all the wipe settings of the region to the initial status settings.

For details of the initial status, see “Selecting the State After Powering On (Start Up Menu)” in Chapter 18 (Volume 3).

Saving, Canceling, and Deleting Edited Wipe Patterns

Saving the edited wipe pattern as a snapshot

Holding down the [WIPE] button, press the button in the memory recall section for the register in which you want to save.

The button you pressed lights yellow.

Buttons for registers in which wipe snapshots are already saved light orange.

Canceling a saved wipe snapshot

To cancel a wipe snapshot

Immediately after saving, hold down the [STOR STAT] button and press the [UNDO] button.

At other times, hold down the [STOR STAT] button, and press the button for the register in which the wipe snapshot you want to cancel is saved.

Buttons for registers in which wipe snapshots are already saved light orange.

Canceling recall of a wipe snapshot

To cancel the operation of recalling a wipe snapshot, press the [UNDO] button.

Deleting the date of a saved wipe snapshot

Holding down the [DEL] button, press the button for the register in which the wipe snapshot you want to delete is saved.

The register button you pressed goes off.



Chapter 6 DME Wipes

Overview

A DME wipe is a wipe transition that uses a DME effect to change from one video image to the next.

There are two types of DME wipe: those which can be selected for a normal transition, and those which can be selected for an independent key transition.

For details of independent key transitions, see page 181.

Notes

It is also possible to carry out a DME wipe on a key using the resizer (*see page 354*).

Types of DME Wipe Pattern

The patterns used for a DME wipe fall into two broad classes.

Preset patterns: predetermined fixed patterns

User programmable DME patterns: patterns which you can create using keyframe effects

DME wipe execution mode and pattern numbers that can be used

There are three DME wipe execution modes, depending on the number of DME channels available: one-channel mode, two-channel mode and three-channel mode. The pattern numbers that can be used in these modes are as follows.

Execution mode	Preset pattern numbers that can be used	User programmable DME pattern numbers that can be used
One-channel mode	1000 series	1901 to 1999
Two-channel mode	2000 series	2901 to 2999
Three-channel mode	3000 series	3901 to 3999

Notes

When the signal format is 1080P, three-channel mode cannot be used.

DME wipe pattern groups

The patterns used in DME wipes fall into the following groups.

For each group (excluding user programmable DMEs), for schematic patterns and numbers, see “DME Wipe Pattern List” (page 492). The black part of the pattern represents the old video, and the white part the new video, with the wipe taking place in the direction of the arrow.

Slide: The new video slides in over the old video.

(Pattern numbers: 1001 to 1008 (one-channel mode), 2601 to 2608 (two-channel mode))

Squeeze: The new video appears squeezed over the old video, and progressively expands to cover it.

(Pattern numbers: 1021 to 1031 (one-channel mode), 2621 to 2628 (two-channel mode))

Split: The old video splits, and the new video appears in the gap.

(Pattern numbers: 1011 to 1013 (one-channel mode))

Door: The new video moves like a door closing, and progressively covers the old video.

(Pattern numbers: 1041 to 1048 (one-channel mode))

Flip tumble: The old video rotates about an axis and is replaced by the new video. During the transition, the signal from the utility 2 bus of the M/E bank appears as the background.

(Pattern numbers: 1101 to 1104, 1109, 1110, 1121, 1122, 1124, 1131 to 1133, 1135 (one-channel mode))

Mirror: The new video appears over the old video as a mirror effect slides in all four directions.

(Pattern numbers: 1355 to 1358 (one-channel mode))

Sphere: The new video appears wrapped around a sphere over the old video, then returns to the original video while unwrapping.

(Pattern number: 1365 (one-channel mode))

Character trail: The new video appears with a trail over the old video. Next this gradually returns to the original from the periphery.

(Pattern numbers: 1371, 1372 (one-channel mode))

Wave: The new video appears with a wave-like effect over the old video. Next this returns to the original video as the effect reduces.

(Pattern numbers: 1378, 1379 (one-channel mode))

Ripple: The new video appears over the old video like outwardly moving ripples.

(Pattern number: 1381 (one-channel mode))

Page turn: The old video moves like a page turning, and the new video appears behind it.

(Pattern numbers: 1301 to 1313, 1315 to 1318, 1341 to 1345 (one-channel mode), 2701 to 2713, 2715 to 2718, 2741 to 2745 (two-channel mode))

Page roll: The new video unrolls like a scroll over the old video. This is a type of page turn.

(Pattern numbers: 1321 to 1333, 1335 to 1338, 1346 to 1350 (one-channel mode), 2721 to 2733, 2735 to 2738, 2746 to 2750 (two-channel mode))



Frame in-out: Completed in two transitions. In the first transition, the new video appears, then on the second transition the new video goes out and the old video returns.

(Pattern numbers: 1201 to 1208, 1221 to 1224 (one-channel mode), 2851 to 2854, 2861 to 2864 (two-channel mode))

Picture-in-picture: The one-channel mode and two-channel mode differ as follows.

In one-channel mode, this completes in two transitions. In the first transition, the old video shrinks, and the new video appears behind it.

In the second transition, the old video expands again until it is its original size.

(Pattern number: 1251 (one-channel mode))

In two-channel mode, in the first half of the transition, the old video shrinks, and the new video appears. In the second half of the transition, the new video expands, and the old video disappears. You can move the pattern from the current position by a relative amount. During the transition, the signal from the utility 2 bus of the M/E bank appears as the background.

(Pattern numbers: 2651 and 2652 (two-channel mode))

2D trans: The new video appears over the old video, while undergoing expansion, two-dimensional rotation and translation.

(Pattern numbers: 1051 to 1058, 1061 to 1064, 1068 (one-channel mode))

3D trans: In one-channel mode, the new video appears over the old video, while undergoing expansion, three-dimensional rotation and translation.

(Pattern numbers: 1071, 1072, 1074, 1076, 1077, 1088, 1091 to 1094 (one-channel mode))

In two-channel mode, the old video changes to the new video while both undergo expansion, three-dimensional rotation and translation.

(Pattern numbers: 2631 to 2634, 2642, 2644 (two-channel mode))

Sparkle: The new video appears over the old video with a nonlinear effect applied, such as broken glass, explosion, or melt. Next this returns to the original video as the effect gradually reduces.

(Pattern numbers: 1391, 1393, 1394, 1396, 1398, 1399 (one-channel mode))

Split slide: The new video appears in strip form while sliding interleaved in the opposite direction over the old video.

(Pattern numbers: 1384 to 1389 (one-channel mode))

Mosaic: In the first half of the transition, a mosaic is gradually applied to the old video, then at the 50% point the inner image changes to the new video. In the second half, the mosaic effect on the new video is gradually reduced, returning to the original image at 100%.

(Pattern number: 1701 (one-channel mode))

Defocus: In the first half of the transition, the old video is gradually defocused, then at the 50% point the inner image changes to the new video. In the second half, the defocusing effect on the new video is gradually reduced,

returning to the original image at 100%.

(Pattern number: 1702 (one-channel mode))

Brick: In two-channel mode, a brick such that the side surface is visible slides in over the old video, then rotates so that the new video can be seen.

(Pattern numbers: 2801 to 2804, 2811 to 2814 (two-channel mode))

In three-channel mode, a brick appears over the old video as the image is expanding and rotating, and switches to the new video.

(Pattern number: 3601 (three-channel mode))

User programmable DME: Using a DME keyframe effect created with a keyframe operation, this executes a DME wipe.

(Pattern numbers: 1901 to 1999 (one-channel mode), 2901 to 2999 (two-channel mode), 3901 to 3999 (three-channel mode))

For details of creating keyframe effects, see “Creating User Programmable DME Patterns” (page 358).

Notes

In an independent key transition, the following patterns can be used.

Execution mode	DME wipe patterns that can be used
One-channel mode	Slide, split, squeeze, door, 2D trans, 3D trans, frame in-out, page turn, page roll, mirror, sphere, character trail, wave, ripple, split slide, sparkle, user programmable DME
Two-channel mode	Page turn, page roll

User programmable DME in transition mode

For the transition mode set when creating a keyframe effect for a user programmable DME pattern, the following can be used.


- **Single:** single transition mode
- **Flip tumble (Flip Tumble):** flip tumble transition mode
- **Dual:** dual transition mode
- **Picture-in-picture (PinP):** one-channel and two-channel picture-in-picture transition mode
- **Compress:** a type of picture-in-picture, in which the new image is the background, and the currently visible image shrinks, and then expands to its original size. (See example in the next item.)
- **Frame in-out (Frame I/O):** frame in-out transition mode. When the first transition completes, if you move the position of the image, you can move it both horizontally and vertically.
- **Frame in-out H (Frame I/O H):** a type of frame in-out mode, which is specified when creating a transition effect in the horizontal direction. The image movement is reflected at both the transition start point and end point. (See page 333.)
The operation is carried out according to DME wipe patterns 1202, 1203, or 1204.

- **Frame in-out V (Frame I/O V):** a type of frame in-out mode, which is specified when creating a transition effect in the vertical direction. The image movement is reflected at both the transition start point and end point. (See page 334.)


Transition mode “Compress”

The change in the image when the transition mode is set to “Compress” is as follows, in comparison to the case of “Picture-in-picture.”

- **Example of the image change in the transition mode “Picture-in-picture” (one-channel mode)**

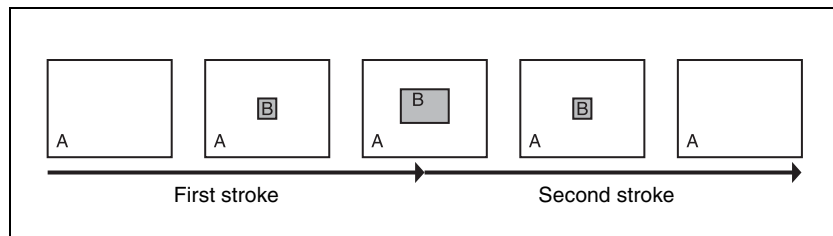


- **Example of the image change in the transition mode “Compress”**

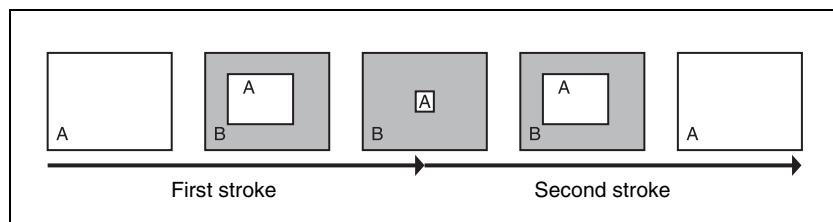


Transition mode “frame in-out”

In this mode, when the first transition has completed, you can move the image with the positioner in both horizontal and vertical directions, but the image position at the transition start point and end point does not change.

The description is of an example of creating an effect such as the following.

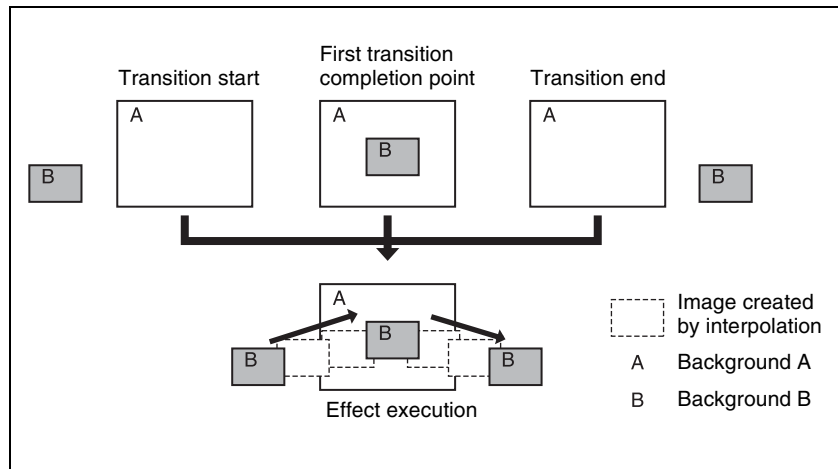

At the first transition completion point, if you move the image with the positioner, the transition appears as in the following figure.

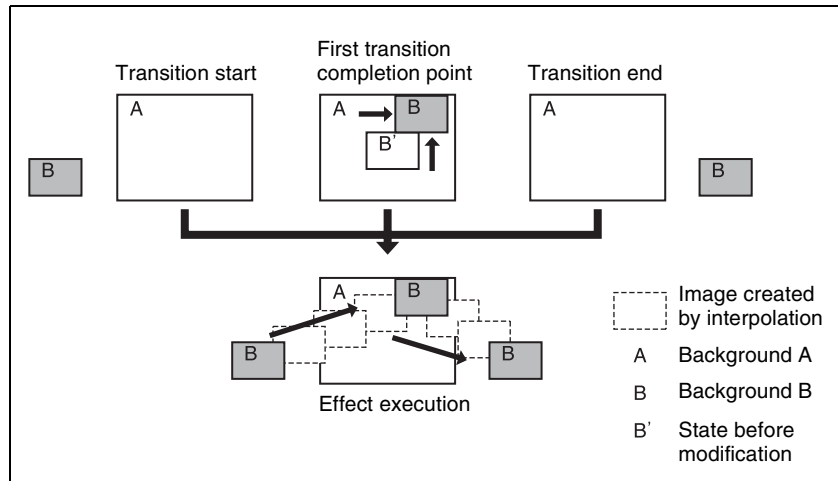


Transition mode “frame in-out H”


This mode is specified when creating a transition effect in the horizontal direction.

In this mode, when the first transition has completed, you can move the image with the positioner in both horizontal and vertical directions. The image at the transition start point and end point also moves.

The description is of an example of creating an effect such as the following.

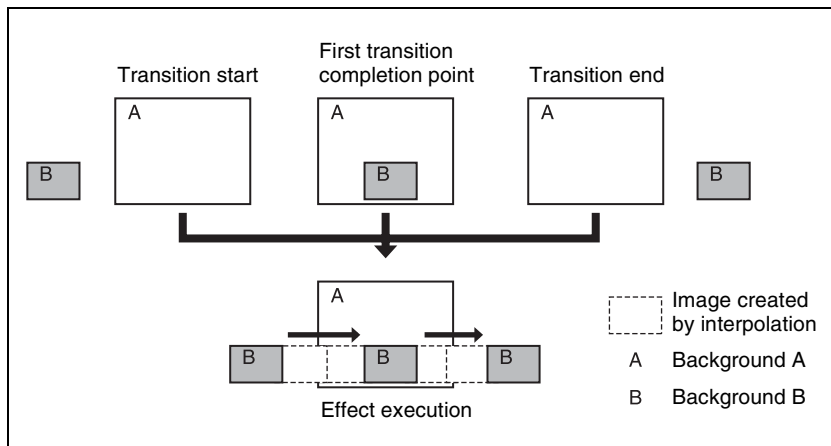

At the first transition completion point, if you move the image with the positioner, the transition appears as in the following figure.

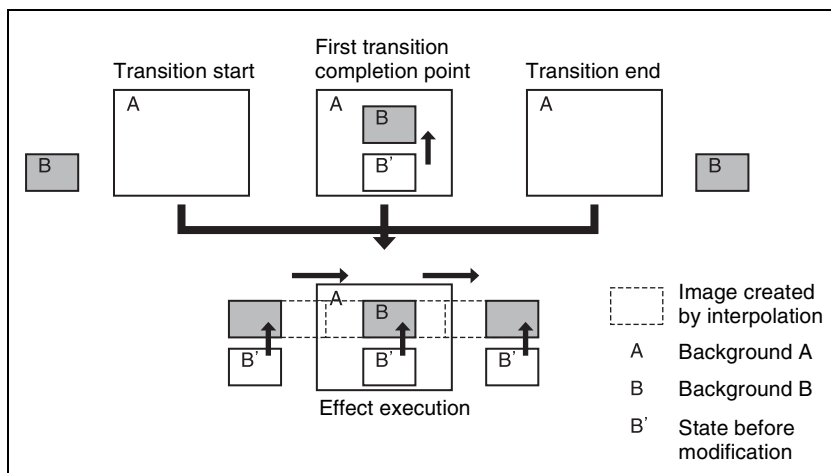


Transition mode “frame in-out V”


This mode is specified when creating a transition effect in the vertical direction.

In this mode, in the state at completion of the first transition, you can move the image with the positioner in both horizontal and vertical directions. The image at the transition start point and end point also moves.

The description is of an example of creating an effect such as the following.

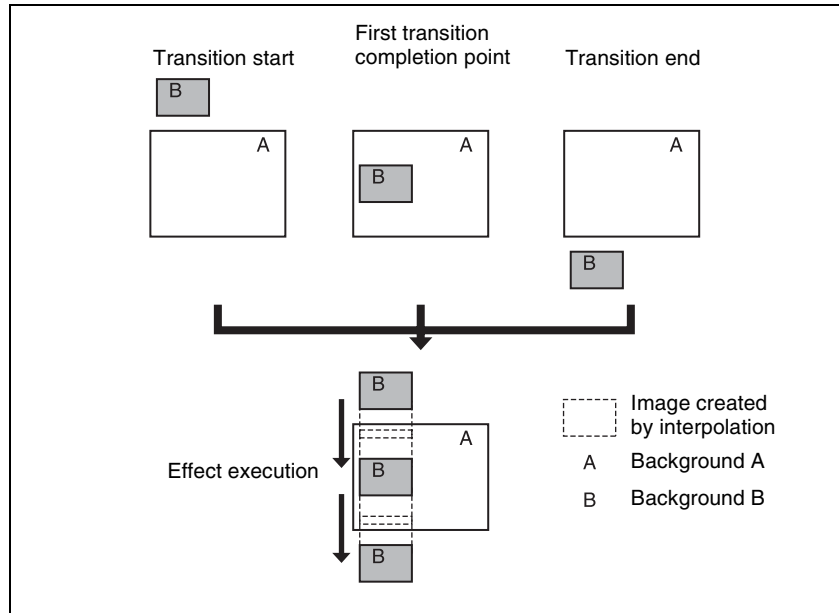

At the first transition completion point, if you move the image with the positioner, the transition appears as in the following figure.

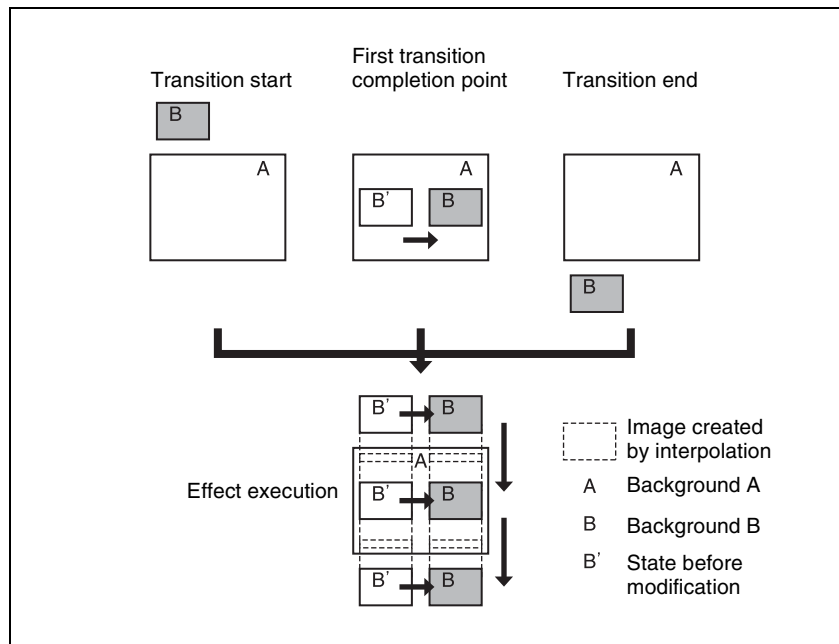

Signals forming part of the background for a DME wipe

For a two-channel mode page turn, page roll, brick, frame in-out, and so on, the part of the pattern shown in gray (*see page 486*) is filled with the signal selected on the DME external video bus.

For three-channel mode brick, the part of the pattern shown in dark gray is filled with the DME external video signal, and the light gray portion with the signal selected as follows.

When the DME channel used is 3 or 4, the signal selected on the DME utility 1 bus. For channel 7 or 8, the signal selected on the DME utility 2 bus.

DME Wipe Pattern Variation and Modifiers

You can modify the selected DME wipe pattern in the same way as an ordinary wipe pattern, as follows.

For the setting operations, see “Setting DME Wipe Modifiers” (page 342).

Direction: You can set the DME wipe direction to normal, reverse, or alternating normal/reverse (*see page 342*), except for a key transition, which is always in normal/reverse mode. However, a key transition can only be specified when the following patterns are selected, and when other patterns are selected, this is fixed, as normal/reverse.

Patterns: 1204, 1207, 1221 to 1224

Edge: You can apply a border or soft border (*see page 343*).

In the case of those user programmable DME patterns for keys in which an edge has already been applied to the effect, the behavior is as follows.

- When the DME wipe edge setting is on, only part of the edge applied in the effect is enabled, and that portion can be adjusted (*page 343*).
- When the DME wipe edge setting is off, the edge applied in the effect is enabled as is.

Positioner: You can move the DME wipe pattern or center of the effect to an arbitrary position. Using the position select function, you can also instantaneously move the pattern.

- 1031

When this pattern number is selected, with the progress of the transition the pattern center automatically moves initially from the set position toward the center of the screen (*see page 344*). In other words, the effect obtained is the same as in a normal wipe with the positioner set to “AUTO CENTER”.

- 1201 to 1208, 1221 to 1224, 1251

When these pattern numbers are selected, you can set the pattern position when the first transition completes.

- 1381, 1391, 1393, 1394, 1396
When these pattern numbers are selected, you can set the center of the transition effect.
- 2651, 2652
When these pattern numbers are selected, you can move the pattern for each channel, or with values relative to the current position the two channels simultaneously.
- 2801 to 2804, 2811 to 2814
When these pattern numbers are selected, you can set the vertical position as the brick slides in.
- 2851 to 2854, 2861 to 2864
When these pattern numbers are selected, you can set the pattern position for each channel setting when the first transition completes.

Pattern limit: You can restrict the range of the transition as desired. However, this is not available for a DME wipe in the independent key transition control block.

For more details, see “Pattern Limit” (page 171).

Size: This can only be used when one of the following pattern numbers is selected.

- 1201 to 1208, 1221 to 1224, 1251
 - 2651, 2652, 2851 to 2854, 2861 to 2864
- You can set the size of the image.

Crop: You can crop the image. It is also possible in 16:9 mode to crop both sides, to convert the image to a 4:3 aspect ratio. For the execution of a DME wipe crop transition, you can select from the following three possibilities.

- Cut
- Last 5%
- Linear

When [Last 5%] is selected, you can set the [Release Transition] as follows.

- Last 30%
- Last 5%
- Off

Notes

When pattern numbers 1701 and 1702 are selected, crop cannot be used.

Relation Between DME Wipes and Other Effects

The relations between DME wipes and other effects are as follows.

Relation to ordinary wipes

- DME wipes do not use the wipe generator built into the switcher. Therefore, during the execution of a DME wipe, you can still use a pattern produced by the wipe generator as the source for a pattern key or mask.
- A DME wipe pattern cannot be used as the source for a pattern key or mask.

Relation to processed keys

When using the DME for a processed key, if you select a DME wipe, an available DME is automatically allocated to the DME wipe. If all of the DME channels are in use, then it is not possible to select a DME wipe.

If in a Setup menu a setting has been made for DME allocation, that Setup menu setting takes precedence (*see “Setting the assignments of DME channels to use on the individual M/E banks” in Chapter 20 (Volume 3).*

Relation to resizer

When resizer is enabled, it is not possible to select a DME wipe.

For the key 1 and key 2, key 3 and key 4, key 5 and key 6, or key 7 and key 8 combinations, if one is used for a dual resizer effect, the other key cannot be used for a DME wipe.

Number of DME wipes that can be used simultaneously on a single M/E bank

DME wipes can be used in nine places, including the eight independent key transitions.

Notes

- When the signal format is 1080P, DME wipes can be used in five places, including the four independent key transitions.
- In the M/E-4 block, it is not possible to use a DME wipe for keys 5 to 8.

Simultaneous use is possible in a maximum of two places.

However, when one DME channel wipe pattern is selected for the background, DME can only be used in one place for keys 1 to 4. When two or more channels are selected, DME cannot be used.

Basic Procedure for DME Wipe Settings

You carry out DME wipe setting operations principally using the DME Wipe menu for each bank.

This section describes the basic procedures for DME wipe settings, taking the M/E-1 >DME Wipe menu as an example.

For details of independent key transition DME wipe settings, see “DME Wipe Settings for Independent Key Transitions” (page 350).

For details of resizer DME wipe, see page 354.

DME Wipe Settings Menu

Accessing the DME Wipe menu

To access the M/E-1 >DME Wipe menu, use either of the following operations.

- In the menu control block, select the top menu selection button [M/E 1], and press VF6 ‘DME Wipe.’

Notes

To select [M/E-4], a previous assignment in the Setup menu is required.

- In the transition control block of the M/E-1 bank, press the transition type selection button [DME] twice in rapid succession.

Either of the above operations displays the M/E-1 >DME Wipe menu.

DME Wipe Pattern Selection

Selecting a DME wipe pattern by a menu operation

- 1 In the M/E-1 >DME Wipe menu, select HF1 ‘1ch’ for one-channel mode, HF2 ‘2ch’ for two-channel mode or HF3 ‘3ch’ for three-channel mode.
- 2 Select the desired DME wipe pattern group with one of the following buttons.
 - **Slide/Squeeze:** slide and squeeze
 - **Split/Door:** split and door



- **Flip Tumble:** flip tumble
- **Mirror/Sphere:** mirror and sphere
- **Character Trail:** character trail
- **Wave/Ripple:** wave and ripple
- **Page Turn/Roll:** page turn and page roll
- **Frame I/O/P in P:** frame in/out and picture-in-picture
- **2D Trans/3D Trans:** 2D trans and 3D trans
- **Sparkle/Split Slide:** sparkle and split slide
- **Mosaic/Defocus:** mosaic and defocus
- **Brick:** brick
- **User Program:** user programmable DME

Selectable DME wipe pattern groups in one-channel mode: All of the above groups except for Brick.

Selectable DME wipe pattern groups in two-channel mode: Slide/Squeeze, Page Turn/Roll, Frame I/O, PinP, 3D Trans, Brick and User Program.

Selectable DME wipe pattern groups in three-channel mode: User Program and Brick.

For details of DME wipe patterns, see “Types of DME Wipe Pattern” (page 328) and “DME Wipe Pattern List” (page 492).

The patterns from the selected pattern group appear on the screen.

3 Press the button to select the desired pattern.

Notes

For a key transition, the page turn, page roll and picture-in-picture cannot be used.

Adjusting DME wipe pattern parameters

Of the DME wipe patterns, the following have parameters that can be adjusted.

When Brick (for two channels) is selected (pattern numbers 2801 to 2804, 2811 to 2814)

Knob	Parameter	Adjustment	Setting values
1	Side V Size X	Horizontal magnification	0.01 to 8.00
2	Side V Size Y	Vertical magnification	0.01 to 8.00
3	Height	Height of brick	0.01 to 100.00
4	Center X	Horizontal center position	-100.00 to +100.00 ^{a)}
5	Center Y	Vertical center position	-100.00 to +100.00 ^{b)}

- a) The horizontal center position of the video pasted on Side V. At –100.00 the center is at the left edge of the screen, and at +100.00 the center is at the right edge of the screen.
- b) The vertical center position of the video pasted on Side V. At –100.00 the center is at the bottom edge of the screen, and at +100.00 the center is at the top edge of the screen.

When Frame in-out (for two channels) is selected

• Pattern numbers 2851 to 2854

Knob	Parameter	Adjustment	Setting values
5	Delay	Timing for video selected on a utility bus to appear on the screen	–100.00 to +100.00

• Pattern numbers 2861 to 2864

Knob	Parameter	Adjustment	Setting values
1	Rot X	Rotation about the Y axis (horizontal direction)	–100.00 to +100.00
2	Rot Y	Rotation about the X axis (vertical direction)	–100.00 to +100.00
3	Rot Z	Rotation about the Z axis	–100.00 to +100.00
5	Delay	Timing for video selected on a utility bus to appear on the screen	–100.00 to +100.00

When Brick (for three channels) is selected (pattern number 3601)

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Side V Size X	Side V horizontal magnification	0.01 to 8.00
2	Side V Size Y	Side V vertical magnification	0.01 to 8.00
3	Height	Height of brick	0.01 to 100.00 ^{a)}
4	Side V Center X	Side V horizontal center position	–100.00 to +100.00 ^{b)}
5	Side V Center Y	Side V vertical center position	–100.00 to +100.00 ^{c)}

- a) Shared with knob 3 for parameter group 2
- b) The horizontal center position of the video pasted on Side V. At –100.00 the center is at the left edge of the screen, and at +100.00 the center is at the right edge of the screen.
- c) The vertical center position of the video pasted on Side V. At –100.00 the center is at the bottom edge of the screen, and at +100.00 the center is at the top edge of the screen.

Knob	Parameter	Adjustment	Setting values
1	Side H Size X	Side H horizontal magnification	0.01 to 8.00
2	Side H Size Y	Side H vertical magnification	0.01 to 8.00
3	Height	Height of brick	0.01 to 100.00 ^{a)}
4	Side H Center X	Side H horizontal center position	-100.00 to +100.00 ^{b)}
5	Side H Center Y	Side H vertical center position	-100.00 to +100.00 ^{c)}

a) Shared with knob 3 for parameter group 1

b) The horizontal center position of the video pasted on Side H. At -100.00 the center is at the left edge of the screen, and at +100.00 the center is at the right edge of the screen.

c) The vertical center position of the video pasted on Side H. At -100.00 the center is at the bottom edge of the screen, and at +100.00 the center is at the top edge of the screen.

Setting DME Wipe Modifiers

You can apply various modifiers to the DME wipe pattern: setting the DME wipe direction, pattern position, and so on.

For an overview of the DME wipe modifiers, see “DME Wipe Pattern Variation and Modifiers” (page 336).

Specifying the DME wipe direction (Direction)

You can specify the DME wipe direction (normal/reverse).

To specify the DME wipe direction in a menu

1 In the M/E-1 >DME Wipe menu, select HF4 ‘Edge/Direction.’

The Edge/Direction menu appears.

2 In the <Direction> group, specify the DME wipe direction.

Normal: regular direction

Normal/Reverse: alternate between regular and reverse for each transition

Reverse: reverse direction to normal

To specify the DME wipe direction with a button in the transition control block

In the transition control block of each of the M/E-1 to M/E-3 and PGM/PST banks, press the following direction selection buttons.

NORM: Normal

NORM/REV: Normal/Reverse

REV: Reverse

Modifying the DME wipe pattern edge

- 1 In the M/E-1 >DME Wipe menu, select HF4 'Edge/Direction.'

The Edge/Direction menu appears.

- 2 Depending on whether the selected pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.

For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.

- 3 In the <Edge> group, select the edge type.

Border: border

Soft Border: soft border

- 4 Set the parameters according to the selection in step 3.

- **When border is selected**

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00
3	Luminance	Luminance	0.00 to 100.00
4	Saturation	Saturation	0.00 to 100.00
5	Hue	Hue	359.99 to 0.00

- **When soft border is selected**

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00
2	Inner Soft	Border inner softness	0.00 to 100.00
3	Luminance	Luminance	0.00 to 100.00
4	Saturation	Saturation	0.00 to 100.00
5	Hue	Hue	359.99 to 0.00

Display indications when multiple channels are selected at the same time

The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

Setting the DME wipe position (Positioner)

- 1** In the M/E-1 >DME Wipe menu, select HF5 'Modify.'
The Modify menu appears.
- 2** Depending on whether the DME wipe pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.
For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.
- 3** In the <Position> group, press [Position], turning it on.
- 4** Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	-200.00 to +200.00
2	V	Vertical position	-200.00 to +200.00

Display indications when multiple channels are selected at the same time

The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

To return the DME wipe pattern position to the center of the screen
In the <Position> group, press [Center].

Displaying and moving the position of the DME wipe pattern (position select)

- 1** In the M/E-1 >DME Wipe menu, select HF5 'Modify.'
The Modify menu appears.

In the <Position Select> group, the one of the [Top Left], [Top Right], [Bottom Left], and [Bottom Right] buttons that is on indicates the current display position of the DME wipe pattern.

- 2** In the <Position> group, press [Position], turning it on.
- 3** Depending on whether the DME wipe pattern is in one-channel mode or two-channel mode, proceed as follows.

In one-channel mode: press [1st Ch], turning it on.
In two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.
- 4** To move the position of the DME wipe pattern, press the button where you want to move to, turning it on.

The DME wipe pattern displayed on the screen moves to the position of the specified button.

Setting relative positions to move the DME wipe pattern

In two-channel mode, use the following procedure.

- 1** In the M/E-1 >DME Wipe menu, select HF5 ‘Modify.’

The Modify menu appears.
- 2** In the <Ch Select> group, select the target channels.
- 3** Press [Position] in the <Position> group, turning it on.
- 4** Set the following parameters.

Knob	Parameter	Adjustment	Setting values
4	Relative H	Relative movement in the horizontal direction	−400.00 to +400.00
5	Relative V	Relative movement in the vertical direction	−400.00 to +400.00

For details of the method of DME wipe pattern selection, see “DME Wipe Pattern Selection” (page 339).

Setting the DME wipe pattern size (Size)

- 1** In the M/E-1 >DME Wipe menu, select HF5 ‘Modify.’

The Modify menu appears.

- 2 Depending on whether the selected pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.

For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.

- 3 Press [Size], turning it on.

- 4 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Set size of effect	0.00 to 200.00 ^{a)}

a) The effect size when [Size] is off is taken as 100.00%.

Display indications when multiple channels are selected at the same time

The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

Adjusting the DME wipe pattern cropping

Notes

When pattern numbers 1701 and 1702 are selected, crop cannot be used.

- 1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

- 2 Depending on whether the selected pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.

For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time. Some patterns need no selection which is fixed in the <Ch Select> group.

- 3 In the <Crop Mode> group, press [Crop], turning it on.

- 4 Set the following parameters.

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Crop the top of the image	-100.00 to +100.00
2	Left	Crop the left of the image	-100.00 to +100.00
3	Right	Crop the right of the image	-100.00 to +100.00
4	Bottom	Crop the bottom of the image	-100.00 to +100.00

The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

In the <Crop Mode> group, press [4:3 Crop], turning it on.

1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

- For a pattern in one-channel mode:** in the <Ch Select> group, press [1st Ch], turning it on.

For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channels. You can select more than one channel at the same time.

- 3** In the <Crop Mode> group, press [Crop] or [4:3 Crop] (to crop from 16:9 to 4:3 aspect ratio), turning it on.

- 4** In the <Crop Mode> group, press [Remove From Begin].


The Remove From Begin menu appears.

- 5 In the <Crop Transition> group, select the execution mode for the DME wipe crop transition.

Cut: Cut mode. The cropping does not change during the transition, but at the end point of the transition the cropping is removed (enlarges).

Last 5%: The cropping is maintained for the first 95% of the transition, and is progressively removed during the last 5% of the transition (enlarges).

Linear: The cropping is removed linearly through the whole course of the transition (enlarges).

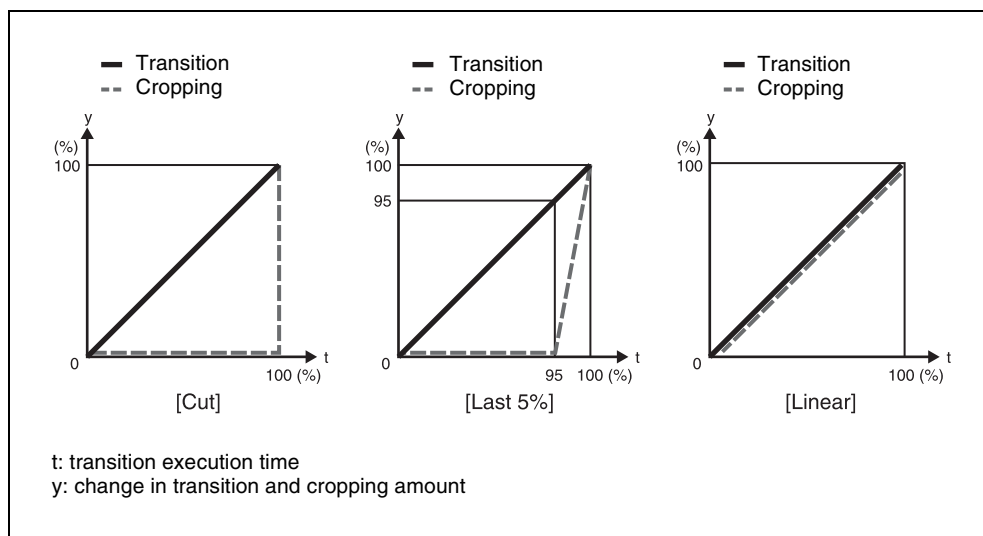

Setting the timing of transition completion

When the execution mode for a DME wipe crop transition is set to [Last 5%], you can select the timing of transition completion from 70% ([Last 30%]), 95% ([Last 5%]), and 100% ([Off]).

- 1 In the M/E 1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

- 2 In the <Crop Mode> group select [Remove From Begin].


The Remove From Begin menu appears.

- 3 In the <Release Transition> group, select the timing of transition completion.

Last 30%: The transition completes at the end of 70% of the transition execution time. The transition has a dead zone from 70% to 95% of the transition time.

Last 5%: The transition completes at the end of 95% of the transition execution time. When the transition completes, the cropping is removed during the last 5% (enlarges).

Off: The transition completes at the end of the transition execution time. During the last 5% of the transition, the transition and cropping removal proceed together.

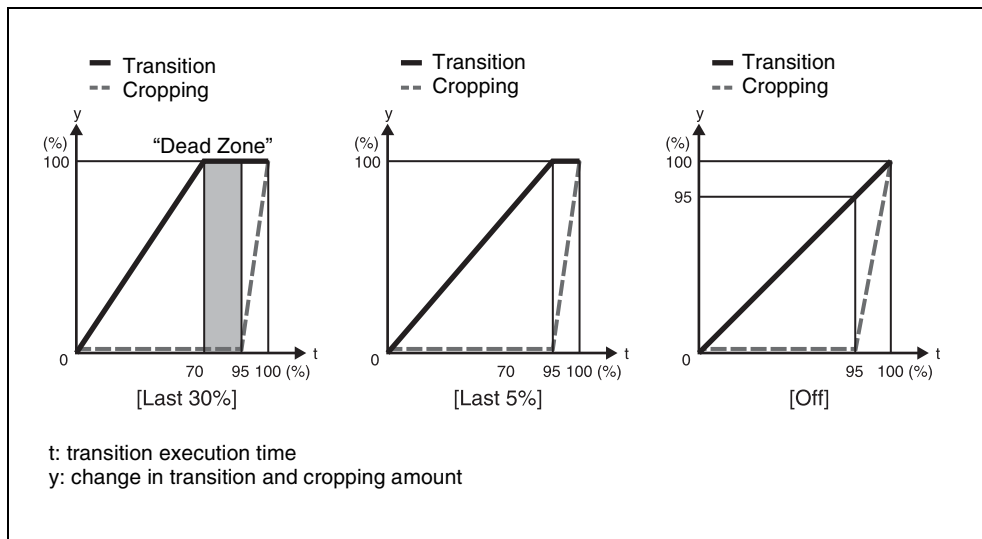

DME Wipe Modify Clear

Press [Default Recall] at the lower left of the menu display, turning it on, then press VF6 'DME Wipe' to return the DME wipe settings to their initial status.

For details of the menu operation to return the DME wipe state to that set in initial status, see "Returning to default state in function groupings" (page 118).

DME Wipe Settings for Independent Key Transitions

You carry out independent key transition DME wipe setting operations using the DME Wipe Adjust menu for each keyer.

For an overview of independent key transitions, see page 181.

This section describes the independent key transition DME wipe settings, taking the M/E-1 >Key1 >Transition >DME Wipe Adjust menu as an example.

Basic Procedure for Independent Key Transition DME Wipe Settings

Accessing the independent key transition DME wipe settings menu

As an example, to access the M/E-1 >Key1 >Transition >DME Wipe Adjust menu, carry out the following operation.

- In the menu control block, select the top menu selection button [M/E 1], and select VF1 'Key1' and HF6 'Transition' to display the Transition menu for key 1. Next, press [DME Wipe Adjust].
If VF1 [Key5] is shown, press the switching button at the top of the menu, so that [Key1-4] appears, and press VF1 [Key1].

Notes

To select [M/E-4], a previous assignment in the Setup menu is required.

- Press the key delegation button [Key1] in the independent key transition control block of the M/E-1 bank, then press the independent key transition type [DME] twice in quick succession.

Carrying out the above operation displays the M/E-1 >Key1 >Transition >DME Wipe Adjust menu (which will be referred to below as simply the Key1 DME Wipe Adjust menu).

Selecting the independent key transition DME wipe pattern

You select the independent key DME wipe pattern from the list of patterns displayed in the menu.

To select a DME wipe pattern for independent key 1 on the M/E-1 bank, use the following procedure.

- 1** In the <Pattern Select> group of the Key1 DME Wipe Adjust menu, press [1ch] for one-channel mode or [2ch] for two-channel mode.

The Pattern Select menu appears.

- 2** Select the desired DME wipe pattern group with one of the following buttons.

(In two-channel mode, only Page Turn and Page Roll are selectable.)

- **Slide/Squeeze:** slide and squeeze
- **Split/Door:** split and door
- **Mirror/Sphere:** mirror and sphere
- **Character Trail:** character trail
- **Wave/Ripple:** wave and ripple
- **Page Turn/Roll:** page turn and page roll
- **Frame I/O:** frame in/out
- **2D Trans/3D Trans:** 2D Trans and 3D Trans
- **Sparkle/Split Slide:** sparkle and split slide
- **User Program:** user programmable DME

For details of DME wipe patterns, see “Types of DME Wipe Pattern” (page 328) and “DME Wipe Pattern List” (page 492).

The patterns from the selected pattern group appear on the screen.

- 3** Press the button to select the desired pattern.

Setting Independent Key Transition DME Wipe Modifiers

You can add modifiers such as pattern position and size for an independent key transition DME wipe.

For introductory information, see “Setting the DME wipe position (Positioner)” (page 344) and “Setting the DME wipe pattern size (Size)” (page 345).

Setting the DME wipe position (Positioner)

For applicable pattern numbers, see page 336.

- 1 In the <Position> group of the Key1 DME Wipe Adjust menu, press [Position], turning it on.
- 2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–200.00 to +200.00
2	V	Vertical position	–200.00 to +200.00

To return the DME wipe pattern position to the center of the screen
In the <Position> group, press [Center].

Setting the DME wipe pattern size (Size)

For applicable pattern numbers, see page 337.

- 1 In the Key 1 DME Wipe Adjust menu, press [Size], turning it on.
- 2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Size	Set size of effect	0.00 to 200.00 ^{a)}

a) The effect size when [Size] is off is taken as 100.00%.

Cropping a key DME wipe

- 1 In the <Crop Mode> group of the Key1 DME Wipe Adjust menu, press [Crop], turning it on.
- 2 Set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Cropt the left and right of the image	Left value shown
2	V	Crop the top and bottom of the image	Top value shown
3	All	Crop the top, bottom, left, and right of the image	Left value shown

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Cropping of the top of the image	-100.00 to +100.00
2	Left	Cropping of the left of the image	-100.00 to +100.00
3	Right	Cropping of the right of the image	-100.00 to +100.00
4	Bottom	Cropping of the bottom of the image	-100.00 to +100.00

To crop to 4:3 in 16:9 mode

In the <Crop Mode> group, press [4:3 Crop], turning it on.

To set the operation for DME wipe crop transition execution

- 1** In the <Crop Mode> group of the Key1 DME Wipe Adjust menu, press [Crop], turning it on.
- 2** In the <Crop Mode> group, press [Crop] or [4:3 Crop] (to crop to 4:3 in 16:9 mode), turning it on.
- 3** In the <Crop Mode> group, press [Remove From Begin].

The Remove From Begin menu appears.

For subsequent operations, see step 5 of “To set the action when a DME wipe crop transition is executed” (page 347).

To set the timing of transition completion

- 1** In the <Crop Mode> group of the Key1 DME Wipe Adjust menu, press [Crop], turning it on.
- 2** In the <Crop Mode> group, press [Remove From Begin].

For subsequent operations, see “Setting the timing of transition completion” (page 348).

Applying a border to a key DME wipe

In the <Edge> group of the Key1 DME Wipe Adjust menu, press [Border], turning it on.

For subsequent operations, use the same process as in step 4 of “Modifying the DME wipe pattern edge” (page 343).

Resizer DME Wipe Setting

You can carry out a DME wipe on a key using the resizer.

Notes

When the screen aspect ratio is 4:3 in HD format, when the resizer DME wipe is used to shrink a video image, this is applied to the 16:9 screen including the added video on the left and right sides. Use the crop function as required to extract the 4:3 image.

DME wipe patterns available for resizer DME wipe

You can use the following patterns of the DME wipe pattern one-channel mode that can be used in a resizer DME wipe. (7000-series numbers)

- Slide (pattern numbers: 7001 to 7008)
- Squeeze (pattern numbers: 7021 to 7031)
- frame in-out (pattern numbers: 7201 to 7208, 7221 to 7224)

Relation between DME wipes and other effects

The following relations hold between a resizer DME wipe and other effects.

Relation to processed keys

It is not possible to select a resizer DME wipe for a key with processed key enabled.

Relation to resizer

It is not possible to use a resizer DME wipe for a key with resizer enabled. It is not possible to use a resizer DME wipe for a key forming a pair with a key with the dual resizer effect enabled. The key combinations forming pairs are keys 1 and 2, keys 3 and 4, key 5 and key 6, and key 7 and key 8. For example, when a dual resizer effect is enabled for key 1, it is not possible to use a resizer DME wipe on key 2.

Making resizer DME wipe settings

- 1** In the <Pattern Select> group of the Key1 DME Wipe Adjust menu, press [1ch].
The 1ch Pattern Select menu appears.
- 2** Select [Resizer Slide/Squeeze] or [Resizer Frame I/O].

The patterns of the selected group appear.

The wipe patterns that can be used for a resizer DME wipe are as follows.

- **Slide** (pattern numbers: 7001 to 7008)
- **Squeeze** (pattern numbers: 7021 to 7031)
- **Frame in-out** (pattern numbers: 7201 to 7208, 7221 to 7224)

3 Press the desired pattern to select it.

For more about resizer DME wipe modifiers, see “Setting Independent Key Transition DME Wipe Modifiers” (page 351).

DME Wipe Snapshots

You can snapshot and save a DME wipe pattern together with the current settings of its modifiers and pattern limit in a dedicated register for recall when required.

There are 10 DME wipe snapshot registers for each of the M/E and P/P banks. To save and recall these registers, use the Flexi Pad control block, the Multifunction Flexi Pad block in each switcher bank or the Menu control block.

In the case of a simple transition system, there are eight DME wipe snapshot registers for each switcher bank.

DME Wipe Snapshot Operations With the Flexi Pad

To carry out DME wipe snapshot operations, use the Flexi Pad control block. You can save, recall and delete DME wipe snapshots using the procedures similar to the procedures for wipe snapshot operations. In DME wipe snapshot operations, use the [DME] button instead of the [WIPE] button used in wipe snapshot operations.

Selecting a DME wipe pattern in the Flexi Pad control block

In the standard type Flexi Pad control block, enter a four-digit pattern number, using the [DME] button.

For details, see “Flexi Pad Control Block (Standard Type)” (page 53).

Notes

- You cannot select a DME wipe pattern in the simple type Flexi Pad control block.
- A button in the memory recall section in which a DME wipe snapshot is saved shows the pattern, and lights yellow.
For a user-programmable DME, the register number (*see page 358*) appears. Depending on the setting of the Setup menu (*see “Operation Settings (Operation Menu)” in Chapter 19 (Volume 3)*), you can also display a register name.
- In a simple type Flexi Pad control block, it is not possible to delete a DME wipe snapshot.

For details of the operating procedures, see “Wipe Snapshots” (page 314).

DME Snapshot Operations With the Menus

In the same way as for wipe snapshots, you can save, recall, and delete DME snapshots.

For details of the operating procedures, see “Wipe Snapshot Operations With the Menus” (page 317).

Creating User Programmable DME Patterns

With a user programmable DME, you can use DME effects created through the use of keyframes for a transition on the switcher system.

Note the following points when creating a keyframe effect for use as a user programmable DME pattern.

Register numbers and pattern numbers

When saving a keyframe effect as a user programmable DME pattern, specify the register number that corresponds to the pattern number as shown in the following table.

Execution mode	Register number	Pattern number
One-channel mode	101 to 199	1901 to 1999
Two-channel mode	201 to 299	2901 to 2999
Three-channel mode	301 to 399	3901 to 3999

For details of registers and keyframe effects, see Chapter 13 “Keyframe Effects” (Volume 2), respectively.

Notes

When the signal format is 1080P, three-channel mode cannot be used.

Keyframe effects in the global channel

When the effect with the same number as the reference channel is present on the DME global (GLBL) channel, executing the user programmable DME will also execute the effect on the global channel simultaneously.

When executing a user programmable DME, take note of whether the effect is present on the global channel.

User Programmable DME Transition Mode

To create a user programmable DME, it is necessary to set the transition mode (the way in which the effect moves). To set the transition mode, use the Key Frame >DME User PGM menu.

For details of the operating procedures, see “Transition Mode Settings for User Programmable DME” in Chapter 13 (Volume 2).

The following transition modes are available.

Channels	Transition mode	Effect group
One-channel mode	Single transition mode	Slide, Split, Door, Page turn, Page roll, Squeeze, Mirror, Sphere, Character Trail, Wave, Ripple, 2D Trans, 3D Trans, Sparkle, Split Slide
	Flip Tumble	Flip Tumble, Mosaic, Defocus
	Frame in-out	Frame in-out
	Frame in-out H ^{a)}	Frame in-out
	Frame in-out V	Frame in-out
	Picture-in-picture ^{b)}	Picture-in-picture
	Compress ^{c)}	Picture-in-picture
Two-channel mode	Dual transition mode	Slide, Squeeze, 3D Trans
	Two-channel picture-in-picture	Picture-in-picture

a) Transition according to DME wipe patterns 1202, 1203, or 1204

b) Transition according to DME wipe pattern 1201

c) Transition according to DME wipe pattern 1251

For details, see “Overview” (page 328).

Notes

For the following group of effects available in two-channel mode, no user programmable DME wipe patterns can be created.

Page turn, Page roll, Frame in-out, Brick

Notes on creating keyframe effects

When creating a keyframe effect to be used as a user programmable DME pattern, note the following, depending on the transition mode used.

Notes on single transition mode (one-channel mode)

- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the last keyframe to be a full-size image.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Single].

Notes on flip tumble (one-channel mode)

- Create the first keyframe image at full size. In the <Back> group of the DME >Input/Output >Video/Key menu, depending on the direction of the rotation you want during the transition, press [H Invert] or [V Invert], turning it on.



- Create the last keyframe with the image inverted so the back side is visible, and with the size at full size.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Flip Tumble].

Notes on frame in-out (one-channel mode)

Create a minimum of three keyframes.

- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the first transition to end such that the image can be seen within the screen. At this point, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- Either create the last keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [FRAME I/O].

Notes on Frame in-out H (one-channel mode)

Create a minimum of three keyframe points.

- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- As the state after completion of the first transition, move the image horizontally to make it visible within the screen. At this time, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- For the last keyframe move the image horizontally to place it outside the screen area or set the image size to zero, so that the image is not visible within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [FRAME I/O H].

Notes on frame in-out V (one-channel mode)

Create a minimum of three keyframe points.

- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- As the state after completion of the first transition, move the image vertically to make it visible within the screen. At this time, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- For the last keyframe move the image vertically to place it outside the screen area or set the image size to zero, so that the image is not visible within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [FRAME I/O V].

Notes on picture-in-picture (one-channel mode)

Create a minimum of three keyframes.

- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the first transition to end such that the image can be seen within the screen. At this point, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- Either create the last keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [P In P].

Notes on compress (one-channel mode)

Create a minimum of three keyframe points.

- Create the first keyframe with the image at full size.
- In the state at completion of the first transition, create the image to be visible within the screen. At this time, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- For the last keyframe, once again set the image size to full size.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Compress].

Notes on dual transition mode (two-channel mode)

- Create the first keyframe for each channel as follows.
Channel 1: create the image full-size.
Channel 2: either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the last keyframe for each channel as follows.
Channel 1: either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
Channel 2: create the image full-size.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Dual].


Notes on picture-in-picture (two-channel mode)

Create a minimum of three keyframes.

- Create the first keyframe for each channel as follows.
Channel 1: create the image full-size.
Channel 2: since the priority is low, it will not be visible on the screen, so no particular restrictions apply.
 In the Global Effect >Ch1 to Ch4 >Combiner menu, when setting the priority of channel 1 and channel 2, set the channel 1 priority higher.
- In the intermediate part of the transition, create the two images so that both are visible within the screen. In the Global Effect >Ch1 to Ch4 >Combiner menu, when setting the priority of channel 1 and channel 2, set the channel 2 priority higher.

It is recommended to make the priority settings at a keyframe point at which the two images are not overlapping.

- During the course of a transition, there is a “dead zone” corresponding to the intermediate point of the whole effect (*see following figure*), during which the image does not change. Therefore, it is necessary to create the effect so that the image in the intermediate part of the transition is the keyframe for the mid-point of the whole effect. The range of this “dead zone” corresponds to the central one-third of the range of the transition indicator. This also applies to an auto transition.

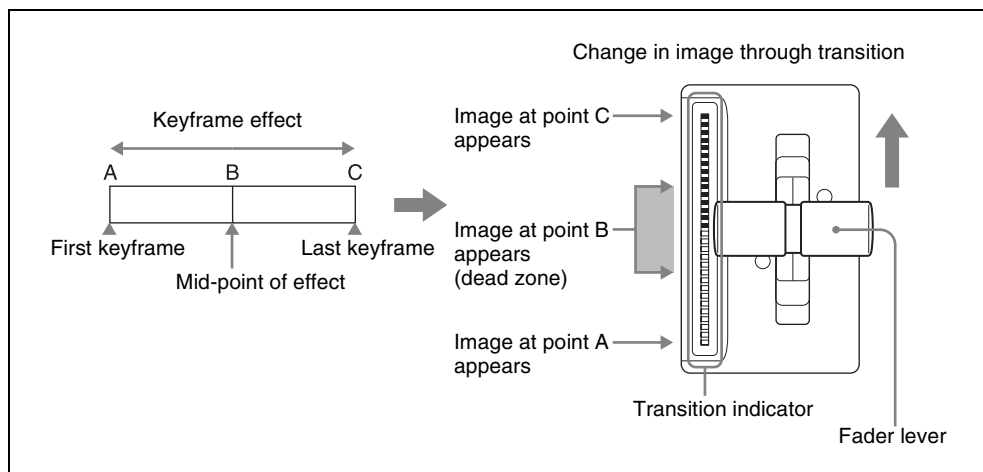

- Create the last keyframe for each channel as follows.
Channel 1: since the priority is low, it will not be visible on the screen, so no particular restrictions apply.
Channel 2: create the image full-size.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [P In P].


DME Wipe Pattern Operations in the Multifunction Flexi Pad Control Block

Recalling a DME Wipe Snapshot

The operation of recalling a DME wipe snapshot in the Multifunction Flexi Pad control block is the same as the operation of recalling a wipe snapshot, except for pressing the [DME WIPE] button to select DME wipe snapshot mode.

See “*Recalling a Wipe Snapshot*” (page 320).

You can change the indications for buttons [0] to [9] in the memory recall section to pattern images, using the Engineering Setup >Panel >Operation >Flexi Pad Mode menu.

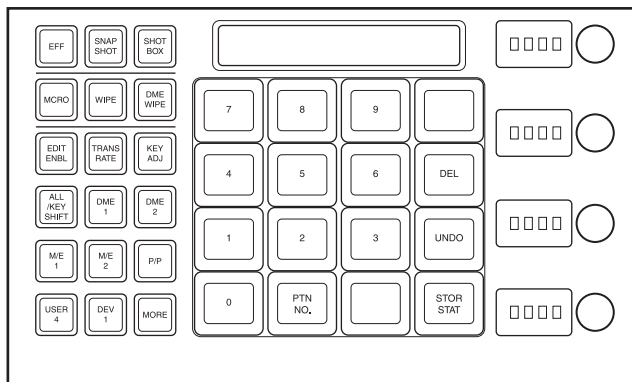

Selecting the DME Wipe Pattern

The operation of selecting the DME wipe pattern in the Multifunction Flexi Pad control block is the same as the operation of selecting a wipe pattern, except for pressing the [DME WIPE] button to select DME wipe snapshot mode.


See “*Selecting the Wipe Pattern*” (page 321).

Note, however, that the pattern numbers for DME wipe patterns have four digits.

Editing the DME Wipe Pattern

By pressing the [EDIT ENBL] button to switch the memory recall section to editing mode as shown in the following illustration, you can edit the selected DME wipe pattern with the following buttons.

To exit from the editing mode, press the [EDIT ENBL] button once more, or press the [EXIT] button.

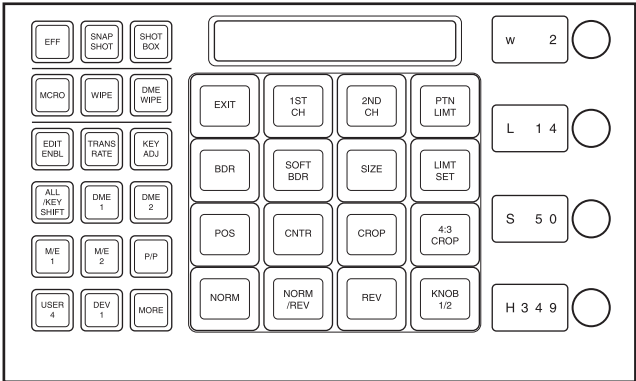

Note that the operation of the following buttons is the same as when editing a wipe pattern.

- [EXIT] button
- [PTN LIMIT], [LIMIT SET] buttons
- [NORM], [NORM/REV], [REV] buttons
- [KNOB 1/2] button

For the method of operation of these buttons, see “Editing the Wipe Pattern” (page 321).

Channel selection buttons

1ST CH (channel 1): Selects channel 1.

2ND CH (channel 2): Selects channel 2.

You can also select two channels by pressing the buttons simultaneously.

DME wipe pattern edge setting buttons

BDR (border): Applies a border to the DME wipe pattern.

SOFT BDR (soft border): Softens the applied border.

You can adjust the parameters selected with these buttons using the control knobs, when the button is lit green.

- **When border is selected**

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100
2	L	Luminance	0 to 100
3	S	Saturation	0 to 100
4	H	Hue	0 to 359

- **When soft border is selected**

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100
2	I	Degree of softening of inside of border	0 to 100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	0 to 359

Buttons for positioning the DME wipe pattern

POS (position): Adjusts the position of the DME wipe pattern.

CNTR (center): Returns the DME wipe pattern position to the center.

When you press the [POS] button, the alphanumeric display first shows the name of the parameter, “H” or “V,” and then the value of the parameter. When the [POS] button is lit green, you can adjust the position of the pattern with the control knobs.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–200 to +200
2	V	Vertical position	–200 to +200
3	H (R)	Relative horizontal movement	–400 to +400
4	V (R)	Relative vertical movement	–400 to +400

Buttons for setting DME wipe pattern cropping

CROP: Adjusts the DME wipe pattern cropping.

4:3 CROP: Crops a 16:9 image to 4:3.

When the [CROP] button is lit green, you can set the cropping ratio of the DME wipe pattern, with the control knobs.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Cropping ratio of the image from left and right sides	−100 to +100
2	V	Cropping ratio of the image from top and bottom sides	−100 to +100
3	A	Cropping ratio of the image from all four sides	−100 to +100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	T	Cropping ratio of the image from the top	−100 to +100
2	L	Cropping ratio of the image from the left	−100 to +100
3	R	Cropping ratio of the image from the right	−100 to +100
4	B	Cropping ratio of the image from the bottom	−100 to +100

Button for specifying effect size

SIZE: Specifies the effect size. When the [SIZE] button is lit green, you can specify the effect size, with the control knobs.

Knob	Parameter	Adjustment	Setting values
1	S	Effect sizes	0 to 200 ^{a)}

a) The effect size when [Size] is off is taken as 100.00.

DME wipe modify clear

With the [DME WIPE] button held down, pressing and holding down the region selection button for the selected region returns the DME wipe settings to their initial status.

For details of the initial status, see “Selecting the State After Powering On (Start Up Menu)” in Chapter 18 (Volume 3).

Saving, Canceling, and Deleting DME Wipe Snapshots

The operations of saving, canceling, and deleting a DME wipe pattern snapshot you have created are the same as the operations of saving, canceling, and deleting a wipe snapshot.

For the operations for wipe snapshots, see “Saving, Canceling, and Deleting Edited Wipe Patterns” (page 324).





Chapter 7 Frame Memory

Overview

Frame memory is a function whereby a frame of input video can be frozen and written to memory, for further use as material for editing. You can also play recorded frame memory clips (movies).

Frame capacity

The frame memory board has two blocks of memory, and the following table shows the maximum number of images that can be written to each block. (Of the two, one is reserved for storing frame memory clips.)

HD system:

Video format	Memory capacity
1080i/50	Approx. 1000 frames
1080i/59.94	
1080PsF/23.976	
1080PsF/24	
1080PsF/25	
1080PsF/29.97	
1080P/50	Approx. 2000 frames
1080P/59.94	
720P/50	Approx. 2300 frames
720P/59.94	

SD system:

Video format	Memory capacity
480i/59.94	Approx. 5600 frames
576i/50	Approx. 4800 frames

For details of operating procedures, see “Still Image Operations” (page 373).

Types of image and terminology used

The following types of image are handled in frame memory.

Freeze image: An input image that has been frozen, but not saved to memory.

Still image: A freeze frame that has been saved to memory as a file. Each file (still file) holds just one still image.

Frame memory clip: A clip consists of a sequence of still images, which appears as a movie on playback. In this manual this is also referred to simply as a “clip.” The files (still files) constituting clips are referred to as a “clip file.”

When the above distinctions are not being made, an image is simply referred to as an “image.”

About extended clips

Of the two memory blocks for saving a clip, the clip saved in the one which is not combined with a still image is called an “extended clip.”

However, when the signal format is 1080P, since both a still image and a clip are saved in both memory blocks, there is no extended clip.

Use of frame memory

There are eight frame memory channels, FM1 to FM8, and each channel independently allows a freeze image to be saved or recalled.

By allocating FM1 to FM8 to cross-point buttons you can use the still image output or clip output from each channel as input material.

Notes

However, when the signal format is 1080P, only the four options of FM1 to FM4 can be used.

Correspondence between input and output

There are two buses for capturing frame memory material: the frame memory source 1 bus and the frame memory source 2 bus.

These input buses are used by allocation to one of the pairs of output, FM1&2, FM3&4, FM5&6, and FM7&8. You can freeze a frame in each channel separately, or freeze in the two channels simultaneously.

The source buses allocated to FM1 to FM8 are as follows.

Input	Frame memory source bus 1	Frame memory source bus 2
Output	FM1	FM2
	FM3	FM4
	FM5	FM6
	FM7	FM8

Pair mode

By enabling the pair mode, you can link FM1 and FM2, FM3 and FM4, FM5 and FM6, and FM7 and FM8. For example, when a freeze or image processing is carried out on FM1, the same operation is carried out on FM2. The same

applies to the other pairs. When a pair of images are captured in pair mode, the image frozen in FM1 (3, 5, or 7) is referred to as the main file and the other frozen in FM2 (4, 6, or 8) is referred to as the sub file.

Pair files and single files

A file that can be recalled in pair mode is termed a “pair file.” A pair file can be created by setting pair mode and capturing an image, or by using the coupling function (*see page 406*) to combine two single files.

A file other than a pair file is termed a “single file.” A single file can be created by switching off pair mode and capturing an image, or by using the separation function (*see page 407*) to split a pair file.

Operation modes

The frame memory has the following operation mode.

V/K mode: When the pair mode is active, the key signal is automatically selected on frame memory source bus 2. This is convenient for handling the video and key signals together in frame memory. For example, when you select a video signal on frame memory source bus 1, the key signal assigned to it is automatically selected on frame memory source bus 2. You can also use the signal automatically selected on frame memory source bus 2 as a key signal when processing keyframe memory 1.

To change the pair mode or operation mode, use the Frame Memory menu.

Frame memory folders

Still images and clips can be managed in a maximum of twelve groups. Such a group is called a “frame memory folder.” Folders can be added or deleted, and can be given a name of up to 8 characters.

Notes

- When the system is powered off, the folder names are deleted. The folder names need to be saved on media.
- The following names cannot be used for folders.
Flash1, Flash2
CON, PRN, AUX, CLOCK\$, NUL, COM0, COM1, COM2, COM3,
COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9
A folder named “Default” is provided, and this folder cannot be renamed or deleted.
- Still images and clips in different frame memory folders cannot have the same name.

Still Image Operations

The frame memory functions provides the following still image file functions.

- Freezing an input image
- Saving a still image
- Recalling a still image
- Processing an image
- Continuously capturing images (record)
- Recalling a continuous sequence of images (animation)

For an overview of frame memory concepts, see “Overview” (page 370).

Notes

During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons (*see page 395*), frame memory operations may not be performed properly. Carry out frame memory operations after stopping clip playback.

Preparations

Allocating the frame memory outputs (FM1 to FM8) to cross-point buttons

To output a frame memory image to a monitor, for example, the output signal from the frame memory (FM1 to FM8) must be allocated to a cross-point button. Carry out this allocation in the Setup menu.

Notes

When the signal format is 1080P, only the four options of FM1 to FM4 can be used.

Accessing the Frame Memory menu


Most frame memory operations are carried out using the Frame Memory menu. To access the Frame Memory menu, use either of the following procedures.

- In the menu control block, select the top menu selection button [FRAME MEM].
- Press the cross-point button to which the frame memory output is allocated twice in rapid succession.

Interpreting the Frame Memory Menu

The menu screen consists of the following principal parts.

The frame memory selection area display is the same for all except the Pattern Adjust/Pattern Select/Field Invert/File (excluding Pair Recombination menu)/Folder/External Device menus.

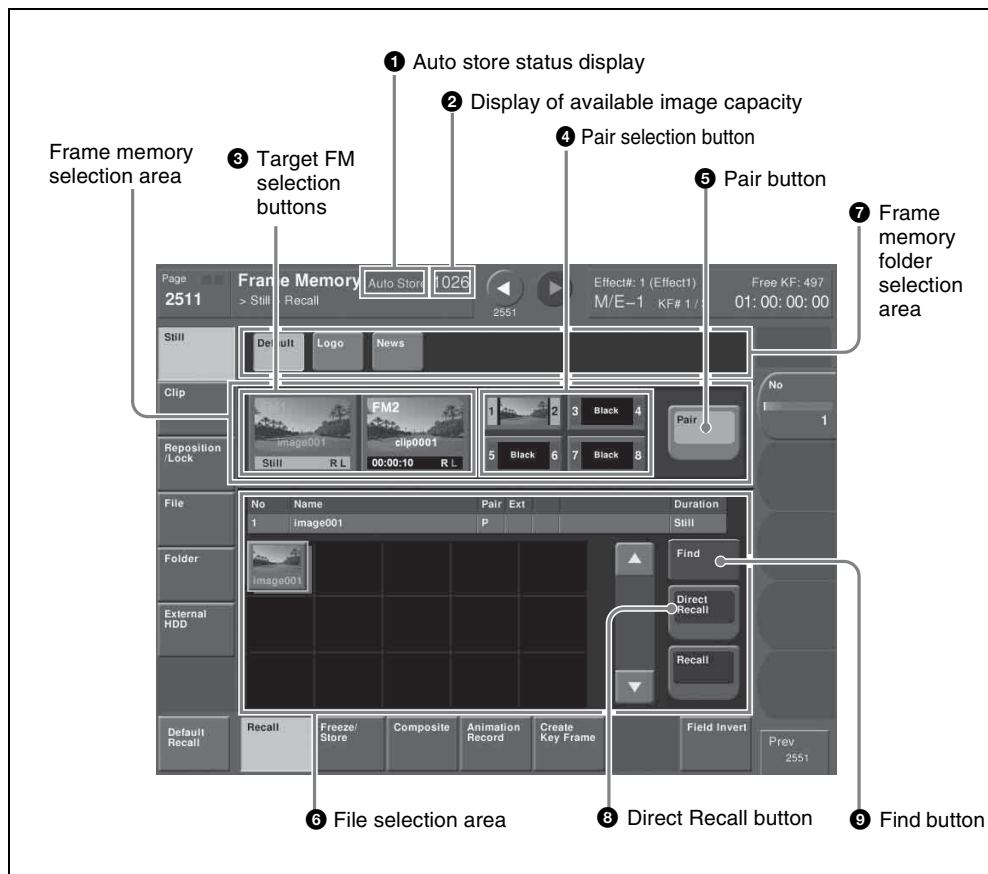

Frame Memory menu

1 Auto store status display

Depending on the setup settings, this appears when the auto store function is enabled.

② Display of available image capacity


This shows the remaining number of frames. When no more frames can be stored, in pair mode “1” or “0” appears in red, and in single mode “0” appears in red.

The lower figure shows the remaining number of frames that can be used as extended clips.

Notes

When the signal format is 1080P, each time a still image is saved the remaining space is reduced by two frames.

③ Target FM selection buttons

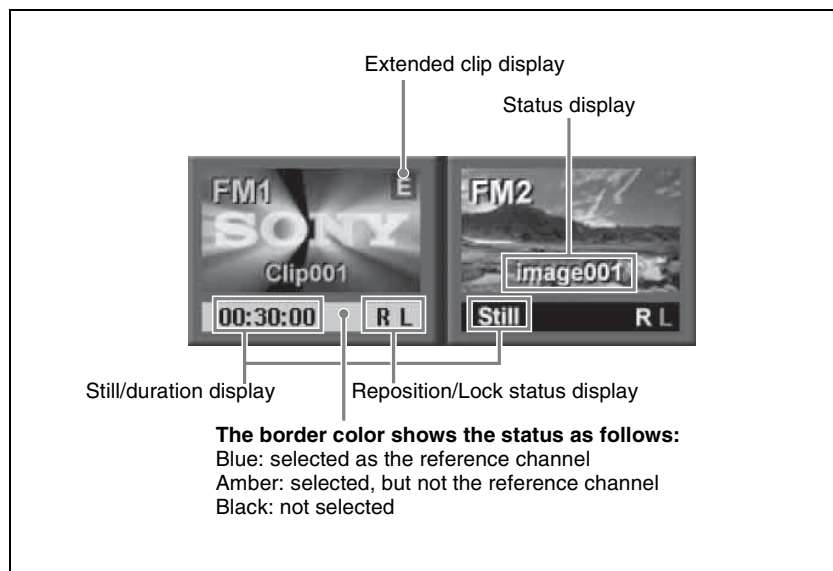

Press one of these to select which of the selected outputs (FM1 and FM2 in the example shown) the operation applies to.

The following information appears on the button.

Status display

File name (e.g. image001) and thumbnail: when a file is output

Black: when a black signal is output

Through: when the input image is output

Freeze: when a freeze is output

Record: when continuously capturing images (record)

Still/duration display

When a still image is selected, “Still” is shown. When a clip is selected, a duration indication such as “00:00:10” is shown.

Reposition/Lock status display


This shows “R” when the reposition function (*see page 385*) is on, and shows “L” when the lock function (*see page 386*) is on.

Extended clip display

For an extended clip, an “E” appears.

4 Pair selection button

Select the pair to be displayed in the target FM selection buttons. (in the following figure, the pair of FM1 and FM2 is selected.)

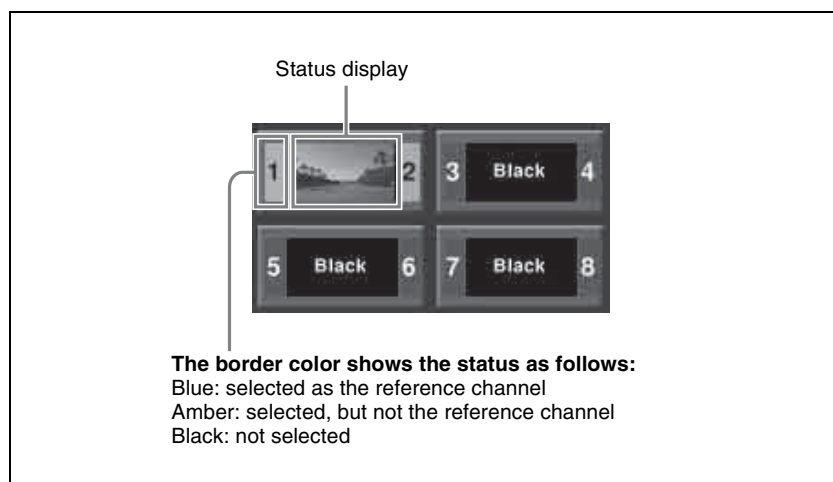

The following information appears on the button.

Status display

For a pair, shows the status for the reference.

Thumbnail: when a file is output

Black: when a black signal is output

Through: when the input image is output

Freeze: when a freeze is output

Record: when continuously capturing images (record)


5 Pair button

Press this button, turning it on, to enable pair mode.

6 File selection area

You can select from the displayed still image files or clip files.

File information detail display

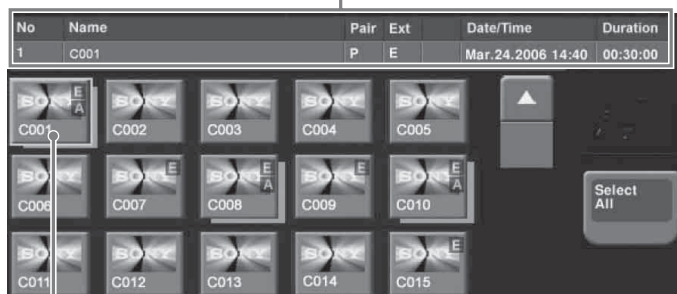

Selected file.

When a pair file is selected each press switches the front and the back.

Thumbnail indications

Still image files and clip files: Still image files are displayed as gray buttons and clip files are displayed as yellow buttons.

Single files and pair files: Single files are displayed with shadow and pair files are displayed with no shadow.

Selected file: Pale blue border. When more than one file is selected, only the first is pale blue, and the remainders are amber. If the pair file was selected, each press switches the front and the back.

File information detail display

For the selected file, this shows the file name, “P” if a pair file, “E” if an extended clip, and the duration.

7 Frame memory folder selection area

Select the frame memory folder to be displayed.

8 Direct Recall button

Toggle on and off the direct recall mode in which pressing a thumbnail immediately recalls the file.

9 Find button

Pressing this button displays a popup window, in which you can enter a file name to carry out a search.

Selecting an Input Image

For the input image to frame memory, you can use either the signal selected on one of the two frame memory source buses or a dedicated color matte signal. When using the signal on frame memory source bus 1 or 2 for the input image, select the signal as described below.

Selecting the signal on a frame memory source bus

As an example, to select a signal on frame memory source bus 1, use the following procedure.

- 1 In the auxiliary bus control block, press the AUX delegation button to which frame memory source bus 1 is allocated, turning it on.

For allocation of buses to the AUX delegation buttons, see “Assigning a Bus to an AUX Delegation Button” in Chapter 19 (Volume 3).

On a CCP-6224/6324 control panel, you switch the cross-point control block for use as an AUX bus control block. For details of the switching, refer to the Setup menu (“Auxiliary Bus Control Block Settings (Aux Assign Menu)” in Chapter 19 (Volume 3)).

- 2 In the auxiliary bus control block cross-point buttons, select the signal to be used for the input image.

To select a signal with a key or DME effect applied on the frame memory source bus

In the key control block, press the [FM FEED] button, turning it on. This automatically assigns the key fill and key source signals being keyed by the currently selected keyer to frame memory source buses 1 and 2. When DME is selected on the keyer, the key fill and key source signals to which a DME effect is applied are assigned.

Selecting Outputs and Target Frame Memory

Selecting outputs (FM) and target frame memory

The following description applies to the case of settings for FM1&2, but the procedures are similar for the other cases.

- 1 In the Frame Memory menu, press one of VF1 to VF4, and select the required HF menu.

The current status of frame memory appears. (See page 374.)

- 2 From the pair selection buttons, press the buttons corresponding to FM1 and FM2.

This assigns the signals to FM1 and FM2.

To the right of the target FM selection buttons, the FM1 and FM2 output status appears (see page 375).

- 3 If required, press [Pair], to select the FM operation mode (pair mode).

On: Operate on FM1(3, 5, 7) and FM2(4, 6, 8) as a pair.

Off: Operate on FM1(3, 5, 7) and FM2(4, 6, 8) individually.

For more details, see “Pair mode” (page 371).

Notes

In the Pair Recombination menu, the [Pair] operation is not possible.

- 4 Press the target FM selection button [FM1] or [FM2] (see page 375) to select the FM operations apply to.

When [Pair] is On: Whichever of FM1 and FM2 you press, the pair is selected.

When [Pair] is Off: One of the targets must be selected. However, in the Clip >Play menu you can also select both FM1 and FM2.

Selecting a frame memory folder

Press a button in the frame memory folder selection area (see page 377).

By pressing [More] to switch the display, you can select from a maximum of 12 folders.

Thumbnails of the files within the selected folder appear.

Capturing and Saving an Input Image

As the input material for the frame memory, you can use the signal selected on the frame memory source bus. For this signal you can use video processing (video levels or hue value adjustment) or masking.

Allocating a frame memory source bus signal to one of FM1 to FM8, then carrying out a freeze captures a still image in the corresponding frame memory output image, and saves it in temporary memory.

For a freeze, an image can be captured either as video frame (a “frame freeze”) or a video field (“field freeze”).

Notes

When the system is powered off, any freeze images written to temporary memory are lost.

Freezing an image and writing it to memory

To freeze the signal selected as input material, and write it to memory, use the following procedure.

- 1 In the Frame Memory menu, select VF1 'Still' and HF2 'Freeze/Store.'

The Freeze/Store menu appears.

- 2 Select the target frame memory.

For the procedure, see "Selecting outputs (FM) and target frame memory" (page 378).

- 3 To enable V/K mode, press [V/K Mode] turning it on.

- 4 Press a button in the frame memory folder selection area, to select the folder to hold the freeze image.

For details of the selection method, see page 379.

Notes

The folder selected here is the destination folder for writing the freeze image.

It is not possible to change the selection of this folder after the following step 5.

An orange bar appears on the selection button for the destination folder.

- 5 Press [Freeze Enable], turning it on.

The signals of frame memory source buses 1 and 2 are assigned to the pair of FMs selected in step 2, a freeze is now possible.

- 6 If necessary, make the video process settings (*see page 382*) or mask settings (*see page 383*) for application to the selected signal.

- 7 In the state in which you want to freeze, press one of the following in the <Freeze> group, to write the freeze image to temporary memory.

Frame: Freeze one frame.

Field: Freeze one field.

Off: Release the freeze, and delete the recorded freeze image.

After carrying out the freeze, to return to the state immediately before the freeze, press [Undo] in the <Freeze> group.

Notes

- All freeze images written to temporary memory are lost when the system is powered off.
- If you change the frame memory to use as in step **2** before saving the freeze images written to temporary memory, all the freeze images in temporary memory are lost, unless the auto store function has been enabled in setup. With the auto store function enabled, the freeze images written to temporary memory are saved automatically when the frame memory selection is changed.
- For the following signal formats, a field freeze is not possible.
1080P/50, 1080P/59.94, 1080PsF/23.976, 1080PsF/24, 1080PsF/25, 1080PsF/29.97, 720P/50, 720P/59.94

Saving a freeze image (Store)

You can save an image in temporary memory which has been placed with the freeze function as a file in memory. You can save a single image in a single file and apply a name of up to eight characters to the file.

Notes

- When the system is powered off, all the files saved in memory are lost.
- When the signal format is 1080P, the file name is limited to seven characters. Each time a still image is saved, the remaining space is reduced by two frames.

To save a captured still image in a file, use the following procedure in the Still >Freeze/Store menu.

1 Press [Store].

The keyboard window (*see page 125*) appears.

2 In the keyboard window, enter the file name.

Notes

The following names cannot be used:

CON, PRN, AUX, CLOCK\$, NUL, COM0, COM1, COM2,
COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8,
LPT9

3 In the keyboard window, press the [Enter] button.

This saves the still image file in memory.

The destination folder is the folder selected in step 4 of “Freezing an image and writing it to memory.”

If the entered folder name already exists, a message to confirm overwriting appears.

When the system is powered off, the file saved in memory is erased.

To carry out a freeze and store simultaneously (Freeze and Store)

Press [Freeze & Store], turning it on.

In this state, if you press [Frame] or [Field], this carries out a freeze, and simultaneously stores in a still image file.

Setting video processing

To set video processing for the signal selected on a frame memory source bus, use the following procedure in the Still >Freeze/Store menu.

- 1 In the <Video Process> group, press [Video Process], turning it on.
- 2 Use the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Overall gain of the video signal	−200.00 to +200.00
2	Y Gain	Y signal gain	−200.00 to +200.00
3	C Gain	Chrominance signal gain	−200.00 to +200.00
4	Hue Delay	Hue delay	−180.00 to +180.00
5	Black Level	Y signal black level	−7.31 to +109.59

To return the settings to the default values, press [Unity] in the <Video Process> group.

Notes

When a pair setting is active, it is coupled to the video process on/off setting, but the above parameter settings are only valid for frame memory source bus 1. The pair setting cannot be used to set the frame memory source bus 2. If you want to set video process for frame memory source bus 1 only with the pair setting when old settings for frame memory source bus 2 remain, return the frame memory source bus 2 settings to their default values. When setting video process for the frame memory source bus 2, disable the pair setting.

Setting a mask

Masks can be set separately for frame memory source buses 1 and 2. To apply a mask to the signal selected on frame memory source bus 1, for example, use the following procedure in the Still >Freeze/Store menu.

- 1 Press [Box Mask] turning it on.
- 2 Use the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	-100.00 to +100.00
2	Left	Left position	-100.00 to +100.00
3	Right	Right position	-100.00 to +100.00
4	Bottom	Bottom position	-100.00 to +100.00

- 3 To link the masks on frame memory source buses 1 and 2, press [Mask Link], turning it on.

Recalling Still Images

You can recall an image file saved in memory, and allocate to any of the FM1 to FM8 outputs.


Recalling a still image

To recall a still image file saved in memory using the thumbnails, and assign it to an FM output, use the following procedure.

- 1 In the Frame Memory menu, select VF1 'Still' and HF1 'Recall.'

The Recall menu appears.

- When [Pair] is on, only pair files (pairs of main file and sub file) are displayed.
- When [Pair] is off, both single files and pair files appear (see following figure).

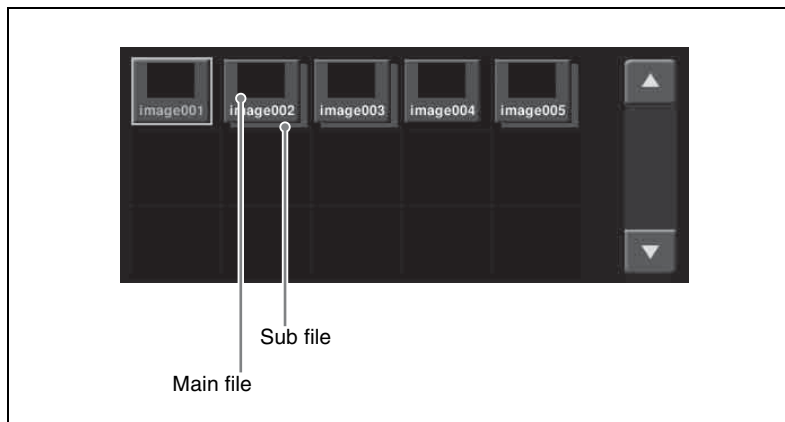

- 2** In the frame memory selection area, select the FM to be assigned. (See page 379.)
- 3** If [Direct Recall] is on, press and turn it off.
- 4** Select the desired folder in the folder selection area.
By pressing [More] to switch the display, you can select from a maximum of 12 folders.

Thumbnails of the files within the selected folder appear.

- 5** Using the arrow keys or turning the knob, scroll the file thumbnail display.

Knob	Parameter	Adjustment	Setting values
1	Scroll	Thumbnail display scrolling	1 and upwards

- 6** Press the thumbnail of the clip you want to recall.
- 7** Press [Recall].

This recalls the still image file, which is assigned to the FM you selected in step **2**.

To recall in direct recall mode

Direct recall means that pressing a thumbnail immediately recalls the file. In this mode, only the front thumbnail file is recalled.

- 1** In step **7** above, instead of pressing [Recall], press [Direct Recall].
- 2** Press the thumbnail for the file you want to recall.

This immediately recalls the file.

To display the subsidiary file in front

With the direct recall mode on, press [Sub Display], turning it on.

To search by file name

- 1 Press the [Find] button.

The Find window appears.



- 2 Press [Find].

A keyboard window appears.

- 3 Enter the string you want to search for, and press [Enter].

This starts the search, and the indicator lights.

When the search ends, the files found are selected.

- 4 To move through the selected files, press the [< Prev] or [Next >] button.

- 5 Press outside the Find window on the menu screen.

This closes the Find window.

Image Output

There are two functions related to image output: the reposition function for moving the output image, and the lock function for fixing the output image.

Moving the output image (reposition function)

For up to two channels of FM1 to FM8 (one from FM1, FM3, FM5 and FM7 and the other from FM2, FM4, FM6 and FM8), you can move the output image with respect to the screen. The area of the screen around the image that has been moved is filled with black. There are two ways of carrying out this repositioning.

Normal mode: Movement in the horizontal direction is in two-pixel increments.

Black and white mode: Movement in the horizontal direction is in one-pixel increments, and for each pixel moved the color is inverted.

Notes

It is not possible to save an image moved with the reposition function directly to frame memory.

- 1 In the Frame Memory menu, select VF3 'Reposition/Lock' and HF1 'Reposition.'

The Reposition menu appears. In this menu, you can also enable the V/K mode (*see page 380*).

- 2 In the frame memory selection area, select the FM output (*see page 379*).

- 3 In the <Reposition> group, select the movement mode.

Normal: Move in normal mode.

Black&White: Move in black & white mode.

- 4 With the knobs, adjust the parameters to move the image.

Knob	Parameter	Adjustment	Setting values
1	Position H	Move in horizontal direction	-200.00 to +200.00 ^{a)}
2	Position V	Move in vertical direction	-200.00 to +200.00 ^{a)}

a) See page 296.

The surroundings of the moved image on the screen are filled with black.

- 5 To return the image moved by the reposition function to the center position, in the <Reposition> group press [Center].

Fixing the output image selection (lock function)

For the output of each FM1 to FM8, this fixes the image at the current output. When this lock is enabled, even if the output is recalled in a snapshot or keyframe, the images output to FM1 to FM8 are preserved.

Notes

When the signal format is 1080P, this function cannot be used.

- 1 In the Frame Memory menu, select VF3 'Reposition/Lock' and HF2 'Lock.'
The Lock menu appears.
- 2 In the frame memory selection area, select the FM output. (*See page 379.*)
- 3 Press [Lock], turning it on.
This fixes the currently selected frame memory output image.
To release the lock, set [Lock] to off.

Continuously Capturing Still Images (Record)

You can continuously capture (freeze) a sequence of input video frames and store the sequence of the still images over a specified time interval. The name of each image recorded in this way consists of a first character string followed by a second string.

First character string: A common part of name assigned to all the still images captured in one record operation. This string includes a maximum of four characters, which can be specified using a menu before carrying out the capture. The first string is automatically used as the clip name when the images are treated as a frame memory clip.

Second character string: A four-digit number (0000 or greater), which is incremented each time a still image is captured.

Notes

When using the record function to continuously capture frames, it is not possible to use the mask function.

Continuously freezing input images and writing to memory

- 1 In the Frame Memory menu, select VF1 'Still' and HF4 'Animation Record.'
The Animation Record menu appears.
- 2 Select the desired frame memory.
For details of the operating procedures, see "Selecting outputs (FM) and target frame memory" (page 378).
- 3 To use V/K mode, press [V/K Mode], turning it on.

- 4** Press a button in the frame memory folder selection area, to select the folder to hold the freeze image.

For details of the selection method, see page 379.

Notes

The folder selected here is the destination folder for writing the freeze image.

It is not possible to change the selection of this folder after the following step **5**.

An orange bar appears on the selection button for the destination folder.

- 5** Press [Record Enable], turning it on.

The signals of frame memory source buses 1 and 2 are assigned to the pair of FMs selected in step **2**, the recording function is now possible.

- 6** Input the file name if required.

Pressing [File Name] displays the keyboard window and you can enter the first character string (up to four characters) of the file name.

- 7** Set the recording time if required.

Pressing [Duration] displays the numeric keypad window, in which you can enter the recording time in the form of timecode.

If you set the recording time to zero, this uses all frame memory in which storing is possible for recording.

- 8** If required, set video processing for the selected signal.

For details of the operating procedures, see “Setting video processing” (page 382).

- 9** Press [Record], to start recording.

When the recording time is set, recording stops once the time has elapsed.

- 10** Press [Stop] to stop recording.

Even if the recording time is set, you can still stop recording before the set time has elapsed.

Recalling a Continuous Sequence of Still Images (Animation)

You can use a continuous sequence of images captured with the record function as keyframes to create an effect. By executing this effect you can recall the continuous sequence (animation).

Notes

- For example, to create an effect using FM1, FM1 must be assigned to a user region.
- To execute the effect, you must assign the user region to which FM1 is assigned to a region selection button in the numeric keypad control block and the Multifunction Flexi Pad control block. (*For details of assigning to region selection buttons, see Chapter 19 “Control Panel Setup (Panel)” (Volume 3).*)

In the Frame Memory menu, effect creation follows the image file names. Of the eight characters in the file names, if files have the same characters except for the last three characters they are treated as an image file group, and the effect is created with the last three (numeric) characters in sequence.

Notes

When creating the effect in pair mode (*see page 371*), the files used must be main files and sub files with the same last three (numeric) characters in the file name.

To recall a continuous sequence of still images, create an effect in the user region with the still image files as a keyframe, and run the created effect.

Notes

With the 720P format or 1080P format, you can continuously recall images using the frame memory in units of two frames only.

Creating an effect with still image files as a keyframe

- 1 In the Frame Memory menu, select VF1 ‘Still’ and HF5 ‘Create Key Frame.’

The Create Key Frame menu appears.

- A thumbnail appears for each group of files having the same characters, except for the last three characters, in the file name.
- When [Pair] is on, only pair files (each pair comprising a main file and a sub file) appear.

- When [Pair] is off, both single files and pair files all appear.

2 In the frame memory selection area, select the frame memory to be assigned.

This creates the effect in the user region to which the selected frame memory is assigned.

For details of the operating procedures, see “Selecting outputs (FM) and target frame memory” (page 378).

3 Select the desired folder in the folder selection area. By pressing [More] to switch the display, you can select from a maximum of 12 folders.

Thumbnails of the files within the selected folder appear.

4 Turn the knob to select the register number in the user region.

Knob	Parameter	Adjustment	Setting values
5	Register	Effect register number	1 to 99

Notes

To search for an empty register in the user region, use the numeric keypad control block or the Multifunction Flexi Pad control block (*see step 3 of “Recalling a Register” in Chapter 13 (Volume 2)*).

5 Use the arrow keys or turn the knobs to scroll the thumbnail display of the files.

Knob	Parameter	Adjustment	Setting values
1	Scroll	Thumbnail display scrolling	1 and upwards

6 Select the thumbnail of the files to be used for the keyframe.

7 If necessary, turn the knob to check the animation effect in the thumbnail display.

Knob	Parameter	Adjustment	Setting values
3	Viewer	Animate thumbnail display of files	00:00:00 and upwards

8 Using the region selection buttons in the numeric keypad control block or the Multifunction Flexi Pad control block, select one of the regions (User1 to User8) to which the frame memory output signals have been assigned.

9 Carry out either of the following.

- To clear the effect register selected in step **4**, and create a new effect: press [Create Key Frame].
- To add to the end of the effect register selected in step **4**, press [Append Key Frame].

A confirmation message for creating the effect appears.

If there is an inappropriate condition for creating the effect, an error message appears.

For details of error messages, see “Error Messages” in the Appendix (Volume 3).

10 Press [OK].

This creates the effect in the selected user region register.

To cancel creating the effect

Press [Cancel].

Notes

- The effect is built with the selected files, in increasing order of the last three characters of the file name. If you do not want to include some of these files in the effect, first delete or rename them.
- A maximum of 99 keyframes can be included in a single effect.

Recalling a sequence of still images

Run the effect created by the foregoing procedure.

The procedure for doing this is the same as for any other effect.

For details, see “Executing Effects” in Chapter 13 (Volume 2).

Frame Memory Clip Function

What is a “frame memory clip”?

Movies can be read into frame memory, and recalled and played back. A movie held in frame memory is called a “frame memory clip.”

A frame memory clip can be named using up to four characters. (*For details of frame memory clip names, see “Continuously Capturing Still Images (Record)” (page 387).*)

Frame memory clip settings

For frame memory clips, you can make the following settings using a menu or device control block (trackball/search dial/joystick).

- Start point
- Stop point
- Loop On/Off

The above settings can be saved in a snapshot register as snapshot attributes, and recalled.

Frame Memory Clip Operations

For an overview of frame memory clip concepts, see “Frame Memory Clip Function” (page 392).

Notes

During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons (*see page 395*), frame memory operations may not be performed properly. Carry out frame memory operations after stopping clip playback.

Preparations for Operation

The preparations for using a frame memory clip (hereafter, a “clip”) are the same as for a still image operation. *See “Preparations” (page 373) and “Selecting Outputs and Target Frame Memory” (page 378).*

Recalling Clips


Recalling a clip

You can recall a clip from each of frame memories 1 to 8.

- 1 In the Frame Memory menu, select VF2 ‘Clip’ and HF1 ‘Recall.’

The Recall menu appears. (*See following figure*)

- When [Pair] is set to On, only pair files (sets of main file and sub file) are shown.
- When [Pair] is set to Off, both of single files and pair files are shown.

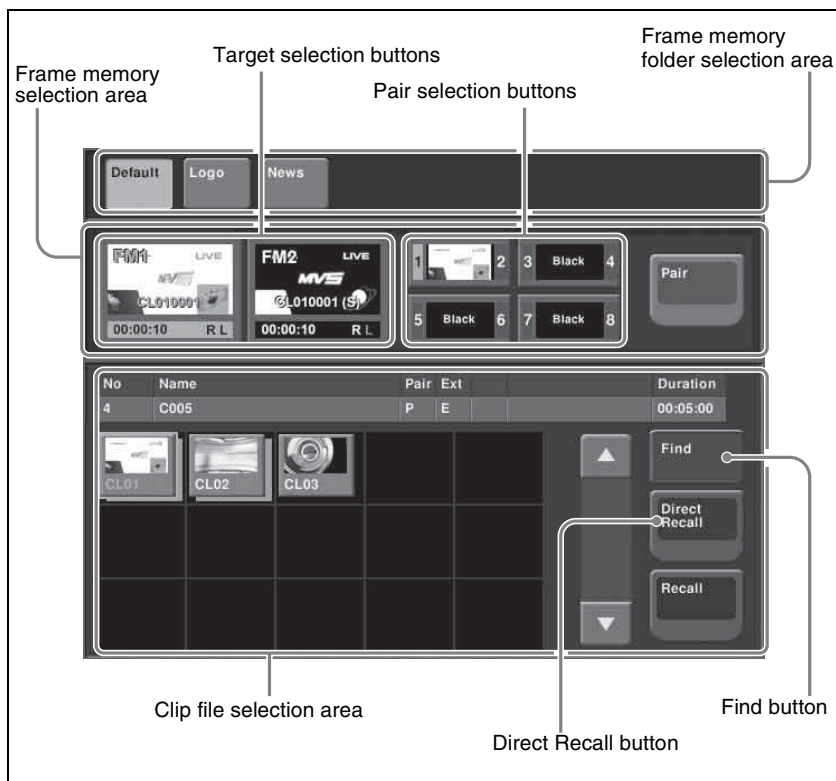

- 2** In the frame memory selection area, select an assigned target FM. (See page 378)
- 3** If [Direct Recall] is on, press the button, turning it off.
- 4** In the folder selection area, select the desired folder.
By pressing [More] to switch the displays, you can select from a maximum of 12 folders.

Thumbnails of the files within the selected folder appear.

- 5** Using the arrow keys or turning the knob, scroll the file thumbnail display.

Knob	Parameter	Adjustment	Setting values
1	Scroll	Thumbnail display scrolling	1 and upwards

- 6** Press the thumbnail of the clip you want to recall.

7 Press [Recall].

This recalls the clip file, which is assigned to the FM you selected in step **2**. In pair mode, if a clip is selected, the main file is output to FM1, and the sub file to FM2. In single mode, when only one of FM1 and FM2 is selected, the front file on the thumbnail is output.

To recall in direct recall mode

Direct recall means that pressing a thumbnail immediately recalls the file. In this mode, only the front thumbnail file is recalled.

1 In step **7** above, instead of pressing [Recall], press [Direct Recall].

2 Press the thumbnail for the file you want to recall.

This immediately recalls the file.

To display the subsidiary file in front

With the direct recall mode on, press [Sub Display], turning it on.

To search the clip file by file name

Press the [Find] button.

For details, see “To search by file name” (page 385) in Chapter 7.

Clip Playback

You can play a recalled clip by a menu operation or by using the device control block.


Notes

With a pair file recalled, it is possible to set [Pair] to Off and carry out a single file operation, but if you then set [Pair] to On again, the output of frame memory may be black. In such cases it is necessary to recall the pair file once more.

Playing a clip using the menu

1 In the Frame Memory menu, select VF2 ‘Clip’ and HF2 ‘Play.’

The Play menu appears. The status of the clip shown in the current target FM selection buttons appears here.

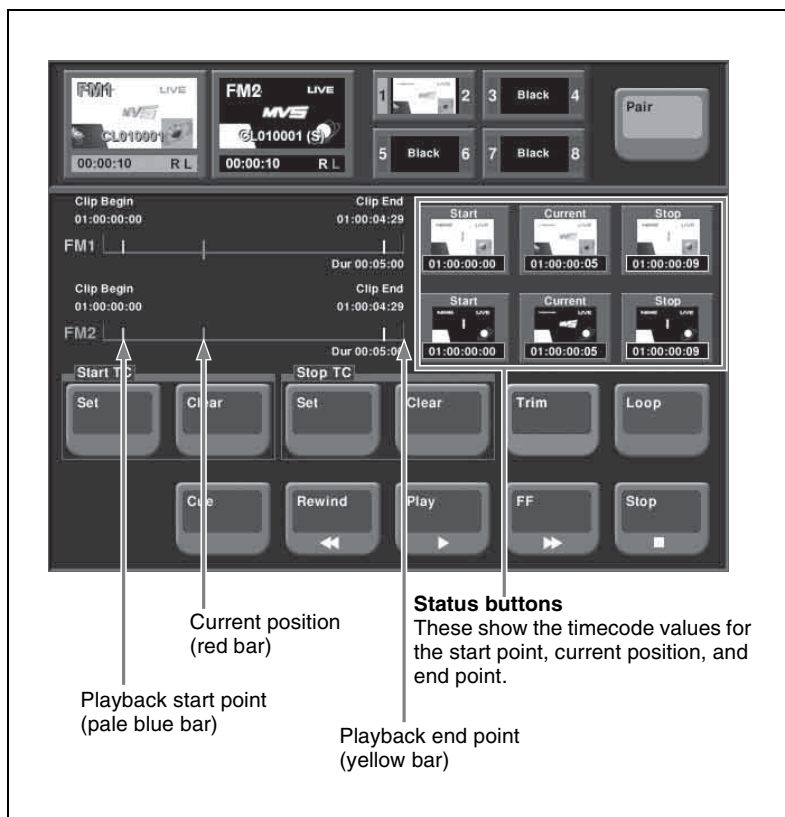

- 2** When [Pair] is Off, press a target FM selection button to select the target.
- 3** To set loop playback, press [Loop], turning it on.
- 4** To start playback, press [Play]. During playback, to stop, press [Stop].

To cue up

Press [Cue].

To play the image at the beginning of the clip (Clip Begin)

Press [Rewind].

To play the image at the end of the clip (Clip End)

Press [FF].

To specify the playback start point

To set the current position as the playback start point, in the <Start TC> group, press [Set]. To set a different position, press the [Start] status button, and enter a timecode value from the numeric keypad window.

To specify the playback stop point

Start playback, and at the desired position press the [STOP] button to stop playback, then in the <Stop TC> group, press [Set]. To set to any position, press the [Stop] status button, and enter a timecode value from the numeric keypad window.

To change the current position

To change the current position, press the [Current] status button, and enter a timecode value from the numeric keypad window.

To delete the parts of a clip file other than the playback part (trimming)

- 1** Set the playback start point and stop point.
- 2** Press [Trim].
A confirmation message appears.
- 3** Press [Yes].

Using the device control block (search dial) to play back clips**Notes**

A frame memory clip must first be recalled with a menu operation.

- 1** With the device selection buttons, select the frame memory clip to be played (FM1 CLIP to FM8 CLIP).

If the pair mode is on, both main and subsidiary FMs light.

- 2** Press the [PLAY] button, turning it on.

To stop playback, press [STOP] or any of the [SHTL], [JOG], [CUE], [REW], [FF], and [ALL STOP] buttons.

For details of the buttons in the device control block (search dial), see “Device Control Block (Search Dial)” (page 65) in Chapter 2.

To specify the playback start point

To make the current position the playback start point, press the [START TC] button. To set a different position, press the [SET START TC] button, then enter the timecode from the numeric keypad control block.

To specify the duration

Press the [SET DUR] button, and enter a timecode from the numeric keypad control block. If the playback start point is already set, this automatically sets the playback stop point. If the playback stop point is already set, this automatically sets the playback start point. (The duration setting is not displayed in the device control block.)

To specify the playback stop point

Start playback, and at the desired position press the [STOP] button to stop playback, then press the [STOP TC] button. To set to any position, press the [SET STOP TC] button, and enter a timecode from the numeric keypad control block.

To carry out the variable speed playback

Use the search dial.

For details on using the search dial, see “Controlling the Tape/Disk Transport” in Chapter 12 (Volume 2).

To apply a loop to a frame memory clip

Press the [LOOP] button.

Using the device control block (trackball) or device control block (joystick) to play back clips

Notes

A frame memory clip must first be recalled with a menu operation.

- 1** Press the [DEV] button in the region selection buttons, and select the frame memory clip for playback (FM1 CLIP to FM8 CLIP).

If the pair mode is on, both main and subsidiary FMs light.

- 2** Press the [PLAY] button, turning it on.

To stop playback, press [STOP] or any of the [SHTL], [JOG], [CUE], [REW], [FF], and [ALL STOP] buttons.

For details of the buttons in the device control block (trackball) or device control block (joystick), see “Device Control Block (Trackball)” (page 60) in Chapter 2.

For details of the playback start point, stop point, and duration settings, see the previous item, “Using the device control block (search dial) to play back clips” (page 397).

To carry out the variable speed playback

Press any of the [SHTL], [JOG], and [VAR] buttons, then turn the Z-ring or move the joystick. The image changes in the forward direction when you turn the Z-ring clockwise, and in the reverse direction when you turn it counterclockwise. Move the joystick to the right for the forward direction and to the left for the reverse direction.

When you pressed the [JOG] button: Playback is at a speed corresponding to the turning speed of the Z-ring or the movement speed of the joystick.

When you pressed the [SHTL] button: Playback is at a speed corresponding to the rotation angle of the Z-ring or amount of movement of the joystick.

When you pressed the [VAR] button: Playback is at a speed corresponding to the rotation angle of the Z-ring or amount of movement of the joystick, in the range -1 to +3 times normal speed.

Clip Creation


You save a movie as a clip.

Notes

If the number of frame memory clips exceed 100 single files (50 pair files), an error appears.

Using the menu to record clips

- 1** In the Frame Memory menu, select VF2 ‘Clip’ and HF3 ‘Record.’
The Record menu appears.

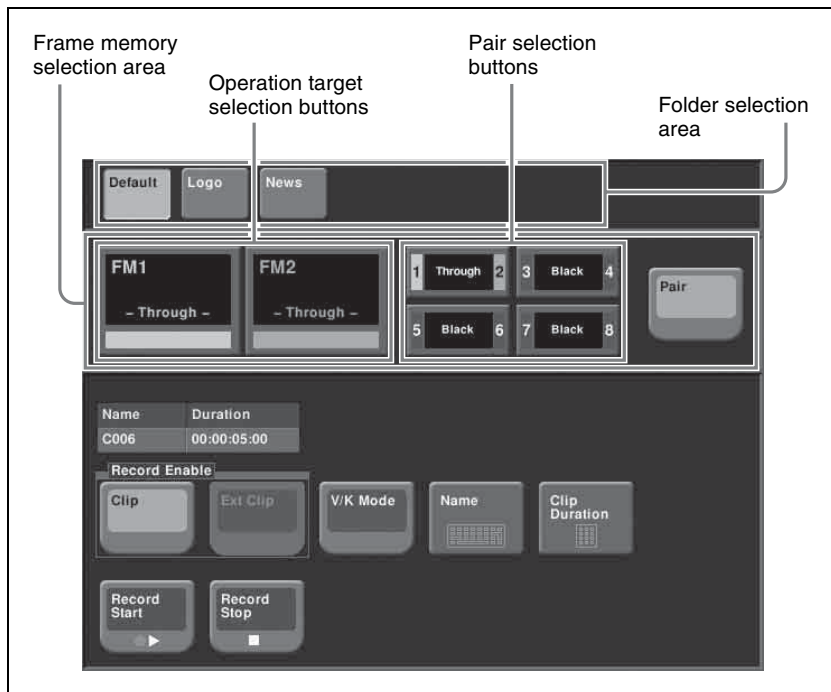

- 2** With [Pair] off, press the operation target selection button, to select the operation target.
- 3** In the folder selection area, select the folder containing the clip to be recorded.
- 4** In the <Record Enable> group, select the clip type.
 - To record a normal clip, press [Clip].
 - To record an extended clip, press [Ext Clip].
- 5** To set the clip name, press [Name].
A keyboard window appears.
- 6** Enter the clip name, and press Enter.
- 7** To start recording, press [Record Start].
- 8** To end recording, press [Record Stop].

To set the clip duration

- 1 Press [Clip Duration].
A numeric keypad window appears.
- 2 Enter a timecode value or number of frames, and press Enter.
This confirms the clip duration.

Creating and Handling Frame Memory Folders

You can create, rename, and delete frame memory folders.

Creating a new folder

- 1 In the Frame Memory menu, select VF5 'Folder.'
The Folder menu appears. The status area shows a list of the current folder settings.
- 2 Select [New].
A keyboard window appears.
- 3 Enter the folder name, and press Enter.
This confirms the folder name.

Changing the folder name

- 1 In the Frame Memory >Folder menu, select the folder with the arrow keys or by turning the knobs.

Knob	Parameter	Adjustment	Setting values
1	No.	Folder selection	1 to 12
2	Num	Number of files to select consecutively from selected file	1 to 12

- 2 Press [Rename].
A keyboard window appears.
- 3 Enter the new folder name, and press Enter.

Notes

The following names cannot be used for folders:

Default, Flash1, Flash2
CON, PRN, AUX, CLOCK\$, NUL, COM0, COM1, COM2,
COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8,
LPT9

This changes the folder name.

Deleting a folder

- 1 In the Frame Memory >Folder menu, select the folder with the arrow keys or by turning the knobs.

Knob	Parameter	Adjustment	Setting values
1	No.	Folder selection	1 to 12
2	Num	Number of files to select consecutively from selected file	1 to 12

To select all folders, select [All].

- 2 Press [Delete].
A confirmation message appears.
- 3 To carry out the deletion select [Yes], and to cancel the deletion select [No].

Notes

It is not possible to delete the default folder (named “Default”).

Clip Output

As for still image operation, you can use the reposition and lock functions.

For details of the operation, see “Image Output” (page 385).

Clip Transition Operations

A frame memory clip (movie) is played back, linked to a transition using a mix (dissolve) or wipe.

The following restrictions apply to the use of a clip transition.

- Key frame capture is not possible.
- It is not possible to apply a pattern limit.
- Transitions executed in two strokes, such as a preset color mix with the stroke mode set to Normal, or a DME wipe with a picture-in-picture pattern, will not execute correctly.
- It is not possible to vary the transition rate of a clip transition.
- Transition preview cannot be used.
- No instantaneous state of a clip transition can be saved as a snapshot.
- When recalling a snapshot including a clip transition during executing another clip transition, the follow-on transition does not operate properly. Be sure to complete the transition before recalling a snapshot.

Notes

When a clip transition is selected as the transition type, if one of the wipe direction selection buttons in the transition control block is lit, it indicates the direction of clip playback.

Setting a clip transition


The following example describes the case of a clip transition using FM 1&2 Clip on the M/E-1 bank.

Notes

To use a clip transition effectively, the image from the frame memory clip being played back during the clip transition should be seen in the M/E-1 program output. For example, inserting a key using frame memory output 1 and frame memory output 2.

- 1** Display the M/E-1 >Misc >Transition menu, and in the <Transition Type> group select “FM1&2 Clip.”
- 2** Press [Clip Transition].

The Clip Transition menu appears.

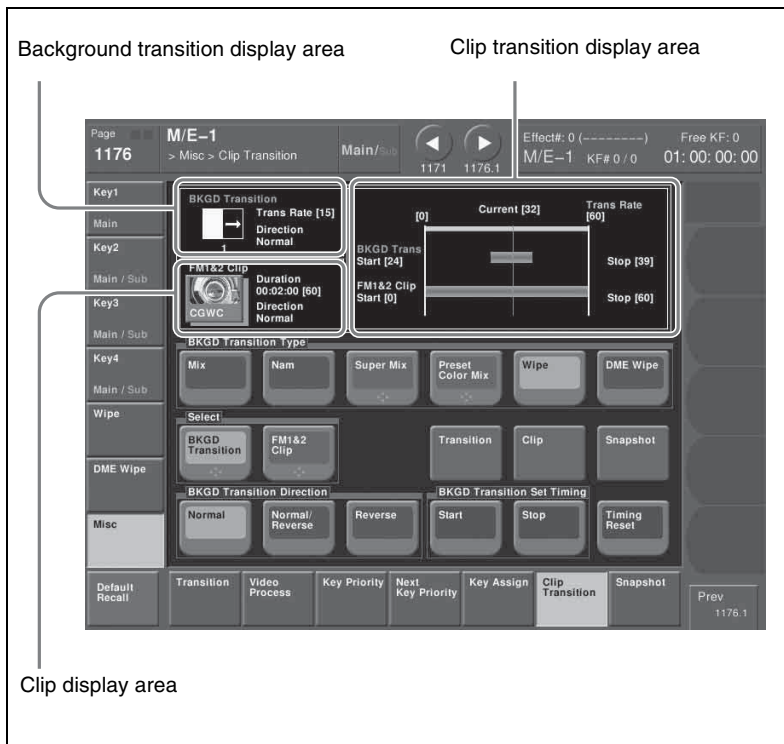


- 3 Press the [Clip] button.
The Clip menu appears, and the status area shows a list of clips.
- 4 Select the clip to use in the clip transition.
- 5 Return to the Clip Transition menu, and in the <BKGD Transition Type> group, select the background transition type.

Notes

For details of the background transition selected here, see the various adjustments in the M/E-1 >Misc >Transition menu.

- 6 In the <Select> group, press [BKGD Transition].
- 7 Use either of the following methods to set the background transition start point independently of the clip playback timing.
 - Move the fader lever to the desired position, and in the <BKGD Transition Set Timing> group press [Start].

- Turn knob 1 to set the number of frames. (The left end of the reference axis (see following figure) is the position of frame 0.)

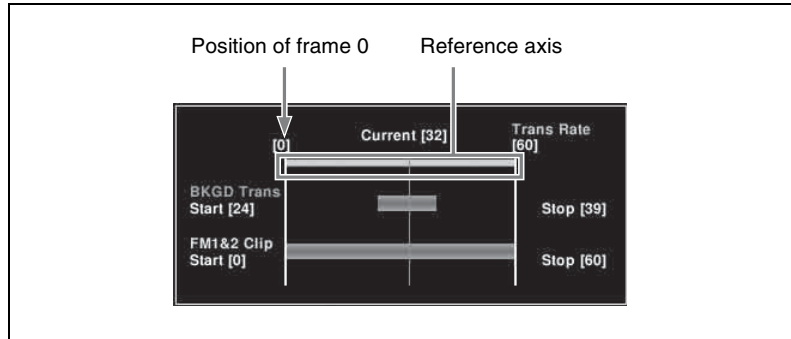

8 Using either of the following methods, set the end point of the background transition.

- Move the fader lever to the desired position, and in the <BKGD Transition Set Timing> group press [Stop].
- Turn knob 2 to set the number of frames.

9 If Wipe or DME Wipe is selected in the <BKGD Transition Type> group, in the <BKGD Transition Direction> group, select the background transition direction.

10 In the <Select> group, press [FM 1&2 Clip].

11 Using either of the following methods, set the start point of the clip.

- Move the fader lever to the desired start point, and in the <Clip Transition Set Timing> group press [Start].
- Turn knob 1 to set the number of frames. (The left end of the reference axis (see previous figure) is the position of frame 0.)

Notes

It is not possible to set the end point.

12 In the <Clip Transition Direction> group, select the playback direction of the clip.

To reset the start point and end point

Press [Timing Reset].

The background transition start point and end point, and the clip start point are all reset.

Image Data Management

You can carry out the following operations on the files in which images are saved.

- Pair file processing
- Move
- Delete
- Rename

Notes

During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons (*see page 395*), frame memory operations may not be performed properly. Carry out frame memory operations after stopping clip playback.

Pair File Processing

You can create a pair file from two single files. In the reverse direction, you can split a pair file into two single files.

Couple: You can create a pair file from two single still image files or clip files.

Separate: You can also separate a pair file into two single still image files or clip files.

Creating a pair file from two single files

Notes

Carrying out the following operation automatically switches [Pair] to On.

The following description applies to the case of FM1&2, but the procedures are similar for the other cases.

- 1** In the Frame Memory >Still >Recall menu or Frame Memory >Clip >Recall menu, recall the two single files you want to convert to a pair file, to FM1 and FM2.
- 2** In the Frame Memory menu, select VF4 'File' and HF1 'Pair Recombination.'

The Pair Recombination menu appears.

3 Press [Couple].

This converts the files output to FM1 and FM2 to a pair.

Splitting a pair file into two single files

Notes

Carrying out the following operation automatically switches [Pair] to Off.

The following description applies to the case of FM1 and FM2, but the procedures are similar for the other cases.

1 In the Frame Memory >Still >Recall menu or Frame Memory >Clip >Recall menu, recall the pair file.

2 Select the folder in which the file to be moved is stored.

3 In the Frame Memory menu, select VF4 'File' and HF1 'Pair Recombination.'

The Pair Recombination menu appears.

4 Press [Separate].

The FM1 and FM2 pair file is split into separate single files.

Moving Files

1 In the Frame Memory menu, select VF4 'File' and HF5 'Move.'

The Move menu appears. The status area shows files to be moved in the upper area, and destination files in the lower area.

2 Select the folder which contains the file to be moved.

3 Using any of the following methods, select the file to be moved.

- Press the arrow keys to scroll the display.
- Press directly on the thumbnail in the status area.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	File selection	1 and upwards
2	Num	Selection of number of files in sequence	1 and upwards

- 4 Select the destination folder and file.
- 5 Press [Move].
- 6 To confirm the move press [Yes], and to cancel press [No].

Deleting Files

- 1 In the Frame Memory menu, select VF4 'File' and HF5 'Delete.'

The Delete menu appears. In the status area, whether pair mode is on or off, all of the saved files appear as thumbnails.

- 2 Select the folder which contains the file to be deleted.

- 3 Using either of the following methods, select the file to be deleted. If necessary, press the arrow keys to scroll the display.

- Press directly on the thumbnail in the status area.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	File selection	1 and upwards
2	Num	Selection of number of files in sequence	1 and upwards

- To delete all files, press [Select All], turning it on.
- When a clip thumbnail is selected, the still image files making up the clip are also selected for deletion.

- 4 If necessary, turn the knob to check the contents of the frame memory clip through the thumbnail display.

Knob	Parameter	Adjustment	Setting values
3	Viewer	For a movie, the current frame position. For a still image, no effect.	00:00:00 and upwards

- 5 Press [Delete].

A message for confirming the deletion appears.

- 6 To confirm the deletion press [Yes], and to cancel press [No].

Renaming Files

- 1 In the Frame Memory menu, select VF4 'File' and HF6 'Rename'

The Rename menu appears. In the status area, whether pair mode is on or off, all of the saved files appear as thumbnails.

- 2 Using either of the following methods, select the file to be renamed. If necessary, press the arrow keys to scroll the display.

- Press directly on the thumbnail in the status area.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	File selection	1 and upwards

- 3 If necessary, turn the knob check the contents of the frame memory clip through the thumbnail display.

Knob	Parameter	Adjustment	Setting values
3	Viewer	For a movie, the current frame position. For a still image, no effect.	00:00:00 and upwards

- 4 Press [Rename].

A keyboard window appears.

- 5 Enter the new name, then press [Enter] in the keyboard window.

Notes

The following names cannot be used:

CON, PRN, AUX, CLOCK\$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

This renames the file.

External Hard Disk Drive Access

You can connect a hard disk drive to the USB port of the switcher processor, to carry out the following operations.

Format: Format the hard disk.

Backup: Batch saving of files from frame memory to the hard disk.

Restore: Restoring frame memory from files saved on the hard disk.

Since image data saved in memory is lost when the system is powered off, using an external hard disk drive allows required data to be preserved.

Notes

- Only one hard disk drive can be connected to a single switcher processor.
- While the hard disk is being accessed, frame memory operations are not possible.
- During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons (*see page 395*), frame memory operations may not be performed properly. Carry out frame memory operations after stopping clip playback.
- When the signal format is 1080P, this function cannot be used.

Consult your Sony service representative or sales representative about the hard disk drives that can be connected.

Hard Disk Formatting

When you connect a hard disk drive for the first time, it is necessary to format the hard disk. This partitions the disk, creating 15 logical areas (FMHDD1 to FMHDD15).

- 1** In the Frame Memory menu, select VF6 'External Device' and HF1 'Ext HDD Format.'

The Ext HDD Format menu appears.

To get the hard disk drive information

In the button area press [Refresh Status].

The Device item shows the product information for the hard disk drive.

- 2** Press [Format].

A popup window for confirming formatting appears.

Notes

Carrying out formatting erases any existing data on the hard disk.

3 Press [Yes].

This starts the hard disk formatting. A progress bar and numerical indication appear to show the progress of the operation.

When the operation is completed, a popup window reading “Success!!” appears.

4 Press [OK].

The popup window disappears.

Saving Files

You can save all of the files from frame memory to the external hard disk drive.

Notes

Before carrying out this operation for the first time, it is necessary to format the hard disk (*see previous item, “Hard Disk Formatting”*).

1 In the Frame Memory menu, select VF6 ‘External Device’ and HF2 ‘Ext HDD Backup/Restore.’

The Ext HDD Backup/Restore menu appears.

For each partition, a list of the directory names and number of files appears.

To get the hard disk drive information

Press [Refresh Status].

The Device item shows the product information for the hard disk drive, and the names of directories.

2 Using any of the following methods, select a logical drive (FMHDD1 to FMHDD15).

- Press directly on the list to select.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Partition	Partition selection	1 to 15

3 In the <Backup> group, do either of the following.

- To replace the existing data, press [Replace].
- To save in addition to the existing data, press [Append].

A popup window for confirming file saving appears.

Notes

When you execute [Replace], all of the saved files in the logical drive is erased immediately before the saving operations.

4 Press [Yes].

This starts the file saving operation. If there is no directory, a directory is automatically created, and the files are saved within it. A progress bar and numerical indication appear to show the progress of the operation.

When the operation is completed, a popup window reading “Completed.” appears.

5 Press [OK].

To rename a directory

Select a directory in the list, and in the button area press [Rename].

In the keyboard window that appears, enter the new directory name, and press [Enter]. The name of a directory is limited to eight characters.

Notes

The following names cannot be used:

CON, PRN, AUX, CLOCK\$, NUL, COM0, COM1, COM2, COM3,
COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

Recalling Files

You can recall all of the saved files on the hard disk drive into frame memory.

1 Carry out steps **1** and **2** of the procedure “*Saving Files*” (page 411).

Notes

It is not possible to select a partition (FMHDD1 to FMHDD15) of a hard disk in which no file is saved.

2 In the <Restore> group, do either of the following.

- To replace the existing data with the recalled data, press [Replace].
- To add the recalled data to the existing data, press [Append].

A popup window for confirming file recall appears.

Notes

When you execute [Replace], any existing data in frame memory is lost immediately before the recalling operations.

3 Press [Yes].

This starts the file recall operation. A progress bar and numerical indication appear to show the progress of the operation.

When the operation is completed, a popup window reading “Completed.” appears.

4 Press [OK].

Managing Images Using a DDR/VTR

Using a DDR/VTR for High-speed Backup and Restoring

You can save all files currently held in frame memory as a backup data set, by high-speed recording on video tape or other medium.

To restore the folder structure, it is necessary to save the automatically generated file list (of file name, length of clip, and so on) in memory.

Notes

At the beginning of this backup data a red or blue image is automatically inserted when the data is created. Do not delete this image, as it is required for restoring the data.

High-speed recording of backup data to DDR or VTR

Notes

Before starting the backup, it is necessary to select the FM output to record on an AUX bus, for example, and input the AUX output to the DDR/VTR.

- 1** In the Frame Memory menu, select VF6 'External Device,' and HF4 'Backup to DDR/VTR.'

The Backup to DDR/VTR menu appears.

- 2** In the <Backup Enable> group, select either of the following.

Clip/Still: Data from the first board (still images and clips)

Ext Clip: Data from the second board (extended clips)

- 3** Press [Backup Start].

The message "Preparing now..." is displayed in a popup window, and it changes to a confirmation message when the preparation is complete.

- 4** Start recording at the external device, and immediately after that press [Yes].

This starts the backup, and when completed a message appears.

5 Stop the recording at the external device, and press the [OK] button.

6 To save the file list in memory, press [File >File Name Data].

The File >File Name Data menu appears.

The name of the file that is saved is fixed (FM_Bkup).

For details, see the section “Overview of File Operations” in Chapter 17 (Volume 2).

Restoring backup data from DDR or VTR

Notes

Before starting the restore operation, it is necessary to select the DDR/VTR output on the FM input bus.

1 In the Frame Memory menu, select VF6 ‘External Device’ and HF5 ‘Restore from DDR/VTR.’

The Restore from DDR/VTR menu appears.

2 Press [File >File Name Data], to read the file list from the File Name Data menu.

For details, see the section “Overview of File Operations” in Chapter 17 (Volume 2).

3 In the <Restore Enable> group, select either of the following.

Clip/Still: Data from the first board (still images and clips)

Ext Clip: Data from the second board (extended clips)

4 In the [Restore Type] group, press either of the following.

Replace: Replace the existing frame memory data with the recalled data

Append: Add to the existing frame memory data.

Notes

If you selected “Ext Clip” in step 4, “Append” is selected automatically.

5 Press [Restore Start].

A confirmation popup window appears.

6 Start playback at the external device, and immediately after that press [Yes].

Chapter 7 Frame Memory

This starts the restore operation, and when completed a message appears.


- ## Extracting Images from Video Tape

Notes

When the signal format is 1080P, this function cannot be used.

The extraction is carried out according to the following rules.


V: video Red: red marker frame ^{a)}



Each section surrounded by red marker frames is extracted as a clip (main file). If the red markers surround a single frame, then it is extracted as a still image. In the case above two clip files (main files) are extracted, and one still image file.

Example 2: When a video signal clip is followed by a key signal clip with the same number of frames (pair file)

V: video K: key Red: red marker frame ^{a)} Blue: blue marker frame ^{b)}

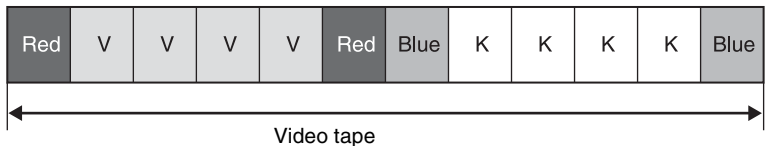

Result of extraction:
The section surrounded by red marker frames is extracted as the main file, and the section surrounded by blue marker frames is extracted as the sub file.
In the case above, one clip file (pair file) is extracted.

- a) A red marker frame is a monochrome frame with the RGB signal levels respectively 100%, 0%, 0%.
- b) A blue marker frame is a monochrome frame with the RGB signal levels respectively 0%, 0%, 100%.

Notes

- For extraction as a pair file, the main file and sub file must have the same number of frames.
- For image extraction as an extended clip, [Ext Clip] must be selected in the Record menu <Record Enable> group when the video tape content is recorded as a clip.
- For image extraction as still images, [Clip] must be selected in the Record menu <Record Enable> group when the video tape content is recorded as a clip.

- 1** In the Frame Memory >Clip >Record menu, record the tape image as a clip.
For details, see “Using the menu to record clips” (page 399).
- 2** In the Frame Memory menu, select VF4 ‘File’ and HF2 ‘Auto Extraction.’
The Auto Extraction menu appears.
- 3** Select a clip (single file) recorded from the tape.
- 4** Press [Extraction Start].
A confirmation popup window appears.
- 5** Press [Yes].

This starts the extraction, analyzes the currently selected single clip, and automatically extracts a movie (Clip) or still image (Still). When there is key data, a pair file is created.

To check the details of the images (still image/clip)

Use the following knob operations.

Knob	Parameter	Setting	Values
1	No.	File number	1 to maximum
3	Viewer	Timecode for selected image	00:00:00 to maximum

Chapter 8 Color Backgrounds, Copy and Swap, and Other Settings

Color Background

The dedicated generators generate color signals, and these can be used as color backgrounds in video effects.

Color background selection

There are two color backgrounds, color background 1 and color background 2, which you use by assigning to cross-point buttons.

Color combinations (“color mix”)

The color generators can output the result of combining two colors, which are color 1 and color 2.

Using a pattern from a dedicated pattern generator, color 1 and color 2 can be combined in the boundary region, forming a color gradation. This is referred to in the menu system as “color mix.”

You can also apply modifiers to the selected pattern.

When the “color mix” function is not used, the result is a flat color, and color 1 is always output.

You carry out color background settings in the Color Bkgd menu. This section describes the settings menu for color background 1 as an example.

Color Background Settings Menu

Accessing the Color Bkgd1 menu

Use either of the following operations.

- In the menu control block, select the top menu selection button [COLOR BKGD], and press VF1 ‘Color Bkgd1.’
- Press a cross-point button assigned to color background 1 twice in rapid succession.

The above operation displays the Color Bkgd1 menu.

Basic Color Background Setting Operations

Making a single-color matte (Flat Color)

If you are not using the “color mix” function to combine two colors, use the following procedure.

- 1 In the <Matte> group of the Color Bkgd 1 menu, press [Flat Color], turning it on.

You can now adjust color 1.

- 2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Making a color combination (color mix)

To combine color 1 and color 2, use the following procedure.

- 1 In the <Matte> group of the Color Bkgd 1 menu, press [Mix Color], turning it on.

- 2 Set the following parameters as required.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of softening of edge	0.00 to 100.00
5	Pattern	Pattern number	1 to 24 ^{a)}

a) The patterns are the same as for a standard wipe. See “Wipe Pattern List” (page 486).

You can also carry out the pattern selection by pressing the [Mix Ptn Select] button, to display the Mix Ptn Select menu. Select any pattern appearing in the Mix Ptn Select menu (standard wipe patterns 1 to 24), and you can then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

- 3 To adjust color 1, set [Color 1] on, and to adjust color 2 set [Color 2] on, then adjust the parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
3	Hue	Hue	359.99 to 0.00

4 If required, set the pattern modifiers.

• When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	-200.00 to +200.00 ^{a)}
2	Position V	Vertical position	-200.00 to +200.00 ^{a)}

a) See page 296.

• When turning [Multi] on and using replications of the same pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 ^{a)}

a) See page 301.

• When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	-100.00 to +100.00 ^{a)}

a) See page 300.

• When turning [Pairing] on and making a wipe pattern like a Venetian blind

Knob	Parameter	Adjustment	Setting values
1	Width	Width of the slits	1 to 128 (integer)

• When turning [Angle] on in the <Rotation> group and slanting the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	-100.00 to +100.00 ^{a)}

a) See page 298.

- When turning [Speed] on in the <Rotation> group and rotating the pattern at a constant rate

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	−100.00 to +100.00 ^{a)}

a) See page 299.

- When selecting H (horizontal) or V (vertical) in the <Modulation> group and applying waviness to the pattern
(The modulation is always a sine wave.)

Notes

When using 1080PsF mode in an HD system, the modulation function is not available.

Knob	Parameter	Adjustment	Setting values
1	Amplitude	Amplitude of modulation	0.00 to 100.00
2	Frequency	Frequency of modulation	0.00 to 100.00
3	Speed	Speed of waves	−100.00 to +100.00 ^{a)}

a) See “Applying modulation to the wipe pattern (Modulation)” (page 304).

- 5 To interchange color 1 and color 2, press the [Color Invert] button, turning it on.

Copy and Swap

You can copy or swap the settings among the switcher banks or between keyers.

The following settings can be copied or swapped.

- Overall settings for the M/E-1 to M/E-4, and PGM/PST banks
- Keyer settings
- Wipe settings in a transition control block
- Wipe settings in an independent key transition control block
- DME wipe settings in a transition control block
- DME wipe settings in an independent key transition control block
- Matte data (color 1, color 2, and how to compose them)
- Color settings
- DME channel settings
- Format converter input settings (copy only)
- Format converter output settings (copy only)

You can carry out copy operations with a simple button operation. Swap operations, and copy operations on DME data can only be done with a menu operation.

M/E copy and M/E swap

You can copy and swap the overall bank settings among the M/E-1 to M/E-4, and PGM/PST banks.

Target bank	Target data
M/E-1 M/E-2 M/E-3 M/E-4 PGM/PST	Bank settings excluding the following data items: • Setup data • Flexi Pad settings • Snapshots • Keyframe effects • Key snapshots • Key memory

Notes

If a DME is being used on the source M/E bank, then if for example there are insufficient DME channels, it may not be possible to select the DME. There are no such restrictions on a swap.

Keyer copy and keyer swap

You can carry out copy and swap operations among the 40 keyers listed in the following table.

Target bank	Target keyer	Target data
M/E-1 M/E-2 M/E-3 M/E-4	Keys 1 to 8	Key settings excluding the following data items: • Setup data • Key snapshots • Key memory
PGM/PST	Downstream keys 1 to 8	

Notes

If a DME is being used on the source keyer for a copy or either keyer for a swap, then if for example there are insufficient DME channels, or the limit on using DME channels within an M/E bank is exceeded, it may not be possible to select the DME.

Wipe copy and wipe swap

You can copy and swap the wipe settings among the banks listed in the following table.

Target bank	Target data
M/E-1 M/E-2 M/E-3 M/E-4 PGM/PST	Wipe settings. It is not, however, possible to carry out copy or swap involving independent key transition wipe settings.

Wipe copy and wipe swap in the independent key transition control block

You can copy and swap the wipe settings among the 40 keyers listed in the following table.

Target bank	Target keyer	Target data
M/E-1 M/E-2 M/E-3 M/E-4	Keys 1 to 8	Wipe settings in the independent key transition control block.
PGM/PST	Downstream keys 1 to 8	

DME wipe copy and DME wipe swap

You can copy and swap the DME wipe settings among the banks listed in the following table.

Target bank	Target data
M/E-1 M/E-2 M/E-3 M/E-4 PGM/PST	DME wipe settings. It is not, however, possible to carry out copy or swap involving independent key transition DME wipe settings.

DME wipe copy and DME wipe swap in the independent key transition control block

You can copy and swap the DME wipe settings among the 36 keyers listed in the following table.

Target bank	Target keyer	Target data
M/E-1 M/E-2 M/E-3 M/E-4	Keys 1 to 8 But excluding keys 5 to 8 on M/E-4	DME wipe settings in the independent key transition control block.
PGM/PST	Downstream keys 1 to 8	

Matte data copy and swap

You can copy or swap the matte data among the 87 color generators listed in the following table.

Target bank	Target keyer and data	
M/E-1 M/E-2 M/E-3 M/E-4 PGM/PST	- Keys 1 to 8 - Downstream keys 1 to 8	- Matte data for key fill - Matte data for key edge fill
	Matte data for wipe border edge	
Color background	- Matte data for color background 1 - Matte data for color background 2	

Color data copy and swap

You can copy or swap the color data among the color generators listed in the following table.

Target bank	Target keyer and data	
M/E-1 M/E-2 M/E-3 M/E-4 PGM/PST	- Keys 1 to 8 - Downstream keys 1 to 8	- Colors 1 and 2 for key fill - Colors 1 and 2 for key edge fill “Zabton” color data
	Colors 1 and 2 for wipe border	
	Color data for preset color mix	

Target bank	Target keyer and data
Color background	• Colors 1 and 2 for color background 1 • Colors 1 and 2 for color background 2
Frame memory	• FM1 color • FM2 color
DME ch1 to ch8	• Background • Border • Sepia • Light • Shade • Drop shadow (other than DME ch4 and DME ch8) • Trail

DME channel copy and swap

You can copy and swap the channel data among DME channels 1 to 4 or DME channels 5 to 8.

It is not possible to copy or swap the channel data between DME channels 1 to 4 and DME channels 5 to 8.

Notes

When the signal format is 1080P, the combinations for a copy or swap operation are limited to the following.

- Channels 1 and 2
- Channels 3 and 4
- Channels 5 and 6
- Channels 7 and 8

Copying format converter data

You can copy data from one format converter input to another or from one output to another.

Copy and Swap Operations

Copy and Swap Menu Operations

Accessing the Copy/Swap menu

In the menu operation section top menu selection buttons, press the [Copy/Swap] button, then press VF1 ‘Copy/Swap.’ The Copy/Swap menu appears. Here a copy/swap operation on wipe data is described by way of example, using the Copy/Swap >Wipe menu, but the same general procedure applies to all of the following menus.

- M/E: Copying and swapping M/E data
- Key: Copying and swapping key data
- Wipe: Copying and swapping wipe data
- DME Wipe: Copying and swapping DME wipe data
- Matte: Copying and swapping matte data
- Color: Copying and swapping color data
- DME: Copying and swapping data by DME channels
- Format Converter: Copying format converter data

For details, see “Settings Relating to Signal Inputs (Input Menu)” in Chapter 21 (Volume 3).

*For an overview of the concepts involved, see “Copy and Swap” (page 424).
For details of color corrector copy and swap, see “Copy and Swap Operations” (page 446).*

Copying and swapping wipe data

As an example, to copy or swap wipe data, use the following procedure.

- 1** In the Copy/Swap menu, select HF3 ‘Wipe.’

The Copy/Swap >Wipe menu appears.

The status area shows lists for the copy/swap source on the left, and the copy/swap destination on the right.

- 2** In the <Data Select> group, select either of the following.

Wipe: The operation applies to wipes in the transition control block.

Key Wipe: The operation applies to wipes in the independent key transition control block.

3 Using any of the following methods, select the data to be copied or swapped.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs to make the setting.

Knob	Parameter	Adjustment	Setting values
1	Left No	Select data for copy/ swap source	1 to 5 ^{a)} 1 to 40 ^{b)}
2	Right No	Select data for copy/ swap destination	1 to 5 ^{a)} 1 to 40 ^{b)}

a) Transition control block wipe data

b) Independent key transition control block wipe data

For details of the data affected, see “Copy and Swap” (page 424).

4 To copy, press [Copy], and to swap, press [Swap].

This carries out the copy or swap.

To undo a copy or swap

Press [Undo], to return to the state before the copy or swap was carried out.

Copy by Button Operation

You can carry out the following copy operations by a simple button operation.

- M/E copy
- Keyer copy
- Wipe copy
- DME wipe copy

Notes

On the CCP-6224/6324, it is not possible to carry out a copy by button operation.

Basic button operation

The basic button operation is to hold down the copy source button, then press the destination button.

You can undo the last operation using [Undo] in the menu (*see page 429*).

M/E copy button operation

In the Flexi Pad control block of each M/E bank, use the [SNAPSHOT] button.

To copy from M/E-1 to M/E-2

In the M/E-1 Flexi Pad control block, hold down the [SNAPSHOT] button, then press the [SNAPSHOT] button in the M/E-2 Flexi Pad control block.

Keyer copy button operation

To specify the copy source, use the key delegation buttons in the key control block, and to specify the copy destination, use the key delegation buttons in the independent key transition control block.

To copy from M/E-1 key 1 to M/E-2 key 2

In the key control block M/E delegation buttons, press [M/E1], turning it on, then hold down the [KEY1] button, and in the M/E-2 independent key transition control block, press the [KEY2] button.

Wipe copy button operation

Use the [WIPE] button in the Flexi Pad control block of each M/E bank.

To copy the M/E-1 wipe to the M/E-2 wipe

In the M/E-1 Flexi Pad control block, hold down the [WIPE] button, then press the [WIPE] button in the M/E-2 Flexi Pad control block.

DME wipe copy button operation

Use the [DME] button in the Flexi Pad control block of each M/E bank.

To copy the M/E-1 DME wipe to the M/E-2 DME wipe

In the M/E-1 Flexi Pad control block, hold down the [DME] button, then press the [DME] button in the M/E-2 Flexi Pad control block.

Misc Menu Operations

In the Misc menu, you can carry out the following operations.

- Enabling and disabling operation from an external device, System Manager, or an editing keyboard.
- Enabling and disabling side flags on the background bus of each of the M/E-1 to M/E-4 and PGM/PST banks.

For the side flag function, see “Side Flags” (page 464).

- Switching the safe title function on or off for each switcher output.
- Displaying the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and changing the settings.

Port Settings for Control From an External Device

Enabling or disabling control from an external device

- 1 In the menu control block, press the top menu selection button [MISC], then select VF1 ‘Enable’ and HF1 ‘Port Enable.’

The Misc >Enable >Port Enable menu appears with the status area showing the settings of the following ports.

- Switcher Remote1 to Remote4 ports (RS-422A, D-sub 9-pin)
- Switcher GPI port (parallel, 25-pin)
- DME1/DME2 Editor ports (RS-422A, D-sub 9-pin)
- DME1/DME2 GPI ports (parallel, 25-pin)

When the signal format is 1080P, you can also make settings for DME3/DME4.

- 2 In the <Switcher> or <DME> group, press on the name of the port for which you want to disable control from an external device, turning it off. To re-enable control for the port, press on its name once more.

Notes

For the AUX bus operation from the Remote 1 to Remote 4 ports of the switcher, the setting (Enable/Disable/Manual) in the Setup menu takes precedence. Only when the setting is “Manual,” the settings made in the Port Enable menu apply.

For details, see “Interfacing With External Devices (Device Interface Menu)” in Chapter 19 (Volume 3).

DME override

- 1 In the menu control block, press the top menu selection button [MISC], then select VF1 ‘Enable’ and HF1 ‘Port Enable.’

The Misc >Enable >Port Enable menu appears.

- 2 In the <DME Override> group, select the DME override mode.

DME Override: When a switcher snapshot or effect using a DME is recalled, forcibly select the DME that was used when saving.

On Air Protect: The operation is the same as the DME override function, except that a DME being used by an M/E bank or P/P bank that is on air will not be forcibly selected.

Notes

If effects using the same DME channel are selected simultaneously in two or more regions, the DME is selected with the order of precedence P/P >M/E1 >M/E2 >M/E3 >M/E4.

Enabling or disabling control from System Manager

By installing the BZPS-8000 System Management Software (System Manager), you can use a computer connected on a network for management of some switcher data and control operations.

To enable or disable this function, use the following procedure.

- 1 In the menu control block, press the top menu selection button [MISC], then select VF1 ‘Enable’ and HF1 ‘Port Enable.’

The Misc >Enable >Port Enable menu appears.

- 2 Press [System Manager].

Each time you press the button toggles between enable and disable.

Editing Keyboard Settings

Notes

The following operations are only possible when a license for the BZS-8050 Editing Control Software is activated. *For details of license registration, see*

Enabling or disabling control from the editing keyboard

- 1 In the menu control block, press the top menu selection button [MISC], then select VF1 ‘Enable’ and HF2 ‘Plug-In Editor.’

The Misc >Enable >Plug-In Editor menu appears.

- 2 In the <Control From Plug-In Editor> group, press [Editor Enable].

Each time you press the button toggles between enable and disable.

To enable control of the preview bus only

When control from the editing keyboard is disabled (when [Editor Enable] is set to Disable), to enable control of the preview bus only, press [PVW Bus Enable] in the <Control From Plug-In Editor> group.

Safe Title Settings

Switching the safe title function on or off

- 1 In the menu control block, press the top menu selection button [MISC] and select VF2 ‘Safe Title.’

The Misc >Safe Title menu appears.

- 2 Using any of the following methods, select the signal to which the settings apply.

- Directly press the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob to make the setting.

Knob	Parameter	Adjustment	Setting values
1	Output	Signal to which the settings apply	1 to 48

Notes

- It is not possible to change the setting for the output for which the safe title is set off in a Setup menu.
- The safe title function cannot be used for output signals for which through mode is set to Enable in a Setup menu.

For more information about the Setup menu settings referred to above, see “Signal Input Settings (Input Menu)” and “Signal Output Settings (Output Menu)” in Chapter 20 (Volume 3).

3 Press [Safe Title] to set it on or off.

Displaying a List of Transition Rates and Changing the Settings

In the Transition menu, for each bank you can display a list of the M/E (or PGM/PST) transition rates and independent key (or DSK) transition rates, and change the settings.

These settings are linked to the other transition rate setting operations.

You can also display and set the fade-to-black transition rate.

Displaying the Transition menu

In the menu control block, press the top menu selection button [MISC], then select VF3 ‘Transition.’

The Misc >Transition menu appears.

About the Transition menu display

The display of the independent key transition rate in the Misc >Transition menu depends on the selection in the <Key Transition> group of the Engineering Setup >Switcher >Transition menu for each of the M/E and PGM/PST banks.

When [Same] (On direction and Off direction settings the same) is selected in the <Key Transition> group: Only “Key” (or “DSK” in the PGM/PST bank) appears.

When [Independ] (On direction and Off direction settings independent) is selected in the <Key Transition> group: “Key(On)” and “Key(Off)” each appear. In the case of the PGM/PST bank, “DSK(On)” and “DSK(Off)” appear.

For more details, see “Settings Relating to Video Switching (Transition Menu)” in Chapter 20 (Volume 3).

Setting the transition rate in the Transition menu

To set the M/E transition rate

For example, to make the settings for the M/E-1 bank, use the following procedure.

- 1 In the <M/E-1 Transition Rate> group of the Misc >Transition menu, press [Transition].
- 2 Turn the knob to set the number of frames.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frames)

Notes

When a clip transition is selected as the transition type, it is not possible to change the transition rate in this menu.

To set the independent key transition rate

By way of example, the following is the procedure for settings of keys 1 to 4 in the M/E-1 block.

- 1 Press in the list in the status area of the Misc >Transition menu, to select M/E-1.
- 2 In the <Transition Rate> group, press [Key K1-K4].
To insert (on) or remove (off) keys individually, press [Key(On) K1-K4] or [Key(Off) K1-K4].
- 3 Turn the knobs to set the number of frames.

Knob	Parameter	Adjustment	Setting values
1	Key1 Trans Rate	Key 1 transition rate	0 to 999 (frames)
2	Key2 Trans Rate	Key 2 transition rate	0 to 999 (frames)
3	Key3 Trans Rate	Key 3 transition rate	0 to 999 (frames)
4	Key4 Trans Rate	Key 4 transition rate	0 to 999 (frames)

To set the fade-to-black transition rate in the Transition menu

- 1 In the Misc >Transition menu, press [FTB].
- 2 Turn the knob to set the number of frames.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frames)

AUX Menu Operations

AUX Bus Settings

Making video process settings for an AUX bus

1 In the Aux > Aux Bus menu, using any of the following methods, select the AUX bus to which the settings apply.

- Directly press the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob to make the setting.

Knob	Parameter	Adjustment	Setting values
1	AUX Bus	AUX bus selection	1 to 48

2 Press [Video Process], turning it on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	-200.00 to +200.00
2	Y Gain	Luminance signal gain	-200.00 to +200.00
3	C Gain	Chrominance signal gain	-200.00 to +200.00
4	Hue Delay	Hue delay	-180.00 to +180.00
5	Black Level	Black level	-7.31 to +109.59

To return adjustment values to their defaults, press [Unity].

Status Menu


The Status menu shows the following information.

- Operating status of the DME

Viewing the DME operating status

To view the DME operating status, press the top menu selection button [STATS] in the menu control block.

This selects VF1 'DME Status' and the Status menu appears.

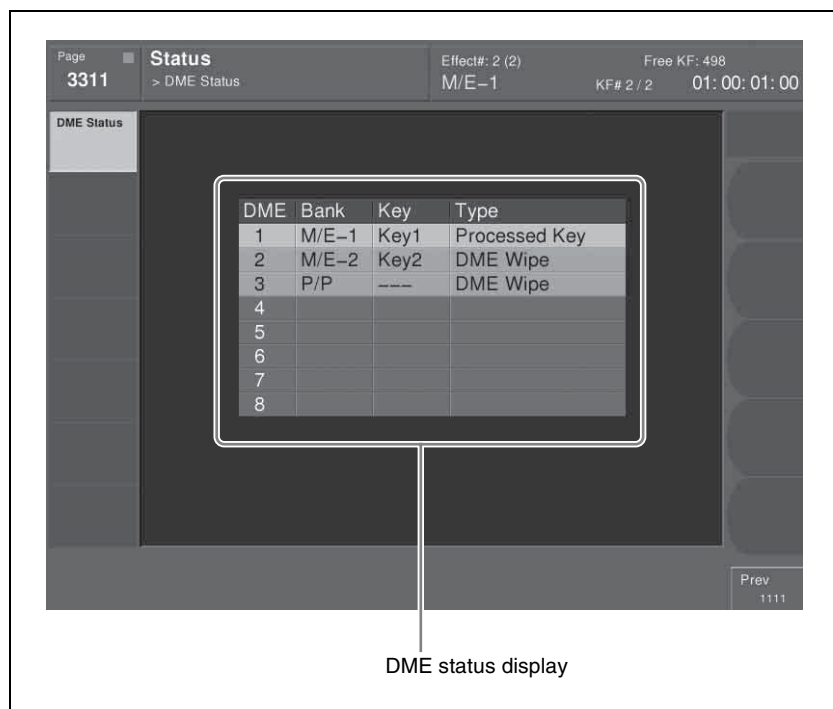

For each DME channel, you can see how the DME is being used in the corresponding operation block.

The display background color also indicates the following differences in the way in which a DME is being used.

Blue: The DME is currently being used in other than the final program output.

Red: The DME is currently being used in the final program output.

Router Control Menu Operations

Using the Router >Router Control >Router Control menu, you can carry out router switching operations.

Checking the List of Inputs for Each Destination

You can check the list of signals currently input for each destination.

In the menu control block, press the top menu selection button [RTR], then select VF1 'Router Control' and HF1 'Router Control.'

The following menu appears, and the left side of the status area shows a list for destination assignments.

Dest Bln #	Protect	Dest Name	Src Name	Lvl Btn #	Level Assign
10		OUT/0010		1	1-----
11		OUT/0011		2	-2-----
12		OUT/0012		3	--3-----
13		OUT/0013		4	---4-----
14		OUT/0014			
15		OUT/0015			
16		OUT/0016			
17		OUT/0017			
18		OUT/0018			
19		OUT/0019			
20		OUT/0020			
21		OUT/0021			
22		OUT/0022			
23		OUT/0023			
24		OUT/0024			

Change Xpl

Level Button No

Level 1Level 2Level 3Level 4

If in the Assign >RTR Mode Setting menu, [Inhibit] is set to On for a destination, the corresponding line appears in gray. Also, if [PROT] (protect) is set to ON for a source, using a BKSr3xxx or R1xxx series Router remote control, a padlock icon appears.

The right side of the status area shows the level assignment status to the Level 1 to Level 4 buttons.

Selecting the level

In the Level Button No group at the lower right in the above illustration, press the selected level for switching.

Switching the Source for Each Destination

You can switch the source for each destination with a menu operation.

For the assignment of destinations and sources to buttons, use the Setup >Panel >Aux Assign >RTR Mode Setting menu. For details, refer to “Using the Auxiliary Bus Control Block for Router Control” in Chapter 19 (Volume 3).

1 Press [Change Xpt].

The Router >Router Control >Router Control >Change Xpt menu appears.
Destination Select buttons appear in groups of 16.
Source Select buttons appear by group (maximum 24 buttons).

2 Press one of the Destination Select buttons, to select the destination for which you want to switch the source.

To change the group

Press one of the [1-16], [17-32], [33-48], and [49-64] buttons.

3 Press one of the Source Select buttons, to select the source you want to switch.

To change the group

Press one of the [1-24], [25-48], ... [97-120], and [121-128] buttons.

Video Process

The term “video process” is applied to adjustments to the luminance and hue of the input video signal.

There are two types of adjustment, depending on the application:

- Adjustment of an individual input signal
- Image effects on a particular bus

Notes

These types of adjustment may be carried out independently. However, since they are implemented by the same hardware, if the same signal is subjected to processing twice, there may be limitations on the range of effects obtained in the final result.

Video Process Adjustments for Each Input Signal

For each signal input to the switcher, you can set video process on or off and set the parameters (Video Gain, Y Gain, C Gain, Hue Delay, and Black Level) in the Setup menu.

For details of the settings, see “Signal Input Settings” in Chapter 20 (Volume 3).

Video Process Adjustments on a Particular Bus

Buses to which the adjustments apply

For each of the following buses, you can switch video process adjustments on or off, and adjust the parameters.

- Following buses in the M/E-1 to M/E-4, and PGM/PST banks
 - Key fill buses for keys 1 to 8
 - Background A and background B buses
 - Utility 1 and utility 2 buses
- Frame memory source 1 and frame memory source 2 buses
- Aux 1 to 48 buses

These settings also apply to keyframes and snapshots.

Making the adjustments

Adjust VIDEO GAIN, Y GAIN, BLACK LEVEL, C GAIN, and HUE DELAY in the following menus.

Applicable bus		Menu used for operation	See page
M/E-1 to M/E-3 banks	Key fill buses for keys 1 to 8	M/E-1 to M/E-4 menus	page 237
	Background A and B buses	Video Process menu	page 442
	Utility 1 and 2 buses		
PGM/PST bank	Key fill buses for DSK1 to DSK8	PGM/PST menu	page 237
	Background A and B buses	Video Process menu	page 442
	Utility 1 and 2 buses		
Frame memory source 1 and 2 buses		Frame Memory menu	page 382
Aux 1 to 48 buses		AUX menu	page 436

Video Process Memory

When using video process adjustments for an image effect on a bus, this function saves the final values for each pair number for the signals. The video process on/off setting is not saved.

When you change the adjustments the values are automatically saved, and these last values are recalled when the pair number is selected.

In other words, by switching video process memory on, regardless of the video process information for each bus, you can carry out video process adjustments for each input signal.

The parameters saved are as follows.

VIDEO GAIN, Y GAIN, BLACK LEVEL, C GAIN, HUE DELAY

Switch the video process memory on or off in the Setup menu.

For details of setting operations, see “Settings Relating to Keys, Wipes, Frame Memory and Color Correction (Key/Wipe/FM/CCR Menu)” in Chapter 20 (Volume 3).

Video Process Settings

This section describes operations on the M/E-1 to M/E-4, and PGM/PST background A and B buses, and utility buses 1 and 2.

For these operations, use the Misc >Video Process menu in the respective operating bank.

For video process settings on other buses, see the following.

- *Settings for a particular input signal: “Signal input settings” in Chapter 20 (Volume 3)*
- *Key fill bus settings: “Video Processing” (page 237)*
- *Settings for frame memory source buses 1 and 2: “Setting video processing” (page 382)*
- *Settings for Aux 1 to 48 buses: “Making video process settings for an AUX bus” (page 436)*
- *Overview of video process: “Video Process” (page 440)*

This section describes an example on the background A bus of the M/E-1 bank. For the background B bus or utility bus 1 or 2, make the adjustment with a similar procedure.

Making video process settings for each bus

- 1** In the menu control block, press the top menu selection button [M/E1] and select VF7 ‘Misc’ and HF2 ‘Video Process.’
- 2** In the <Bkgd-A> group, press [Video Process], turning it on.
- 3** Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	–200.00 to +200.00
2	Y Gain	Luminance signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Black level	–7.31 to +109.59

To return the parameter settings to the defaults, press [Unity] in the <Bkgd-A> group.

Chapter 9 Color Corrector

Preparations

The color corrector enables video signal color correction (black balance/white balance adjustment, gamma correction, knee correction, etc.).

Notes

To use the color corrector, the BZS-8420X Color Corrector Software. To use the software, you are required to input an install key.

For the method of inputting an install key, see “Installation and Device Setup (Install/Unit Config Menu)” in Chapter 18 (Volume 3).

Restrictions on color corrector and M/E combination

Signal format	When the color corrector output is selected		When the color corrector output is not selected
	3M/E system	4M/E system/5M/E system	4M/E system/5M/E system
Other than 720P	—	Re-entry signal selection on a key bus or the utility 1 bus cannot be performed over a cascade of two or more M/E blocks. (Restriction 2)	—
720P	Re-entry signal selection on a key bus or the utility 1 bus cannot be performed over a cascade of two or more M/E blocks. (Restriction 2)	Re-entry signal selection on a key bus or the utility 1 bus cannot be performed. (Restriction 1)	Re-entry signal selection on a key bus or the utility 1 bus cannot be performed over a cascade of two or more M/E blocks. (Restriction 2)

Example of restriction 2: When M/E-1 is selected on the M/E-2 background A bus (or background B bus, key bus, or utility 1 or 2 bus), then M/E-2 cannot be selected on the M/E-3 key bus or the utility 1 bus.

Assigning the color corrector input buses to AUX delegation buttons

There are two inputs for capturing material to the color corrector: the CCR1 bus and the CCR2 bus.

For details of the input assignment operation, see “Auxiliary Bus Control Block Settings (Aux Assign Menu)” in Chapter 19 (Volume 3).

Selecting the color correction input signal

After assigning CCR1 and CCR2 to AUX buses, use the following procedure.

- 1** Press the AUX delegation buttons assigned to CCR1 (or CCR2).
- 2** In the cross-point button row, select the signal to which you want to apply color correction.

Notes

The signals that can be selected on the CCR1 and CCR2 buses are primary inputs, premium inputs, format converter inputs and frame memory outputs (FM1 to FM8) only.

However you can make all the internal signals of the switcher selectable by a setting in the Setup menu.

For details, see “Selecting the Bank to Make the Settings” in Chapter 20 (Volume 3).

Selecting the color corrector output signal

By assigning the signal output from the color corrector to a cross-point button, you can make that signal available on that button.

For details of the assignment process, see “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).

Accessing the CCR menu

For color correction operations, use the CCR menu.

To access the CCR menu, in the menu control block, press the top menu selection button [CCR].

The following description uses CCR1 as an example. To apply color correction to CCR2, replace VF1 ‘CCR1’ by VF2 ‘CCR2,’ and follow the same procedure.

Overall Color Corrector Operations

Enabling Color Corrector

To enable the functions of color corrector 1, for example, use the following procedure.

- 1** In the CCR menu, press VF1 'CCR1' and any HF.
- 2** In the <CCR> group, press [CCR], turning it on.
This enables the functions of color corrector 1.

Returning all color corrector settings to their defaults

- 1** In the <CCR> group, press [Unity].
A confirmation message appears.
- 2** Press [Yes].
This returns all color corrector settings to their defaults, whether [CCR] is on or off.

Copy and Swap Operations

Copying color corrector data

- 1** In the CCR menu, press VF3 'Copy/Swap.'
The Copy/Swap menu appears.
The status area shows a copy source list on the left and a copy destination list on the right.
- 2** Using any of the following methods, select the copy source data and copy destination data.
 - Press directly on the list in the status area.
 - Press the arrow keys to scroll the reverse video cursor.
 - Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Left No	Select copy source data	1 or 2
2	Right No	Select copy destination data	1 or 2

3 Press [Copy].

This carries out the copy.

Swapping color corrector data

Refer to the procedure described in the previous item “Copying color corrector data.” In step **3**, press [Swap] instead of [Copy].

To undo copy or swap

In the Copy/Swap menu, press [Undo].

The state before carrying out the copy or swap is restored.

Color Corrector Functions

This section describes the color corrector functions.

For each of the following operations, it is possible to copy or swap data between two color correctors (CCR1 and CCR2).

Input Video Processing Operations

Carry out the following corrections to a YUV signal before conversion to an RGB signal.

- Overall gain adjustment of the video signal
- Gain adjustment of the Y signal
- Gain adjustment of the C signal
- Hue delay
- Black level adjustment

To apply input video processing effects, use the following procedure.

- 1** In the CCR menu, press VF1 'CCR1' and HF1 'Input Process.'

The Input Process menu appears.

- 2** In the <Input Process> group, press [Input Process], turning it on.

- 3** Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	−200.00 to +200.00
2	Y Gain	Y signal gain	−200.00 to +200.00
3	C Gain	Chrominance signal gain	−200.00 to +200.00
4	Hue Delay	Hue delay	−180.00 to +180.00
5	Black Level	Black level	−116.90 to +116.90

To return the parameters to their default settings

Press [Unity] in the <Input Process> group.

Primary Color Correction Operations


Carry out the following corrections to each of the R, G, and B signals.

Black balance adjustment: setting the output level for a 0% level input signal.

White balance adjustment: setting the output level for a 100% level input signal.

Gamma correction: adjusting the curvature of the gamma curve.

Knee correction: adjusting the position of the maximum point of the gamma curve.

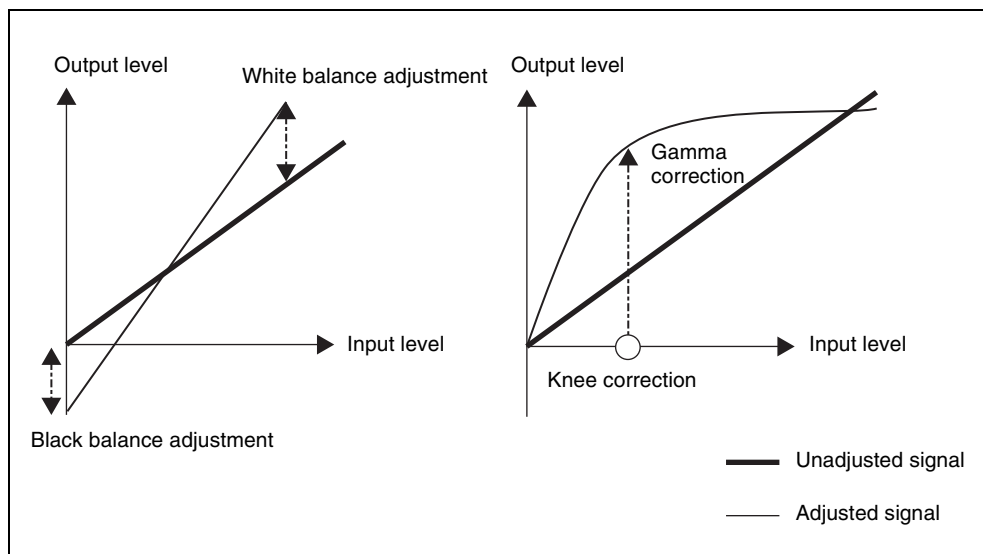

It is also possible to mask part of the region to be corrected.

Applying primary color correction

- 1 In the CCR menu, press VF1 'CCR1' and HF2 'Primary CCR.'
The Primary CCR menu appears.
- 2 In the <Primary CCR> group, press [Primary CCR], turning it on.
- 3 In the <Primary CCR Adjust> group, select the setting item.

Black: black balance adjustment

White: white balance adjustment

Gamma: gamma correction

Knee: knee correction

4 Depending on the selection in step **3**, adjust the following parameters.

• **When Black or Gamma is selected**

Knob	Parameter	Adjustment	Setting values
1	Red	Red signal adjustment	–100.00 to +100.00
2	Green	Green signal adjustment	–100.00 to +100.00
3	Blue	Blue signal adjustment	–100.00 to +100.00
4	All	Simultaneous RGB adjustment	Red value is shown

• **When White is selected**

Knob	Parameter	Adjustment	Setting values
1	Red	Red signal adjustment	0.00 to 200.00
2	Green	Green signal adjustment	0.00 to 200.00
3	Blue	Blue signal adjustment	0.00 to 200.00
4	All	Simultaneous RGB adjustment	Red value is shown

• **When Knee is selected**

Knob	Parameter	Adjustment	Setting values
1	Red	Red signal adjustment	20.00 to 75.00
2	Green	Green signal gain	20.00 to 75.00
3	Blue	Blue signal gain	20.00 to 75.00
4	All	Simultaneous RGB adjustment	Red value is shown

To return the parameters to their default settings

In the <Primary CCR> group, press [Unity].

Masking a part of the primary color correction

Here the procedure for mask 1 operation is described by way of example. You can carry out mask 2 operation in a similar way.

- 1** In the Primary CCR menu, press [Mask1].
- 2** In the < Primary/Secondary Mask > group, press [Mask1], turning it on.

Notes

When [Mask 2] is selected in the Secondary CCR menu, linked to this setting it automatically changes from [Mask 2] to [Mask 1].

- 3** Press [Mask1 Adjust].

The Mask1 Adjust menu appears.

- 4** In the <Mask Source> group, select the mask source.

Box: signal from dedicated box generator

Pattern: signal from dedicated pattern generator

- 5** Depending on the selection in step **3**, adjust the following parameters.

• **When Box is selected**

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	-100.00 to +100.00
2	Left	Left position	-100.00 to +100.00
3	Right	Right position	-100.00 to +100.00
4	Bottom	Bottom position	-100.00 to +100.00
5	Soft	Degree of softness of box	0.00 to 100.00

• **When Pattern is selected**

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of softness of pattern edge	0.00 to 100.00
5	Pattern	Pattern number	1 to 24

For the pattern selection, you can also press [Mask Ptn Select] in the Mask1 Adjust menu, then use the Mask Ptn Select menu.

Press any of the displayed patterns (standard wipe patterns 1 to 24) to select it, then you can adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of softness of pattern edge	0.00 to 100.00

- 6** When selecting the pattern as a mask source, set the pattern modifiers as required.

• **When turning [Position] on and setting the pattern position**

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	-200.00 to +200.00 ^{a)}
2	Position V	Vertical position	-200.00 to +200.00 ^{a)}

a) See “Setting the wipe position (Positioner)” (page 296).

• **When turning [Multi] on and replicating the same pattern**

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 ^{a)}

a) See “Setting the wipe pattern replication (Multi)” (page 301).

• **When turning [Aspect] on and setting the aspect ratio of the pattern**

Knob	Parameter	Adjustment	Setting values
1	Aspect	aspect ratio	–100.00 to +100.00 ^{a)}

a) See “Setting the wipe pattern aspect ratio (Aspect ratio)” (page 300).

• **When turning the [Angle] on in the <Rotation> group and slanting the pattern**

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–100.00 to +100.00 ^{a)}

a) See “Angle” (page 298).

• **When turning [Speed] on in the <Rotation> group and rotating the pattern at a fixed rate**

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00 ^{a)}

a) See “Speed” (page 299).

- 7** To invert the mask source, return to the Primary CCR menu and press [Pri/Sec Mask Invt], turning it on.

Notes

The mask function is common to the primary color correction, secondary color correction, and spot color adjustment functions.

Secondary Color Correction Operations

For the six colors R (red), G (green), B (blue), Y (yellow), C (cyan), and M (magenta), adjust the luminance and saturation, and also the hue within a range of ± 30 degrees of the center value for each color.

You can mask a part of the region to be corrected.

Applying secondary color correction

- 1** In the CCR menu, press VF1 ‘CCR1’ and HF3 ‘Secondary CCR.’
The Secondary CCR menu appears.
- 2** In the <Secondary CCR> group, press [Secondary CCR], turning it on.
- 3** In the <Secondary CCR Adjust> group, select the color for which you want to make the setting.
- 4** Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	-100.00 to +100.00
2	Saturation	Saturation	0.00 to 200.00
3	Hue Delay	Hue delay	-180.00 to +180.00

To return the parameter settings to their default values


In the <Secondary CCR> group press [Unity].

Masking a part of the secondary color correction

Set [Mask] to On in the Secondary CCR menu, then carry out the same operation as described under “*Masking a part of the primary color correction*” (page 450).

Luminance Processing Operations

After converting a signal to which RGB color correction has been applied to a YUV signal, divide the luminance levels into three regions, referred to as Dark, Middle, and Bright, and apply video signal adjustments to these regions.

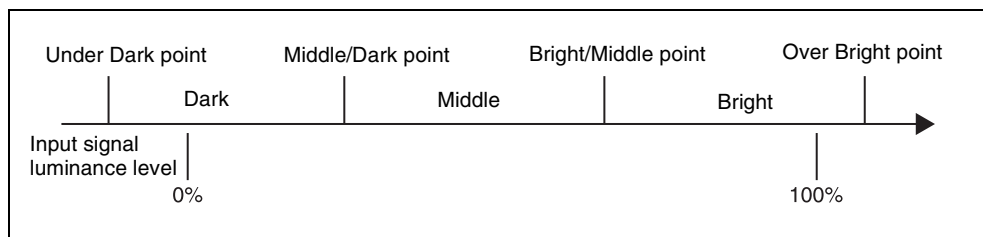


There are three modes for luminance processing, as follows.

Tint mode: adding a specified color to the original video signal.

Color Modify mode: adjusting the original video signal.

Y Modify mode: adjusting the output levels of the input luminance signal.

- White balance adjustment: setting the output level for an input luminance signal at the 100% level.
- Black balance adjustment: setting the output level for an input luminance signal at the 0% level.
- Y lift correction: adjusting the curvature of the curve.
- Y dark correction: adjusting the position of the maximum point of the curve.

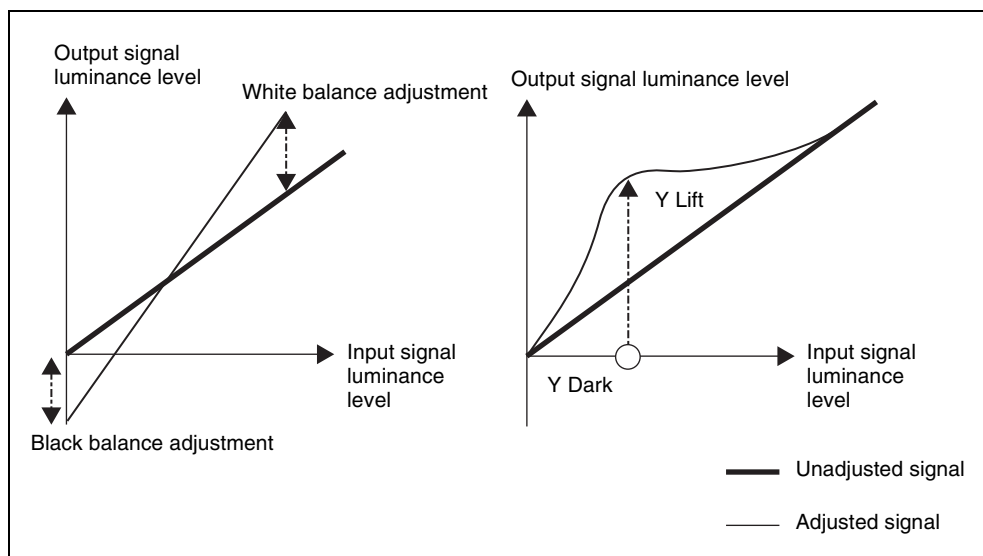

It is also possible to mask part of the region to be corrected.

Applying luminance processing

- 1 In the CCR menu, press VF1 'CCR1' and HF5 'Luminance Process.'

The Luminance Process menu appears.

- 2 In the <Luminance Process> group, press [Luminance Process], turning it on.

- 3 In the <Mode> group, specify the adjustment mode.

Tint: add a specified color to the original video signal.

Color Modify: adjust the original video signal.

Y Modify: adjust the output levels of the input luminance signal.

When tint mode or color modify mode is selected, skip to step 4.

When Y modify mode is selected, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	White	White balance adjustment	0.00 to 200.00
2	Black	Black balance adjustment	-100.00 to +100.00
3	Y Lift	Curvature of curve	-100.00 to +100.00
4	Y Dark	Position of maximum point of curve	-7.31 to +109.59

- 4 In the <Bound> group, make the settings for the three regions (Dark, Middle, and Bright).

- **[Level] parameters:** set the boundaries of the three regions.

Knob	Parameter	Adjustment	Setting values
1	Over B Level	Luminance level of the Over Bright point	50.00 to 150.00
2	Mid B Level	Luminance level of the Bright/Middle point	10.00 to 120.00
3	Dark Mid Level	Luminance level of the Middle/Dark point	-20.00 to +90.00
4	Under D Level	Luminance level of the Under Dark point	-50.00 to +50.00

- **[Soft] parameters:** set the degree of boundary softness of the three regions.

Knob	Parameter	Adjustment	Setting values
1	Over B Soft	Degree of softness at Over Bright point	15.00 to 70.00
2	Mid B Soft	Degree of softness at Bright/Middle point	15.00 to 42.50
3	Dark Mid Soft	Degree of softness at Middle/Dark point	15.00 to 42.50



Knob	Parameter	Adjustment	Setting values
4	Under D Soft	Degree of softness at Under Dark point	15.00 to 70.00

- 5** In the <Luminance Process Adjust> group, press [Dark], [Mid], or [Bright], and adjust the following parameters for the three regions.

• **In tint mode**

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	-100.00 to +100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

• **In color modify mode**

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	-100.00 to +100.00
2	C Gain	Chrominance signal gain	0.00 to 200.00
3	Hue Delay	Hue delay	-180.00 to +180.00

To return the parameters to their default settings

In the <Luminance Process> group, press [Unity].

Spot Color Adjustment

You can change the color of a specified color region to a different color, without affecting other regions. You can also mask part of such a region. Then for the region other than the region whose color you have changed, you can make the following corrections.

- Video signal overall gain adjustment
- Y signal gain adjustment
- Y signal offset adjustment
- C signal gain adjustment
- C signal hue adjustment

Adjusting the color of the specified region (key)

- 1** In the CCR menu, press VF1 'CCR1' and HF6 'Spot CCR/Output.'
The Spot CCR/Output menu appears.

- 2 In the <Spot CCR> group, press [Spot CCR], turning it on.
- 3 In the <Auto> group, press [Sample Mark], turning it on.

Notes

When [Sample Mark] is on, the effects of color adjustment outside the region of spot color adjustment (*see page 458*) and output video processing (*see page 459*) are temporarily disabled.

Turning [Sample Mark] off restores the former state.

- 4 Adjust the parameters so that the color you want to change is included within the sample mark.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	-100.00 to +100.00
2	Position V	Vertical position	-100.00 to +100.00
3	Size	Size	1.00 to 100.00

- 5 In the <Auto> group, press [Auto Start], to adjust the key automatically.

Notes

This automatic adjustment does not carry out key gain adjustment. If required, adjust the key gain as shown in step 6.

- 6 Press [Key Adjust], and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	-7.31 to +109.59
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00
4	Gain	Key gain	-100.00 to +100.00

- 7 Press [Window], turning it on, to adjust the key detection range for spot color adjustment.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	0.00 to 100.00

- 8** In the <Spot CCR> group, press [Spot CCR] to display the parameters, and adjust the replacement color.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

To return the parameters to their default settings

In the <Spot CCR> group, press [Unity].

Masking a part of the spot color adjustment

Set [Mask] to On in the Spot CCR/Output menu, then carry out the same procedure as in “Masking a part of the primary color correction” (page 450).

Adjusting the color outside the spot color adjustment region

- 1** In the Spot CCR/Output menu, press [Outer Out Proc] in the <Outer Out Proc> group, turning it on.
- 2** Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	−200.00 to +200.00
2	Y Gain	Y signal gain	−200.00 to +200.00
3	C Gain	Chrominance signal gain	−200.00 to +200.00
4	Hue Delay	Hue delay	−180.00 to +180.00
5	Black Level	Black level	−116.90 to +116.90

To return the parameters to their default settings

In the <Outer Out Proc> group, press [Unity].

Output Video Processing Operations

Carry out the following corrections are available on the YUV signal.

- Video signal overall gain adjustment
- Y signal gain adjustment
- Y signal offset adjustment
- C signal gain adjustment
- C signal hue adjustment

Applying output video processing effects

- 1 In the CCR menu, press VF1 'CCR1' and HF6 'Spot CCR/Output.'
The Spot CCR/Output menu appears.
- 2 In the <Output Process> group, press [Output Process], turning it on.
- 3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	-200.00 to +200.00
2	Y Gain	Y signal gain	-200.00 to +200.00
3	C Gain	Chrominance signal gain	-200.00 to +200.00
4	Hue Delay	Hue delay	-180.00 to +180.00
5	Black Level	Black level	-116.90 to +116.90

To return the parameters to their default settings

In the <Output Process> group, press [Unity].

YUV Clip Operations

For each of the luminance and color difference signals, the following processing is available.

White clip: setting the maximum level of the luminance signal.

Dark clip: setting the minimum level of the luminance signal.

Positive clip: setting the maximum amplitude in the positive direction of the color difference signal.

Negative clip: setting the maximum amplitude in the negative direction of the color difference signal.

Applying YUV clip processing

- 1 In the CCR menu, press VF1 'CCR1' and HF7 'YUV Clip/RGB Clip.'
The YUV Clip/RGB Clip menu appears.
- 2 In the <YUV Clip> group, press [YUV Clip], turning it on.
- 3 In the <YUV Clip Adjust> group, select the target for adjustment.

Luminance: settings for the luminance signal.

Chroma: settings for the color difference signal.

4 Depending on the selection in step **3**, adjust the following parameters.

• **When Luminance is selected**

Knob	Parameter	Adjustment	Setting values
1	White Clip	White clip adjustment	–6.85 to +109.13
2	Dark Clip	Dark clip adjustment	–6.85 to +109.13

• **When Chroma is selected**

Knob	Parameter	Adjustment	Setting values
1	U Posi Clip	Positive clip adjustment for U signal	–113.39 to +113.39
2	U Nega Clip	Negative clip adjustment for U signal	–113.39 to +113.39
3	V Posi Clip	Positive clip adjustment for V signal	–113.39 to +113.39
4	V Nega Clip	Negative clip adjustment for V signal	–113.39 to +113.39

To return the parameters to their default settings

In the <YUV Clip> group, press [Unity].

RGB Clip Operations

For each of the R, G, and B signals, you can make dark clip and white clip adjustments.

Making RGB clip adjustments

- 1** In the CCR menu, press VF1 ‘CCR1’ and HF7 ‘YUV Clip/RGB Clip.’
The YUV Clip/RGB Clip menu appears.
- 2** In the <RGB Clip> group, press [RGB Clip], turning it on.
- 3** In the <RGB Clip Adjust> group, select the item you want to adjust.
Dark: dark clip adjustment
White: white clip adjustment
- 4** Adjust the following parameters.



Chapter 10 Special Functions

Side Flags

Overview

The term “side flags” refers to the areas to left and right of an image with aspect ratio 4:3 embedded within a 16:9 frame, when these areas are filled with a separate image selected from the utility 1 bus. You can adjust the width of the side flag area.

Side Flag Settings

Input source aspect ratio, auto side flags, and auto crop settings

Aspect ratio 4:3 setting

Set the input signal to aspect ratio 4:3. If set to 16:9, the side flags are disabled.

Auto side flag setting

This function automatically applies side flags when a 4:3 signal is selected in the cross-point control block.

Auto crop setting

When carrying out a DME wipe, this function automatically crops the image during transition to 4:3.

Adjusting the width of the side flag area

You can set the left and right sides separately.

For the operation for the above setting, see “Settings for Switcher Configuration (Config Menu)” in Chapter 20 (Volume 3).

Enabling and disabling side flags with a menu operation

You can enable or disable side flags for the backgrounds (A and B) of each of the M/E and PGM/PST banks.

As an example, to enable side flags for background B row on the M/E-1 bank, use the following procedure.

- 1 In the menu control block, press the top menu selection button [MISC], then select VF1 ‘Enable’ and HF3 ‘Side Flags.’

The Misc >Enable >Side Flags menu appears.

The status area shows the buttons for Bkgd A and Bkgd B for each of the M/E-1 to M/E-4, and PGM/PST (P/P) banks.

- 2 In the <M/E-1 Side Flags> group, press [Bkgd B].

Each time you press the button toggles between Enable and Disable.

To display a menu for the aspect ratio 4:3, auto side flags, and auto crop settings

In the Misc >Enable >Side Flags menu, press [Setup >SWER >Side Flags].

To display a menu for assigning the side flags on/off function to a cross-point button

In the Misc >Enable >Side Flags menu, press [Side Flags Button Assign].

Enabling and disabling side flags with a button operation

For example, to enable side flags for the background B row of the M/E-1 bank, use the following procedure.

- 1 First, in the Setup menu assign the rightmost cross-point button to the [SIDE FLAG] button.

For details of the assignment operation, see “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).

- 2 Press the [SIDE FLAG] button at the right end of the background B row of the M/E-1 bank.

The button you pressed lights amber, and this enables the side flags.

Notes

- The operations of enabling or disabling the side flags by menu operation and by control panel button operation are linked.
- When the auto side flags are on, selecting a 4:3 video material automatically lights the [SIDE FLAG] button, but if you press this button, turning it off, the side flags are temporarily disabled. However, when you select a different 4:3 video material, the [SIDE FLAG] button automatically lights once again, enabling the side flags.

Creating an image with side flags

For example, to create an image with side flags in the background B row of the M/E-1 bank, use the following procedure.

- 1 In the M/E-1 bank cross-point control block, hold down the [UTIL] button, and in the background A row select the signal (utility bus 1 signal) you want to insert in the side flag areas.
- 2 In the background B row, press the cross-point button corresponding to the 4:3 video material.

At this point, if auto side flags are on, this automatically adds side flags to the 4:3 video material. (See “Settings for Switcher Configuration (Config Menu)” in Chapter 20 (Volume 3).)

- 3 Use either of the following methods to turn the side flags on.

- Use the Misc >Enable >Side Flags menu. (See page 464)
- Use a cross-point button operation. (See previous item.)


This adds side flags to the 4:3 video material.

Wipe Action on Images With Side Flags


When a wipe is carried out on an image with side flags, all wipe patterns can be used.

The following illustration shows the action in a wipe.

Wipe from a 4:3 image to a 16:9 image

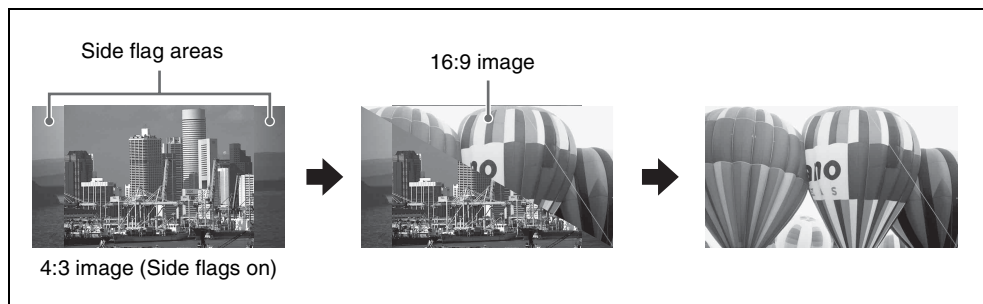

Wipe from a 4:3 image to another 4:3 image (when side flags are on for both images)

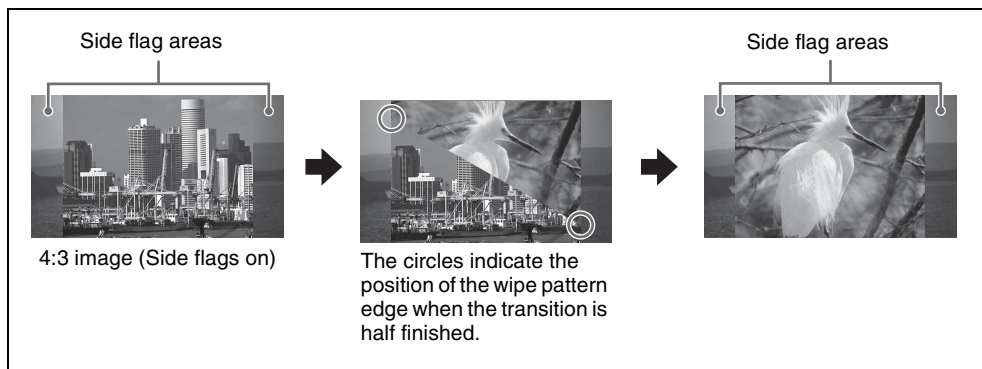

DME Wipe Action for an Image With Side Flags

When a DME wipe is carried out on an image with side flags, all wipe patterns can be used.

Depending on the setting (On/Off) of [Auto Crop] in the Engineering Setup >Switcher >Config menu, the appearance of the 4:3 image changes.

Notes


For signals with the following DME wipe pattern selected on the DME external video bus (gray part shown in the pattern illustration), side flags are not applied when auto side flags are set to Off.

- Two-channel page turn
- Two-channel page roll
- Two-channel frame in-out
- Two-channel brick
- Three-channel brick

The following illustration shows the action in a DME wipe.


DME wipe from a 4:3 image to a 16:9 image

Wipe action using slide (No. 1001)

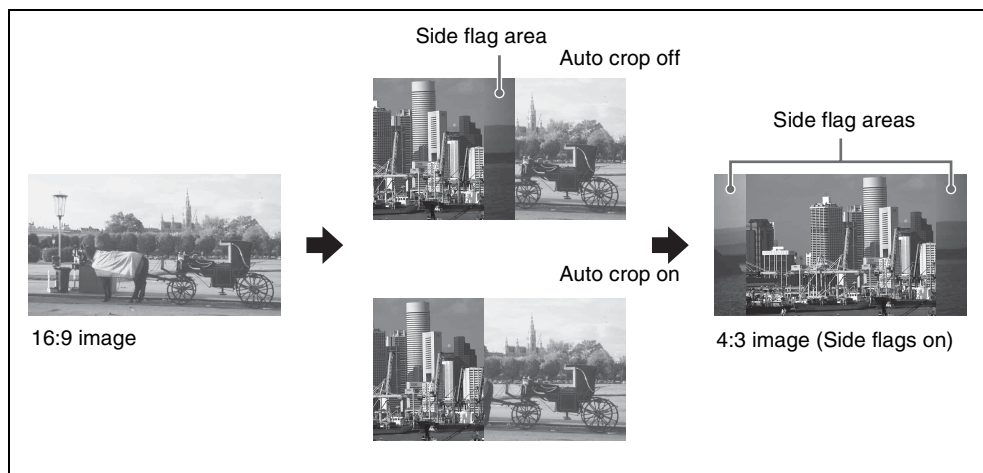


DME wipe from a 4:3 image to another 4:3 image (when side flags are on for both images)


Wipe action using squeeze (No. 1031)

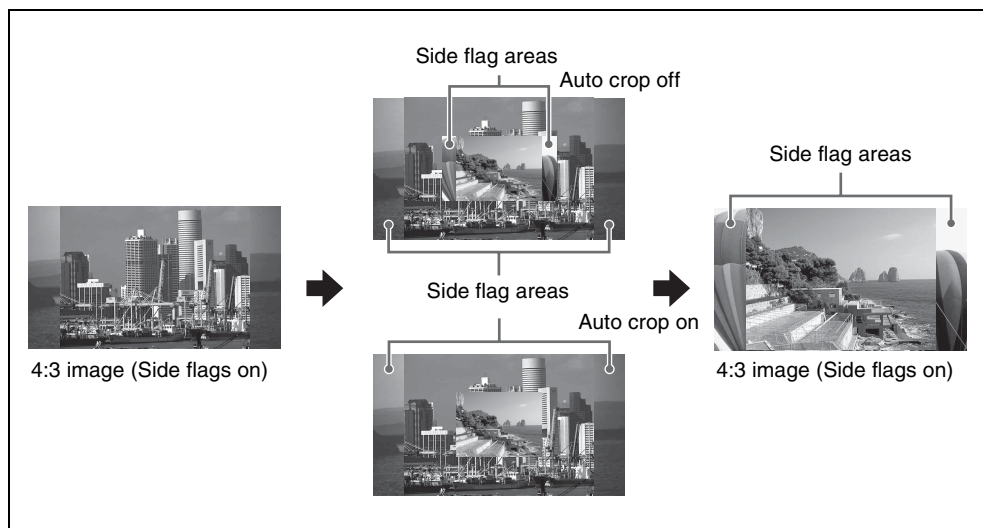

Example 1: Assigning M/E-1 main and sub to a single switcher bank, and switching between them

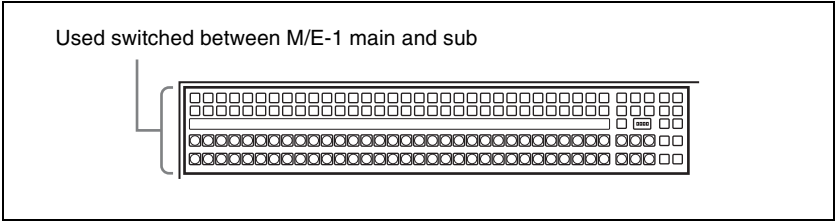

Example 2: Assigning separate switcher banks as “M/E-1 main dedicated” and “M/E-1 sub dedicated”

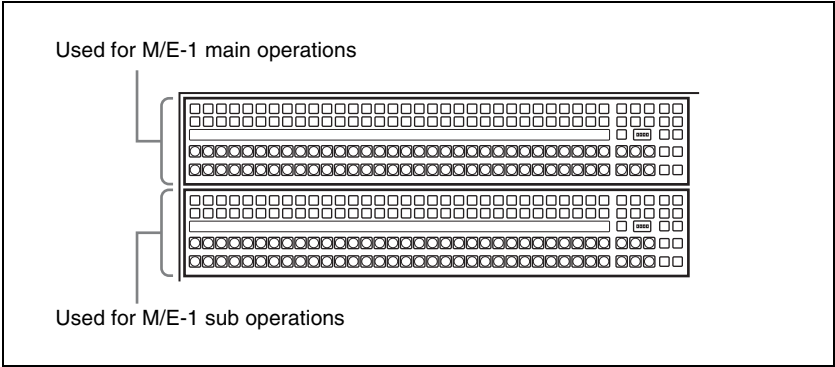

Video creation operations in Multi Program 2 mode

For each of main and sub, there are differences from the operations in standard mode.

For details, see “Differences Between Multi Program 2 Mode and Standard Mode” (page 481).

Sequence of Operations in Multi Program 2

Basic operation sequence

- Enter the BZS-8200X install key (first time only)
- ↓
- Set Multi Program 2 operating mode for each switcher bank
- ↓
- Assign output signals, and set the background configuration, key configuration, and key preview configuration

↓
 For each switcher bank, make a main/sub assignment (one of main dedicated, sub dedicated, and main and sub shared)
 ↓
 For a switcher bank assigned to main and sub shared, assign the [MAIN] and [SUB] delegation buttons
 ↓
 Create the main and sub images
 ↓
 Execute the transition

Optional operations

- Making cross-point settings
- Enabling DME wipe operations for sub
- Inhibiting utility 2 bus signal selection
- Including Multi Program 2 data in keyframes and snapshots
- Changing the key assignment for each output
- Assigning sub preview output to preview selection buttons in the fade-to-black control block
- Changing the matrix size to Standard
- Making settings for keyframe timeline operation

Basic Operations (Required)

Entering the BZS-8200X install key (first time only)

After installing the BZS-8200X Multi Program 2 software in the switcher, carry out the following procedure.

- 1** In the status area of the Engineering Setup >System >Install/Unit Config menu, select the switcher (SWRx), and press [License].

The License menu appears.

- 2** In the License menu, enter the BZS-8200X install key.

For details of the operation, see “Installation and Device Setup (Install/Unit Config Menu)” in Chapter 18 (Volume 3).

- 3** Shut down the menus. (*see page 127.*)
- 4** Power the switcher and SCU off and on again.

Setting the operating mode for each switcher bank

To set a desired switcher bank to Multi Program 2 mode, use the following procedure.

- 1** Display the Engineering Setup >Switcher >Config menu.
- 2** Select the switcher bank from M/E-1 to M/E-4, and P/P.
- 3** In the <M/E Config> group, select [Multi Program2].
- 4** Repeat steps **2** and **3** as required, to set the operating mode for all desired switcher banks.

Assigning output signals for Multi Program 2 mode

To assign signals to outputs

Use the Engineering Setup >Switcher >Config >M/E Output Assign menu. The difference from standard mode is that OUT1 is fixed, set to PGM1 (main program), and OUT6 is fixed, set to PGM2 (sub program), and that for the OUT2 to OUT5 signals you can assign any signal selected from the following.
PGM1, PGM2, PGM3, PGM4, PVW1, PVW2, K-PVW1, K-PVW2,
CLEAN, SUB CLEAN

Notes

Each of main and sub can use a maximum of four of the six outputs (OUT1 to OUT6). The outputs can be used within the following limits.

- OUT1, OUT2: main only
- OUT3, OUT4: can be used for either main or sub
- OUT5, OUT6: sub only

For details, see “Making Settings Required to Use the Software” in Chapter 18 (Volume 3).

To set the background and key configuration

Use the Engineering Setup >Switcher >Config >PGM Config menu. The following are the differences from standard mode.

Background configuration: Consists of the following combinations.

- For main: Clean, Bkgd A, Bkgd B
- For sub: Sub Clean, Utility 2, Utility 3

Key configuration: Key1 can be set to “Enable” only when the background is Clean, Bkgd A, or Bkgd B.

For details, see “Setting the Operation Mode” in Chapter 20 (Volume 3).

To set the key preview configuration

Use the Engineering Setup >Switcher >Config >K-PVW Config menu.
The following are the differences from standard mode.

Background configuration: Clean or Sub Clean

Key configuration: Key1 can be set to “On” or “Link” only when the background is Clean.

For details, see “Setting the Operation Mode” in Chapter 20 (Volume 3).

To assign sub outputs to output ports

Use the Engineering Setup >Switcher >Output >Output Assign menu.
You can assign a sub output signal to a switcher output port number.

For details, see “Assigning Output Signals” in Chapter 20 (Volume 3).

Assigning main and/or sub to switcher banks

For each switcher bank for which Multi Program 2 mode is selected, set whether this is main dedicated, sub dedicated, or main and sub shared.

To assign main and sub to a single switcher bank

1 In the Engineering Setup >Panel >Config >MP2 Main/Sub Assign menu, select the switcher bank.

2 In the <Main/Sub Assign> group, select [Main&Sub].

Main: use for main operations.

Sub: use for sub operations.

Main&Sub: use for both main and sub operations.

When “Main&Sub” is selected, it is necessary to assign [MAIN] and [SUB] delegation buttons to the control panel.

To assign main and sub to two consecutive switcher banks

For example, to assign the first row (first switcher bank) to M/E-1 main, and the second row (second switcher bank) to M/E-1 sub, use the following procedure.

- 1** In the status area of the Engineering Setup >Panel >Config >MP2 Main/Sub Assign menu, select 1st Row (M/E-1), then press [Main] in the <Main/Sub Assign> group.
- 2** Press [Dual M/E Assign] to assign M/E to two banks.
In this state, both 1st Row and 2nd Row are set to main.
- 3** Set 2nd Row to [Sub].
This cancels the shift/non-shift assignment for dual M/E in standard mode.

Notes

It is not possible to assign the combinations of Main with Main&Sub, or Sub with Main&Sub.

Assigning the [MAIN] and [SUB] delegation buttons to buttons on the control panel

To assign the Main/Sub switching function to buttons in the transition control block

This applies to the standard type and compact type transition control block, and the CCP-6224/6324 control panel.

For details of the transition control block, see page 49 (for the standard type) or page 94 (for the compact type).

For details of the CCP-6224 2M/E control panel, see page 97, and for the details of the CCP-6324 3M/E control panel, see page 97.

- 1** In the Engineering Setup >Panel >Config menu, press [Program Button].
The Program Button menu appears.
- 2** Press [Transition Module 1].
The Transition Module 1 menu appears.
- 3** Select the switcher bank in the <Bank Select> group.
The buttons in the transition control block on the left appear in the currently assigned state.
- 4** Press the button whose assignment you wish to change.
The button you press appears in reverse video.



- 5** From the list on the right, select [MAIN], and press [Set].
The indication on the button changes according to the selection.
- 6** Repeat Step **4** and **5** to assign [SUB].

To assign to macro buttons in the cross-point control block

For details of the cross-point control block, see page 45.

- 1** In the Engineering Setup >Panel >Config menu, press [Program Button].
The Program Button menu appears.
- 2** Press [Xpt Module].
The Xpt Module menu appears.
- 3** Select the switcher bank, then in the <PRE MCRO/POST MCRO> group, press [Main Sub].
You can now use the [PRE MCRO] button as [MAIN], and the [POST MCRO] button as [SUB].

To assign macro operations to different buttons

If in the above operation you assigned a Multi Program 2 function to the macro buttons, you can assign the PRE MCRO and POST MCRO functions to different buttons.

For details, see “Assigning Functions to User Preference Buttons” or “Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block” in Chapter 19 (Volume 3).

Examples of Operations in the Multi Program 2 Mode (When Sharing a Switcher Bank)

To create video on the M/E or PGM/PST bank assigned to both main and sub operations, use the following procedure.

- 1** Press the [MAIN] button, turning it on, and turning off the [SUB] button.
- 2** With the normal operations, create the main video.
- 3** Press the [SUB] button, turning it on, and turning off the [MAIN] button.
Now you can create the sub video.

4 Create the sub video.

The basic method of operation is the same as for the main video, except that the utility 2 bus signal is assigned to background A, and the utility 3 bus signal is assigned to background B.

For sub, only keys 2 to 8 can be used, and for wipes, standard wipe patterns only. There are also other differences in operation from standard mode.

For details, see “Differences Between Multi Program 2 Mode and Standard Mode” (page 481) and “Restrictions on Using Multi Program 2 Mode” (page 482).

5 Press the [MAIN] and [SUB] buttons simultaneously, turning them on.

If both buttons are lit, the control panel shows the status of main.

6 Carry out the transition.

Both main and sub video images are switched.

Optional Operations

Making cross-point settings

Cross-point assign tables can be set not only for main output but also for sub output.

You can set cross-point assign tables for the following banks.

M/E-1 SUB to M/E-4 SUB

P/P SUB

The table actually used is that for which the control panel delegation button is lit.

For details, see “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume 3).

Enabling DME wipe operations for sub

By factory default, DME wipe operations are inhibited for sub background. To enable them, in the Engineering Setup >Switcher >Config menu, set [DME Wipe Sub Enable] to On.

This enables DME wipe operations for sub background.

This setting applies to the whole control panel (all M/E banks and PGM/PST bank).



Notes

If a DME wipe for sub is recalled in a snapshot or keyframe, the image will not be handled correctly.

Inhibiting utility 2 bus signal selection

In Multi Program 2 mode, you can inhibit other uses of the utility 2 bus signal in order to use the signal as the background for sub.

This setting applies to the whole control panel (all M/E banks and PGM/PST bank).

In the Engineering Setup >Panel >Config >MP2 Main/Sub Assign menu, set [Util2 Inhibit] to On.

This inhibits operations of selecting from the background B row while holding down the [UTIL] button in the cross-point control block.

Inhibiting key operations for main or sub keyer

In the Engineering Setup >Panel >Config >Operation Inhibit >M/E Operation Inhibit menu, you can make settings to inhibit key operations on each of the main and sub keyers independently.

For details, see “Inhibiting Utility 2 Bus and Key Operations” in Chapter 19 (Volume 3).

Including Multi Program 2 data in recall operations of keyframes and snapshots

In the Engineering Setup >Switcher >Config menu, set [Recall M/E Config] to On.

When a keyframe or snapshot is stored or recalled, the following data is included.

M/E Config, PGM Config, M/E Output Assign, and Key PVW Config

For details of the above data, see “Setting the operating mode for each switcher bank” (page 472) and “Assigning output signals for Multi Program 2 mode” (page 472).

This setting applies to the whole control panel (all M/E banks and PGM/PST bank).

Notes

M/E Config data is saved, even when this setting is Off.

Changing the key assignment for each output (Misc menu)

In Multi Program 2 mode you can change the key assignments independently.

The following describes an example using M/E-1, but the operation is the same for other banks.

Notes

- This setting is linked to the setting in the Engineering Setup >Switcher > Config >PGM Config menu.
- It is not possible to make this setting while the above PGM Config menu is locked, or [Recall M/E Config] (*see previous item*) is set to Off.

1 In the M/E-1 menu, select first VF7 ‘Misc,’ then HF5 ‘Key Assign.’

The Key Assign menu appears, and the current key assignment is shown in the status area.

2 Change the setting in “Key Enable” as required.

Keys recalled in a snapshot recall

If a snapshot is recalled independently on main or sub, this only retrieves the settings for the key assigned to the recalled side. For example, if key 1 and key 2 are assigned on main, and key 3 and key 4 are assigned on sub, then if you recall a snapshot on main, this only retrieves the settings for key 1 and key 2, and the state of key 3 and key 4 assigned on sub is not affected.

Assigning sub preview output to preview selection buttons

You can assign the sub preview output to a preview selection button in the fade-to-black control block or downstream key/fade-to-black control block.

For details, see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).

When the Multi Program 2 license is valid, by assigning the “Shift” function to a button, you can assign two preview outputs, “Shift” and “Unshift” to a single button. To use the shift output, always assign “Shift” to some button.

Changing the matrix size to Standard

When using a router, if the matrix size is set to [128×128], it is not possible to control the utility 3 bus on the S-Bus. When using Multi Program 2, in the <Matrix Size> group of the Engineering Setup >Router/Tally >Router menu, select other than [128×128].

For details, see “Assigning Switcher Inputs and Outputs to S-Bus Space” in Chapter 23 (Volume 3).

When [136 × 138] is selected, as for the bus number of the utility 3 bus, a DME Key bus number is used as follows.

No.	Bus (Standard)	Bus (MP2)
70	M/E-1 DME Key	M/E-1 Utility3
85	M/E-2 DME Key	M/E-2 Utility3
100	M/E-3 DME Key	M/E-3 Utility3
115	P/P DME Key	P/P Utility3

Making settings for timeline-related keyframe operations

To assign sub regions to the region selection buttons in the numeric keypad control block

In the Engineering Setup >Panel >Config >10 Key Region Assign menu, assign regions to the region selection buttons in the numeric keypad control block.

For details, see “Overall Control Panel Settings (Config Menu)” in Chapter 19 (Volume 3).

To make region and reference region selections using a menu

During snapshot or keyframe operations, you can select a region (including sub) in the Key Frame >Region Select menu. This is convenient for selecting some of the regions assigned to the numeric keypad control block or changing the reference region.

For details, see “Specifying the Region and Edit Points” in Chapter 13 (Volume 2).

To assign regions shown in the Timeline menu

You can select how regions assigned to region selection buttons appear in the Key Frame >Timeline menu.

For details, see “Settings in the Timeline Menu” in Chapter 13 (Volume 2).

Enabling re-entry between the main and sub sides of the same M/E bank

In the Engineering Setup >Switcher >Config menu, set [MP2 Free Re-Entry] to On.

Notes

- Re-entry adds a 1H delay to the video. Nested re-entry may lead to problems in the video.
- A maximum of ten re-entry stages are possible, with the final output having a delay of 5H.

- The selection order of re-entry signals affects the number of lines by which the output signal is lowered.
- If a delay occurs in the image, even when the through mode is set, the ancillary data does not pass through.
- For example, it is possible to select the re-entry of M/E-1 main on M/E-1 main.

Restrictions on Mutual Re-entry When Using Multi Program 2

The snapshot function is affected by this re-entry function.

When the [MP2 Free Re-Entry] button is On, and any of the switcher banks are in Multi Program 2 mode, then the following restrictions apply.

If you save and recall snapshots simultaneously with more than one region specified, the recorded state is played back in the order of precedence of regions (M/E-1 >M/E-2 >M/E-3 >M/E-4 >P/P). Therefore, if you save and recall snapshots with more than one region specified, the cross-point settings may not be recalled correctly.

To recall the snapshots correctly, press the cross-point button before recalling the snapshots, to select a signal other than the re-entry signal, then recall the snapshots.

Functions Added in Multi Program 2 Mode

- You can set video processing for the utility 3 bus signal.
- In the control panel and DCU GPI input settings and switcher GPI link settings, the actions that can be selected now also include “Sub Cut” and “Sub Auto Trans.”
- A switcher GPI link can now be set also for the utility 3 bus.
- To the macro event configuration parameters and macro attachment settings, “Main & Sub” and “Sub” have been added.
- For cross-point button link settings, M/E-1 to M/E-4, and P/P “Sub Program,” “Sub Preset,” and “Sub Trans PGM” have been added to the link source bus.
- Snapshot attributes can now be set independently for main and sub.
- There are additional menus for sub which can be recalled by pressing a button twice.
- You can set [MP2 Auto Correct] to On or Off in the Effect menu or Snapshot menu. When this is set to On, for example, copy destination and source data is automatically recognized as main or sub, and the data interchanged.
- When the key adjustment mode is selected on the Multifunction Flexi Pad (or when the KEY ADJ button is lit), if you select the region selection button to which [M/E-x Sub] is assigned, the [TRNS] button operates as a button for the sub region.

- You can assign [SUB TRANS] to the key control block. This button functions as a [TRNS] button for the sub region.

Differences Between Multi Program 2 Mode and Standard Mode

The differences from operation in standard mode are as follows.

Item		Main	Sub
Keys ^{a)}		Keys 1 to 8 can be used	Keys 2 to 8 only can be used
Wipes (background)	Patterns	Same as standard mode	• Only standard patterns can be used • Pattern mix is not possible
	Modifiers	Same as standard mode	• Pairing, modulation, spring, spiral, and split cannot be used • Edge fill mattes are single-color only • Replication can be selected from four patterns
Wipes (key)		Same as wipes (background) for sub	
DME wipes	Use	Can be used	Cannot be used (Can be used, with a setting change)
	Patterns for 1 channel	Each of main and sub can be used.	
	Patterns for 2 channels	Only one of main and sub can be used (For each M/E, the number of DMEs that can be used is the same as in standard mode.)	
	Patterns for 3 channels		
	Backgrounds	Wipe edge fill matte (including color mix and other settings in the Matte Adjust menu)	Wipe edge fill matte (single-color only)
	Modifiers	Same as standard mode	Wipe border colors are single-color only
Transitions	Key priority	Cannot be used	
	Transition preview	Cannot be used	
	Preset color mix	Color matte or video signal selected on the utility 2 bus	Color matte only

Item		Main	Sub
Snapshots	Cross-point hold	Utility 2 cannot be set	Utility 3 is added. BKGD A/B and Key1 cannot be set.
Control from an editor		Same as standard mode	Cannot be used
Operation setting for switcher GPI inputs and outputs		Same as standard mode	Cannot be used

a) Keys 2 to 8 are common to main and sub.

Notes

- Allow a transition to complete before carrying out main and sub delegation switching.
- The sub background A bus (utility 2 bus) is shared with wipe edge border fill. Making a change to one affects the other.
- Even if the wipe border width is set to the same numeric value for main and sub, the same image is not obtained.

Restrictions on Using Multi Program 2 Mode

- The following functions are not available for sub:
 - Data copy and swap
 - Default recall (except for parametric recall)
 - [AUTO] button function (*see page 93*)
- Re-entry is limited to five levels. Re-entry is not possible for main and sub of the same M/E.
However, this restriction can be removed. *For details, see “Enabling re-entry between the main and sub sides of the same M/E bank” (page 479).*
- In the following cases, a transition using the fader lever may not be performed correctly:
 - When the main and sub bus toggle modes are set differently
 - For a pattern mix, preset color mix, and so on
- For an Internal bus link, GPI link, or External bus link, the “Utility 2” bus cannot be selected.
- Screen aspect, show key, and [MCRO ATTCH ENBL] button settings are common to main and sub.
- If a snapshot is recalled simultaneously for main and sub, or a keyframe is executed simultaneously for main and sub, then for the following common to main and sub the main settings are reflected.
 - Key
 - M/E Config
 - DME external video bus and utility 1 bus

- When a macro attachment is set on the DME utility 1 bus or DME utility 2 bus, it is not possible to make separate main and sub settings.
- When snapshots with different M/E Config settings are recalled:
 - If M/E Config data is not to be included in the snapshot data, the current system settings are used for snapshot reproduction.
 - If M/E Config data is to be included in the snapshot data first M/E Config data is set, and then other snapshot data is recalled.
- The bus override function is only available on the following buses:
 - M/E-1 to M/E-4 Main BKGD A/B buses
 - M/E-1 to M/E-4 Sub BKGD A/B buses (UTIL-2, UTIL-3 buses)
 - P/P Main PGM/PST bus
 - P/P Sub PGM/PST buses (UTIL-2, UTIL-3 buses)
- When a master snapshot or master timeline is executed with a key being assigned to both main and sub, it is uncertain which data will be reflected.
- When recalling a master snapshot with different register numbers for main and sub, the recall timing may differ by one field or more between main and sub.
- The link state is maintained even when M/E Config is changed. Set the link setting again, as required.
- Since keys 2 to 4 are shared between main and sub, when the main and sub fader lever positions are different, if you move the fader lever, the video changes instantaneously to the value of the most recently moved fader lever.
- When the transition type for main or sub is set to preset color mix, it is not possible to carry out independent key transition operation (common to main and sub).
- When the signal format is 1080P, snapshots, wipe snapshots, and effects created using a wipe for sub, do not function correctly with a signal format other than 1080P. Similarly, those created with other than the 1080 signal format, do not function correctly with a signal format of 1080P.



Appendix (Volume 1)

Wipe Pattern List

Standard Wipes

1		2		3		4	
5		6		7		8	
9		10		11		12	
13		14		15		16	
17		18		19		20	
21		22		23		24	

Enhanced Wipes

26		27		29		49	
300		301		302		303	
304							

Rotary Wipes

100		101		102		103	
104		105		106		107	
150		151		156		158	
160		162		516		518	
604		606		624		661	

Mosaic Wipes

200		201		202		203	
206		207		208		209	
210		211		212		213	
220		221		222		223	
224		225		226		227	
228		229		230		231	
232		233		234		235	



236		237		238		239	
240		241		242		243	
244		245		246		247	
250		251		252		253	
254		255		256		257	
260		261		262		263	
264		265		266		267	
268		269					

Random/Diamond Dust Wipes

270		271		272		273	
274							

DME Wipe Pattern List

DME Wipe Patterns Available in One-Channel Mode

Slide

1001		1002		1003		1004	
1005		1006		1007		1008	

Split

1011		1012		1013	

Squeeze

1021		1022		1023		1024	
1025		1026		1027		1028	
1029		1030		1031			

Door

1041		1042		1043		1044	
1045		1046		1047		1048	

2D trans

1051		1052		1053		1054	
1055		1056		1057		1058	
1061		1062		1063		1064	
1068							

3D trans

1071		1072		1074		1076	
1077		1088		1091		1092	
1093		1094					

Flip tumble

1101		1102		1103		1104	
1109		1110		1121		1122	
1124		1131		1132		1133	
1135							


Frame in-out

1201		1202		1203		1204	
1205		1206		1207		1208	
1221		1222		1223		1224	

Picture-in-picture



Page turn

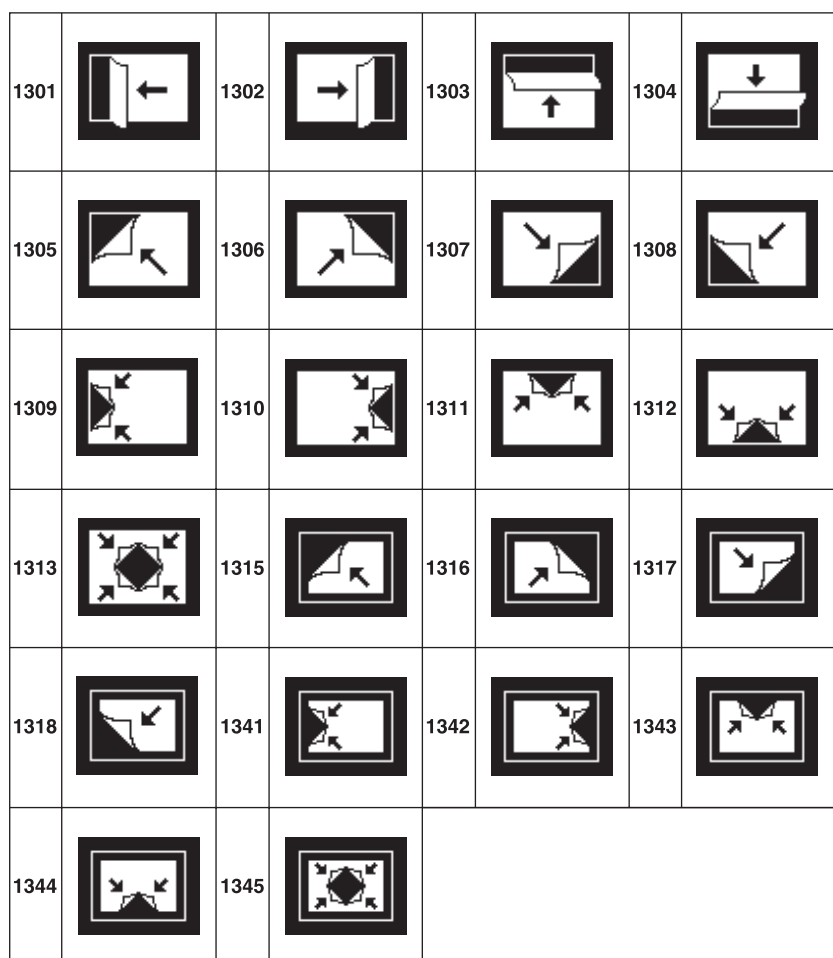


Page roll

1321		1322		1323		1324	
1325		1326		1327		1328	
1329		1330		1331		1332	
1333		1335		1336		1337	
1338		1346		1347		1348	
1349		1350					

Mirror

1355		1356		1357		1358	

Sphere



Character trail




Wave




Ripple



Split slide

1384		1385		1386		1387	
1388		1389					

Sparkle

1391		1393		1394		1396	
1398		1399					

Mosaic


1701	

Defocus

1702	

User programmable DME

The illustrations for patterns 1901 to 1999 show an effect register number or register name.

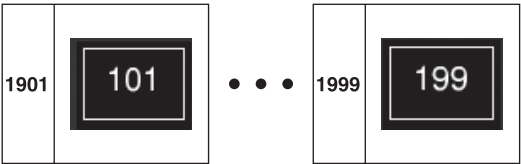

DME Wipe Patterns Available in Two-Channel Mode

Slide

2601		2602		2603		2604	
2605		2606		2607		2608	


Squeeze

2621		2622		2623		2624	
2625		2626		2627		2628	

3D trans

2801		2802		2803		2804	
2811		2812		2813		2814	



Picture-in-picture

2651		2652	

Page turn

2701		2702		2703		2704	
2705		2706		2707		2708	
2709		2710		2711		2712	
2713		2715		2716		2717	
2718		2741		2742		2743	
2744		2745					

Page roll

2721		2722		2723		2724	
2725		2726		2727		2728	
2729		2730		2731		2732	
2733		2735		2736		2737	
2738		2746		2747		2748	
2749		2750					

Brick

2801		2802		2803		2804	
2811		2812		2813		2814	

Frame in-out

2851		2852		2853		2854	
2861		2862		2863		2864	


User programmable DME

The illustrations for patterns 2901 to 2999 show an effect register number or register name.

2901		...	2999	


DME Wipe Patterns Available in Three-Channel Mode

Brick



User programmable DME

The illustrations for patterns 3901 to 3999 show an effect register number or register name.

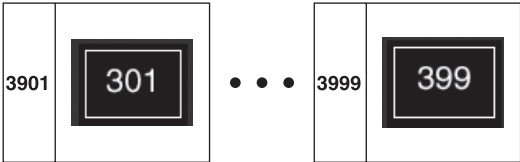


Resizer DME Wipe Pattern List

Slide

7001		7002		7003		7004	
7005		7006		7007		7008	

Squeeze

7021		7022		7023		7024	
7025		7026		7027		7028	
7029		7030		7031			


Frame in-out

7201		7202		7203		7204	
7205		7206		7207		7208	
7221		7222		7223		7224	

Menu Tree

Recalling Menus

This section details the menu structure, and shows the top menu selection buttons in the menu control block which are used to access the menus.

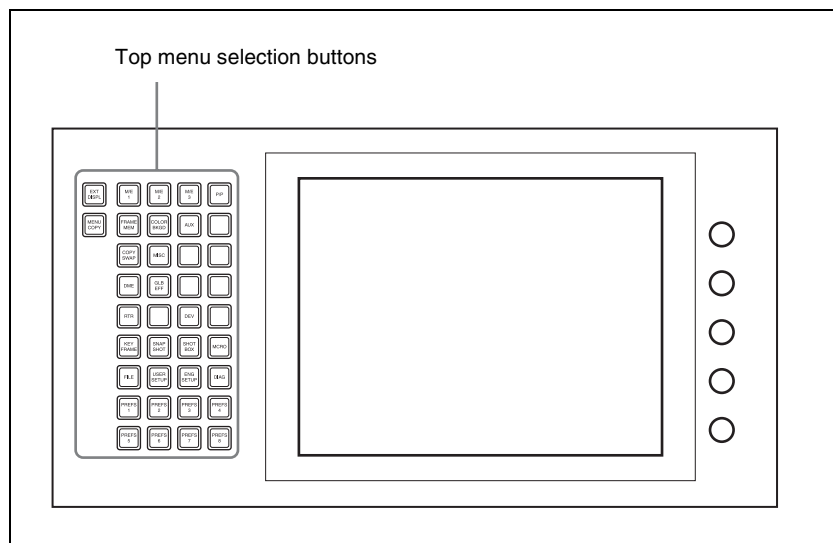

Menu control block

Some menus can also be accessed by pressing other buttons twice in rapid succession.

For more details, see “Menu Organization” (page 103).

Notes

Some menus may not appear, depending on the model.


M/E-1 to M/E-4 Menus

The functions in the M/E-1, M/E-2, M/E-3, and M/E-4 menus are the same, but the menu page numbers are distinguished as follows.


M/E-1 menus: 11xx, M/E-2 menus: 12xx,

M/E-3 menus: 13xx, M/E-4 menus: 81xx

In this section, the numbers for the M/E-1 menus are given as examples.

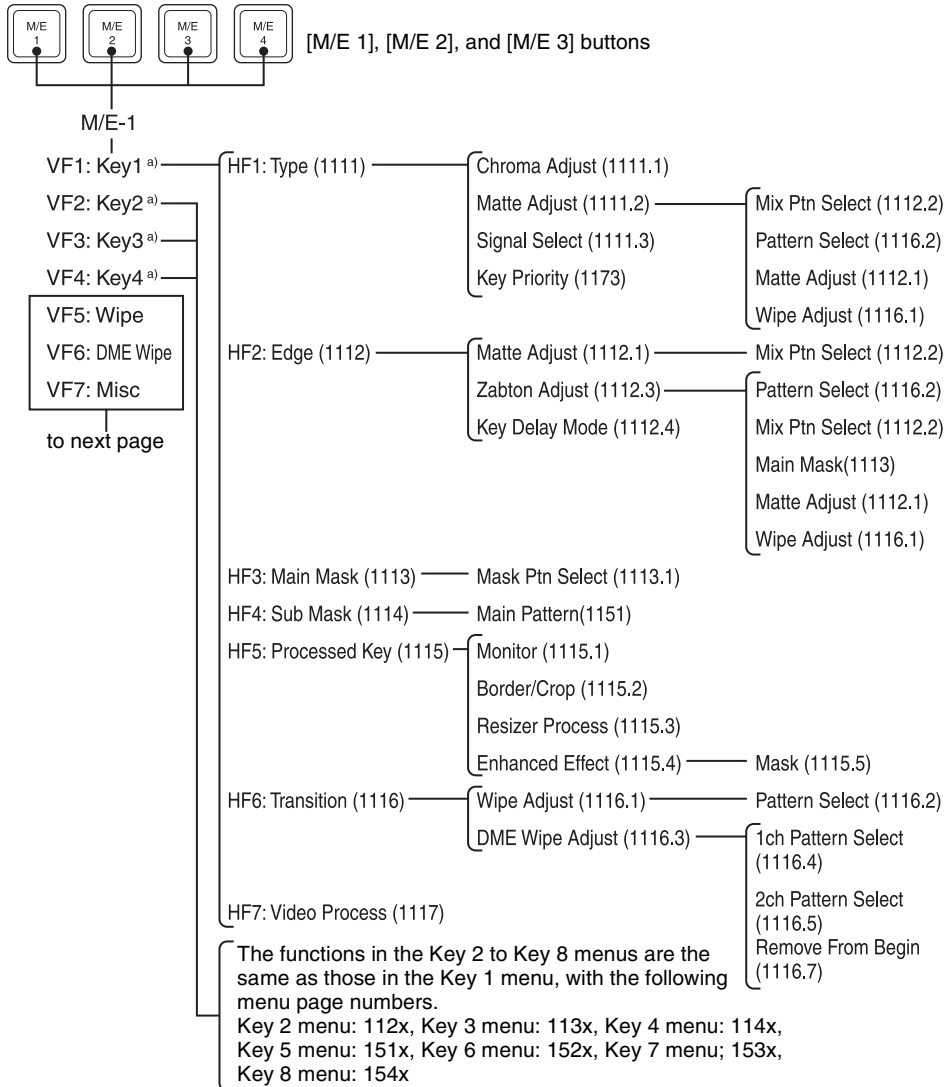


a) For VF1 to VF4, either of the groups Key1 to Key4 and Key5 to Key8 appears.



[M/E 1], [M/E 2], and [M/E 3] buttons

M/E-1



to previous page

VF5: Wipe

HF1: Main Pattern (1151)^{a)}

HF2: Pattern Mix (1152)

HF3: Sub Pattern (1153)

HF4: Edge/Direction (1154)^{a)} - Matte Adjust (1154.1)

Mix Pattern Select (1154.2)

HF5: Main Modify (1155)^{a)} - Multi Adjust (1155.1)

HF6: Sub Modify (1156) - Multi Adjust (1156.1)

HF7: Wipe Snapshot (1157)^{a)}

VF6: DME Wipe

HF1: 1ch (1161)^{a)}

HF2: 2ch (1162)^{a)}

HF3: 3ch (1163)^{a)}

HF4: Edge/Direction (1164)^{a)}

HF5: Modify (1165)^{a)} - Remove From Begin (1165.1)^{a)}

HF7: DME Wipe Snapshot (1167)^{a)}

VF7: Misc

HF1: Transition (1171)^{a)}

HF2: Video Process (1172)

HF3: Key Priority (1173)

HF4: Next Key Priority (1174)

HF5: Key Assign (1175)


HF6: Clip Transition (1176)^{a)} - Clip (1176.1)^{a)}

HF7: Snapshot (1177) - Transition (1171)^{a)}

- Snapshot (1177)^{a)}

a) In Multi Program 2 mode, the menus for sub are displayed with 400 higher numbers than the above for main.

PGM/PST Menu

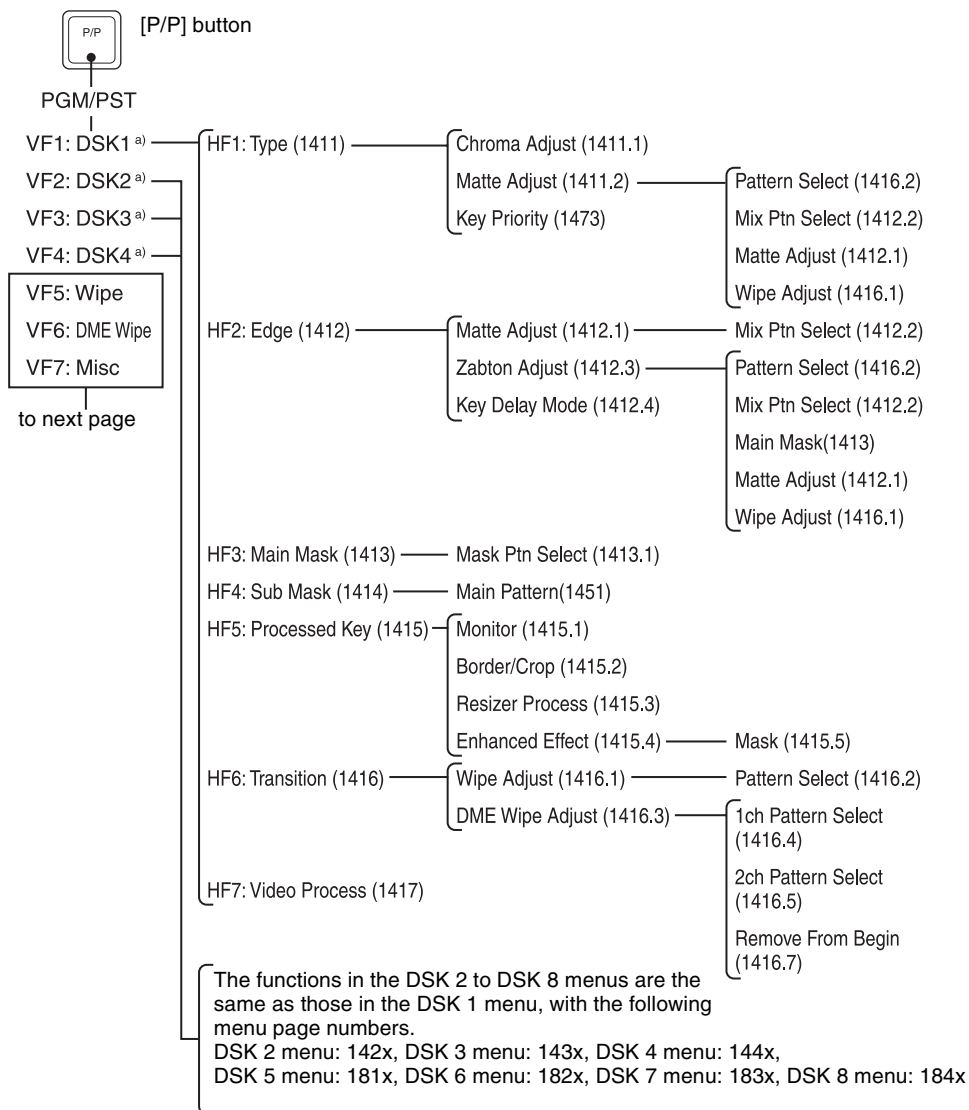

a) For VF1 to VF4, either of the groups Key1 to Key4 and Key5 to Key8 appears.



[P/P] button

PGM/PST

VF1: DSK1

VF2: DSK2

VF3: DSK3

VF4: DSK4

VF5: Wipe

VF6: DME Wipe

VF7: Misc

to previous page

HF1: Main Pattern (1451)^{a)}

HF2: Pattern Mix (1452)

HF3: Sub Pattern (1453)

HF4: Edge/Direction (1454)^{a)} — Matte Adjust (1454.1) — Mix Pattern Select (1454.2)

HF5: Main Modify (1455)^{a)} — Multi Adjust (1455.1)

HF6: Sub Modify (1456) — Multi Adjust (1456.1)

HF7: Wipe Snapshot (1457)^{a)}

HF1: 1ch (1461)^{a)}

HF2: 2ch (1462)^{a)}

HF3: 3ch (1463)^{a)}

HF4: Edge/Direction (1464)^{a)}

HF5: Modify (1465)^{a)} — Remove From Begin (1465.1)^{a)}

HF7: DME Wipe Snapshot (1467)^{a)}

HF1: Transition (1471)^{a)}

HF2: Video Process (1472)

HF3: Key Priority (1473)

HF4: Next Key Priority (1474)

HF5: Key Assign (1475)


HF6: Clip Transition (1476)^{a)} — Clip (1476.1)^{a)}

HF7: Snapshot (1477)^{a)} — Transition (1471)^{a)}


— Snapshot (1477)^{a)}

a) In Multi Program 2 mode, the menus for sub are displayed with 400 higher numbers than the aboves for main.


Frame Memory Menu

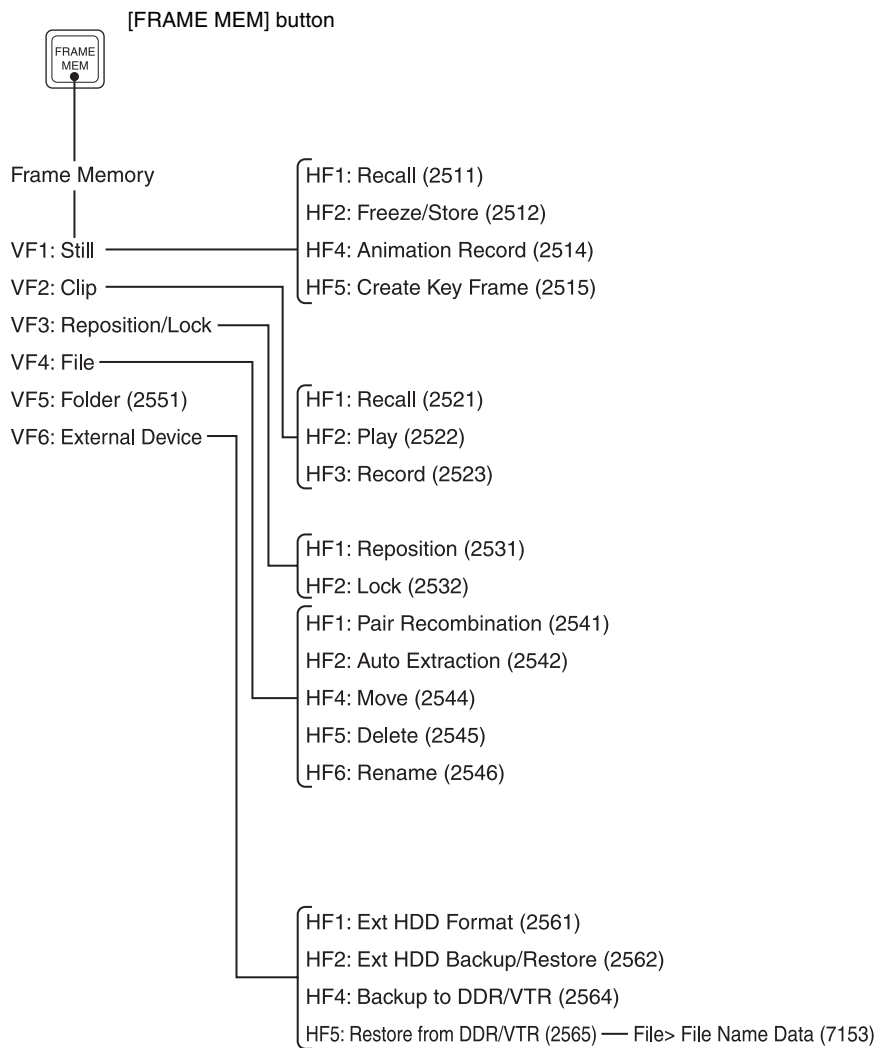


Color Bkgd Menu

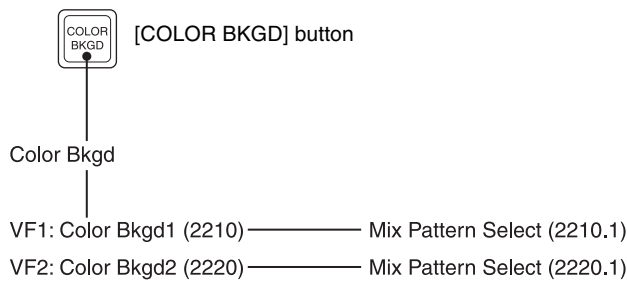


AUX Menu




CCR Menu

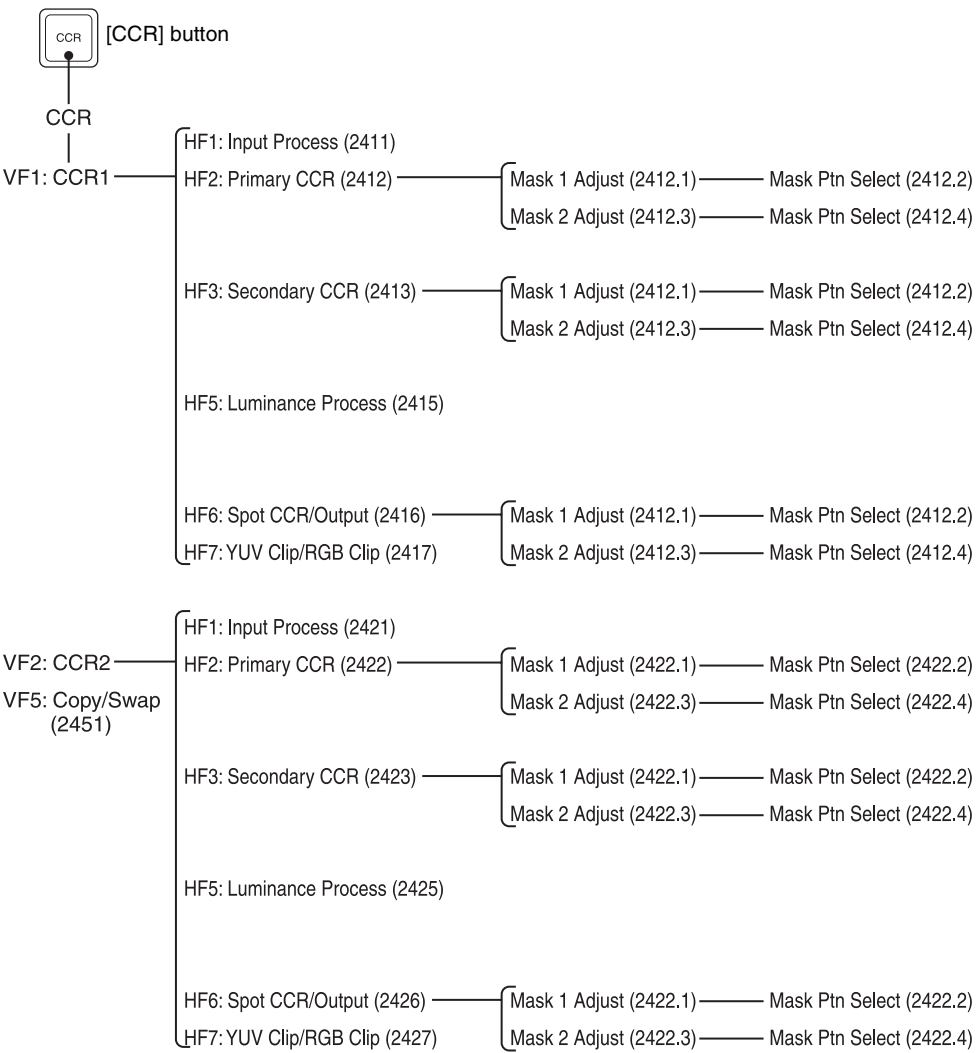


Copy/Swap Menu

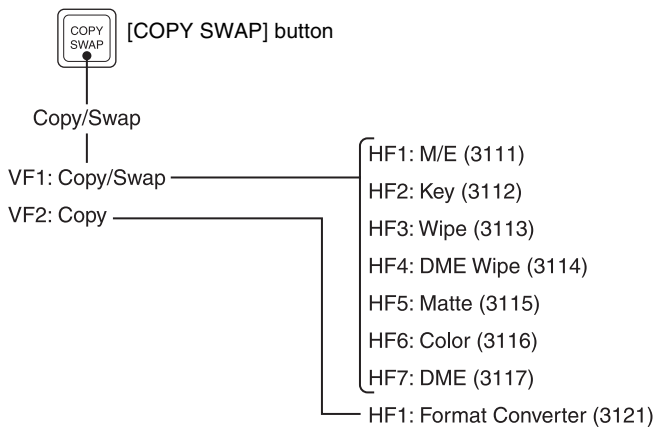


Misc Menu

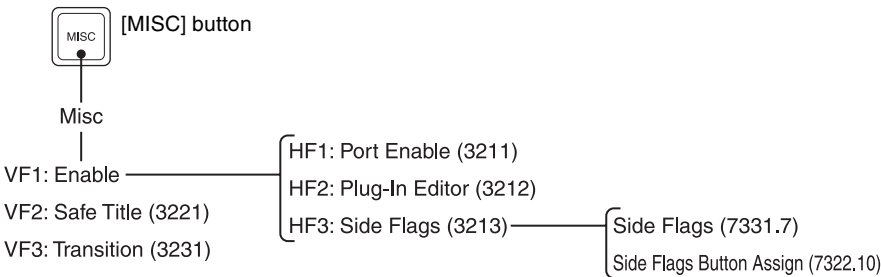


Status Menu




DME Menu

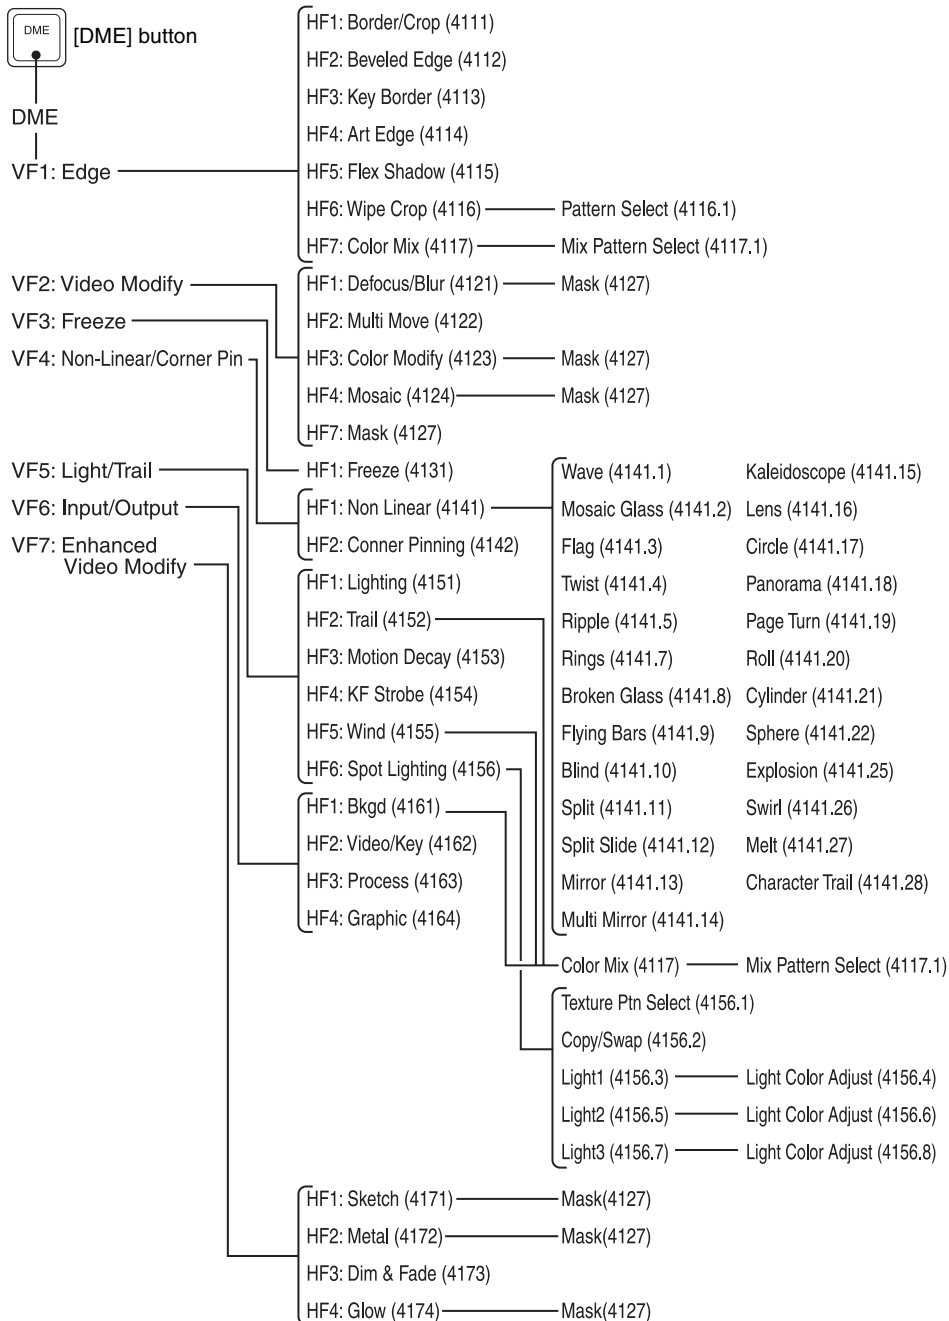


Global Effect Menu

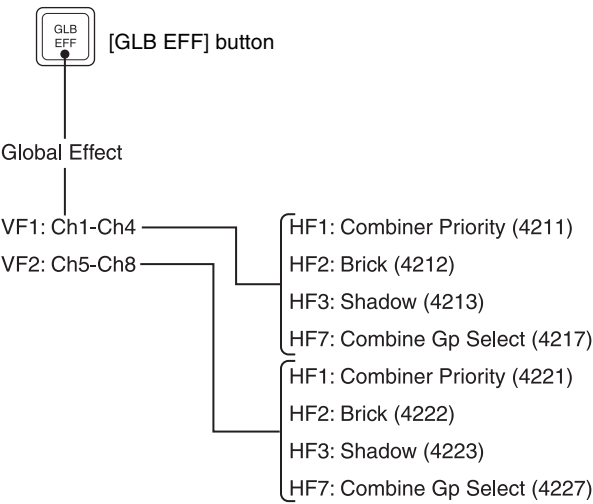


Device Menu

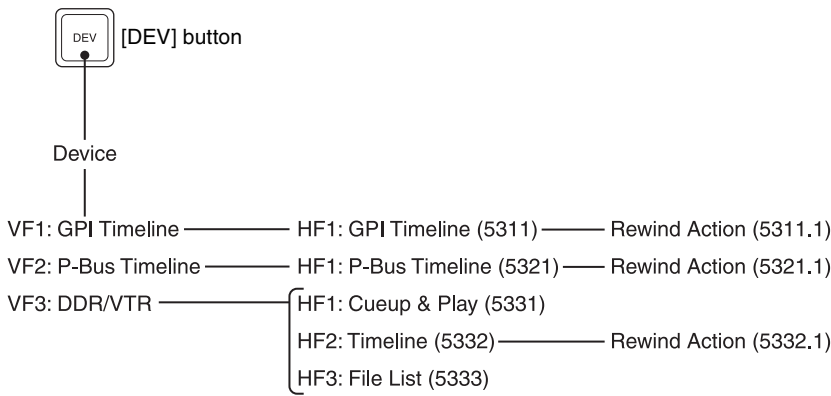


Macro Menu

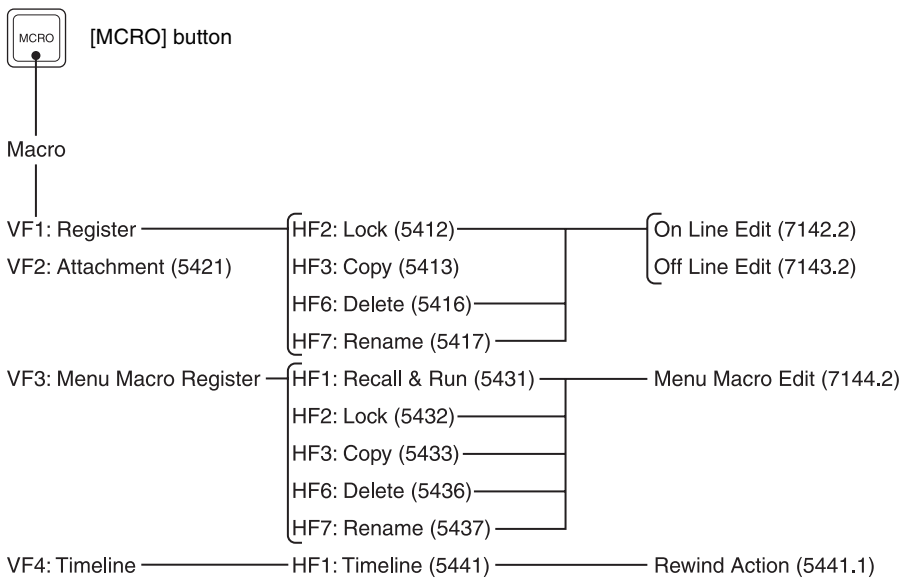


Key Frame Menu

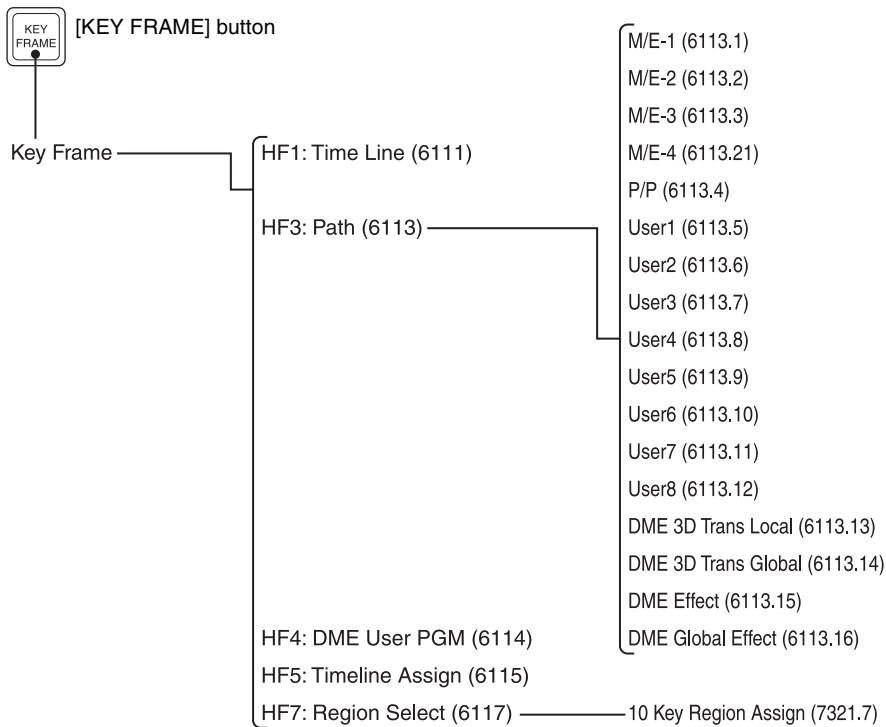


Effect Menu

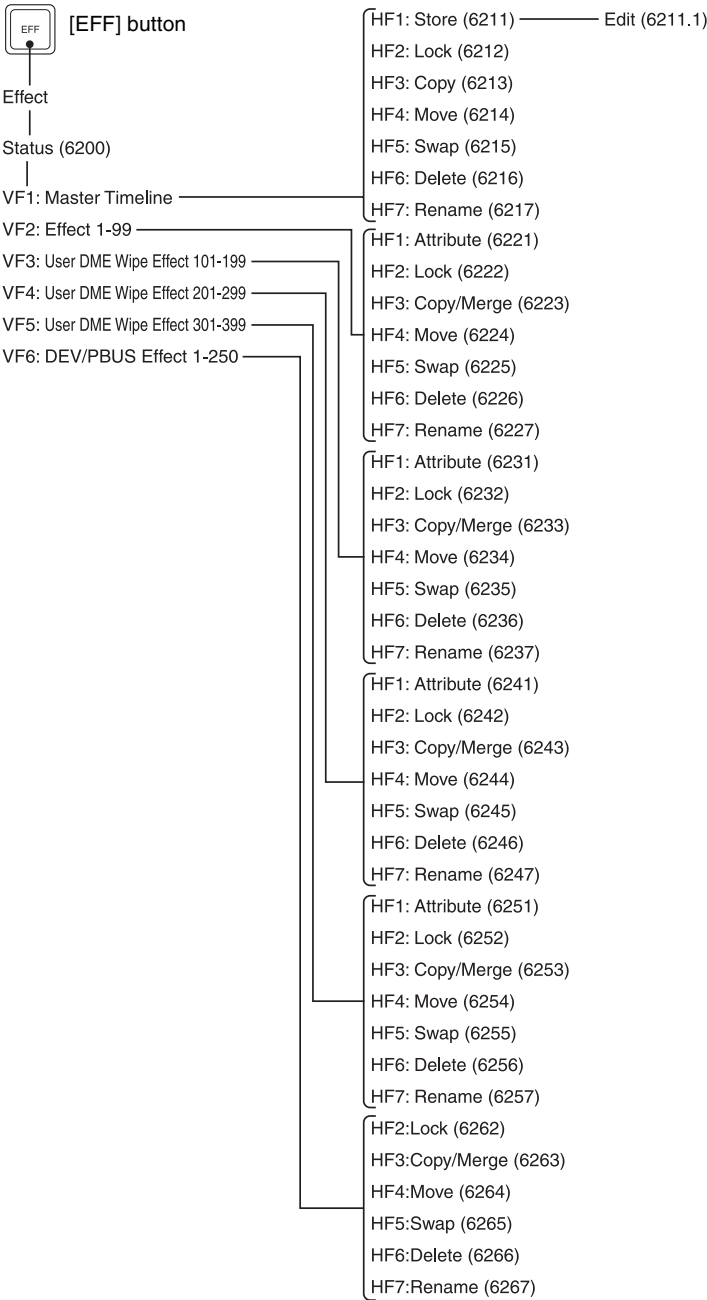


Snapshot Menu

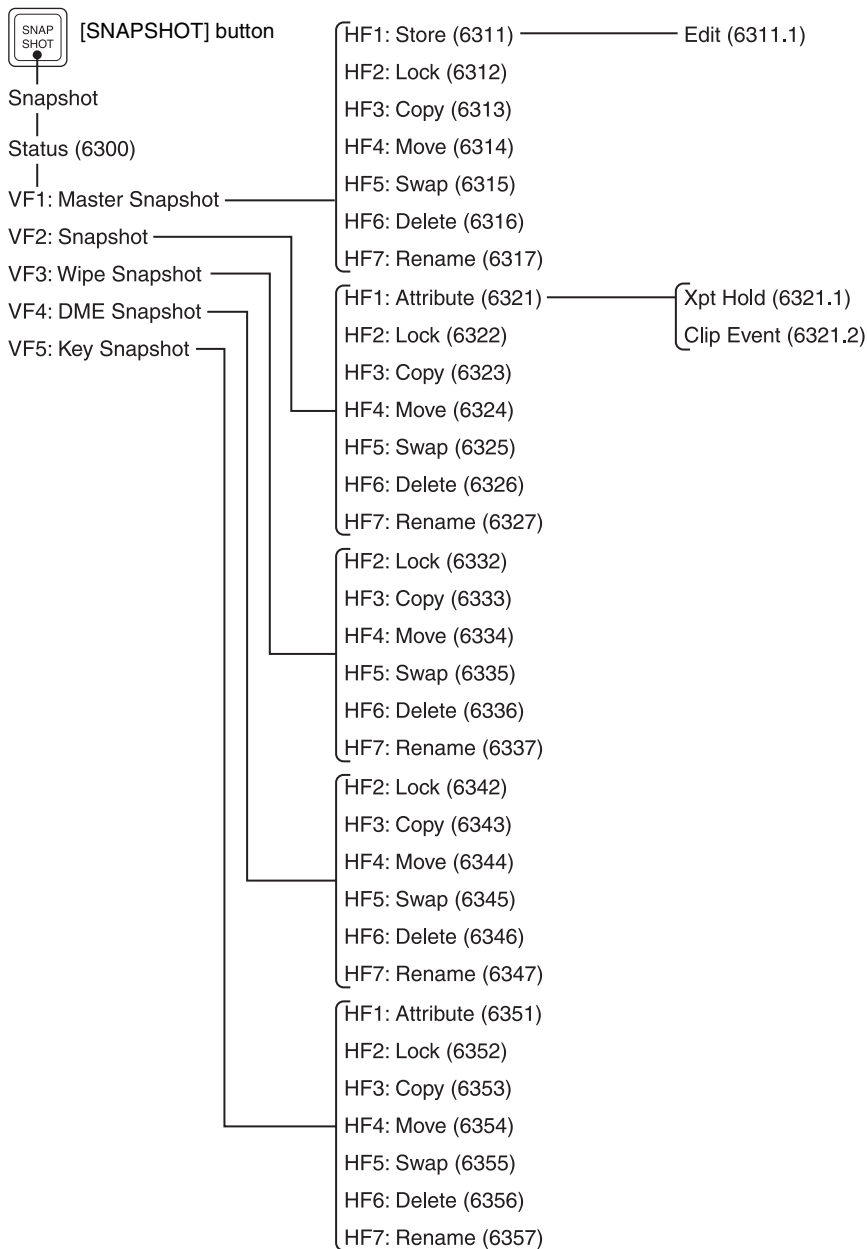


Shotbox Menu

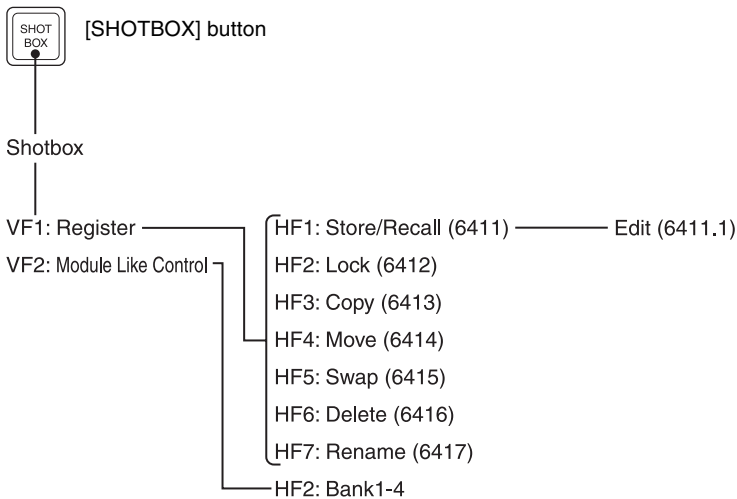


File Menu

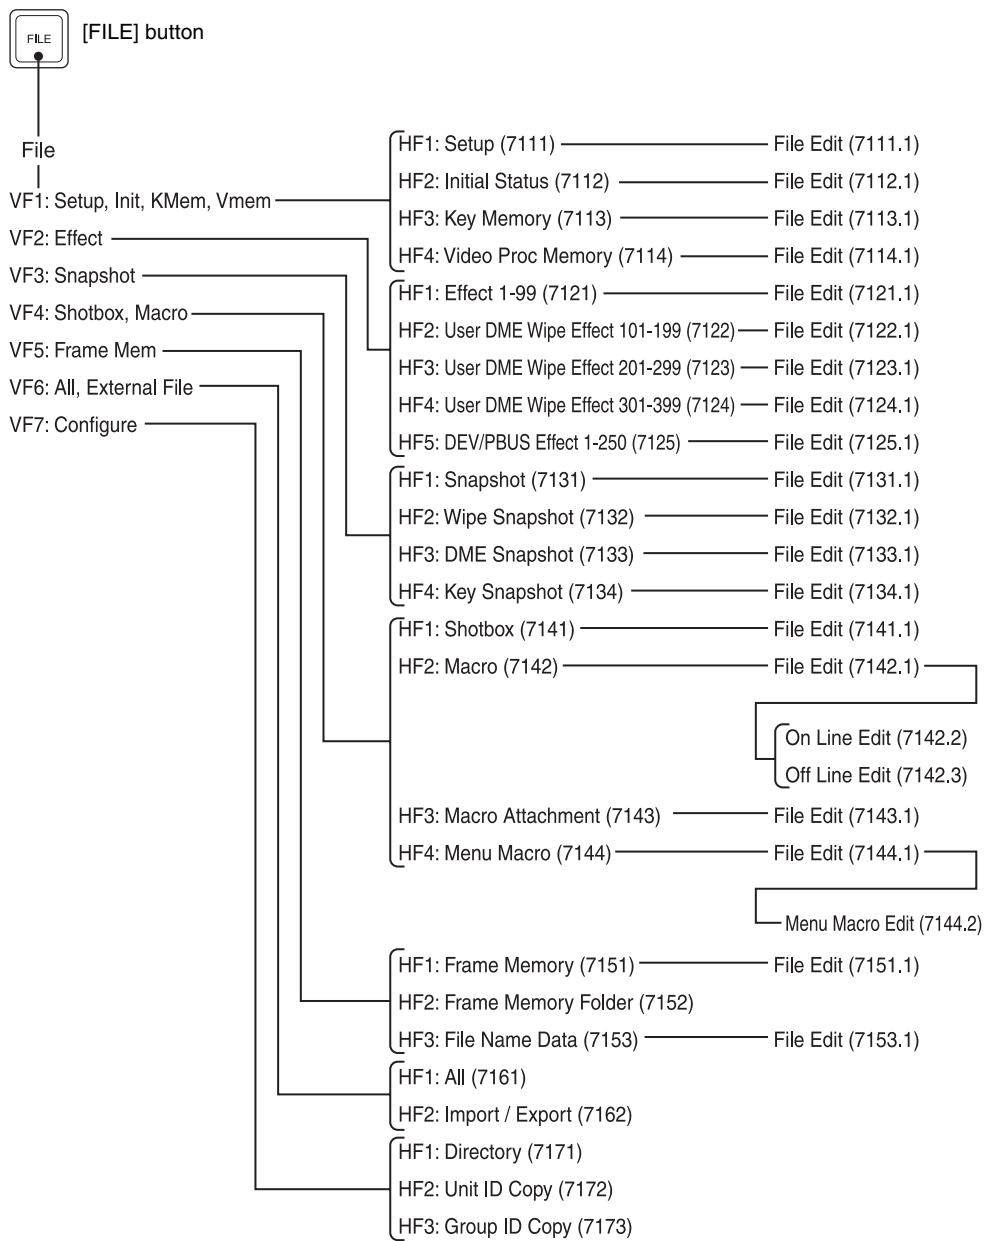

Engineering Setup Menu

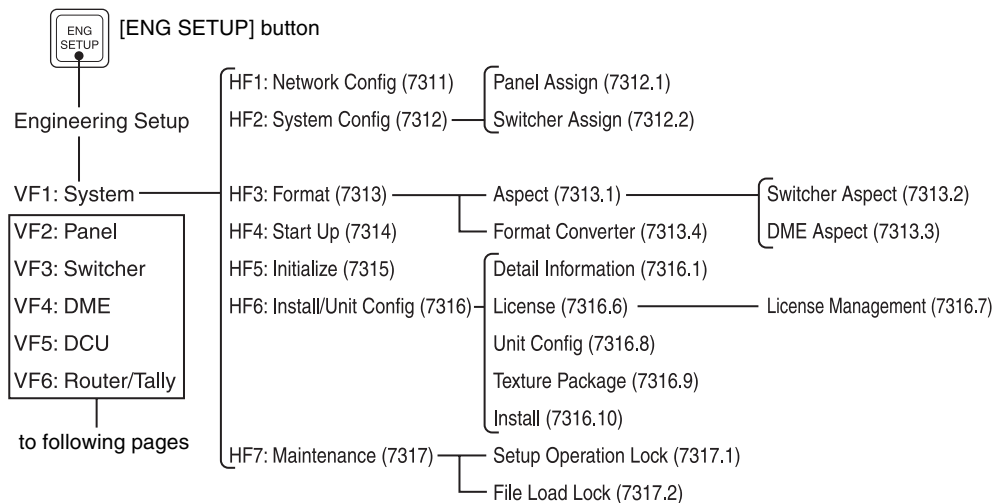

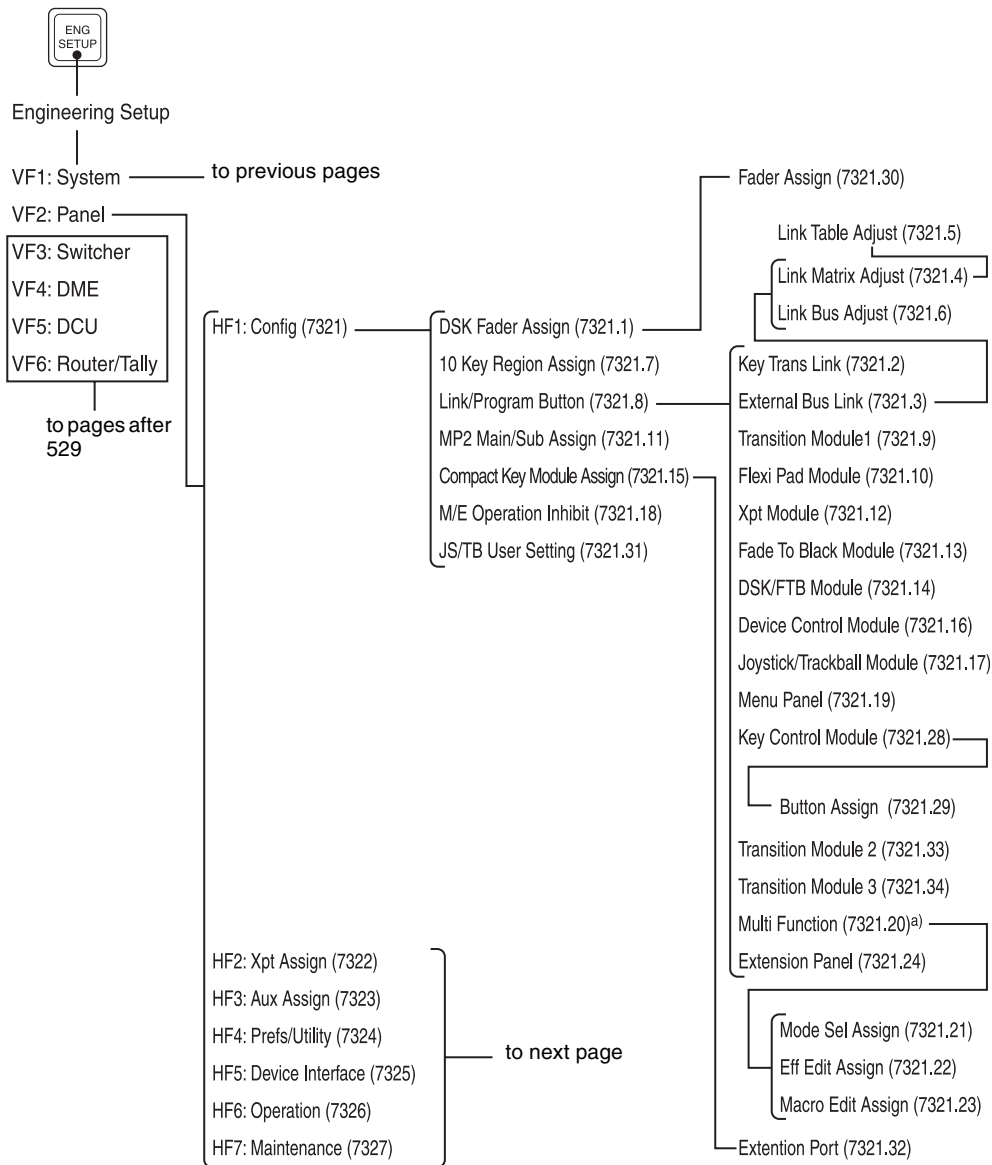



Engineering Setup

VF1: System ——— to previous pages

VF2: Panel

VF3: Switcher

VF4: DME

VF5: DCU

VF6: Router/Tally

to following
pages

HF1: Config (7321)

HF2: Xpt Assign (7322)

Table Button Assign (7322.1)

Main, V/K Pair Assign (7322.5)

Src Name/LCD Color (7322.6)

Table Copy (7322.8)

Name Export (7322.9)

Side Flags Button Assign (7322.10)

Mixer Xpt Assign (7322.11) ——— Main, V/K Pair Assign (7322.5)

HF3: Aux Assign (7323)

RTR Mode Setting (7323.1)

HF4: Prefs/Utility (7324)

Utility Module Assign (7324.1)

Key 2/4 Bus Button Assign (7324.2)

GPI Input (7325.1)

GPI Output (7325.3)

DCU Serial Port/MPE Assign (7325.4)

Effect Mode (7326.2)

HF6: Operation (7326)

Flexi Pad Mode (7326.3)

Custom Button (7326.4) ——— CCP-6000/8000 Button (7326.7)

Sensitivity (7326.5) ——— Search Dial (7326.5)

Macro (7326.6)

Button Tally (7326.9)

HF7: Maintenance (7327)

Main, V/K Pair Assign (7322.5)

Src Name/LCD Color (7322.6)


Source Table Assign (7323.2)

Level Button Assign (7323.4)

Table Assign (7323.3)

H/L Set (7325.2)



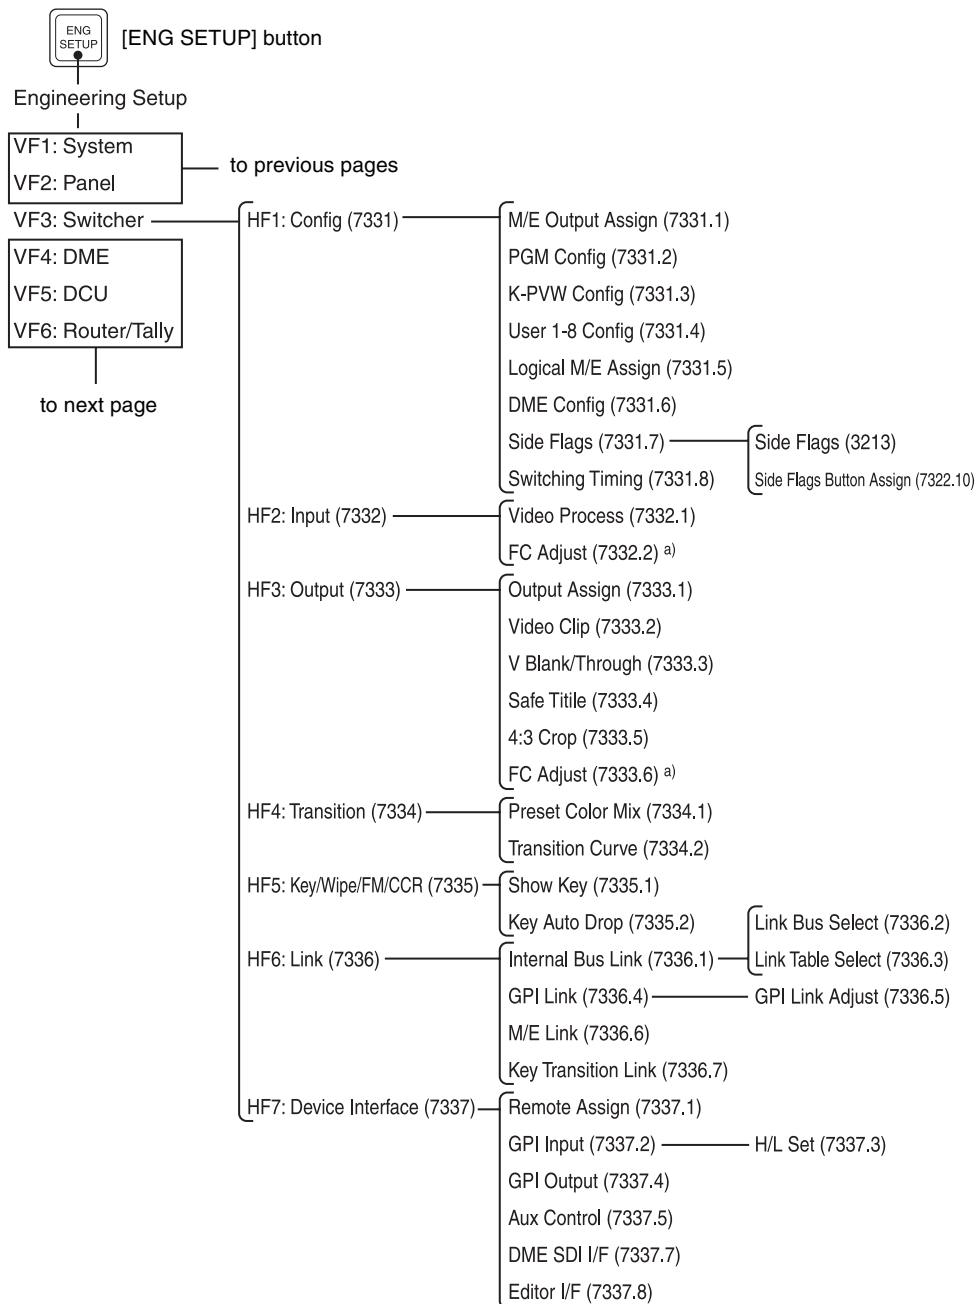



[ENG SETUP] button

Engineering Setup

VF1: System

VF2: Panel

VF3: Switcher

to previous pages

VF4: DME

VF5: DCU

VF6: Router/Tally

HF1: Input (7341)

HF3: Output (7343)

HF4: Device Interface (7344)

TBC Center (7341.1)

Monitor Output (7343.1)

DME1 GPI Input (7344.1) — H/L Set (7344.2)

DME1 GPI Output (7344.3)

DME2 GPI Input (7344.4) — H/L Set (7344.5)

DME2 GPI Output (7344.6)

DME3 GPI Input (7344.7) — H/L Set (7344.8)

DME3 GPI Output (7344.9)

DME4 GPI Input (7344.10) — H/L Set (7344.11)

DME4 GPI Output (7344.12)

HF1: Input Config (7351)

HF2: GPI Input Assign (7352) — H/L Set (7352.1)

HF3: Output Config (7353)

HF4: GPI Output Assign (7354)

HF5: Serial Port Assign (7355) — P-Bus Setting (7355.1)

VTR Setting (7355.2)

DDR SD9P Setting (7355.3)

DDR VDCP Setting (7355.4)

Extended VTR Setting (7355.5)

Simple VDCP Setting (7355.6)

HF1: Router (7361) — External Box Assign (7361.1)

HF2: Group Tally (7362)

HF3: Wiring (7363) — New (7363.1)

Modify (7363.2)

HF4: Tally Enable (7364) — New (7364.1)

Modify (7364.2)

HF5: Tally Copy (7365) — New (7365.1)


Modify (7365.2)

HF6: Parallel Tally (7366) — Set (7366.1)

HF7: Serial Tally (7367) — Source Assign (7367.1)



Diagnostic Menu

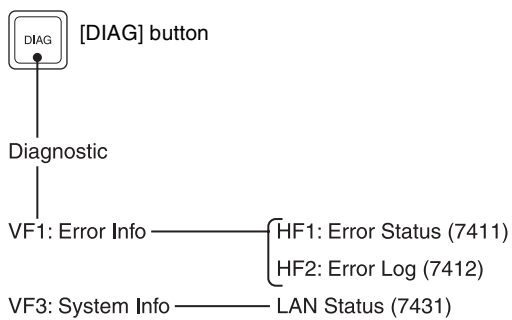

Using the M/E-4 Bank

Assigning a Button for M/E-4 Selection in the Setup Menu

- In the factory defaults for this system, M/E-4 is not assigned to buttons on the control panel.
- To select M/E-4, assign buttons in the Setup menu according to the following table.

Control block	Button	Menu number	Reference in User Guide “Control Panel Setup (Panel)” and “Cross-Point Settings (Xpt Assign Menu)” in Chapter 19 (Volume3)
Cross-point control block	Reentry buttons	7322.1 7322.5	“Creating Cross-Point Assign Tables” Engineering Setup >Panel >Xpt Assign >Table Button Assign menu Engineering Setup >Panel >Xpt Assign >Main,V/K Pair Assign menu
Entire switcher bank	-	7321	“Interchanging the Bank Order or Disabling Operation” Engineering Setup >Panel >Config menu
Key control block	Delegation buttons	7321.29	“Assigning Functions to Key Control Block Buttons” Engineering Setup >Panel >Config >Link/ Program Button >Key Control Module >Button Assign menu
Device control block	Region selection buttons	7321.17	“Assigning Functions to the Device Control Block” Engineering Setup >Panel >Config >Link/ Program Button >Joystick/Trackball Module menu
Numeric keypad control block	Region selection buttons	7321.7	“Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block” Engineering Setup >Panel >Config >10 Key Region Assign menu
Fade to black control block	Preview selection buttons	7321.13	“Assigning Preview Output to Preview Selection Buttons” Engineering Setup >Panel >Config >Link/ Program Button >Fade To Black Module menu
Menu control block	Top menu selection buttons	7321.19	“Assigning Functions to the Menu Control Block Top Menu and User Preference Buttons” Engineering Setup >Panel >Config >Link/ Program Button >Menu Panel menu

Control block	Button	Menu number	Reference in User Guide "Control Panel Setup (Panel)" and "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume3)
Multifunction Flexi Pad control block	Region selection buttons	7321.7	"Assigning Functions to the Buttons in the Multifunction Flexi Pad Control Block" Engineering Setup >Panel >Config >10 Key Region Assign menu

Using Keys 5 to 8

Notes

Keys 5 to 8 cannot be used when the signal format is 1080P.

Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu


In the factory defaults for this system, keys 5 to 8 are not assigned to buttons on the control panel.

To select keys 5 to 8, assign buttons in the Setup menu according to the following table.

Control block	Button	Menu number	Reference in User Guide "Control Panel Setup (Panel)" and "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume3)
Transition control block	Next transition selection buttons	7321.9	"Setting Transition Control Block Button Assignments" Engineering Setup >Panel >Config >Link/ Program Button >Transition Module1 menu
Cross-point control block	SHIFT button	7322.1	"Creating Cross-Point Assign Tables" "Setting the action of the [SHIFT] button in the cross-point controlblock" Engineering Setup >Panel >Xpt Assign >Table Button Assign menu
Key Control Block	Delegation button	7321.29	"Assigning Functions to Key Control Block Buttons" Engineering Setup >Panel >Config >Link/ Program Button >Key Control Module >Button Assign menu
Transition control block (standard type)	Key delegation buttons	7321.33	"Setting Transition Control Block Button Assignments" Engineering Setup >Panel >Config >Link/ Program Button >Transition Module2 menu
	Independent key/ downstreamkey transition execution section	7321.34	"Setting Transition Control Block Button Assignments" Engineering Setup >Panel >Config >Link/ Program Button >Transition Module3 menu
Independent key transition control block	Entire block	7321.15	"Assigning Keys to the Independent Key Transition Control Block (Simple Type)" Engineering Setup >Panel >Config >Compact Key Module Assign menu

Control block	Button	Menu number	Reference in User Guide "Control Panel Setup (Panel)" and "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume3)
Downstream key control block	Key delegation buttons	7321.1	"Assigning the Key Delegation in the Downstream Key Control Block" Engineering Setup >Panel >Config >DSK Fader Assign menu
Downstream key/fade-to-black control block	Key delegation buttons	7321.14	"Assigning Keys to the DSK1 and DSK2 Buttons in the Downstream Key/Fade-to-Black Control Block" Engineering Setup >Panel >Config >Link/Program Button >DSK/FTB Module menu
Device control block (joystick)	Operating buttons	7321.31	"Selecting the Module to be the Reference for Device Control Block" Menu Engineering Setup >Panel >Config >JS/TB User Setting menu
Device control block (trackball)			

Selecting Keys 5 to 8 for Next Transition

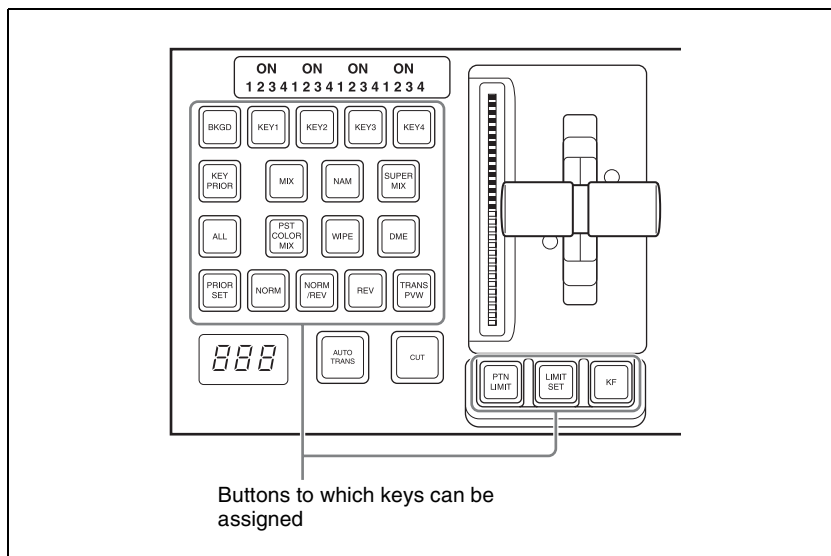

To select keys 5 to 8 for the next transition, in addition to assigning [KEY5] to [KEY8] for the operation, it is also possible to make the selection with [KEY1/5], [KEY2/6], [KEY3/7], [KEY4/8], [SHIFT], and [ADD].

The following describes this method of operation.

Appendix (Volume 1)

Using Keys 5 to 8

3 Select the signal in the key 1 row.

Notes

On an M/E-4 bank, only premium inputs can be used as key signals.



Index

A

- Additive mix 211
- Angle 298
- Aspect ratio 300, 313
- Audio mixer 145
- Auto
 - chroma key adjustments 214
 - transition 174
- AUTO button 74
- AUTO DELEG button 59
- AUTO INS button 71
- AUTO TRANS button 51, 52, 96
- Auto/manual transition
 - combination 176
- AUX
 - bus settings 436
 - delegation buttons 75
 - menu operations 436
- AUX menu 514
- AUX Panel-less Function 141
- Auxiliary bus control block
 - for AUX buses 74
 - for router control 76

B

- Background
 - A/B row 46
 - changing 22
 - mask 205
- Bank selection buttons 83
- Basic menu operations 103
- Blink
 - function 237
- Border 202
 - parameters 243
- BS button 125
- Bus fixed mode
 - fader operation 177
 - wipe direction 179

- Bus selection 137
- Button
 - numbers 142, 143

C

- Caps Lock button 125
- CCP-6224
 - AUX Panel-less Function 141
- CCP-6224 2M/E Control
 - Panel 97
- CCP-6324
 - AUX Panel-less Function 141
- CCP-6324 3M/E Control
 - Panel 97
- CCR menu 515
- Chroma key 201
 - adjustments 212
 - composition 211
 - shadow 213
 - shadow adjustment 217
 - window 212
- Clean mode 201
- Clear button 124, 126
- Clip function 392
- Clip transition 149
 - operations 403
- Close button 123, 125
- Color
 - combination 420, 421
 - matte settings 162
 - vector key 200
- Color background
 - selection 420
 - setting operations 420
 - settings menu 420
- Color Bkgd menu 514
- Color cancel 212
 - adjustments 215
- Color corrector 443
- Color data

- copy 426
- swap 426
- Color mix 420, 421
 - for edge fill matte 294
 - for key fill 221
- Color palette window 127
- Control panel 40
 - configuration 1 40
 - configuration 2 42
 - configuration 3 44
- Copy 424, 428
- Copy/Swap menu 516
- Cross-point
 - button numbers 46
 - buttons 45
 - control block 45
- Cut 149
- CUT button 51, 96

D

- Dead zone 362
- Default recall button 116
- Del button 126
- Delegation buttons 56
- DEST button 75
- Device
 - menu 519
- DEVICE connectors 80
- Device control block
 - joystick 64
 - search dial 65
 - trackball 60
- Diagnostic menu 531
- Digital multi effects 32
- Direction 291, 310, 342
- Display 58, 73
- DME 32, 50, 52, 95
 - applying to a key 233, 248
 - channel selection buttons 58
 - menu 518

- DME channel
 - copy 427
 - swap 427
- DME monitor 58, 74, 93
- DME override 432
- DME patterns
 - user programmable 358
- DME wipe pattern 328
 - edge modification 343
 - groups 328
 - selection 339
- DME wipe pattern list
 - for one-channel mode 492
 - for two-channel mode 500
- DME wipe settings 339
 - for independent key transitions 350
- DME wipes 28, 327
 - copy 425, 426
 - direction 342
 - modifiers 342
 - modify clear 349
 - position 344, 351
 - resizer 354
 - snapshot 356
 - swap 425, 426
- Door 493
- Downstream key control block 90
- Drop border 203
 - parameters 244
- dual resizer effects 272
- Duration
 - setting buttons 70
- Dust mix 287, 290
- E**
 - Edge
 - fill 204
 - modifiers 202
 - EDIT ENBL button 69
 - Edit point specification
 - buttons 69
 - Editing buttons 69
 - EFF LOOP button 71
 - Effect
 - menu 522
 - resizer 268
 - Effect execution direction
 - selection buttons 70
 - Emboss 203
 - Engineering Setup menu 526
 - Enhanced wipes 487
 - Enter button 124, 126
 - External
 - processed key 59, 236, 250
 - External devices 33
 - External hard disk drive 410
- F**
 - Fade to black 191
 - control block 73
 - transition rate 192
 - Fader lever 51, 91, 95
 - File menu 525
 - Files 36
 - deleting 408
 - renaming 409
 - Flexi Pad control block
 - simple type 83
 - standard type 53
 - Flip tumble 495
 - Frame
 - in-out 495, 507
 - Memory menu 513
 - Frame input mode 166
 - Frame memory
 - clip function 392
 - continuously capturing still images (record) 387
 - extracting images 416
 - feed 236, 251
 - pair file processing 406
 - recalling a continuous sequence of still images (animation) 389
 - Frame memory operations
 - 373
 - capturing an input image 379
 - clip 393
 - input image selection 378
 - menu display 374
 - preparations 373
 - selecting frame memory 378
 - selecting outputs 378
 - Fringe 305
 - FTB button 73
 - FULL LINK 288
 - Function
 - button area 115
 - selection buttons 72
- G**
 - Global
 - Effect menu 519
- H**
 - Hard disk 410
 - partition 410
 - HDD 410
 - HF buttons 115
- I**
 - Image
 - data management 406
 - extracting 416
 - Image file
 - deletion 408
 - renaming 409
 - Independent key transition
 - 25, 181
 - DME wipe settings 350
 - simple transitions 196
 - type 186
 - type selection buttons 52, 88, 90
 - wipe modifiers 310
 - wipe settings 309
 - Independent key transition control block
 - simple type 88
 - standard type 184
 - Independent key transition execution section 52, 89, 91, 96



Independent key transition rate
187
display 190
setting by a menu
operation 189
setting in the Flexi Pad
control block 187
setting in the numeric
keypad control block
188

Input
string 125
value 123
Item display 123, 125

J

Joystick 64

K

Key 26
1/2 row 46
bus selection buttons 47
control block 56
default 206
delegation buttons 52, 90
deleting 23
edge modifications 222,
243
Frame menu 521
inserting 23
mask 205
memory 205
modifier buttons 57
modifiers 202
modify clear 236
output destination 236
output status display 157,
195
signal adjustments 215
status display 52, 86, 96
using keys 5 to 8 534
Key active 212
adjustment 214
KEY button 76
Key fill
selection 218

selection buttons 57
Key priority 153
display 157, 195
for keys 1 to 8 158
setting by a menu
operation 156
setting in the transition
control block 153
Key setting
using menus 207
Key snapshot 274
buttons 53, 91
recalling 275, 279
saving 275, 278
setting buttons 53, 91
using simple transition
module 277

Key source
name display 53, 91
selection 218
selection buttons 57

Key transition
selection buttons 86

Key type
selection buttons 57
setting 208

Keyboard window 125

Keyer
copy 424
swap 424

Keyframe 33
control block 68
status 116

KF button 51
Knob 58, 80
parameter buttons 116

K-SS button 89

L

Left button 126
Level selection buttons 76
Line feed button 126
Linear key 200
Lock function 386
Luminance key 200

M

M/E
bank display 48
copy 424
swap 424
M/E-1 to M/E-4 menus 508
Macro 35
attachment 36
menu 520
timeline 35
Magnitude 299
MAIN and SUB delegation
button 474
Main mask 205
using 230, 247
Main menu site 129
Main/sub modifier link 288
Manual transition 175
Masks 204, 229, 247
Matte data
copy 426
swap 426
Max./min. value indication
123
Memory
card slot 80
recall buttons 83
Memory card/USB adaptor
block 80
“Memory Stick”/USB
connections block 81
“Memory Sticks” 81
Menu
accessing 104, 113
control block 79
display 80
operations 116
organization 103
page number button 115
screen 114
shortcut menu 129
shutting down 127
switching between the
main menu sites 129
title button 114
top menu list 103
MENU button 63

- Menu tree 508
- Minus button 124
- Misc menu operations 431
- MIX 50, 52, 95
- Mix 147, 285
- Mode selection buttons 54, 71, 87
- Modulation 304
- MORE button 58
- Morphing 286
- Mosaic
 - wipes 489
- Multi 301, 313
- Multi Program 2 30
 - basic operation 471
 - restriction 482
- Multifunction Flexi Pad
 - Control Block
 - DME Wipe Pattern
 - Operations 363
 - Key Adjustment
 - Operations 253
 - Wipe Pattern Operations
 - 320
- MVS-8000X Multi Format
 - Switcher System 20

N

- NAM 50, 95, 147
- Negative NAM 285
- Next transition 147
 - selecting 147
 - selection buttons 50, 94
- Non-additive mix 50, 95, 147
- Non-Sync state 176
- Normal
 - edge 246
 - mix 211
- Numeric display 55, 87
- Numeric keypad 72
 - control block 71

O

- ON AIR indicators 58
- One-stroke mode 162
- One-time mode 162

- Operation
 - buttons 61
 - modes 372
- Outline 203
 - parameters 245
- Output
 - destination specification
 - buttons 58
- OVERRIDE button 59

P

- Page Roll 497
- Page turn 496
- Pair file processing 406
- Pair mode 371
- Pairing 303
- Parameter group button 115
- Pattern limit 171
 - buttons 51, 86
 - setting by a menu
 - operation 172
 - setting with the fader lever
 - 172
 - transition 173
- Pattern mix 285
 - types 285
- PGM/PST
 - menu 511
- Picture-in-picture 496, 501
- Plane function 211
- Positioner 296, 311, 344, 351
- Positive NAM 285
- Preset color mix 148
- Preview 179
 - selection buttons 73
- Previous page button 116
- PRIOR SET button 52, 96
- PST COLOR MIX 50, 95

R

- Random/diamond dust wipes
 - 491
- Recording
 - to DDR 414
 - to VTR 414
- Reentry buttons 46, 137

- Regions
 - selection buttons 72
- Related manuals 19
- Replication 313
- Resizer DME wipe 354
- Resizer DME wipe patterns
 - 506
- Right button 126
- Rotary wipes 488
- Rotation 298, 312
- RTR button 76

S

- Search dial 65
- Second (2ND) button 76
- Selected
 - bus display 75
 - source name displays 75
- SEMI LINK 288
- Setup 37
- Shadow 203
 - parameters 244
- SHIFT button 47
- Shift button 126
- Shortcut 129
- Shotbox 35
- Shotbox menu 524
- SHOW KEY button 58
- Show key function 251
- Side flags
 - DME wipe action 467
 - MISC menu 464
 - wipe action 466
- Signal
 - assignment to buttons 142
 - name display 146
 - selection 136
- Simple
 - transition 193
- Slide 492, 500, 506
- Snapshot 34
 - menu 523
- Soft edge 203, 310
- Softening
 - edge 246
 - wipe pattern edge 310
- Source

- name displays 76
- Space button 126
- Speed 299
- Spiral 306
- Split 292, 492
 - fader 195
- Spring 306
- Squeeze 493, 500, 506
- Standard wipe patterns 282
- Standard wipes 486
- Status area 115
- Status menu 437, 517
- STOP NEXT KF button 70
- Sub (subsidiary) mask 205
 - using 232, 248
- Subsidiary menu site 129
- SUPER MIX 50, 95
- Super mix 148
 - settings 161
- Swap 424, 428

T

- TC button 123
- Time offset execution 182
- Timecode input mode 166
- Top menu list 103
- Top menu selection buttons 79
- Top menu window 126
- TRACE button 59
- TRANS PVW button 51, 96
- Transition
 - execution 165
 - indicator 91
 - next 147
 - preview 179
- Transition control block
 - simple type 83
 - standard type 49
- Transition execution
 - section 51, 86, 95
 - with the fader lever 175
- Transition indicator 51, 95
 - function 165
- Transition rate 166
 - display 51, 95

- setting by a menu
 - operation 170
- setting in the Flexi Pad
 - control block 167
- setting in the MISC menu
 - 434
- setting in the numeric
 - keypad control block 168
- Transition type 147
 - selecting by a menu
 - operation 160
 - selection buttons 50, 85, 95
- Trim button 124

U

- UNDO button 55, 87
- User preference button 80
- User programmable DME
 - 500, 504
 - Notes on keyframe
 - creation 359
 - patterns 358
 - transition mode 331, 358
- UTIL button 47
- Utility 35
- Utility/shotbox control block
 - 82

V

- V/K mode 372
- VF buttons 115
- Video
 - processing 134, 237
 - signal adjustment 214
- Video process 440
 - memory 441
 - settings 442

W

- Window adjustment 213, 216
- WIPE 50, 52, 95
- Wipe 27, 148
 - copy 425
 - enhanced 282

- modify clear 308
- mosaic 282
- pattern list 486
- random/diamond dust 282
- rotary 282
- standard 282
- swap 425
- Wipe direction 291, 310
 - selection buttons 51, 86, 96
- Wipe modifiers 290
- Wipe pattern
 - aspect ratio 300, 313
 - edge modification 292
 - key 202
 - modulation 304
 - replication 301, 313
 - rotation 298
 - selection 283
 - types 282
- Wipe pattern/modifier
 - combinations 307
- Wipe position 296, 311
- Wipe settings 283
 - for independent key
 - transitions 309
- Wipe snapshot 314
 - deleting 317
 - recalling 316
 - saving 316

X

- XPT HOLD
 - buttons 47, 76
 - status display 87

Y

- Y balance 213
 - adjustment 217

Z

- Zabton 203, 228, 246
- Z-ring 63

The material contained in this manual consists of information that is the property of Sony Corporation and is intended solely for use by the purchasers of the equipment described in this manual.

Sony Corporation expressly prohibits the duplication of any portion of this manual or the use thereof for any purpose other than the operation or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

MVS-8000X
System (SY)
4-177-898-02 (1)

Sony Corporation

<http://www.sony.net/>

Printed on recycled paper.

Printed in Japan
2011.01 32
©2010