


Warming Drawer, 30", Stainless Steel WD30WC

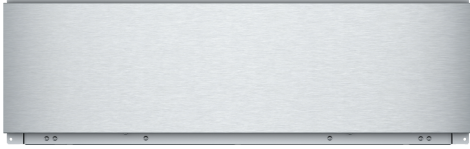

Our warming drawer is the perfect combination of uncompromising performance, unique convenience features and elegant design

- Telescopic Rails: Featuring a telescoping ball-bearing design for smooth opening and closing that supports up to a 40 lbs. load.
- Proof Mode: Includes special proofing mode for preparing bread dough and more.
- Compatible with: installs vertically under Thermador speed, steam or wall ovens
- Touch Control: A digital display to easily activate and monitor any one of the 4 temperature settings.

UPC code:825225937463
 Product color:Stainless Steel
 Amps: 15 A
 Volts:120 V
 Frequency:60 Hz
 Power Cord Length:84"
 Plug Type: 120V-3 prong
 Required Cutout Size (HxWxD) (in): 9 1/4" x 28 1/2" x 23 1/2"
 Overall Appliance Dimensions (HxWxD) (in): 9 7/16" x 29 3/4" x 24 1/2"
 Product Packaging Dimensions (HxWxD):14 1/2" x 35 5/8" x 30 1/2"
 Net Weight:72.000 lbs
 Gross Weight:80.000 lbs



Warming Drawer, 30", Stainless Steel WD30WC

Our warming drawer is the perfect combination of uncompromising performance, unique convenience features and elegant design




Performance

- Warming mode with 3 convenient temperature settings
- Special proof mode
- Automatic shut-off timer
- Concealed 450-watt heating element
- Spacious 2.2 cu.ft. cavity can hold and warm up to 28 dinner plates


Design


- Premium touch control

Warming Drawer, 30", Stainless Steel WD30WC

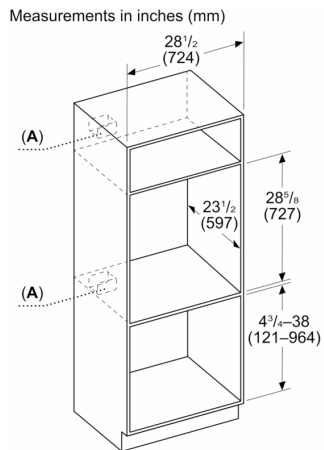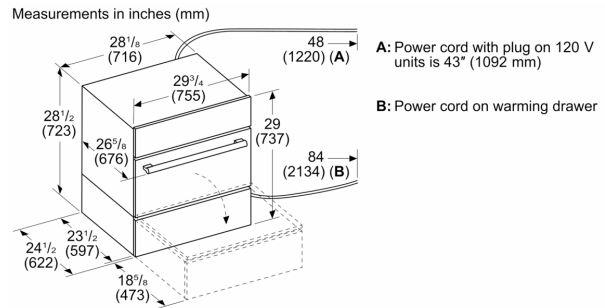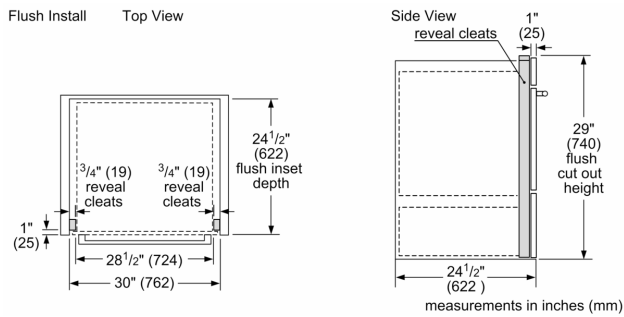


A: For installation into a wall cabinet, the receptacle may be installed above, below, or to the left or right of the unit within reach of the power cord



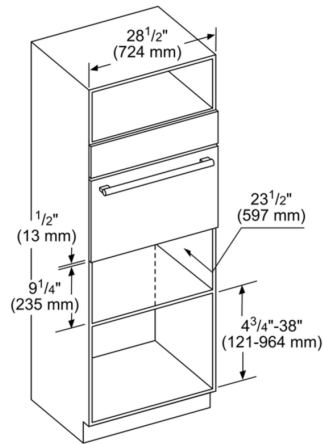

measurements in inches (mm)

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

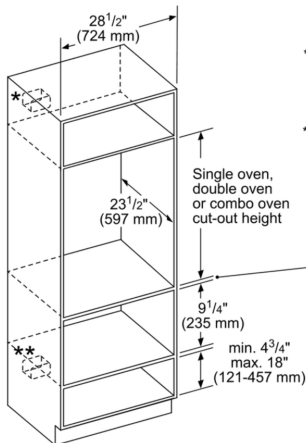

* Wall oven junction box may be located above or to the right or left of the unit within reach of the power cable.

** Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

Single oven, double oven or combo oven cut-out height


Minimum 3/4" (18 mm) required between cut-outs.

9 1/4" (235 mm)


min. 4 3/4" max. 18" (121-457 mm)

measurements in inches (mm)

Flush installation Top View




Side View



measurements in inches (mm)

Flush installation
Single oven over storage or warming drawer



Single Wall Oven

* IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.


minimum 1/2" (13 mm) required between cut-outs*

Warming Drawer

** For WD30W, the installed dimension may differ. This drawing based on a 3/4" (19 mm) thick custom panel.

measurements in inches (mm)

Flush installation
Double or combo oven over storage or warming drawer

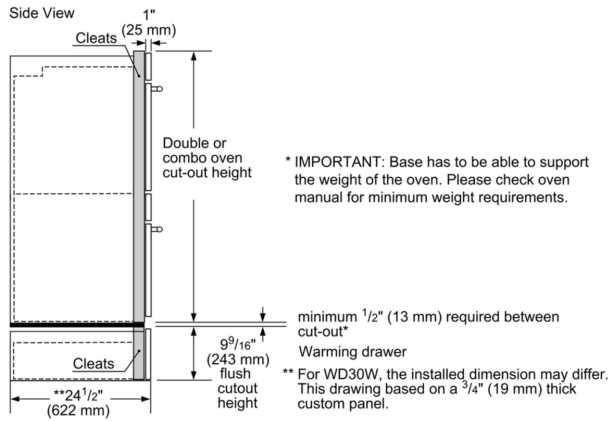

measurements in inches (mm)