720 Rack Instructions

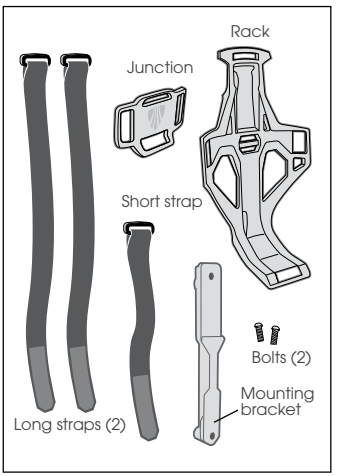

Figure 1. Parts of rack- one side

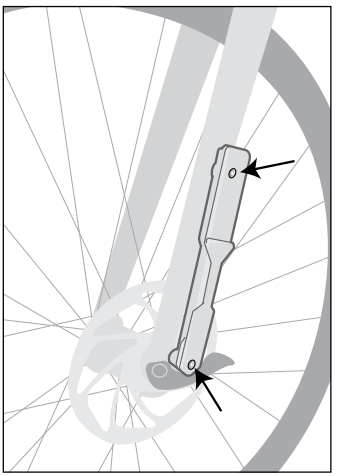

Figure 2. Tighten bolts for mounting bracket to 2.3-2.9Nm

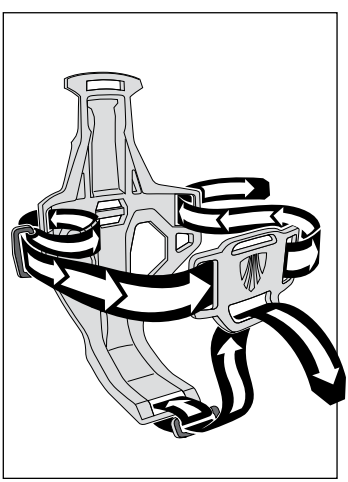

Figure 3. Path of side(long) and lower(short) straps through rack and junction

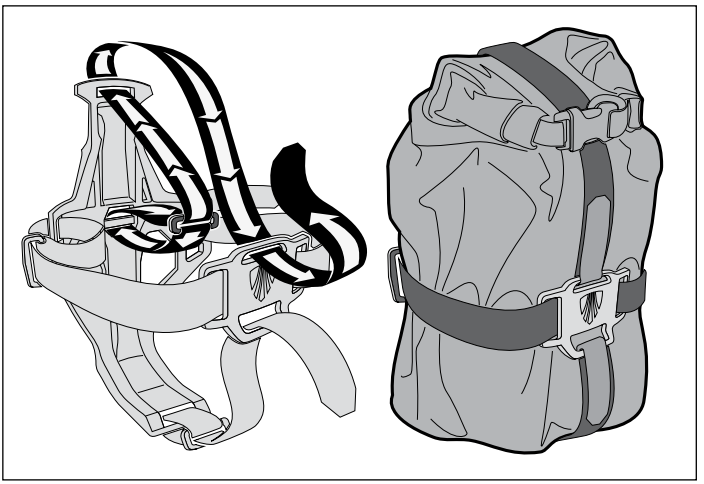

Figure 4. For fully loaded bag, path of top(long) strap through rack and junction

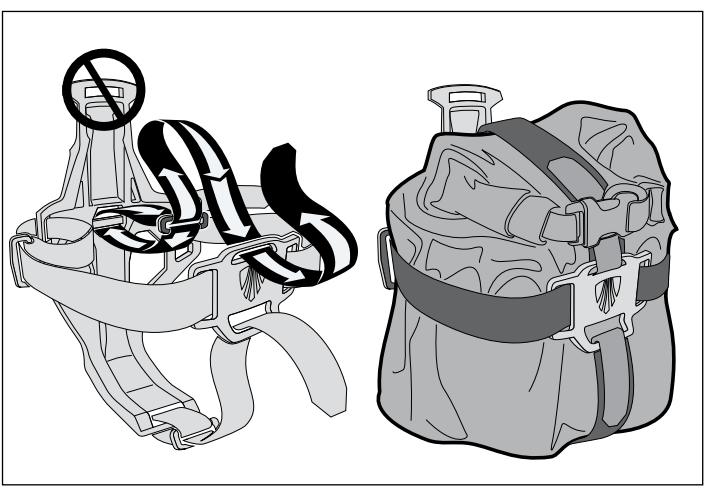

Figure 5. For partially loaded bag, path of top (long) strap through rack and junction, no loads shorter than 18cm (7inches)

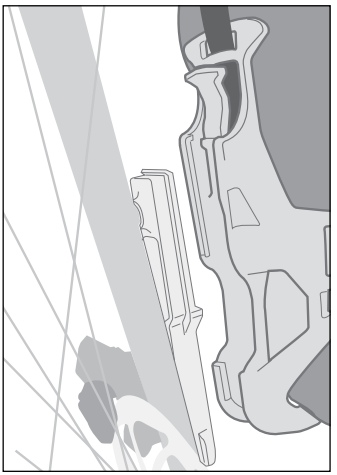

Figure 6. With loaded pannier, align rack with gaps in the mounting bracket

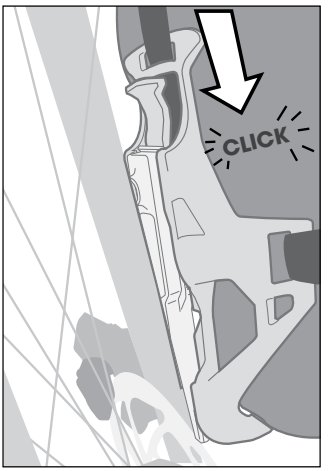

Figure 7. Slide rack down mounting bracket until latch engages and clicks

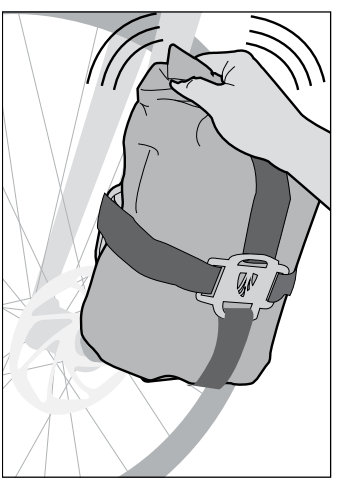

Figure 8. Test for security. Retighten straps every time cargo is added or removed. Check bag security periodically.

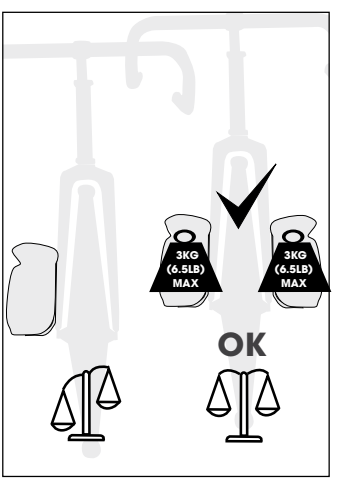

Figure 9. Load both sides equally, maximum 3kg (6.5lb) on each side

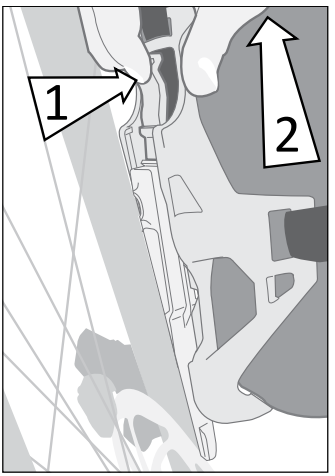

Figure 10. To remove, (1) press latch and (2) lift



Figure 11. Read about use of quick-release in Owner's Manual

⚠ WARNING Attaching anything to the front of your bicycle (handlebar, stem, or fork) will affect the steering. A heavy load can make turning the handlebar slow, difficult, or unpredictable; and might increase braking distance; which could cause you to lose control and crash. To avoid problems, make the load safe:

- **Do not place loads in these panniers that weigh more than 6kg (13lb) total.**
- **Balance the load side-to-side.**
- **Secure the load so that it cannot move.**
- **Make sure no part of the load, including straps, can get into the wheel.**
- **Pack only compressible objects.**