

FETCH+ 2 FAMILY PACK KIT

ASSEMBLY INSTRUCTIONS

Safety

WARNING

Failure to follow these warnings and instructions could result in serious injury or death.

Hardware and assembly

- Do not modify any components of the Family Pack.
- Check the Family Pack components for damage or discoloration over time. Do not use any Family Pack components if any part is broken or showing signs of deterioration and contact your Trek dealer for a replacement.
- If you remove any bolts, clean them using isopropyl alcohol and apply threadlocker to the threads during reinstallation.
- If a bolt has loosened, retighten it to the indicated torque.

Passenger requirements

- Children must be able to sit independently while supporting their own neck (including a helmet).
- Children should be wearing a helmet at all times while on the bicycle.

General use


- The seat surfaces can get hot in the sun. Check the surface temperature before use.
- Never leave a child on the seat unattended.
- Ensure there are no sharp objects the child can reach from the seats.
- The bicycle will balance and turn differently with added weight on the back end. Be cautious and take it slow at first. See the *Trek Fetch+ 4 / Fetch+ 2 Owner's Manual* for more information.
- Check your local regulations for installation of a rear seat — some countries do not allow this.
- Do not clean the seat surface with soap. Use warm water only.

Maximum weight

- The rack can carry a maximum of two children using the seats. Each child individually must not exceed 36 kg (79 lbs). The maximum combined weight on the rack must not exceed 72 kg (158 lbs).
- Recheck the weight of each child over time to make sure they have not outgrown the maximum weight.


WARNING


You must have a rear fender installed before installing the Family Pack. Without the rear fender, a child could get their hands caught in the wheel spokes, causing injury.

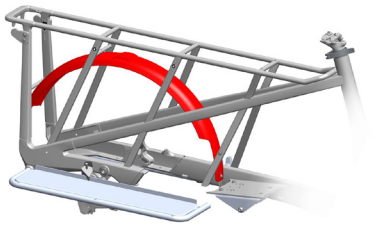


In the box


Safari bar
(page 2)

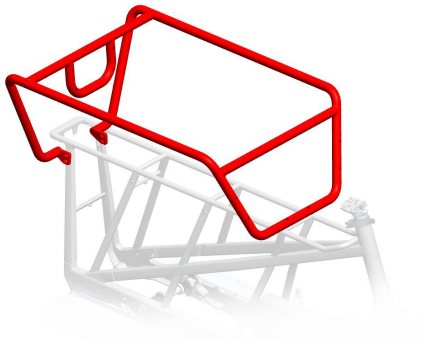




Seat pads
(page 3)

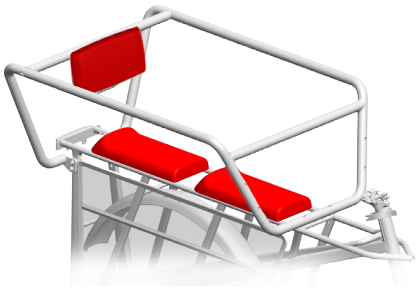




Foot guards
(page 4)









Tools required

Hex bits:
2.5mm, 3mm



Socket bit:
10mm



Screwdriver





Torque wrench




Repair stand
(optional)






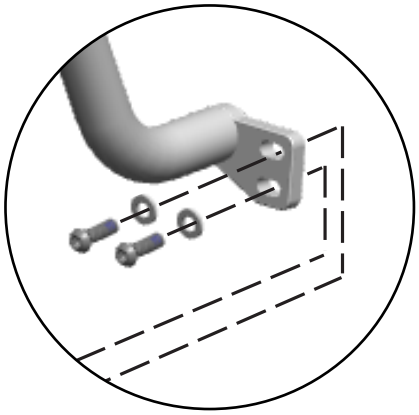



1

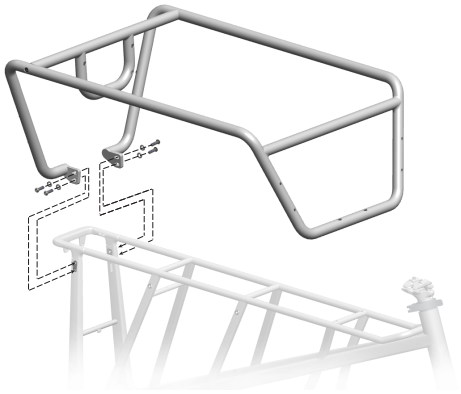

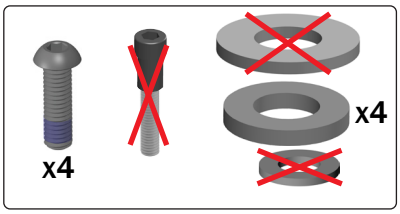



2

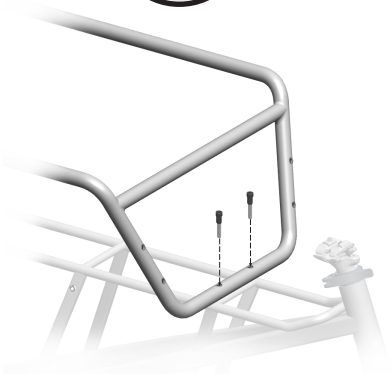





3

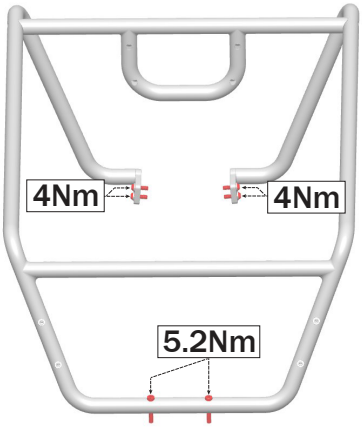







1




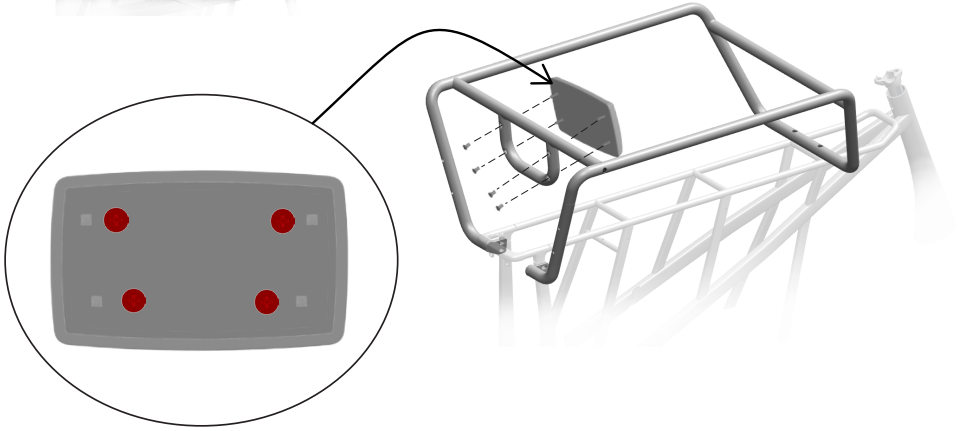


2







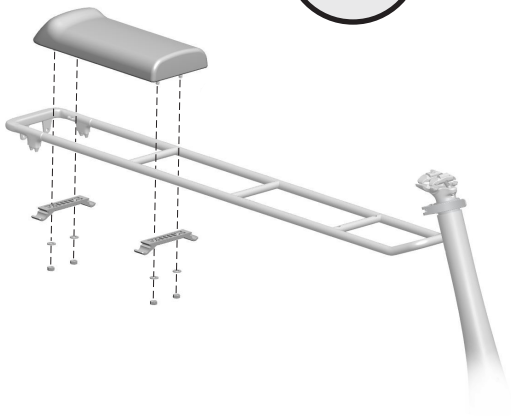



3

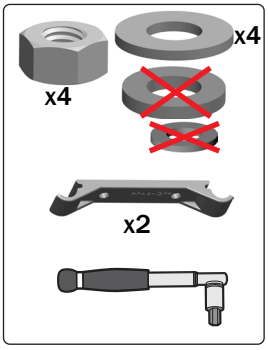

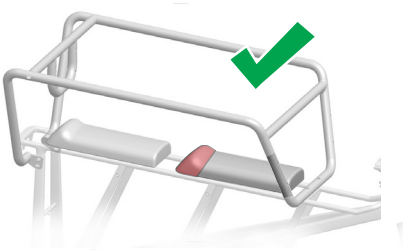

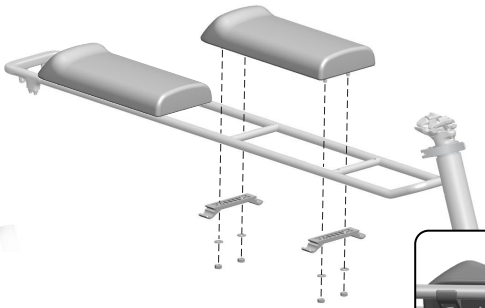


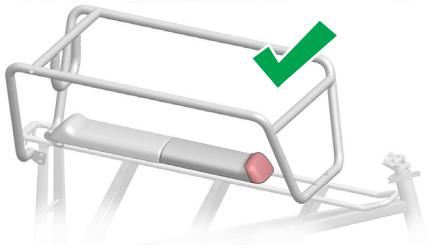







1

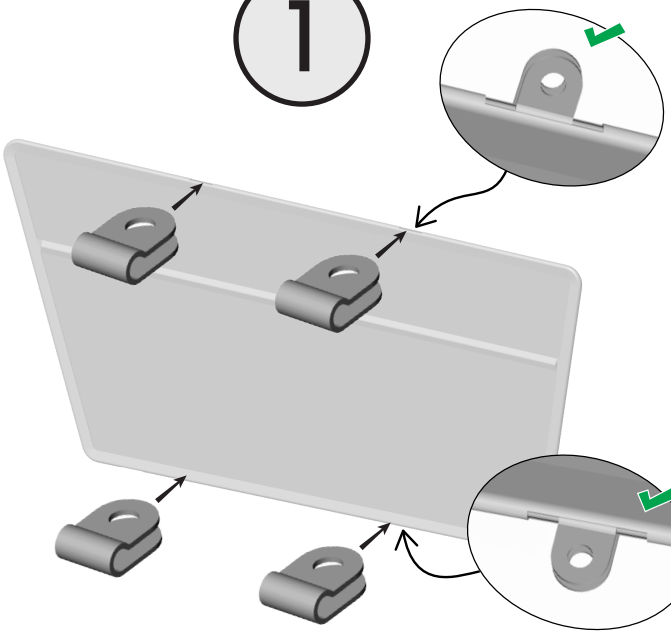




2



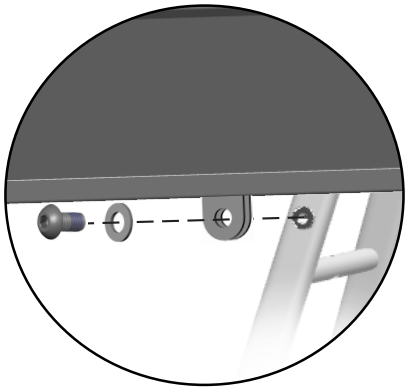

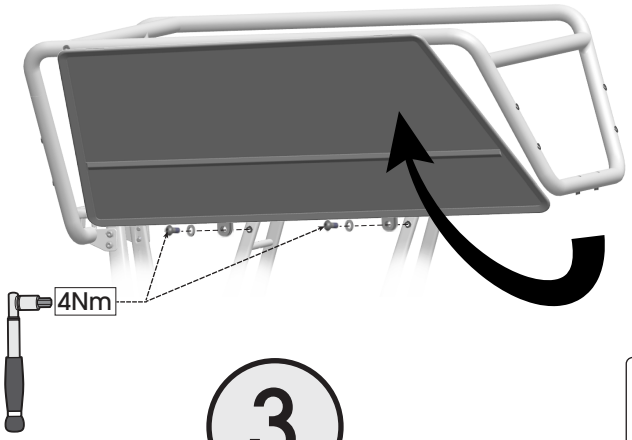

3

