
TREK

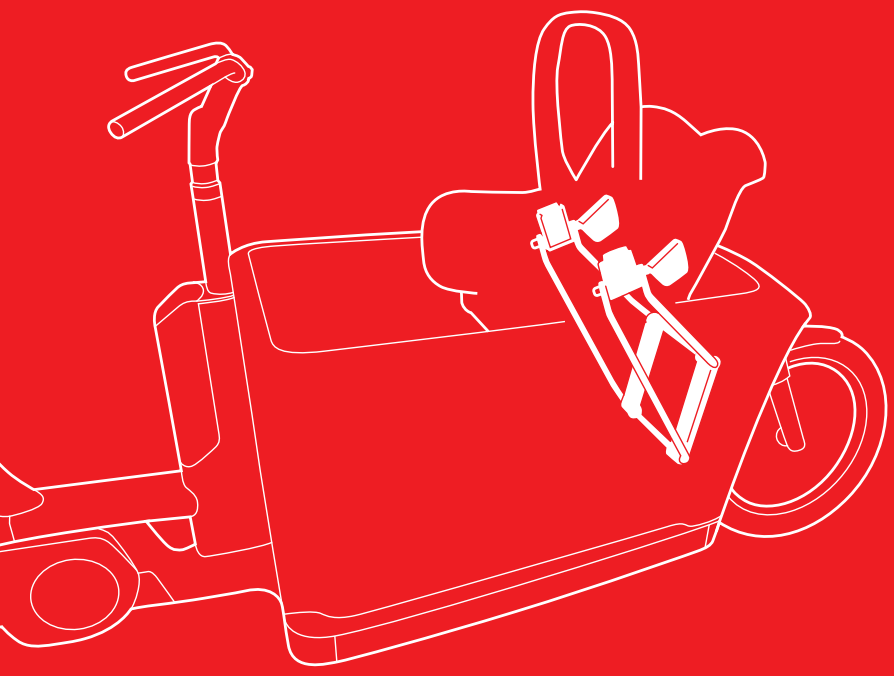

Fetch+ 4 Baby Seat Adapter

INSTALLATION INSTRUCTIONS

Safety

WARNING: Failure to follow these warnings and instructions could result in serious injury or death.

Choose the correct adapter

- The adapters are for use with ONLY a Fetch+ 4 bicycle. Each adapter works with ONLY a Britax® or a Maxi-Cosi® baby car seat. Be sure to use the correct adapter. Do not install any other brand of baby seat onto the adapter. Your local bike shop can help you select the correct adapter.

Installation

- Do not modify the adapter or any parts of the adapter.
- If you remove the adapter from the bike, clean all hardware using isopropyl alcohol and re-apply threadlocker to the bolts during re-installation.
- Always tighten the bolts to the specified torque value using a torque wrench. If a bolt has loosened, re-tighten it.

General use

- Verify the adapter is correctly installed and in good condition before attaching a baby car seat. Never attach a baby car seat to the adapter if there are missing, broken or worn parts on the baby car seat or the adapter. Replace broken or worn parts with new parts from the original manufacturer before using.
- Verify both sides of the baby car seat are fully engaged and locked into place on the adapter.
- Do not allow children to climb or play on the adapters or installed car seat.

Riding with a baby

- If applicable, load the bike in the proper order: first load cargo, then children in the child seats, then attach the baby car seat to the adapter.
- Always use the baby car seat restraint system as recommended by the car seat manufacturer.
- Always buckle the adapter strap over the car seat as shown in Step 5 in this manual.
- Never leave a baby unattended in a baby car seat that is attached to the bicycle.
- Ensure the baby is properly clothed for the weather.
- The bicycle will balance and turn differently with additional weight on the front end. Be cautious and take it slow at first. Refer to the Owner's Manual that came with your bicycle for more information about riding a cargo bike.

Maximum weight of baby


- The maximum combined weight of the baby and the baby car seat is 18kg (39.5lb).
- Only use the adapters for babies within the height and weight limits specified by the baby car seat manufacturer. Refer to the baby car seat manufacturer for these limits.
- Periodically check the baby's height and weight to make sure the baby has not outgrown the capacity of the car seat.


Know the law


- Before you ride, know the local laws for transporting passengers (including limits on the number of passengers that can be transported) and cargo.

Copyright 2023 Trek Bicycle Corporation All Rights Reserved

= WARNING

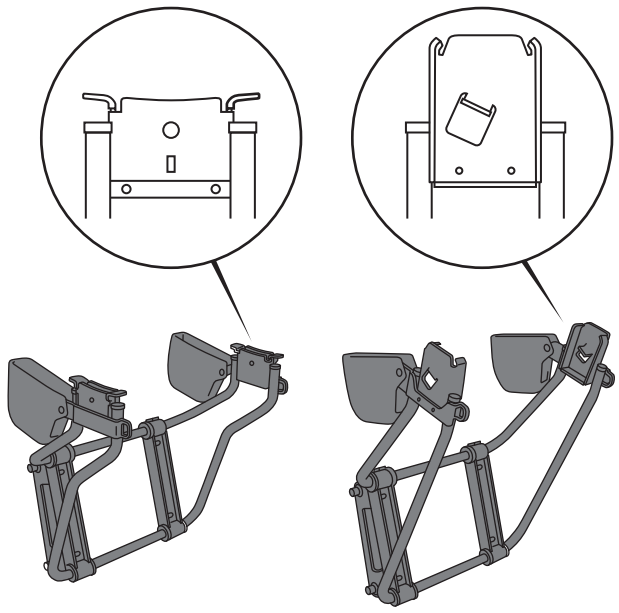


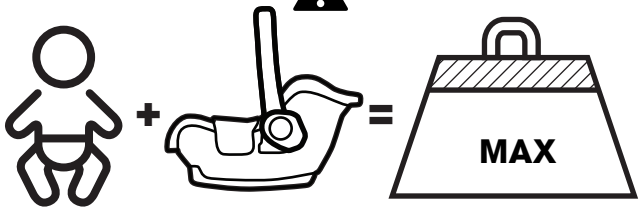


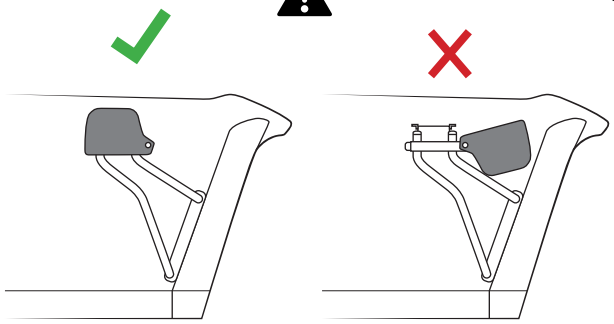


To protect passengers and cargo, always position the covers over the adapter when a baby seat is not installed.


1

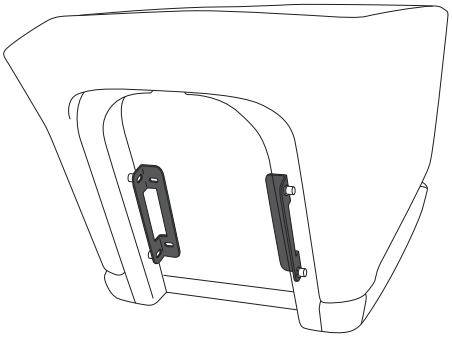

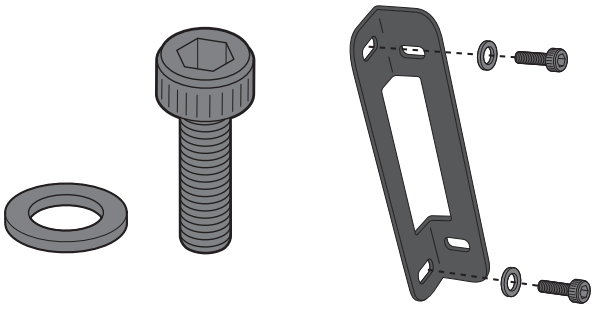

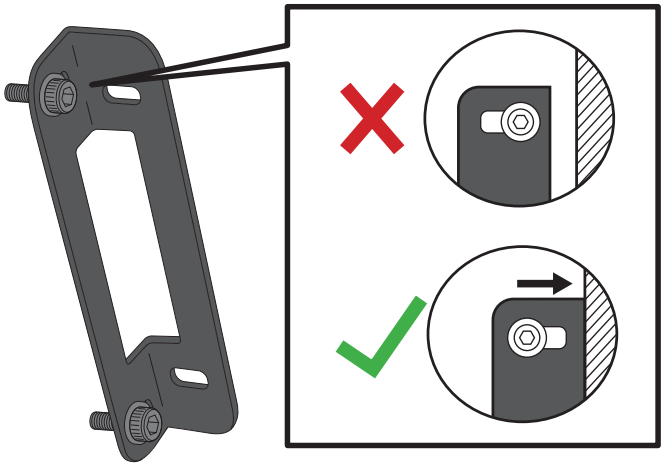



Install brackets flush with the cargo box frame and front panel.

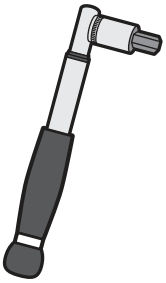


Tighten 20Nm

2

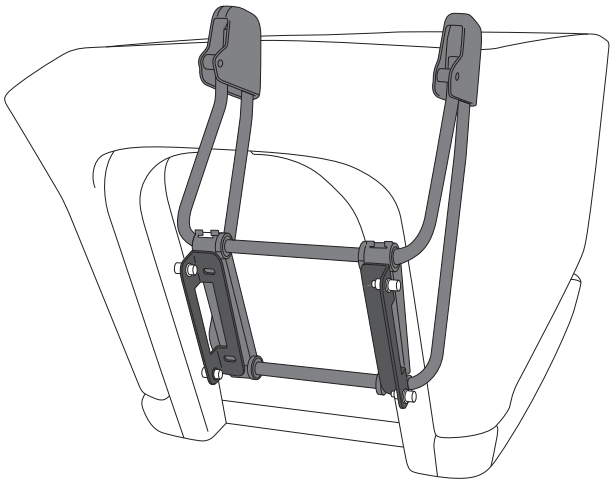


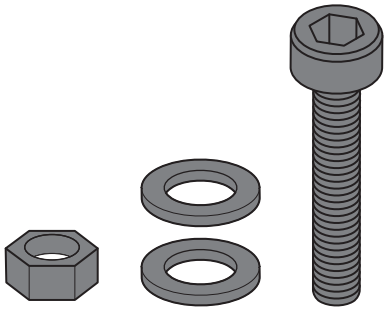

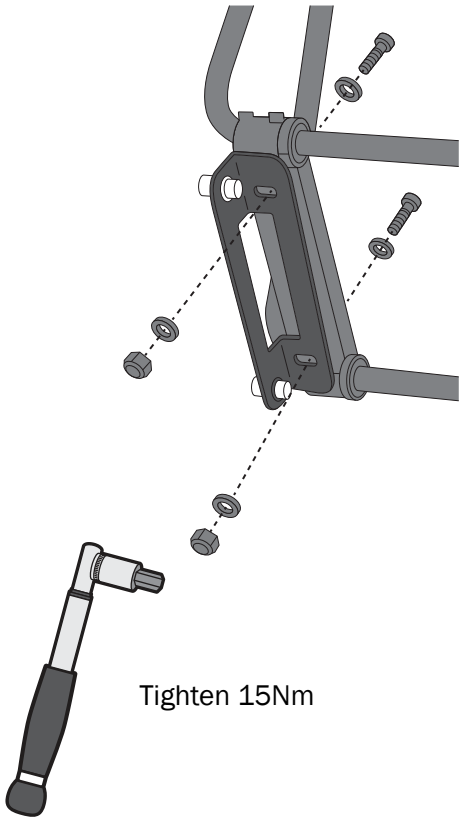

Tighten 15Nm


3

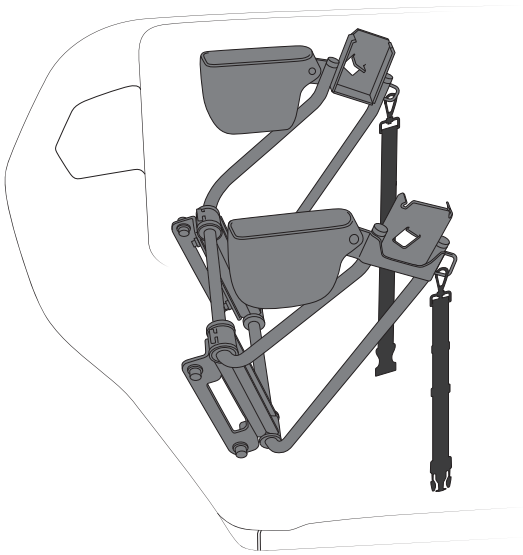




⚠ Remove the straps when not in use. Store in a location away from children. Do not store in direct sunlight. Long-term exposure to direct sunlight may damage the straps.

4

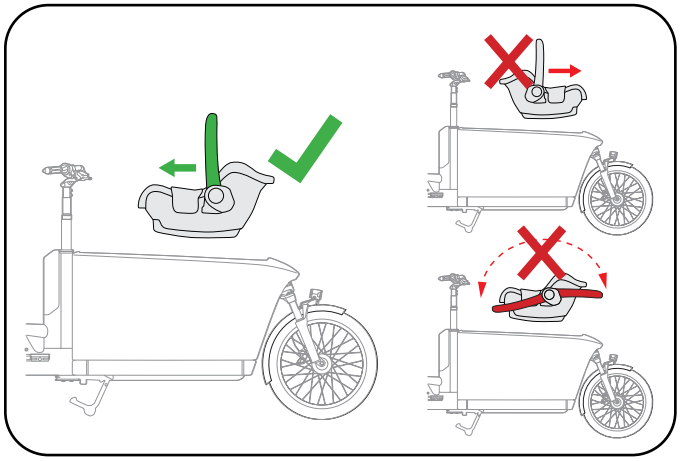


The seat must be attached facing backward.

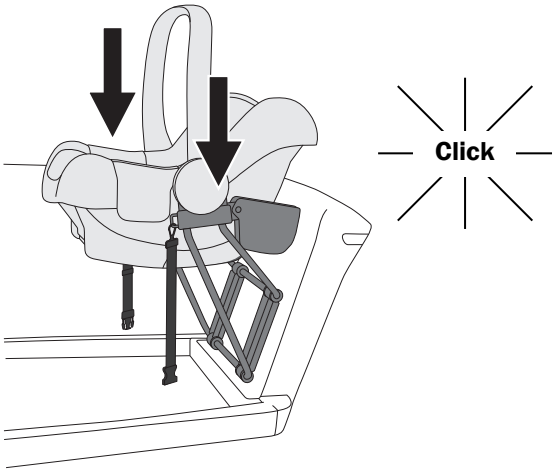


Pull up on the handle to verify the seat is securely attached to the adapter. If the seat is not securely attached, remove the seat and try the installation again. If the seat is still not securely attached, do not use the seat. Contact your local Trek retailer for help.

5

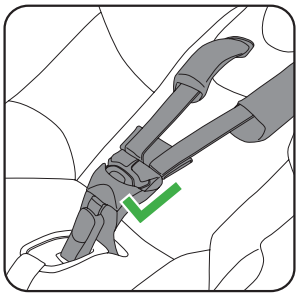

Always use the seat harness to secure the infant to the seat.


.

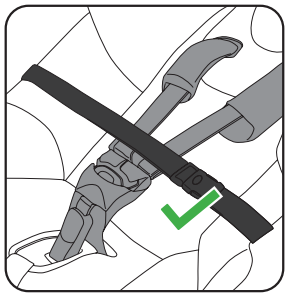


Always buckle and tighten the adapter strap over the seat.

Remove

1

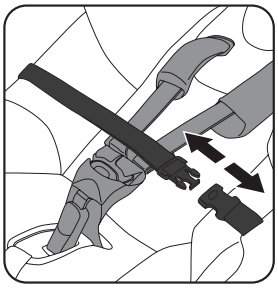

2

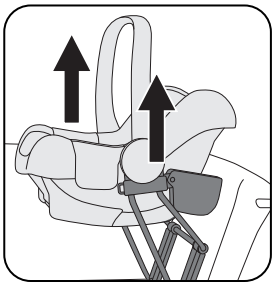

Use the release mechanism on the infant car seat to release the seat from the adapter. Refer to the infant seat manufacturer for detailed instructions.