


**THANKS FOR  
REMEMBERING**



**MODEL WA9500**

## ***ADJUSTABLE TRACK SQUARE***

### ***KNOW YOUR TRACK SQUARE***

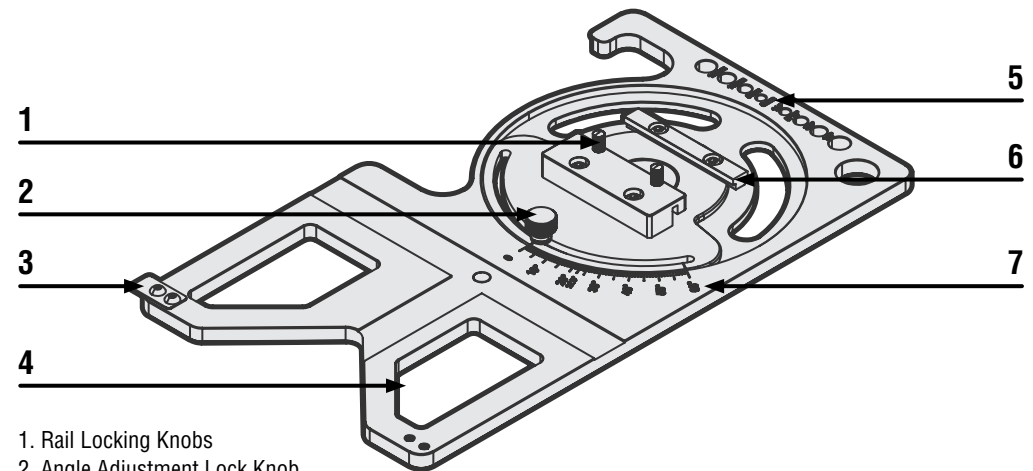

- 1. Rail Locking Knobs
- 2. Angle Adjustment Lock Knob
- 3. Support Rest
- 4. Handle
- 5. Drill Bit Size Gauge
- 6. Guide Bar
- 7. Angle Scale

## OPERATION

### INSTALLING THE GUIDE RAIL

1. Slide the guide rail (Fig. 1 - 1) onto the right guide bar (Fig. 1 - 2). Make sure that the guide rail rests against the left guide bar (Fig. 1 - 3).

2. Turn the two rail locking knobs (Fig. 2 - 1) clockwise to secure the guide rail in place.

### CHANGING ANGLES




1. Loosen the angle adjustment knob (Fig. 2 - 2) by turning it counterclockwise and move it along the angle scale to the desired angle.

2. Lock the angle adjustment knob by turning it clockwise.

### USING THE TRACK SQUARE (FIG. 3)

1. Position the front edge of the track square flat against the edge of your workpiece (Fig. 3 - 1). The support rest (Fig. 3 - 2) should rest on top of the workpiece.

2. Align the guide rail with the cut mark on the workpiece, hold onto the handle (Fig. 3 - 3) to improve stability and safety, and make the cut.

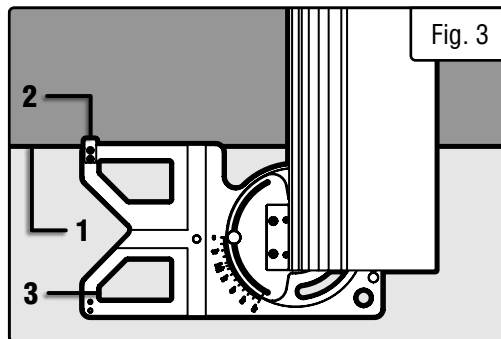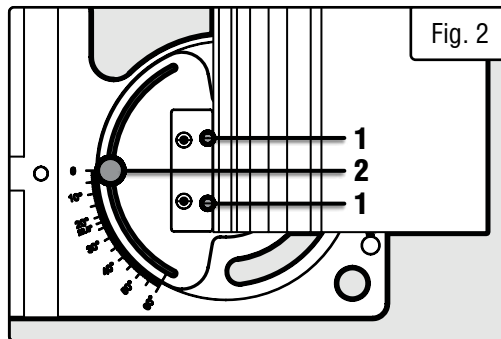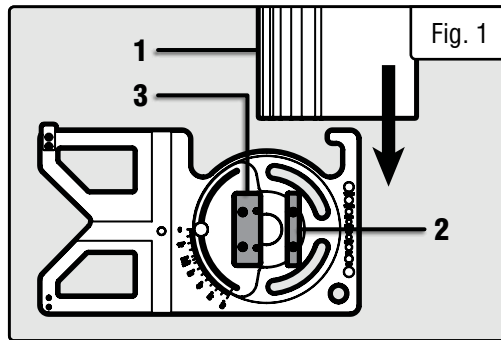

## GENERAL SAFETY WARNINGS

### WORK AREA SAFETY

1. Keep work area clean and well lit. Cluttered or dark areas invite accidents.

### PERSONAL SAFETY

1. Stay alert, watch what you are doing and use common sense when operating a tool. Do not use a tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating tools may result in serious personal injury.

2. Use personal protective equipment. Always wear eye protection. Protective equipment such as a respiratory mask, non-skid safety shoes and hearing protection used for appropriate conditions will reduce the risk of personal injury.

3. Dress properly. Do not wear loose clothing or jewelry. Keep your hair and clothing away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.

### TOOL USE AND CARE

1. Do not force the tool. Use the correct tool for your application. The correct tool will do the job better and safer at the rate for which it was designed.

2. Do not use the tool if the switch does not turn it on and off. Any tool that cannot be controlled with the switch is dangerous and must be repaired.

3. Disconnect the plug from the power source and/or the battery pack from the tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the tool accidentally.

4. Store idle tools out of the reach of children and do not allow persons unfamiliar with the tool or these instructions to operate the tool. Tools are dangerous in the hands of untrained users.

5. Maintain tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the tool's operation. If damaged, have the tool repaired before use. Many accidents are caused by poorly maintained tools.

6. Use the tool, accessories, and tool bits, etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the tool for operations different from those intended could result in a hazardous situation.

### SERVICE

1. Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

### CALIFORNIA PROP 65 WARNING

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities may contain chemicals, including lead, known to the State of California to cause cancer, birth defects, or other reproductive harm. Wash hands after handling. **Some examples of these chemicals are:**

- Lead from lead-based paints.
- Crystalline silica from bricks, cement, and other masonry products.
- Arsenic and chromium from chemically treated lumber.

Your risk from these exposures varies depending on how often you do this type of work. To reduce your exposure to these chemicals, work in a well-ventilated area with approved safety equipment such as dust masks specially designed to filter out microscopic particles.

## NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:



1-847-429-9263 (M-F 8AM-5PM CST)



TECHSUPPORT@WENPRODUCTS.COM