



30" Electric Built-in Single and Double Ovens


PRODUCT MODEL SERIES

GBD307NK	RBD305PD
GBD307PD	RBD306PD
GBS307NK	RBS305PD
GBS307PD	


Electrical:

A three-wire or four-wire, single phase, 240-volt, 60-Hz, AC-only electrical supply is required. Models rated from 7.3 to 9.6 kW at 240 volts (5.5 to 7.2 kW at 208 volts) require a separate 40-ampere circuit, fused on both sides of the line. Models rated at 7.2 kW and below at 240 volts (5.4 kW and below at 208 volts) require a separate 30-ampere circuit, fused on both sides of the line. Use minimum 8 gauge copper wire only. A time-delay fuse or circuit breaker is recommended. A U.L.-listed conduit connector must be provided at the junction box.

OVERALL DIMENSIONS

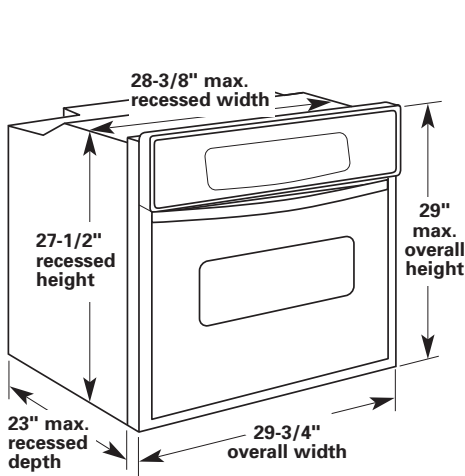


Single oven

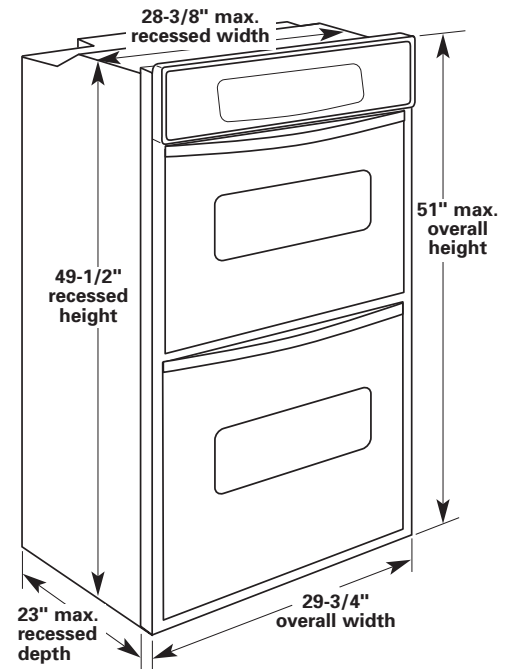


Double oven


CABINET OPENING DIMENSIONS

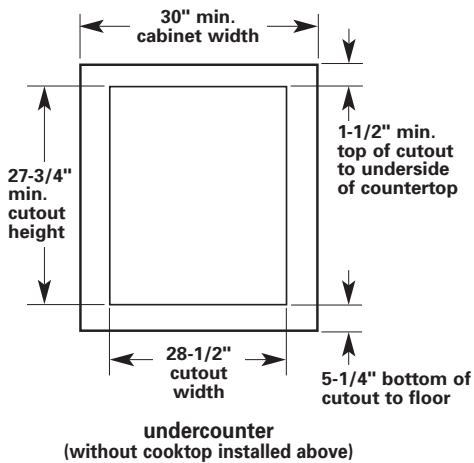

undercounter
(without cooktop installed above)

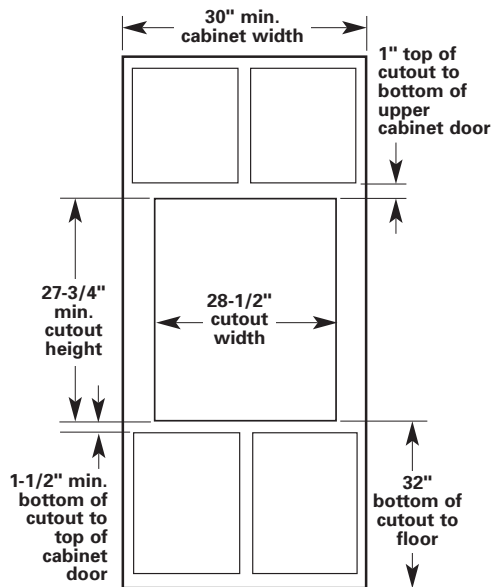

Single oven

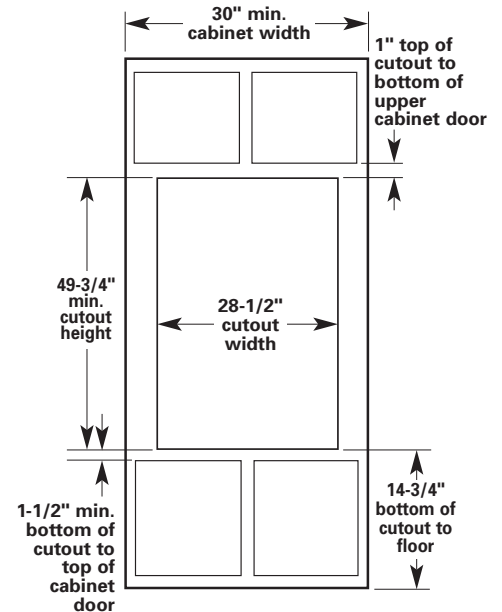

Double oven

