



# Side by Side Refrigerator

## PRODUCT MODEL NUMBERS


GS6NBEXR

**Electrical:** A 115 Volt, 60 Hz., AC only 15 or 20 amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**Water:** A cold water line with water pressure between 30 and 120 psi (207-827) is required for the water dispenser and ice maker.

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).


## OVERALL DIMENSIONS

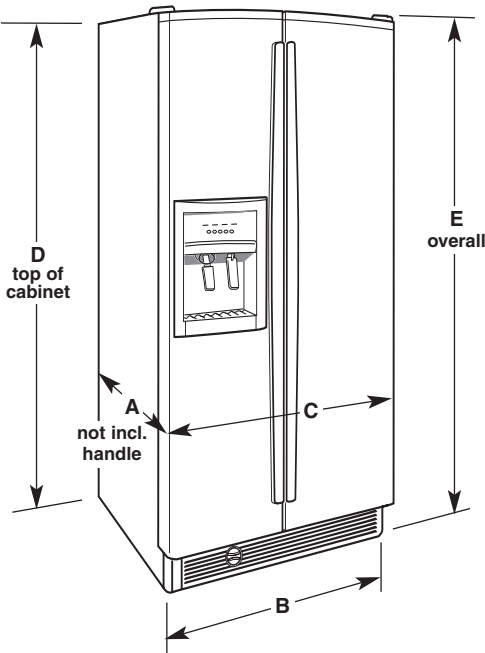

Dimensions "D" and "E" include rollers extended 3/4".

| Model size | Depth<br>"A" | Cab. Width<br>"B" | Door Width<br>"C" | Cab. Height<br>"D" | Overall Height<br>"E" |
|------------|--------------|-------------------|-------------------|--------------------|-----------------------|
| 25 cu.ft.  | 33 1/4"      | 35 1/2"           | 36"               | 68 7/8"            | 70 1/4"               |

## LOCATION REQUIREMENTS

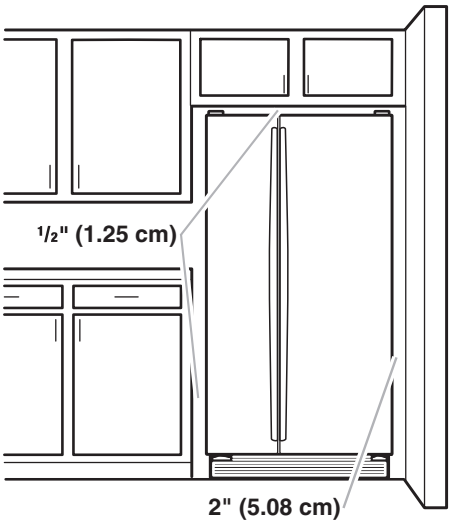

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) space on each side and at the top. When installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on each side (depending on your model) to allow for the door to swing open. If your refrigerator has a water dispenser and ice maker, allow extra space at the back for the water line connections.

**NOTE:** Do not install the refrigerator near an oven, radiator, or other heat source. Do not install in a location where the temperature will fall below 55°F (13°C).