



Accsoon M1


HDMI to UVC On-Camera Device



v1.0




Accsoon M1 x1



15cm Type-C to Type-C Cable x1

Type-C双头数据线 x1 Type-C to Type-C ケーブル x1



User Manual x1

说明书 x1 取扱説明書 x1

English

■ Product Features	1
■ Instructions	3
■ Live Streaming Guide	6
■ Power Indication	7
■ Specifications	8
■ Warranty Statement	9

中文版

■ 产品特征	11
■ 使用说明	13
■ 直播功能使用	16
■ 电量指示	17
■ 产品规格	18
■ 保修声明	19

取扱説明書 日本語版

■ 製品の特徴	21
■ 使用方法	23
■ ライブストリーミング機能について	26
■ 電源表示	27
■ 製品仕様	28
■ 保証書	29

Product Features

Turn your Android phone into an on-camera monitor

Easy live streaming and recording







Support audio and video transmission

Power Android phone & camera through NP-F series battery

Supportive monitoring App Accsoon SEE

Support a wide range of Android phone sizes (phone width 65mm–90mm)

Suitable for multiple scenarios with cold shoe screw hole and 1/4 threaded mounting hole



① HDMI Input

② DC Output

③ Power Indicator

④ Charging Switch

⑤ Type-C Port

⑥ Battery Lock

⑦ 1/4" Screw Hole

⑧ Cold Shoe Mounting Port

Introduction


Accsoon M1 is a portable HDMI-UVC video transmitter that can transmit video from the camera's HDMI interface to Android phones via USB cable, realizing reliable video transmission. With Accsoon SEE, the Android phone can be turned into a supportive monitor. Accsoon SEE also features audio and video recording, live streaming, and other helpful functions. M1 is a budget-friendly solution for video producers, vloggers, wedding photographers, and anyone else who needs to record, live stream, or use a monitor screen on set.

How to use


1. Install Accsoon SEE App on Android phone.




2. Install the phone in M1, and adjust the phone to the right position (avoid the buttons on the side of the phone).



3. Install the M1 to the camera / kit via the cold shoe adapter and ensure the reliable installation.

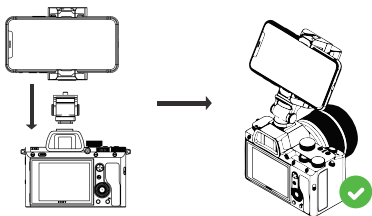

4. If you need to charge the phone or power the camera and other accessories, please insert the NP-F series battery. There is a charging switch on the side of M1, which can turn on/off the mobile phone charging function.

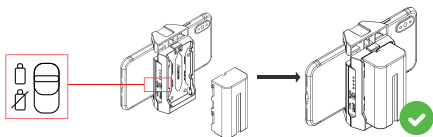

Note: If you need to charge the phone, please make sure the charging switch is "ON". Some mobile phones cannot transfer images via USB during charging; in this case, please make the charging switch "OFF".




ON



OFF

Charging Switch

5. Connect M1 and the camera with an HDMI cable (user-provided).

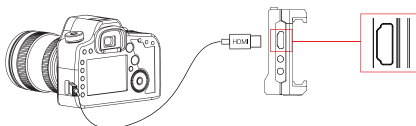


6. If you need to use NP-F batteries to power the camera and other devices, please use the corresponding DC cable (user-provided) .




Note: The DC ports are battery directly output (7.4–8.4V output), and they start to supply power for devices connected once the battery's installed.

7. Use the Type-C cable to connect the phone to the M1.

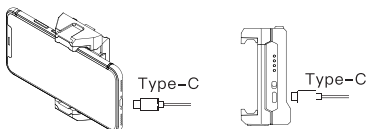

8. Open the Accsoon SEE App, click “Monitor” to enter the monitoring interface.

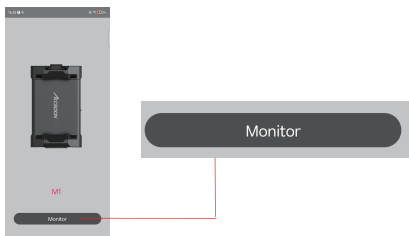


Live Streaming Guide

1. Make sure that the mobile phone can access the Internet via “WiFi” or “4G/5G”.




2. While monitoring, click “Live” in Accsoon SEE App, input RTMP URL and live-stream code, and then click “OK” to start the live streaming.



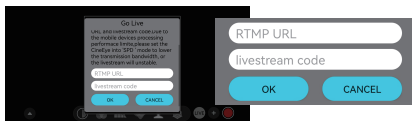

Note: The fluency of the live streaming depends on the stability of the Internet connection. When the video is buffering, please check whether your Internet connection is currently heavily loaded or your mobile network has poor reception quality.

Power Indication



Note:

1. When the battery power reaches 0%, it will stop charging the phone.
2. The charging from the battery power will be turned off after the indicator flashes 20 times.
3. The DC output is not controlled by M1. To keep your batteries from discharging, please replace the battery when the power is low.

Name:	Accsoon M1
Model:	MM-01
Video Input:	1080p 60/50/30/25/24fps 720p 60/50fps
Video Output:	1080p 60/50/30/25/24fps 720p 60/50fps
Compatible Phone Width:	65mm–90mm
Battery Port:	NP-F550/F750/F970
HDMI Port:	Type-A
USB Port:	Type-C
DC Port:	5.5x2.1mm, center positive
DC Output Voltage:	Battery direct output
App:	Android 8.0 and above
Power Consumption:	5V/0.2A (charging excluded)
Operate Temperature:	-10°C~40°C
Size:	50mmx39mmx82mm
Net Weight:	75g

Warranty Period:

1. In case of quality problems occurring within 15 days from the date of receipt, replacement or free maintenance services will be provided.
2. Under proper use and maintenance, from the date of receipt, we provide a one-year warranty on M1 and a three-month warranty on the accessories and wire. Free maintenance service is available during the warranty period.
3. Please keep the purchase voucher and product manual.

Warranty Exclusions:

1. The receipt's date will be regarded as the date of purchase.
2. Damage caused by use or maintenance is not following the requirements of the product manual.
3. Unauthorized repairs and disassembly.
4. Damage caused by force majeure such as fire, flood and lightning strike.

After-sale Support:

1. Customer shall contact the local authorized dealers for service support. If unavailable, please contact Accsoon directly via email (support@accsoon.com) or our website (www.accsoon.com).
2. You will get detailed solutions from the authorized dealers or Accsoon. Accsoon reserves the right to review the damaged products.

Warranty Card

No.

Product Information	Model		Maintenance Company		
	Origin		Phone		
Customer Information	Name		Address		
	Phone		Zip Code		
Date	Failure Phenomenon	Cause	Proof of Maintenance or Replacement	Maintenance Person	Inspection Date

Remark:

1. This card must be sealed by the Accsoon authorized reseller to be effective.

2. Please refer to the warranty statement for details.

Note: The authorized maintenance company conducts to maintain, fill in and seal, otherwise the maintenance record is invalid.

Welcome to use Accsoon products. Hope you are satisfied with our products and services.

Any product quality issue, please timely contact the relevant local reseller or maintenance company.

Certificate of Quality

This product has been inspected and conforms to the standard.

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

产品特征

画质输入输出最高支持1080p60fps

无需额外供电，通过手机供电即可工作

支持实时音视频传输及录制

自由伸缩，可支持宽度在65mm–90mm的安卓手机







丰富的监看功能，将手机变身为专业监视器

Accsoon M1自带的App支持RTMP直播

支持安装NP-F系列电池，为手机、相机以及其他配件供电

标准1/4英寸螺纹安装孔，易于各种套件搭配使用

带冷靴接口，便于安装麦克风、补光灯等其他附件



① HDMI 接口

② DC 输出接口

③ 电量指示灯

④ 充电开关

⑤ Type-C 接口

⑥ 电池安全锁扣

⑦ 1/4" 螺纹孔

⑧ 冷靴接口

简介


Accsoon M1是一款便携的HDMI-UVC视频传输器，可以将相机HDMI接口输出的视频通过USB有线传输至安卓手机，实现可靠的视频传输。搭配致迅的Accsoon SEE App，可以将手机变身为专业的监视器，可以让用户轻松实现低成本的监看，录制和直播。同时，Accsoon M1机身小巧，具有极低的功耗，是户外vlogger和直播用户的最佳选择。

安装与使用


1. 安装Accsoon SEE App至安卓手机。




2. 将手机安装在M1夹持部位，通过左右调节手机达到最佳位置（注意避开手机侧面的按键）



3. 将M1通过冷靴适配器安装到相机/套件上，并确保操作的稳定性。



4. 如需要给手机，相机及其他附件供电，请安装NP-F系列电池。M1侧面有一个手机充电开关，可以打开/关闭充电功能。




注意：如需要给手机充电，请确保充电开关为“ON”状态，部分手机在充电时无法通过USB传输图像，此时请关闭手机充电功能即可。



充电开关

5. 使用HDMI线（需用户自备）连接M1和相机。




6. 如需使用NP-F电池给相机等其他设备供电，请使用对应的DC线（需用户自备）连接至其他设备。




注意：DC接口为电池直接输出（7.4~8.4V输出），使用时请注意电压！！

DC输出不受M1控制，只要插上NP-F电池即开始对外供电。

7. 使用Type-C数据线连接手机和M1，电量显示将自动打开。




8. 打开Accsoon SEE App，产品型号请选择M1，点击“Monitor”即可进入监视界面。

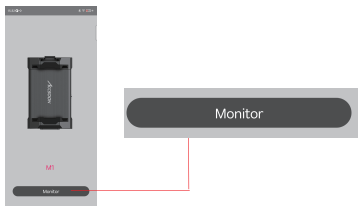

1. 请确保手机可以通过“WiFi”或者“4G/5G”访问网络。




2 监看的同时，点击App上的“Live”按钮，按照提示输入直播地址和直播码后点击“OK”即可进行直播。

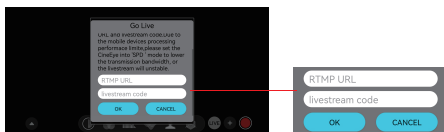

注意：直播的流畅程度取决于网络连接的稳定性，如有卡顿请检查网络连接。

电池电量指示：



提示：

- 1.当电池电量低于0%时，将停止为手机供电。
- 2.指示灯闪烁20次后系统将关闭电池供电。



注意：DC输出不受M1控制，为避免电池过放，当电量低时，请尽快更换电池。

名称:	Accsoon M1
型号:	MM-01
视频输入:	1080p 60/50/30/25/24fps 720p 60/50fps
视频输出:	1080p 60/50/30/25/24fps 720p 60/50fps
兼容手机宽度:	65mm-90mm
电池接口:	NP-F550/F750/F970
HDMI接口:	HDMI A型接口
USB接口:	Type-C接口
DC接口:	5.5x2.1mm, 内正外负
DC输出电压:	电池直接输出
App系统要求:	Android 8.0及以上
功耗:	5V/0.2A (不含充电)
工作温度:	-10℃~40℃
尺寸:	50mmx39mmx82mm
净重:	75g

保质期限

- 1.自签收之日起15日内，出现质量问题，可享受换货或者免费维修服务。
- 2.产品在正确使用及保养下，保修期为自签收之日起一年(附件和线材保修期为3个月)，在保修期内享受免费维修服务。
- 3.请妥善保管好购买凭证、说明书。

免责条款

- 1.超过三包有效期的（无法提供购买凭证的从产品出厂日期开始计算）。
- 2.未按产品使用说明书要求使用、维护、保养造成损坏的。
- 3.未经授权的维修、拆解。
- 4.因火灾、水灾、雷击等不可抗力造成的损坏。

售后支持

- 1.请联系当地致迅授权经销商，如无当地授权经销商请通过致迅公司邮箱: (support@accsoon.com) 或网站(www.accsoon.com)与客服取得联系并获得相应支持。
- 2.致迅经销商或致迅客服会告知您如何运送相关产品及如何处理您的保修问题，致迅公司保留复查损坏产品的权利。

维修记录

(客户联)

编号:

产品信息	主机型号			维修单位		
	产 地			联系电话		
用户信息	用户姓名			用户地址		
	联系电话			邮 编		
送修日期	故障情况	故障原因	故障处理及退换货证明		维修人	交验日期

备注:

1.此证须经成都致迅科技公司授权销售单位盖章方可生效。

2.详情请参阅保修说明。

注:由授权维修单位进行维修,填写维修记录并加盖印章,否则维修记录无效。

欢迎您使用本公司的产品。

我们将为您提供满意的优质服务,如有产品质量问题,请您及时与相关销售单位或维修单位联系。

合格证

本产品经检验符合标准出厂

製品の特徴

Android端末をオンカメラモニターとして使用できる

ライブストリーミング&レコーディング







音声・映像伝送に対応

Android端末とカメラにNP-F電源を供給

モニタリングアプリ「Accsoon SEE」

幅広いAndroid端末のサイズに対応（6.5インチ以下）

1/4インチネジ穴、コールドシューが搭載され、
様々なカメラとアクセサリと接続することが可能



① HDMI メス

② DC メス

③ 電源インジケーター

④ 充電スイッチ

⑤ Type-C メス

⑥ バッテリー ロック

⑦ 1/4インチネジ穴

⑧ コールドシューマウント

はじめに

Accsoon M1は、HDMIから UVC への変換アダプターで、Androidスマートフォンをオンカメラモニターにすることができ、ビデオストリーミングにも使用できます。そして、専用アプリ


「Accsoon SEE」は、音声やビデオの録音、ライブストリーミングなど、便利な機能も備えています。M1は、ビデオプロデューサー、Vlogger、ウェディングフォトグラファー、その他、撮影現場で録画、ライブストリーミング、モニタリングの使用を必要とするすべての人にとって、あらゆるニーズや予算にあったソリューションとなります。

インストールと使用方法


1. スマートフォンにAccsoon SEE アプリをインストールします。




2. M1のクランプ部にスマートフォンを取り付け、左右に適切な位置に調整します（スマートフォンの側面にあるボタンは避けてください）

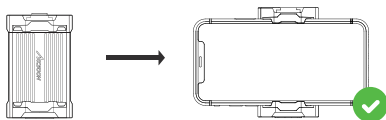

3. コールドシューアダプターを介してM1をカメラ/キットに取り付け、ちゃんと取り付けることを確認します。



4. スマートフォンやカメラなどの電源供給が必要な場合は、NP-Fシリーズのバッテリーを取り付けてください。M1の側面には、充電のスイッチがあり、充電機能のオン/オフを切り替えることが可能です。

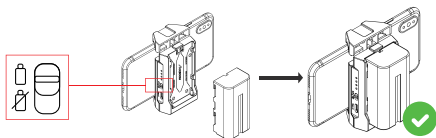

注: スマートフォンの充電が必要な場合は、充電スイッチが「ON」になっていることを確認してください。一部のスマートフォンでは、充電中にUSBで画像を転送できないため、スマートフォンの充電機能をOFFにしてください。




ON



OFF

充電スイッチ

5. M1とカメラの接続にはHDMIケーブル（お客様ご自身でご用意ください）を使用してください。

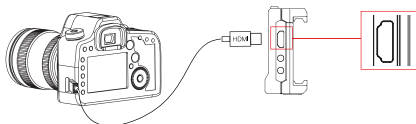


6. カメラや他の機器などの電源供給が必要な場合は、対応するDCケーブル（お客様ご自身でご用意ください）をご使用ください。




注：DCポートはバッテリー直接出力（7.4～8.4V出力）で、バッテリーを装着すると外部電源供給が開始されます。

7. Type-Cケーブルを使ってスマートフォンをM1に接続すると、バッテリーインジケータが自動的に点灯します。

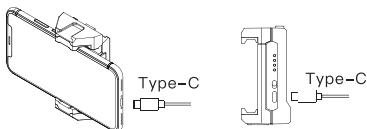

8. Accsoon SEE アプリを開き、「Monitor」をクリックしてモニタリング画面に入ります。

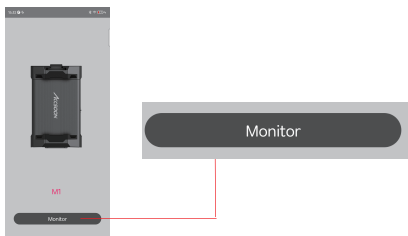


ライブストリーミング機能について

1. スマートフォンが「WiFi」または「4G / 5G」を介してネットワークにアクセスできることを確認してください。




2. モニタリング中に、アプリの「Live」ボタンをクリックし、画面の指示に従ってライブアドレスとライブコードを入力し、「OK」をクリックするとライブになります。



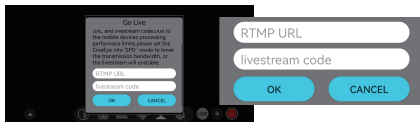

注：ライブブロードキャストのスムーズさは、ネットワーク接続の安定性によって異なります。フリーズが発生した場合は、ネットワーク接続を確認してください。

電源インジケーター



注：

1. 電池残量が0%以下になると、スマートフォンへの充電が停止されます。
2. インジケーターランプが20回点滅すると、システムはバッテリーの電源を切ります。
3. DC出力はM1によって制御されていません。過放電を避けるため、電力が低下したらできるだけ早く電池を交換してください。



製品名:	Accsoon M1
モデル:	MM-01
ビデオ入力:	1080p 60/50/30/25/24fps 720p 60/50fps
ビデオ出力:	1080p 60/50/30/25/24fps 720p 60/50fps
対応機種幅:	65mm-90mm
バッテリー 入力:	NP-F550/F750/F970
HDMI 入力:	HDMI Type A 入力
USB 入力:	Type-C 入力
DC 入力:	5.5x2.1mm, センターポジティブ
DC出力電圧:	バッテリーで直接出力
アプリ:	Android 8.0以上
消費電力:	5V/0.2A (充電せず)
動作温度:	-10℃~40℃
サイズ:	50mmx39mmx82mm
重さ:	75g

保証期限:

- 1.品質に問題がある場合、受領日から15日以内に交換または無料修理サービスを受けることがご利用いただけます。
- 2.製品案内によりご使用する場合、購入日からの1年間以内に（アクセサリーとワイヤーの保証期間は3か月）、修理サービスが無料提供させていただきます。
- 3.購入証明書と説明書は大切に保管してください。

保証対象外:

- 1.保証の有効期間を超えています（購入証明が提供できない場合は、製品の製造日から計算されます）。
- 2.本製品のマニュアルに従った使用、保守、手入れをしなかったことによって破損した場合。
- 3.許可されていない修理および分解。
- 4.火災、洪水、落雷などの不可抗力による損害。

サポート:

- 1.アフターサービスサポートについては現地のAccsoon正規代理店までお問い合わせください。現地に正規代理店がない場合は電子メール（support@accsoon.com）またはWebサイト（www.accsoon.com）にてご連絡いただくようお願いします。
- 2.正規代理店及びAccsoon窓口から詳細なソリューションを得ることができます。Accsoonは破損した商品の原因調査権を有しています。

保証書

No.

製品情報	モデル		メンテナンス会社		
	産地		連絡先		
ユーザー情報	お客様の名前		ご住所		
	連絡先		郵便番号		
修理の日付	故障の状況	故障の原因	故障の処理と返品・交換の証明	処理人	検査日付

注:

1.Accsoon正規代理店による捺印がなければカードは有効ではありません。

2.詳しくは保証書をご覧ください。

備考: 正規代理店はメンテナンス、記入、捺印の作業を行います。それ以外のメンテナンス記録は無効となります。

Accsoon製品をご利用いただき誠にありがとうございます。弊社は質の高い製品と暖かいサービスの提供に取り組んでいます。

品質問題のある場合は早めに現地の代理店か修理部門に連絡してください。

合格証

本製品は検査済みで、仕様に適合しています。



www.accsoon.com

Accsoon

内容如有更新，恕不另行通知

This document is subject to change without notice
コンテンツは予告なく更新される場合があります

Accsoon 是致迅的商标 Copyright©2021 致迅版权所有
Accsoon is a trademark of Accsoon Technology Co., Ltd
Copyright 2021 Accsoon. All rights reserved
AccsoonはAccsoonの商標です 著作権©2021 Accsoon 全著作権所有