



SELECTING PROPANE

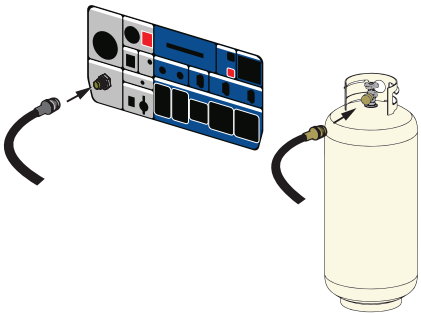


Step 1: Connect the included propane valve to the generator and to the propane tank. Open valve on propane tank.




Step 2: Turn the FUEL CHOICE knob to LPG.

OR

SELECTING GASOLINE

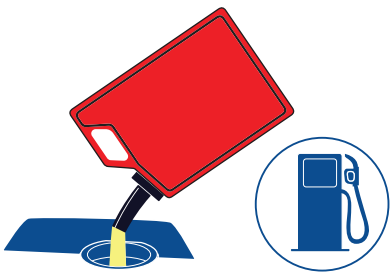


Step 1: Check the generator for gasoline. Add as needed.




Step 2: Turn the FUEL CHOICE knob to GAS.

CONTINUE STARTUP STEPS WITH EITHER FUEL

Step 3: Flip main breaker OFF.




Step 4: Flip the LOW IDLE switch to OFF.




Step 5: Flip 2 WIRE START switch to OFF.



Step 6: Flip the START UP switch to ON.



Step 7: Press START BUTTON and hold until green.



Step 8: Flip main breaker ON and plug in devices.

