



HONDA

BATTERY CHARGER

CV5020XY N1A

CV5080XY N1A

Owner's Manual

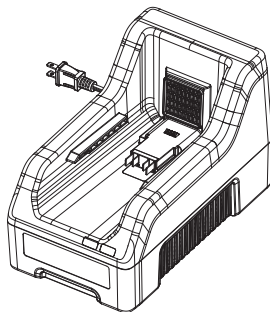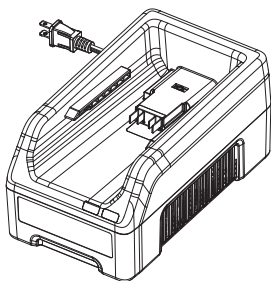

00X31-8C1-6000

Please register your battery charger. See page 10 for details.

PREFACE

Thank you for purchasing a Honda Battery Charger (hereinafter referred to as Product).

Keep this Owner's Manual handy, so you can refer to it at any time. This manual should be considered a permanent part of this product and should remain with this product if it is resold.

We suggest you read the warranty policy to fully understand its coverage and your responsibilities of ownership.

No part of this publication may be reproduced without written permission.

We want to help you get the best results from your new product and to operate it safely.

This manual contains all the information on how to do that, please read it carefully.

As you read this manual you will find information preceded by safety messages in a variety of forms. This information is intended to help you and others avoid injury or damage to your product, other property, or the environment.

The products shown in this manual may differ from the actual products.

If a problem should arise, or if you have any questions about your product, consult your servicing dealer.

Honda Motor Co., Ltd.

CONTENTS

SAFETY & INTERNATIONAL SYMBOLS.....	3
SAFETY INSTRUCTIONS	3
KNOW YOUR CHARGER.....	5
SPECIFICATIONS.....	6
OPERATION	6
MAINTENANCE	8
TROUBLESHOOTING	10
TECHNICAL INFORMATION	10
CUSTOMER INFORMATION.....	11
DISTRIBUTOR'S LIMITED WARRANTY	12
DISTRIBUTOR'S WARRANTY	15

SAFETY & INTERNATIONAL SYMBOLS

Explanation of Safety & international symbols describes safety and international symbols and pictographs that may appear on this product. Read the operator's manual for complete safety, assembly, operating and maintenance and repair information.



Caution / Warning.



Read the operator's manual(s) and follow all warnings and safety instructions. Failure to do so can result in serious injury to the operator and/or bystanders.



For indoor use only.



Do not use in rain or wet conditions.



Positive terminal.



Negative terminal.



Protection Class II.



Disconnect the supply before making or breaking the connections to the battery.

ta=40°C/E

Do not charge battery when temperature is above 104°F(40°C).



Waste electrical products must not be disposed of with household waste. Please recycle where facilities exist. Check with your local authorities or retailer for recycling advice.



If the current of the charger is higher than 3.15A(CV5020XY N1A), the current to the outlet will be stopped by the fuse.



If the current of the charger is higher than 6.3A(CV5080XY N1A), the current to the outlet will be stopped by the fuse.

SAFETY INSTRUCTIONS

You will find important safety information in a variety of forms:

- **Safety Labels** - on the charger.
- **Instructions** - how to use this charger correctly and safely.
- **Safety Messages** - preceded by a safety alert ⚠ symbol and one of three signal words: DANGER, WARNING, or CAUTION. Each message tells you what the hazard is, what can happen, and what you can do to avoid or reduce injury.

These signal words mean:

⚠ DANGER

You **WILL** be KILLED or SERIOUSLY HURT if you don't follow instructions.

⚠ WARNING

You **CAN** be KILLED or SERIOUSLY HURT if you don't follow instructions.

⚠ CAUTION

You **CAN** be HURT if you don't follow instructions.

- **Damage Prevention Messages** - You will also see other important messages that are preceded by the word NOTICE. This word means:

NOTICE

Your charger, other property, or the environment can be damaged if you don't follow instructions.

Read all safety warnings, instructions, illustrations, and specifications, provided with this power tool. Failure to follow all instructions listed below may result in electric shock, fire, and/or serious injury.

Save all warnings and instructions for future reference.

1. **SAVE THESE INSTRUCTIONS** - This manual contains important safety and operating instructions for battery charger.

2. Before using the battery charger, read all instructions and cautionary markings on battery charger and battery.
 3. This charger must be only be used to charge Honda 58V max batteries.
 4. Non-rechargeable batteries cannot be charged with this battery charger.
 5. Use a power source with the voltage specified on the nameplate of the charger.
 6. Do not charge the battery in presence of flammable liquids or gases.
 7. Do not expose charger to rain or snow.
 8. Never carry the charger by the cord or yank it to disconnect it from the receptacle.
 9. After charging or before attempting any maintenance or cleaning, unplug the charger from its power source. Only disconnect the power source by pulling on the charger cord plug.
 10. Make sure cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.
 11. Do not operate the charger with a damaged cord or plug; if damage occurs, replace the charger.
 12. Do not operate or disassemble charger if it has been dropped or damaged in any way; take it to an authorized servicing dealer. Incorrect use or reassembly may result in a risk of electric shock or fire.
 13. This battery charger is not meant to be used by children.
 14. The recommended operating temperature range for the charger is 50°F - 86°F (10°C - 30°C) indoors.
 15. Only use utility power when operating the charger.
 16. During charging, the battery must be placed in a well ventilated area indoors. Keep the working area clean to reduce the risk of fire, electric shock and fire. Do not cover the charger and battery pack with a cloth while charging.
 17. When the charger is not in use and before cleaning, unplug the charger from the outlet.
 18. Only use the charger indoors.
 19. To protect against the risk of electrical shock, do not immerse the unit, cord or plug in water or other liquid.
 20. Examine the battery charger regularly for damage, especially to the cord, plug and enclosure. If the battery charger is damaged, it must not be used until it has been replaced.
- d. Do not expose the charger to water splashes and rain.
 - e. A defective or not chargeable battery must be treated as special waste / hazardous waste. Put it in a special collection point. Do not throw it in the normal household waste neither into water or fire.
 - f. Place the charger far from any heat source.
 - g. To reduce the risk of electric shock, only pull on the power cord's plug when disconnecting it from the receptacle.
 - h. If this charger is damaged or has a defect, do not use it and take to an authorized servicing dealer for inspection.

INTENDED USE

Please read through these operating instructions and keep them for future reference. This battery charger is only designed for Honda 58V battery packs only. If this charger is damaged or has a defect, do not use it and take to an authorized servicing dealer for inspection.


WARNING

This battery charger contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. www.P65Warnings.ca.gov


OTHER WARNINGS

- a. The charger must not be used for non-rechargeable, ordinary batteries.
- b. Adequate ventilation is required.
- c. The information on current and voltage on the battery pack must comply with those of the

KNOW YOUR CHARGER

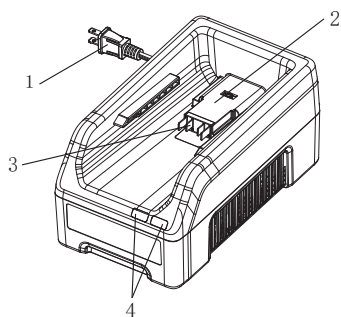

CV5020XY N1A

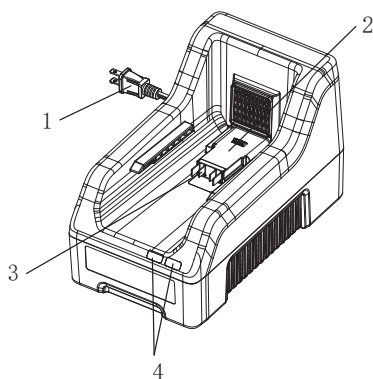

CV5080XY N1A

Model: CV5020XY N1A & CV5080XY N1A
Use this charger for Honda battery packs only.

1	Power Cord
2	Battery Docking Port
3	Electrical Contacts
4	Charge Status Indicator Light

SPECIFICATIONS

Model	CV5020XY N1A
Rated Input	120 V ~ 60 Hz
Rated Output	58.8 V, 2 A
Output Voltage	58.8 V
Charging Current	2 A
Protection Class On Charger	□ II (class II equipment)
Weight	3.0 lb 1.3 kg
Applicable Battery	Approximate Charging Time
DP5080XY CBNA	250 min
DP50120XY CBNA	370 min

Model	CV5080XY N1A
Rated Input	120 V ~ 60 Hz
Rated Output	58.8 V, 8 A
Output Voltage	58.8 V
Charging Current	8 A
Protection Class On Charger	□ II (class II equipment)
Weight	4.9 lb 2.2 kg
Applicable battery	Approximate Charging Time
DP5080XY CBNA	60 min
DP50120XY CBNA	90 min

OPERATION

⚠ WARNING

Using the charger outdoors, exposing it to wet or damp conditions, or without proper ventilation increase the risk of electric shock.

Using a wet battery charger can electrocute or seriously hurt you.

Always keep the charger indoors and charge batteries in a dry environment.

⚠ WARNING

Charging batteries without proper ventilation can increase the risk of starting a fire.


If the battery or charger catches on fire you can be seriously hurt.


Always provide adequate ventilation while charging and charge batteries at room temperature, away from direct sunlight or damp conditions.

HOW TO CHARGE THE BATTERY PACK

The Lithium-Ion battery pack is shipped partially charged. Fully charge the battery pack before using it for the first time.

- Plug the charger into an appropriate outlet that complies with input in "SPECIFICATION".
- Align the raised ribs of the battery pack with the slot in the charger, and then slide the battery pack onto the charger until it stops.
- Normally, the relevant charge indicator will light in green color showing the battery is being charged.
- When the charging process is complete, the green indicator will stay illuminated for three minutes. Please remove the battery pack from the charger and disconnect the charger plug from the power supply.

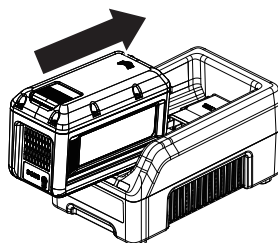

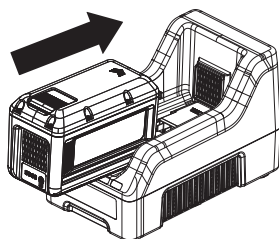

The charger may warm during charging. This is part of the normal operation of the charger. Charge in a well-ventilated area.

If the battery has been operated continuously for an entire charge, or if the battery pack has been exposed to direct sunlight for too long, the battery pack may be too hot to charge. The charger will only start charging a battery once the battery has cooled down to within the working range of the charger.

IMPORTANT CHARGING NOTES:

- The recommended operating temperature range 50°F - 86°F (10°C - 30°C) indoor.
- Never freeze your charger or immerse charger in water or any other liquid.
- When charging, it is normal that the charger and battery pack may become warm to the touch.
- If the battery pack does not charge properly:
 - a. Check that the outlet is functioning properly.
 - b. Plug and unplug to check whether the charger is ok.
 - c. Check whether the battery has been damaged or if the terminals are dirty.
 - d. If the charging problem persists, take the tool, battery pack and charger to an authorized service dealer.
- Under certain conditions, when the charger is plugged into the power supply, the exposed charging contacts inside the charger can be shorted by foreign material. Foreign metal objects should be kept away from the charger cavities. Always unplug the charger from the power supply when there is no battery pack in the charger or before attempting to clean.

TEMPERATURE PROTECTION

This charger has a battery temperature protection function. When the charger detects a battery pack



that is too hot or cold (red indicator will illuminate), it will automatically activate the protection circuit and stop charging. Remove the battery pack until it has reached the correct temperature before charging again. If the red indicator still illuminates, please contact an authorized servicing dealer for assistance.

CHARGER LIGHT INDICATOR

Lights	Light Indicators	Status
No light on		Power on
		Three minutes after charging is complete
One green light on		Normal charging
		Charge over
		Within three minutes after charging is complete
One red light on		Abnormalities in the charger or battery pack
One red light flashes		Charging time-out

HANGING THE CHARGER

1. Find a suitable location indoors, such as a garage, to mount the battery charger safely and securely.
2. Locate a wooden wall stud or vertical wall support near your desired mounting location using a stud finder or similar tool. Note: It is not recommended to use plastic wall anchors to mount the battery charger.
3. Hold the charger bracket up against the wall at a comfortable height in front of the wall stud.
4. Transfer the mounting hole locations of the charger by inserting a pencil through the two mounting holes and marking the wall.
5. Screw appropriate sized mounting screws into the wall using your pencil marks as a template.
6. Install the charger bracket onto the mounting screws.
7. Align the four small slots on the back of the charger with the hooks on the bracket, and then slide the charger downward until it locks onto the bracket.

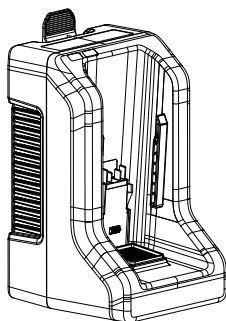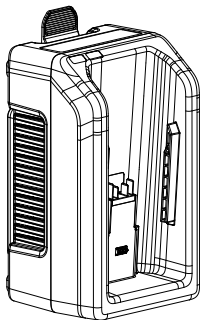

MAINTENANCE

Your battery charger requires no additional maintenance. Do not open the charger. Disconnect the power supply before storage or cleaning.

CLEANING

1. Unplug before any cleaning work.
2. Never use water or chemical cleaners to clean your charger. Keep the charger clean and clear of debris.
3. Wipe down the equipment with a cloth and/or

compressed air. It is highly suggested that you clean the device regularly.

STORAGE

1. Clean the charger before storing.
2. Do not place the charger in wet conditions. Always store your charger in a dry place.
3. Unplug the charger when there is no battery in it.
4. The ideal storage temperature is between 23°F - 86°F (-5°C - 30°C) indoor, garage. Do not store it in excessive heat and do not store the battery pack on the tool.

TRANSPORTATION

1. Disconnect the power supply before transportation, and place the charger into a box to avoid being exposed to sunlight during the transportation.
2. Protect the charger from any heavy impact or strong vibrations which may occur during the transportation in vehicles.

ENVIRONMENTAL PROTECTION

Waste electrical products must not be disposed of with household waste. Check with your local authorities or retailer for recycling advice.

58V ION+ LITHIUM-ION CHARGER (CV5020XY N1A & CV5080XY N1A)

FEDERAL COMMUNICATIONS COMMISSION (FCC)

Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with 47 CFR part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CLASS B DEVICE:

NOTICE

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to 47 CFR part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different than the one the receiver is connected to.
- Consult the dealer or an experienced radio/TV technician for help.

TROUBLESHOOTING

Suspected problems are often due to causes that users can fix themselves. In most cases the problem can be solved quickly.

PROBLEM	POSSIBLE CAUSE	SOLUTION
One red light on	Abnormalities in the charger or battery pack	Remove and reinstall the battery to recheck operation. If the problem still remains, contact an authorized Honda servicing dealer.
One red light flashes	Charging timeout	Remove and reinstall the battery to recheck operation. If the problem still remains, contact an authorized Honda servicing dealer.

If further assistance is required, take the charger to an authorized servicing dealer.

TECHNICAL INFORMATION

Record your battery charger serial number and date of purchase in the space below. You will need this information when making technical or warranty inquiries.

For USA:


Your battery charger must be registered separately from the Honda battery-powered product or batteries it is used with, even if the battery charger was packaged with the product. This separate registration is to ensure you receive important service information in the event of a product update or recall.

Please register your battery charger within 30 days of purchase. Failure to register your battery charger does not diminish your warranty rights.


Your information will remain confidential and will not be shared with any other company or organization.

Charger Serial Number: _____

Date of Purchase: _____

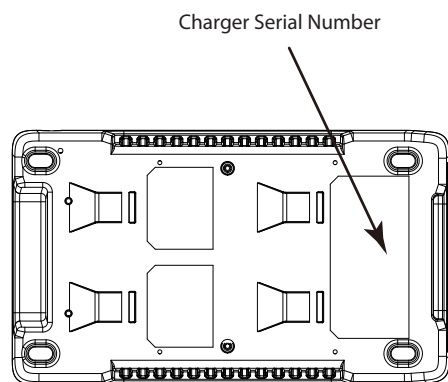

CV5020XY N1A

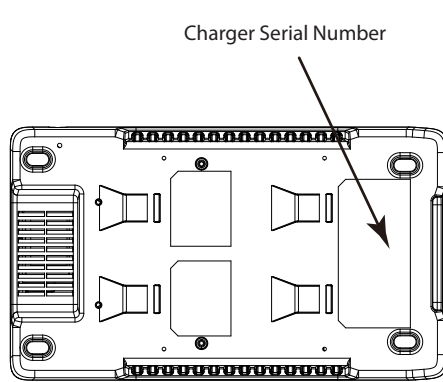

CV5080XY N1A

CUSTOMER INFORMATION

How to Contact Honda

Honda Power Equipment dealership personnel are trained professionals. They should be able to answer any question you may have. If you encounter a problem that your dealer does not solve to your satisfaction, please discuss it with the dealership's management. The Service Manager or General Manager can help. Almost all problems are solved in this way. If you are dissatisfied with the decision made by the dealership's management, contact the Honda Power Equipment Customer Relations Office in your region.

When you write or call, please provide this information:

- Model and serial number
- Name of the dealer who sold the charger to you
- Name and address of the dealer
- Date of purchase
- Your name, address, and telephone number
- A detailed description of the problem

<U.S.A.>

American Honda Motor Co., Inc.

Power Equipment Division

Customer Relations Office

4900 Marconi Drive, Alpharetta, GA 30005-8847

Tel: (770) 497-6400 M-F, 9:00 a.m.- 7:30 p.m. ET

Fax: 678-339-2519

<Canada>

Honda Canada, Inc.

Customer Relations Department

180 Honda Boulevard. Markham, Ontario L6C 0H9

Tel: 1-888-946-6329 (Toll free)

Fax: 1-877-939-0909 (Toll free)

E-mail: honda_cr@ch.honda.com

DISTRIBUTOR’S LIMITED WARRANTY

Honda Power Equipment

This warranty is limited to the following Honda Power Equipment products when distributed by American Honda Motor Co., Inc., Power Equipment Division, 4900 Marconi Drive, Alpharetta, Georgia 30005-8847. The following warranty applies to products manufactured on or after April 1, 2023.

PRODUCTS COVERED BY THIS WARRANTY	LENGTH OF WARRANTY (from date of original retail purchase)	
	PRIVATE RESIDENTIAL ⁽¹⁾	COMMERCIAL/RENTAL/ INSTITUTIONAL
Battery Charger, CV5020XY, CV5080XY Models	36 months	36 months

⁽¹⁾ Private residential: Used in maintaining owner’s primary and/or secondary residence. Any other use, including but not limited to informal “for hire” use, is considered commercial/rental/institutional use.

To Qualify for This Warranty:

The product must be purchased in the United States, Puerto Rico, or the U.S. Virgin Islands from American Honda or a dealer authorized by American Honda to sell those products. This warranty applies to first retail purchaser and each subsequent owner during the applicable warranty time period, unless noted otherwise.

What American Honda Will Repair or Replace Under Warranty:

American Honda will repair or replace, at its option, any part that is proven to be defective in material or workmanship under normal use during the applicable warranty time period. Warranty repairs and replacements will be made without charge for parts or labor. Anything replaced under warranty becomes the property of American Honda Motor Co., Inc. All parts replaced under warranty will be considered as part of the original product, and any warranty on those parts will expire coincident with the original product warranty.

To Obtain Warranty Service:

You must, at your expense, take the Honda Power Equipment product, accessory, replacement part, apparel, or the power equipment on which the accessory or replacement part is installed, and proof of purchase to any Honda Power Equipment dealer in the United States, Puerto Rico, or the U.S. Virgin Islands who is authorized to sell and/or service that product, during the dealer’s normal business hours. To locate a dealer near you, visit our web site at PowerEquipment.Honda.com and click on Find a Dealer. If you are unable to obtain warranty service or are dissatisfied with the warranty service you receive, contact the owner of the dealership involved; normally this will resolve the problem. However, if you should require further assistance, write or call the Power Equipment Customer Relations Department of American Honda Motor Co., Inc.

Exclusions:

- Any damage or deterioration resulting from the following:
 - Neglect of the periodic maintenance as specified in this manual
 - Improper repair or maintenance
 - Operating methods other than those indicated in the product owner’s manual
 - Increasing engine speed beyond factory specification
 - The use of non-genuine Honda parts, accessories, lubricants, and fluids other than those approved by Honda
 - Exposure of the product to soot and smoke, chemical agents, bird droppings, sea water, salt or other corrosive environments
 - Collision, fuel contamination or deterioration, neglect, unauthorized alteration, misuse, incorporation or use of unsuitable attachments or parts
 - Normal wear and tear (including, but not limited to, normal fading of painted or plated surfaces, sheet peeling, and other natural deterioration)
- Consumable parts: Honda does not warrant parts deterioration due to normal wear and tear. The following parts are not covered by warranty (unless they are needed as a part of another warranted repair): spark plug, fuel filter, air cleaner element, clutch disc, tire, wheel bearing, recoil starter rope, cable, belt, cutter blade, oil, and grease.

- Cleaning, adjustment, and normal periodic maintenance work (carburetor cleaning, engine oil draining, blade sharpening, belt and cable adjustments).
- Any product that has ever been declared a total loss or sold for salvage by a financial institution or insurer.
- Auger and paddle assemblies of snow throwers, tiller tines of roto-tillers, mower blades and mower deck housings, are specifically not warranted against impact damage, including but not limited to, abrasive damage.

Disclaimer of Consequential Damage and Limitation of Implied Warranties:

American Honda disclaims any responsibility for loss of time or use of the product, transportation, commercial loss, or any other incidental or consequential damage. Any implied warranties are limited to the duration of this written limited warranty. Some states do not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Honda Parts, Accessories, and Apparel

This warranty is limited to Honda Power Equipment parts, accessories, and apparel when distributed by American Honda Motor Co., Inc., 4900 Marconi Drive, Alpharetta, Georgia 30005-8847.

PRODUCTS COVERED BY THIS WARRANTY	LENGTH OF WARRANTY (from date of original retail purchase)	
	PRIVATE RESIDENTIAL	COMMERCIAL/RENTAL/ INSTITUTIONAL
Parts	6 months	3 months
Accessories	12 months	3 months
Apparel	6 months	3 months

To Qualify for This Warranty:

- The parts, accessories, or apparel must be purchased from American Honda or a dealer authorized by American Honda to sell those products in the United States, Puerto Rico, and the U.S. Virgin Islands. Parts and Accessories must be purchased for installation on original Honda equipment or engines to be eligible for warranty coverage. Installing parts and accessories on non-Honda products or engines voids this warranty.
- You must be the first retail purchaser. This warranty is not transferable to subsequent owners.

What American Honda Will Repair or Replace Under Warranty:

American Honda will repair or replace, at its option, any Honda Power Equipment parts, accessories, replacement parts, or apparel that are proven to be defective in material or workmanship under normal use during the applicable warranty time period. Anything replaced under warranty becomes the property of American Honda Motor Co., Inc. The warranty on all parts, accessories, and apparel replaced under warranty will expire coincident with the original warranty on the replaced parts, accessories, or apparel. Parts and accessories installed by a dealer who is authorized by American Honda to sell them will be repaired or replaced under warranty without charge for parts or labor. If installed by anyone else, parts and accessories will be repaired or replaced under warranty without charge for parts, but any labor charges will be the responsibility of the purchaser. Apparel will be repaired or replaced under warranty without any charge.

To Obtain Warranty Service:

You must, at your expense, take the Honda Power Equipment part, accessory, apparel or the Honda Power Equipment on which the part or accessory is installed, and proof of purchase to any Honda Power Equipment dealer in the United States, Puerto Rico, or the U.S. Virgin Islands who is authorized to sell that product, during the dealer's normal business hours. To locate a dealer near you, visit our web site at PowerEquipment.Honda.com and click on Find a Dealer. If you are unable to obtain warranty service or are dissatisfied with the warranty service you receive, contact the owner of the dealership involved; normally this will resolve the problem. However, if you should require further assistance, write or call the Power Equipment Customer Relations Department of American Honda Motor Co., Inc.

Exclusions:

This warranty does not extend to parts, accessories, or apparel affected or damaged by collision, normal wear, use in an application for which the product was not designed or any other misuse, neglect, incorporation or use of unsuitable attachments or parts, unauthorized alteration, improper installation, or any causes other than defects in material or workmanship of the product. Installing parts and accessories on non-Honda products or engines voids this warranty.

Disclaimer of Consequential Damage and Limitation of Implied Warranties:

American Honda disclaims any responsibility for loss of time or use of the product, or the power equipment on which the product is installed, transportation, commercial loss, or any other incidental or consequential damage. Any implied warranties are limited to the duration of this written warranty. Some states do not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusions and limitations may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

PWL50623-Z

DISTRIBUTOR’S WARRANTY

Honda Canada, Inc., 180 Honda Blvd. Markham, Ontario for and on behalf of Honda Motor Co. Ltd., Tokyo, Japan, gives the following written warranty on each new power product manufactured by Honda Motor Co. Ltd., Japan, distributed in Canada by Honda Canada Inc. and sold by authorized Honda Power Equipment dealers. Whenever used herein, the word “Honda” refers to Honda Canada Inc. and/or Honda Motor Co. Ltd. as appropriate from the context.

Honda warrants that each new Honda power product will be free, under normal use and maintenance, from any defects in material or workmanship for the relevant warranty period set forth below. If any defects should be found in a Honda power product within the relevant warranty period, necessary repairs and replacements with a new part or the Honda equivalent shall be made at no cost to the consumer for parts and labour, when Honda acknowledges that such defects are attributable to faulty material or workmanship at the time of manufacture.

Warranty Period

Warranty coverage commences from the original date of sale or when the unit is first put into use as a demonstrator. The following warranty applies to power products purchased at retail or placed into rental service on or after August 1, 2011.

PRODUCTS COVERED BY THIS WARRANTY	LENGTH OF WARRANTY (from date of original retail purchase)	
	PRIVATE RESIDENTIAL	COMMERCIAL/RENTAL/ INSTITUTIONAL
Battery Charger, CV5020XY, CV5080XY Models	36 months	36 months

This Warranty Covers

- a. Any Honda power product purchased in Canada from an authorized Honda dealer which has been registered at the time of purchase on a form provided by Honda, which has had set-up and pre-delivery service performed by an authorized Honda dealer and which is normally operated on Canada;
- b. Any factory installed part (except normal maintenance parts) referred to in “THIS WARRANTY DOES NOT COVER”; and
- c. Any power product on which required maintenance services have been performed as prescribed in the Owner’s Manual.

This Warranty Does Not Cover

- a. Any repairs required as a result of collision, accident, striking any object, misuse or lack of required maintenance;
- b. Any repairs required as a result of any attachments, parts or devices installed by or repairs done by a party other than an authorized Honda dealer;
- c. Any repairs required as a result of any parts not supplied by Honda, and this part is responsible for the failure or malfunction;
- d. Any power equipment modified, altered, disassembled or remodelled;
- e. Normal maintenance services, including tightening of nuts, bolts and fittings and engine tune-up and the replacement of parts made in connection with normal maintenance services including filters, spark plugs and wires, fuses, belts, lubricants and other expendables susceptible to natural wear;
- f. The Honda lawn mower blades and mower deck housings are specifically not warranted against impact damage including, but not limited to, abrasive damage; and
- g. All accessories or attachments.

The Owner’s Obligation

In order to maintain the validity of this DISTRIBUTOR’S WARRANTY, the required maintenance services as set forth in the Owner’s Manual must be performed at the proper intervals and detailed receipts and records retained as proof.

To Obtain Warranty Service

You must take the Honda power product, at your expense, during normal service hours, to any authorized Honda Power Equipment dealership. If you are unable to obtain or are dissatisfied with the warranty service

you receive, first contact the owner of the dealership involved; this should resolve the problem. If you require further assistance, contact Honda Canada's Customer Relations Department.

Honda Canada, Inc.
180 Honda Blvd. Markham, ON L6C 0H9
or visit www.honda.ca
Telephone: (888) 9HONDA9 Toll Free
(880) 946-6329
Facsimile:(877) 939-0909 Toll Free

Replacement Parts And Accessories Warranty

New Honda Genuine replacement parts or accessories sold to a consumer or installed by an authorized Honda Power Equipment dealer which are not covered by the DISTRIBUTOR'S WARRANTY are warranted for a period of one year from date of purchase, provided, however, that this Replacement Parts and Accessory Warranty does not apply to any replacement parts modified, used with, or installed on a power product for which the replacement parts were not intended. Electrical components that are not installed by the dealer (sold over the counter) are not covered by warranty. Refer to Battery & Charger owners manual.

Entire Written Warranty:

This DISTRIBUTOR'S WARRANTY and the REPLACEMENT PARTS AND ACCESSORY WARRANTY are the only and the entire written warranties given by Honda for Honda power products. No dealer or his agent or employee is authorized to extend or enlarge on these warranties on behalf of Honda by any written or verbal statement or advertisement.

Disclaimer

To the extent the law permits, Honda disclaims any responsibility for loss of time or use of the product, transportation or towing costs or any other indirect, incidental or consequential damage, inconvenience or commercial loss.

Notice To Consumer

The consumer protection, sales of goods and consumer warranty laws of certain jurisdictions (including Quebec) do not allow the exclusion or limitation of certain legal warranties, conditions or representations. The provisions contained in this warranty are not intended to limit, modify, take away from, disclaim or exclude any warranties that you may have under such laws. If these laws apply to you, some or all of the exclusions or limitations in this warranty (including the preceding disclaimer) may not apply and you may have additional rights. To the extent that we may not, as a matter of applicable law, disclaim any implied warranty or condition, the scope and duration of such warranty or condition will be the minimum permitted under such applicable law.

Privacy Statement

The owner information submitted may be used by Honda and its related companies, their dealers, and service provides to communicate marketing, product, and service information to you. If you prefer not to receive marketing information, please contact us at 1-888-946-6329.

NOTES

NOTES

NOTES

