


RW405B

Easy Setup Guide




Printer Setup Video

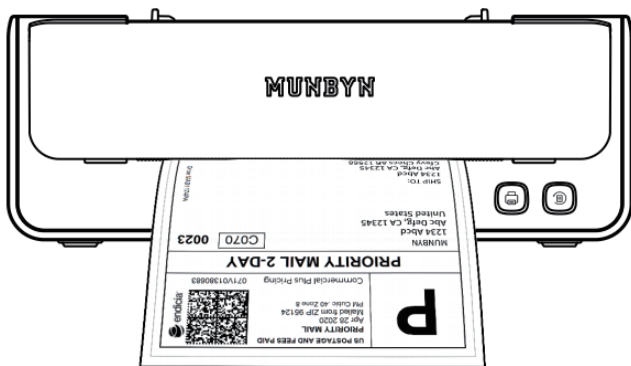

Stand Setup
Video



Maintenance
Video

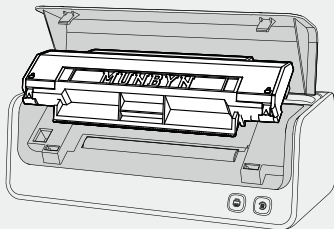

Stand Installation

(1) Slide the base clips on the support panel.




(2) Attach the printer to the base clips on the support panel.

(3) Place the two side panels on the support panel base.
(Note: The "M" logo should face outward.)




(4) Adjust the side panels to fit a 4 x 6 inch label.

(5) Push the button to release the side panels.

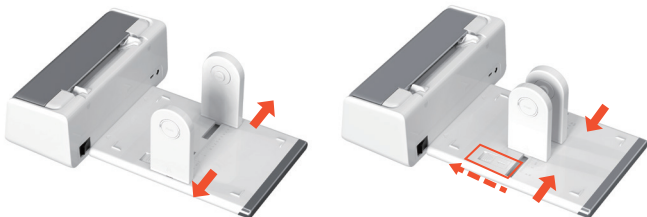


(6) Press the push buttons on each side panel to lock the paper roll in place.

(7) Adjust the side panels for a snug fit around the paper roll.

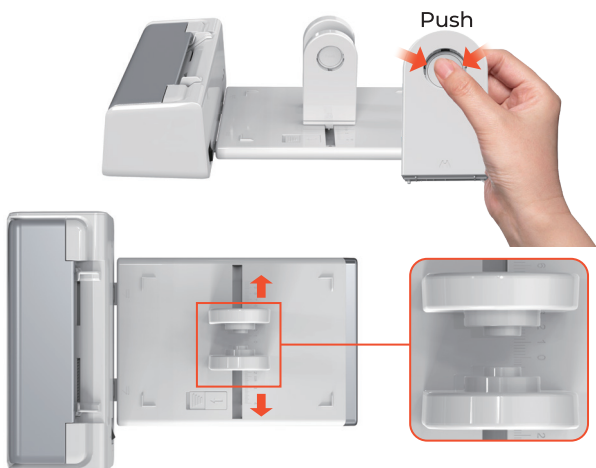

Note: The small convex platform is designed for rolls with a core diameter of 0.5 to 1 inch. The large convex platform accommodates rolls with a core diameter of 1 inch or greater.

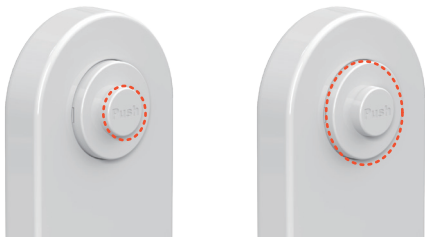

Print Head Maintenance

(1) Turn the printer off and allow it to cool down (about half a minute).

(2) Open the printer cover with both hands.



(3) Press both sides of the button with an arrow on the machine and lift it slightly to remove the print head.



(4) Wipe to clean the marked area of the print head as shown in the picture.




(5) Wait 2-5 minutes until the print head dry, then turn the printer on

(6) If cleaning does not resolve the print quality issues or if the print head is damaged, you may need to replace the print head.

System Setup

Topic	Scan the QR code for a video tutorial
MUNBYN APP - Bluetooth Connection	
MUNBYN Editor - Bluetooth Printing (no driver required)	
macOS - Bluetooth Connection	
Windows - Bluetooth Connection	
macOS - USB Connection	
Windows - USB Connection	

MUNBYN APP - Bluetooth Connection

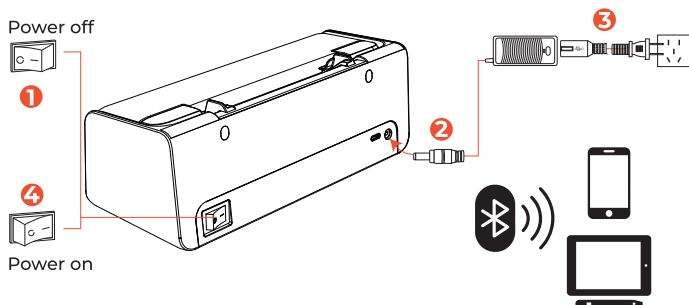

1. Enable Bluetooth on your device.

Note: Do not connect devices directly through the system's Bluetooth search interface.

2. Download the "**MUNBYN Print**" App from the **App Store** or **Google Play** on your device, or scan the QR code below. If a PIN is required, enter "0000".




3. Open App, find and tap "4 inch" > "RW405B", then click "OK".
4. Find and select "RW405B".

MUNBYN Editor

(Supports Bluetooth-enabled Mac, Windows, and Chrome devices for driver-free printing, cutting, DIY labeling)

Tips: MUNBYN Editor is an accessible, user-friendly platform that allows you to easily design, personalize, precisely crop, and print fun designs on Google Chrome. It supports printing for Windows, Mac, and Chrome devices.

Website Link: editor.munbyn.com

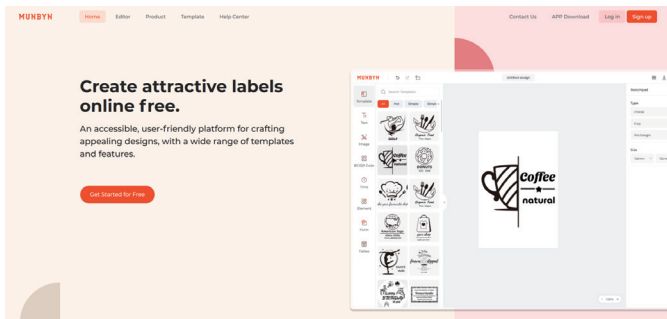

Scan the QR codes to get printing tips:



Bluetooth Printing Tutorial
(no-driver required)
munbyn.biz/wbp




System Printing Tutorial
(USB driver required)
munbyn.biz/wbp



PDF Cropping Tutorial
munbyn.biz/pdf

macOS - Bluetooth Connection

Power off

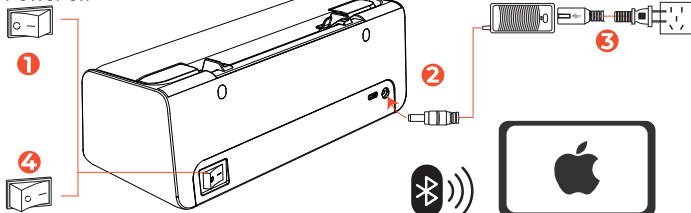


Power on

1. Turn on the printer and connect via USB-C as shown in the picture above.
2. Access the driver by using this link: munbyn.biz/405bmacd
3. Run the driver, and follow the installation steps until download is completed.
4. Turn on the computer's Bluetooth.
5. Click "**Bluetooth Preferences**" and choose your printer to connect it.




6. Go to '**Printer Preferences**' and click the '+' icon to complete your printer setup.

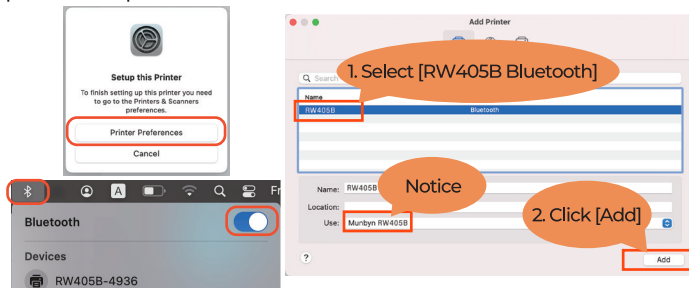

7. Turn off Bluetooth, and then turn it back on.


Windows - Bluetooth Connection

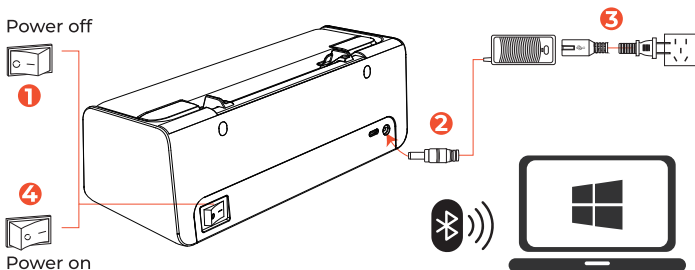

1. Turn on the printer and connect via USB-C as shown in the picture above.

2. Turn on the computer's Bluetooth.


Note: Do not connect devices directly through the system's Bluetooth search interface.

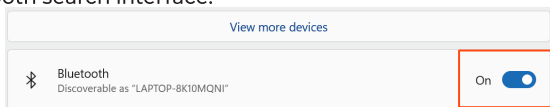

3. Access the driver by using this link: munbyn.biz/405bwind

4. Run the driver, and follow the installation steps until download is completed.


5. Click "Bluetooth" > "Next".

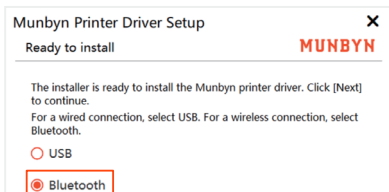

6. Select the printer name, and click "Next"

7. Follow the installation steps until download for Windows is completed.

macOS - USB Connection

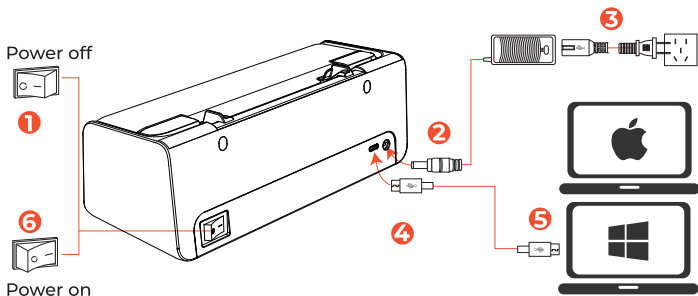

1. Connect the printer to your computer using the original USB-C cable as shown in the picture above.
2. Open the removable drive named "RW405B" on your computer and run the driver file that matches your operating system.
3. Follow the installation steps until download for macOS is completed.

Windows - USB Connection

1. Connect the printer to your computer using the original USB-C cable as shown in the picture above.
2. Open the removable drive named "RW405B" on your computer and run the driver file that matches your operating system.
3. Click "USB" > "Next".
4. Follow the installation steps until download for Windows is completed.

Tech Support



WhatsApp:
+86 178 1788 1067



Facebook Messenger:
MUNBYN Official

E-mail: support@munbyn.com

WhatsApp: +86 178 1788 1067

Phone: +1 (628) 229 3612

Support Hours: 24 hours a day, Monday to Friday

RW405B

MUNBYN provides a 24-month warranty and free lifetime service.

If you encounter any issues with the product, please contact the MUNBYN team for prompt troubleshooting assistance or a replacement.