



Parts Manual

Mfg. No: 627804x6B
Dual Stage Snow Thrower (2000)


Model Components	Page
Auger Housing Assembly.....	4
Chute Rod Assembly.....	6
Discharge Chute Assembly.....	8
Drive Components Assembly.....	10
Electric Start Assembly.....	12
Engine Assembly.....	14
Frame Components Assembly.....	16
Gear Case Assembly.....	18
Handle Assembly.....	20
Shift Yoke Assembly.....	22
Wheels Assembly.....	24
Torque Specification Chart.....	26

Not For
Reproduction

Auger Housing Assembly

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 627804x6B

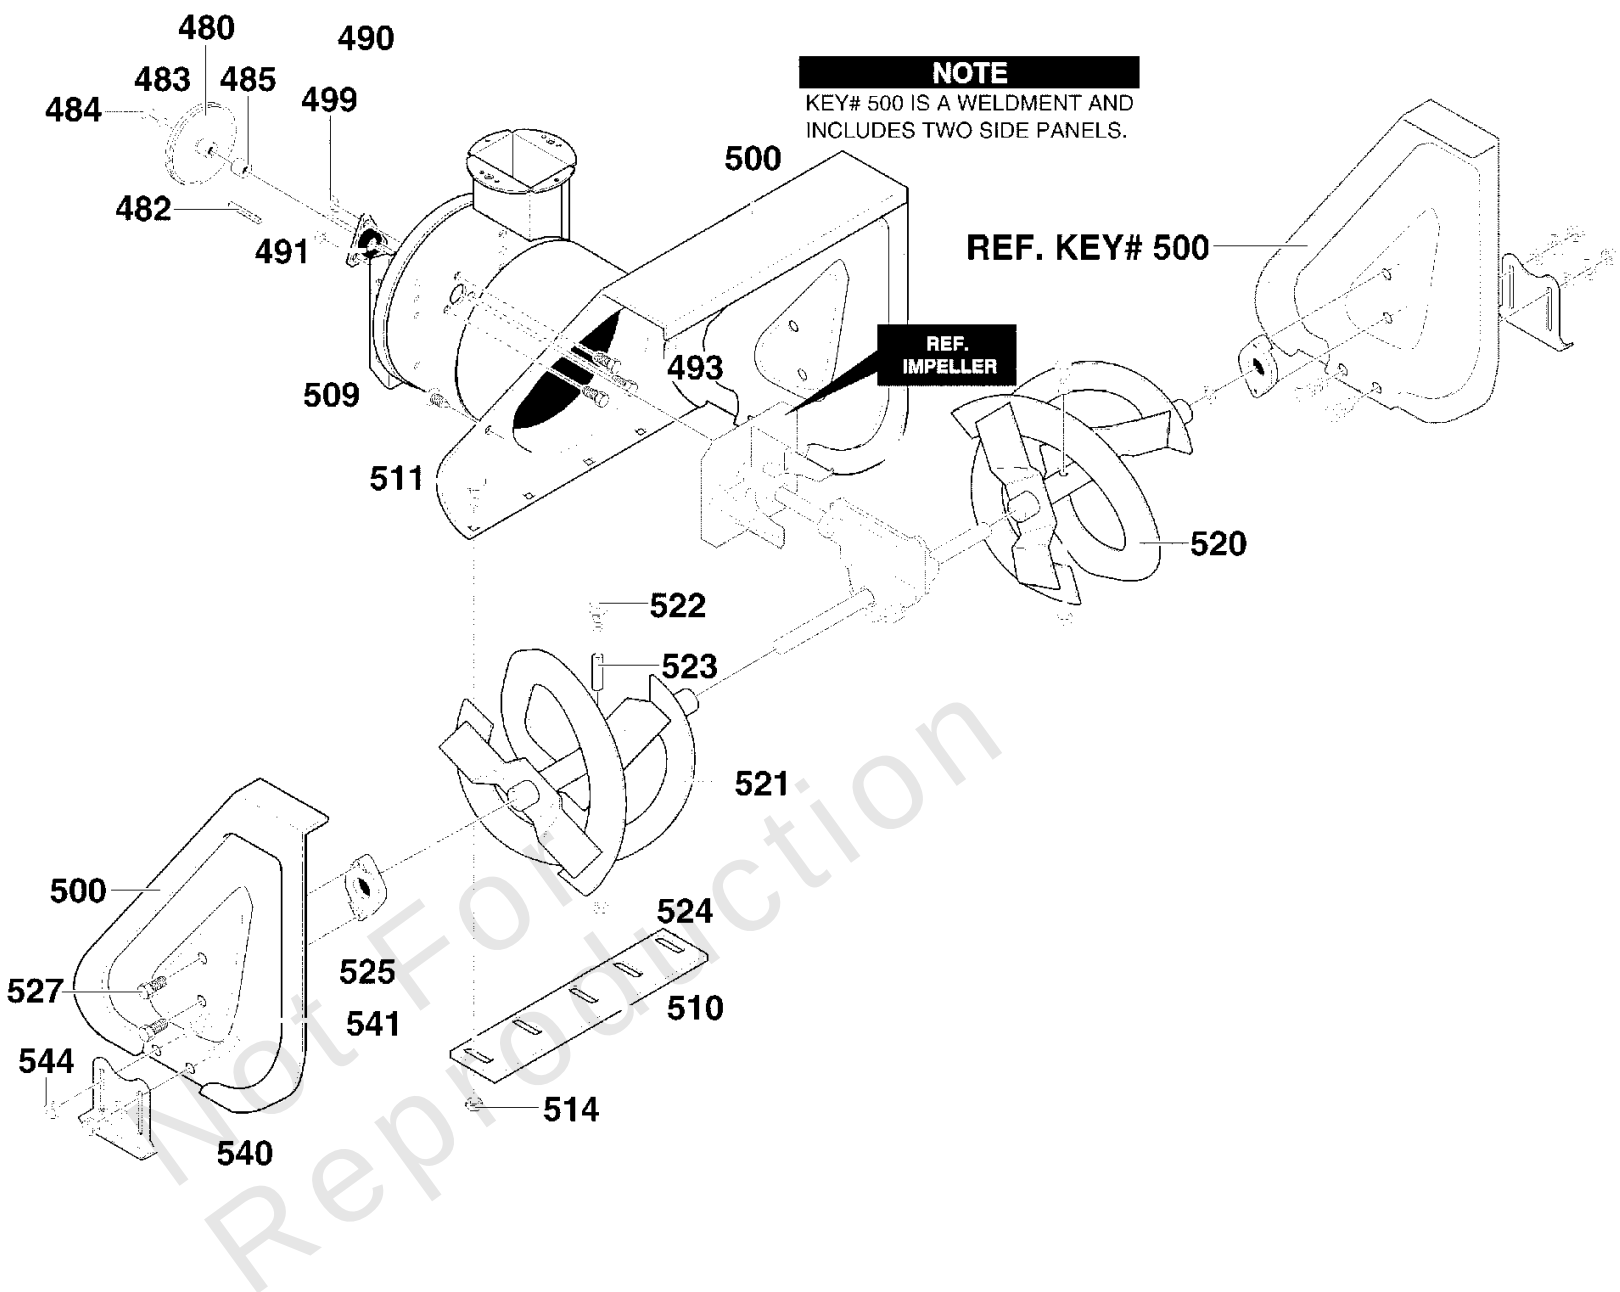


Auger Housing Assembly

REF NO	PART NO	QTY	DESCRIPTION
480	583146MA		PULLEY, V4L
482	71371MA		KEY, SQUARE
483	71074		WASHER, FLAT .53X1.00X.063
484	712121MA		NUT, 1/2-20 REGHEXCTRLK
485	334514MA		SPACER, SLEEVE
490	582960		RETAINER, BALL
491	043846		BEARING, BALL
493	313676		SCREW, 5/16-18 x 0.75
499	710026		NUT, 5/16-18
500	761735-850		HOUSING, ASSY
509	760040MA		PLUG, CHRISTMAS TREE
510	760656-853		SCRAPER BLADE
511	340720MA		BOLT, 1/4-20X.75 CARR.
514	710026		NUT, 5/16-18 HEXWDFLLK WHIZ
520	760605-853		AUGER, LH
521	760606-853		AUGER, RH
522	9524MA		SCREW, 1/4-20X1.75
523	3943MA		SPACER, SLEEVE
524	782585		NUT, 1/4-20 REGHXCTRLK
525	53757MA		BRNG,AUGER SHAFT MF-L
527	782967MA		SCREW, 5/16-18 x 0.75
540	762377-853		SKID, HEIGHT ADJUST
541	340720MA		BOLT, 5/16-18X .75
544	710026		NUT, 5/16-18 REGHEX

Chute Rod Assembly

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 627804x6B

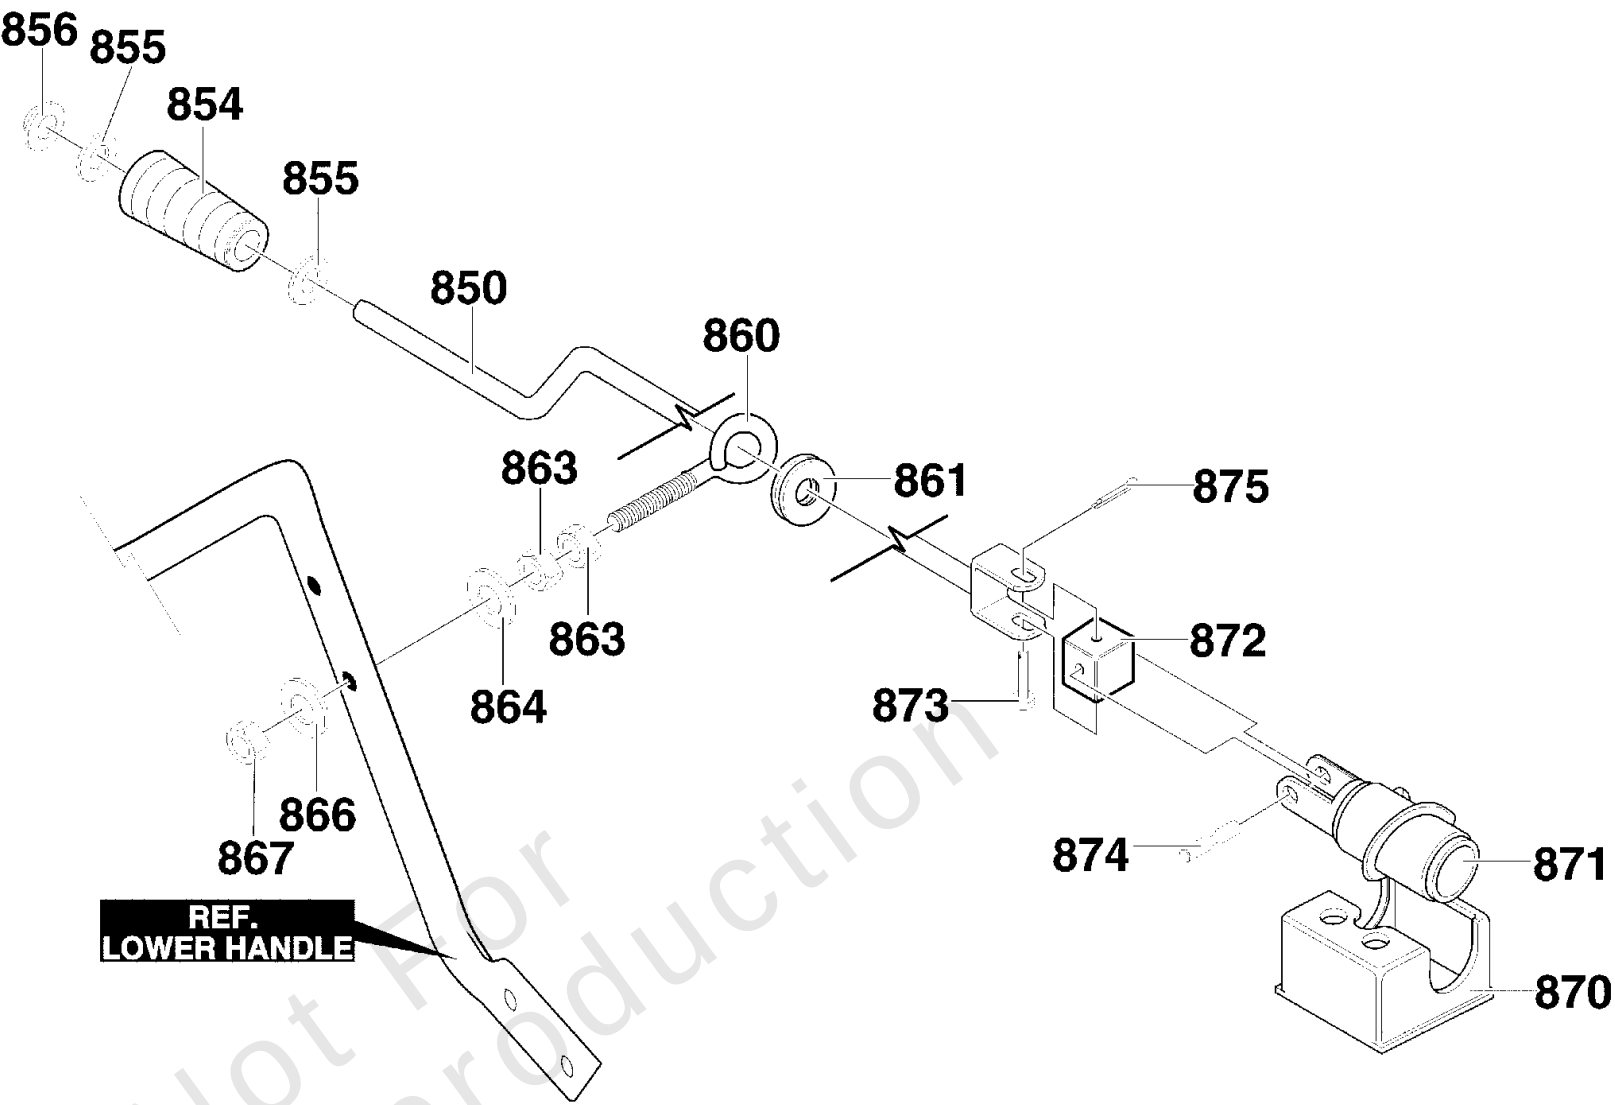


Chute Rod Assembly

REF NO	PART NO	QTY	DESCRIPTION
850	585426MA		CRANK, ASSY
854	51443MA		KNOB, SLEEVE STD BLK
855	309312MA		WASHER, FLAT .39 X .7
856	73664MA		NUT, PUSH ON 3/8"
860	581618MA		EYEBOLT.38-16X6.00 .6
861	148MA		GROMMET, Eyelet
863	124829		NUT, 3/8-16 HEXJAM
864	71072		WASHER, FLAT .406X .81X.066
866	71072		WASHER, FLAT .406X .81X.066
867	71046		NUT, 3/8-16 HEXNYL
870	585195MA		BRKT, WORM
871	585196MA		WORM, GEAR CHUTE
872	578063MA		BLOCK,UNIVERSAL PIVOT
873	578309MA		LF PIN, CLEVIS .25DX
874	578060MA		PIN,UNIV JOINT 3/8X1.
875	579493MA		PIN, COTTER .06X .50

Discharge Chute Assembly

Note: Unless noted otherwise, use the standard torque specifications Mfg. No: 627804x6B

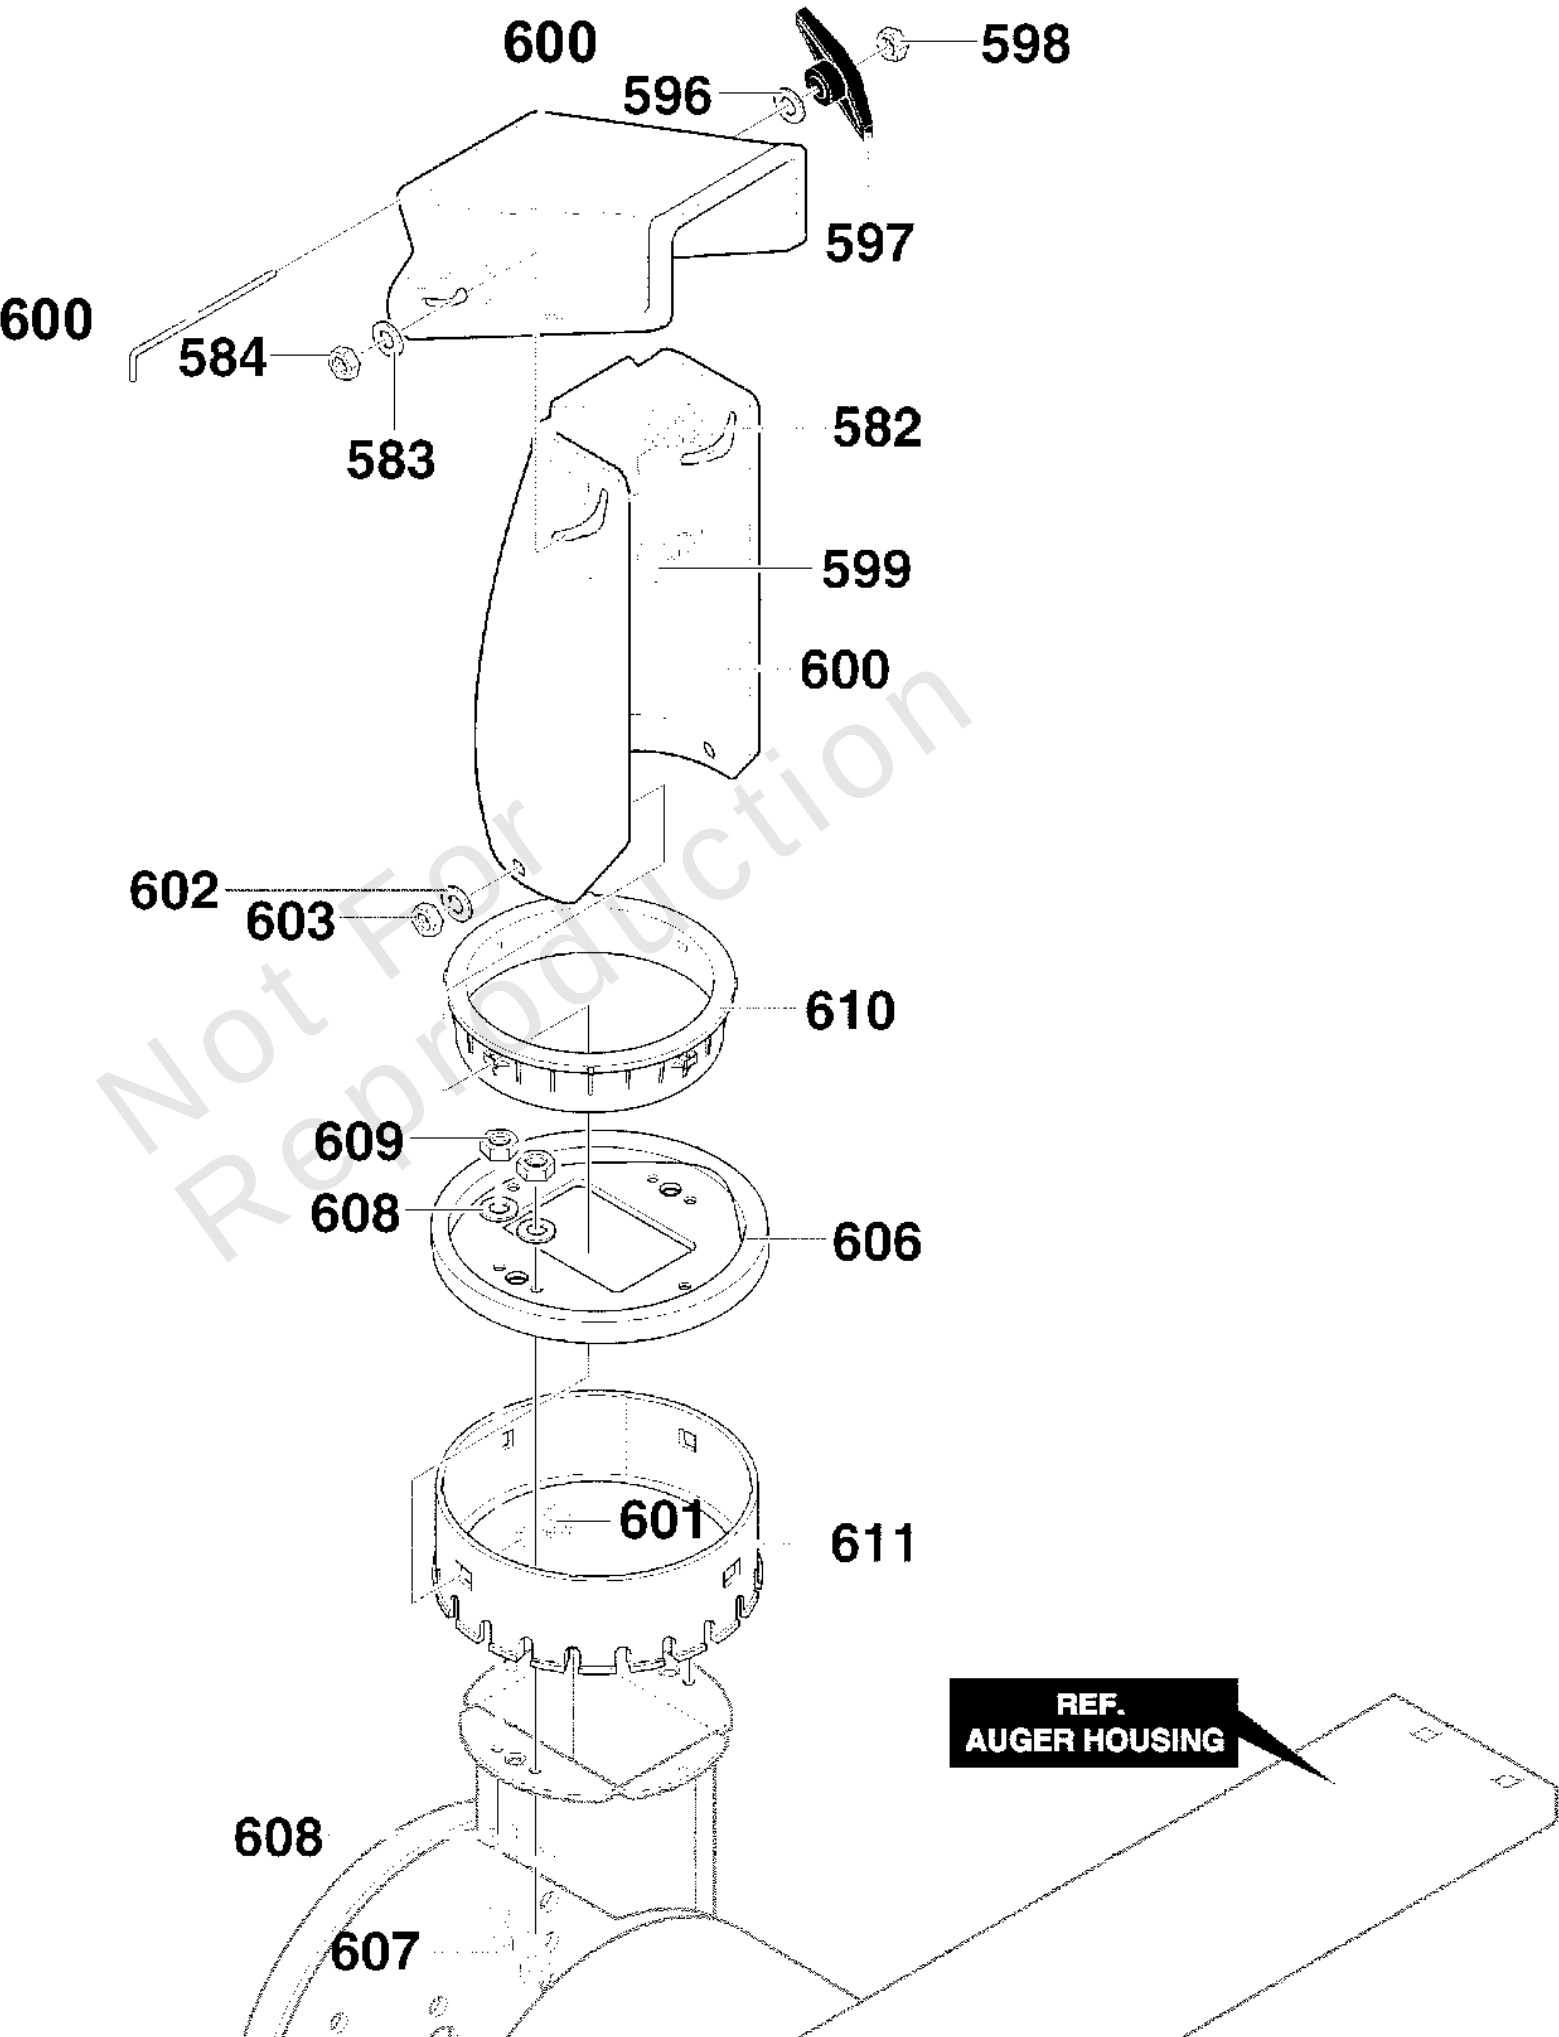


Discharge Chute Assembly

REF NO	PART NO	QTY	DESCRIPTION
582	578088MA		SCREW, 5/16-18X .75SL
583	120393		WASHER, FLAT .349X.69X.066
584	1498		NUT, 5/16-18 REGHEXCTRLK
596	120393		WASHER, FLAT .349X.69X.066
597	13527		KNOB, T
598	71037		NUT, 5/16-18 REGHEX
599	302843MA		BOLT, 5/16-18X1.25 CA
600	762222MA		CHUTE, ASSEMBLY
601	586280		BOLT, 5/16-18X1.00
602	120393		FLATWASHER .349X.69X.066
603	71038		NUT, 5/16-18
606	585214-853		COLLAR, CHUTE
607	302628MA		SCREW, 1/4-20X .75 HH
608	71067MA		FLATWASHER .281X .63X.065
609	780029		NUT, 1/4-20 HEX NYLOCK
610	337227MA		RETAINER, RING INNER
611	585193MA		RETAINER, RING OUTER

Drive Components Assembly

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 627804x6B

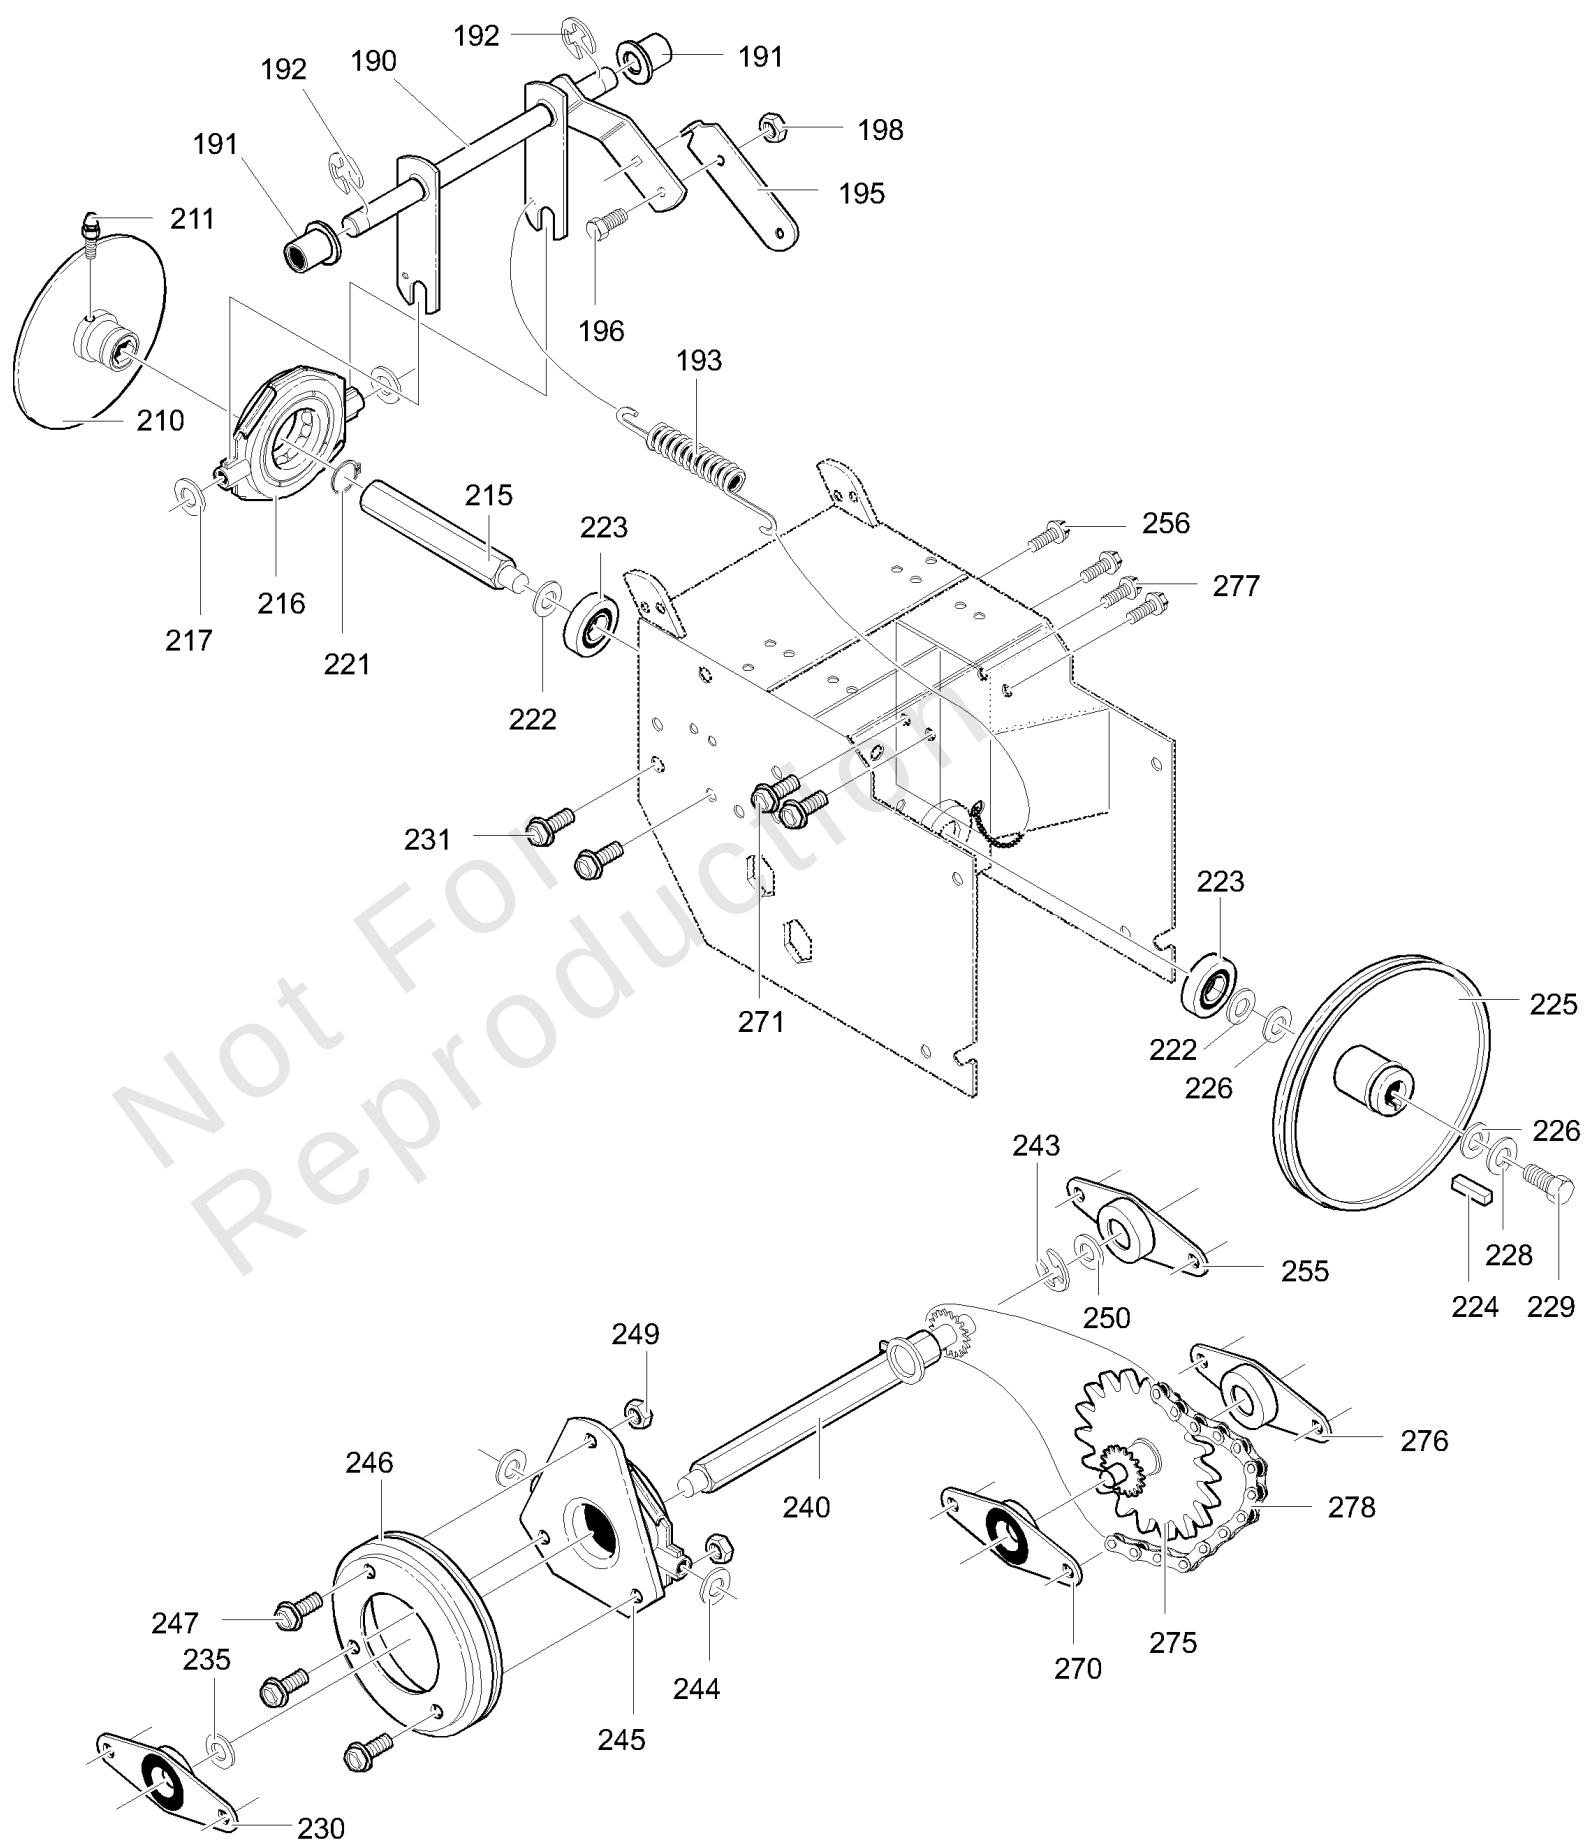


Drive Components Assembly

REF NO	PART NO	QTY	DESCRIPTION
190	761820MA		LEVER, ASSY TRACTION CLUTCH
191	53703MA		BEARING, FLANGE
192	011X16MA		RING, RET E
193	53818MA		SPRING, RETURN
195	579937MA		LEVER, SPRING
196	11871MA		SCREW, 1/4-20X .63
198	782585		NUT, 1/4-20 REGHEXCTRLK
210	583163-853		DISC, ASSY
211	583206MA		ZERK, GREASE
215	583155MA		SHAFT, HEX TRACTION
216	85501MA		BEARING, TRUNION
217	71074		FLATWASHER, .53 X1.00X.063
221	73811MA		RING, RETEX
222	580969MA		FLATWASHER, .680X1.12X.060
223	043846		BEARING, BALL
224	71371MA		KEY, SQUARE
225	580961MA		PULLEY, V3L 6.50X .56
226	580965MA		WASHER, WAVE
227	712123		FLATWASHER, .281X1.00X.063
228	071059MA		WASHER, SPLIT .26X.50X.06
229	302628MA		SCREW, 1/4-20X .75 HH
230	334163MA		BEARING & RETAINER
231	780055MA		SCREW, 5/16-18 x 0.50
235	579858MA		WASHER.502-0.75-.06 F
240	579897MA		HEX, ASSY#40-8T W/PBRG
243	783002MA		RING, RETEX
244	71074		FLATWASHER, .53 X1.00X.063
245	337029MA		BEARING, TRUNION
246	313883		WHEEL, ASSY FRICTION
247	11871MA		SCREW, 1/4-20X .63
249	303008MA		NUT, 1/4-20 HEXKEPS
250	579858MA		WASHER.502-0.75-.06 F
255	334163MA		BEARING & RETAINER
256	780055MA		SCREW, 5/16-18 x 0.50
270	334163MA		BEARING & RETAINER
271	780055MA		SCREW, 5/16-18 x 0.50
275	761789MA		JACK, ASSY#41-36/7
276	334163MA		BEARING & RETAINER
277	780055MA		SCREW
278	579867MA		CHAIN ROLLER

Electric Start Assembly

Note: Unless noted otherwise, use the standard torque specifications


Mfg. No: 627804x6B

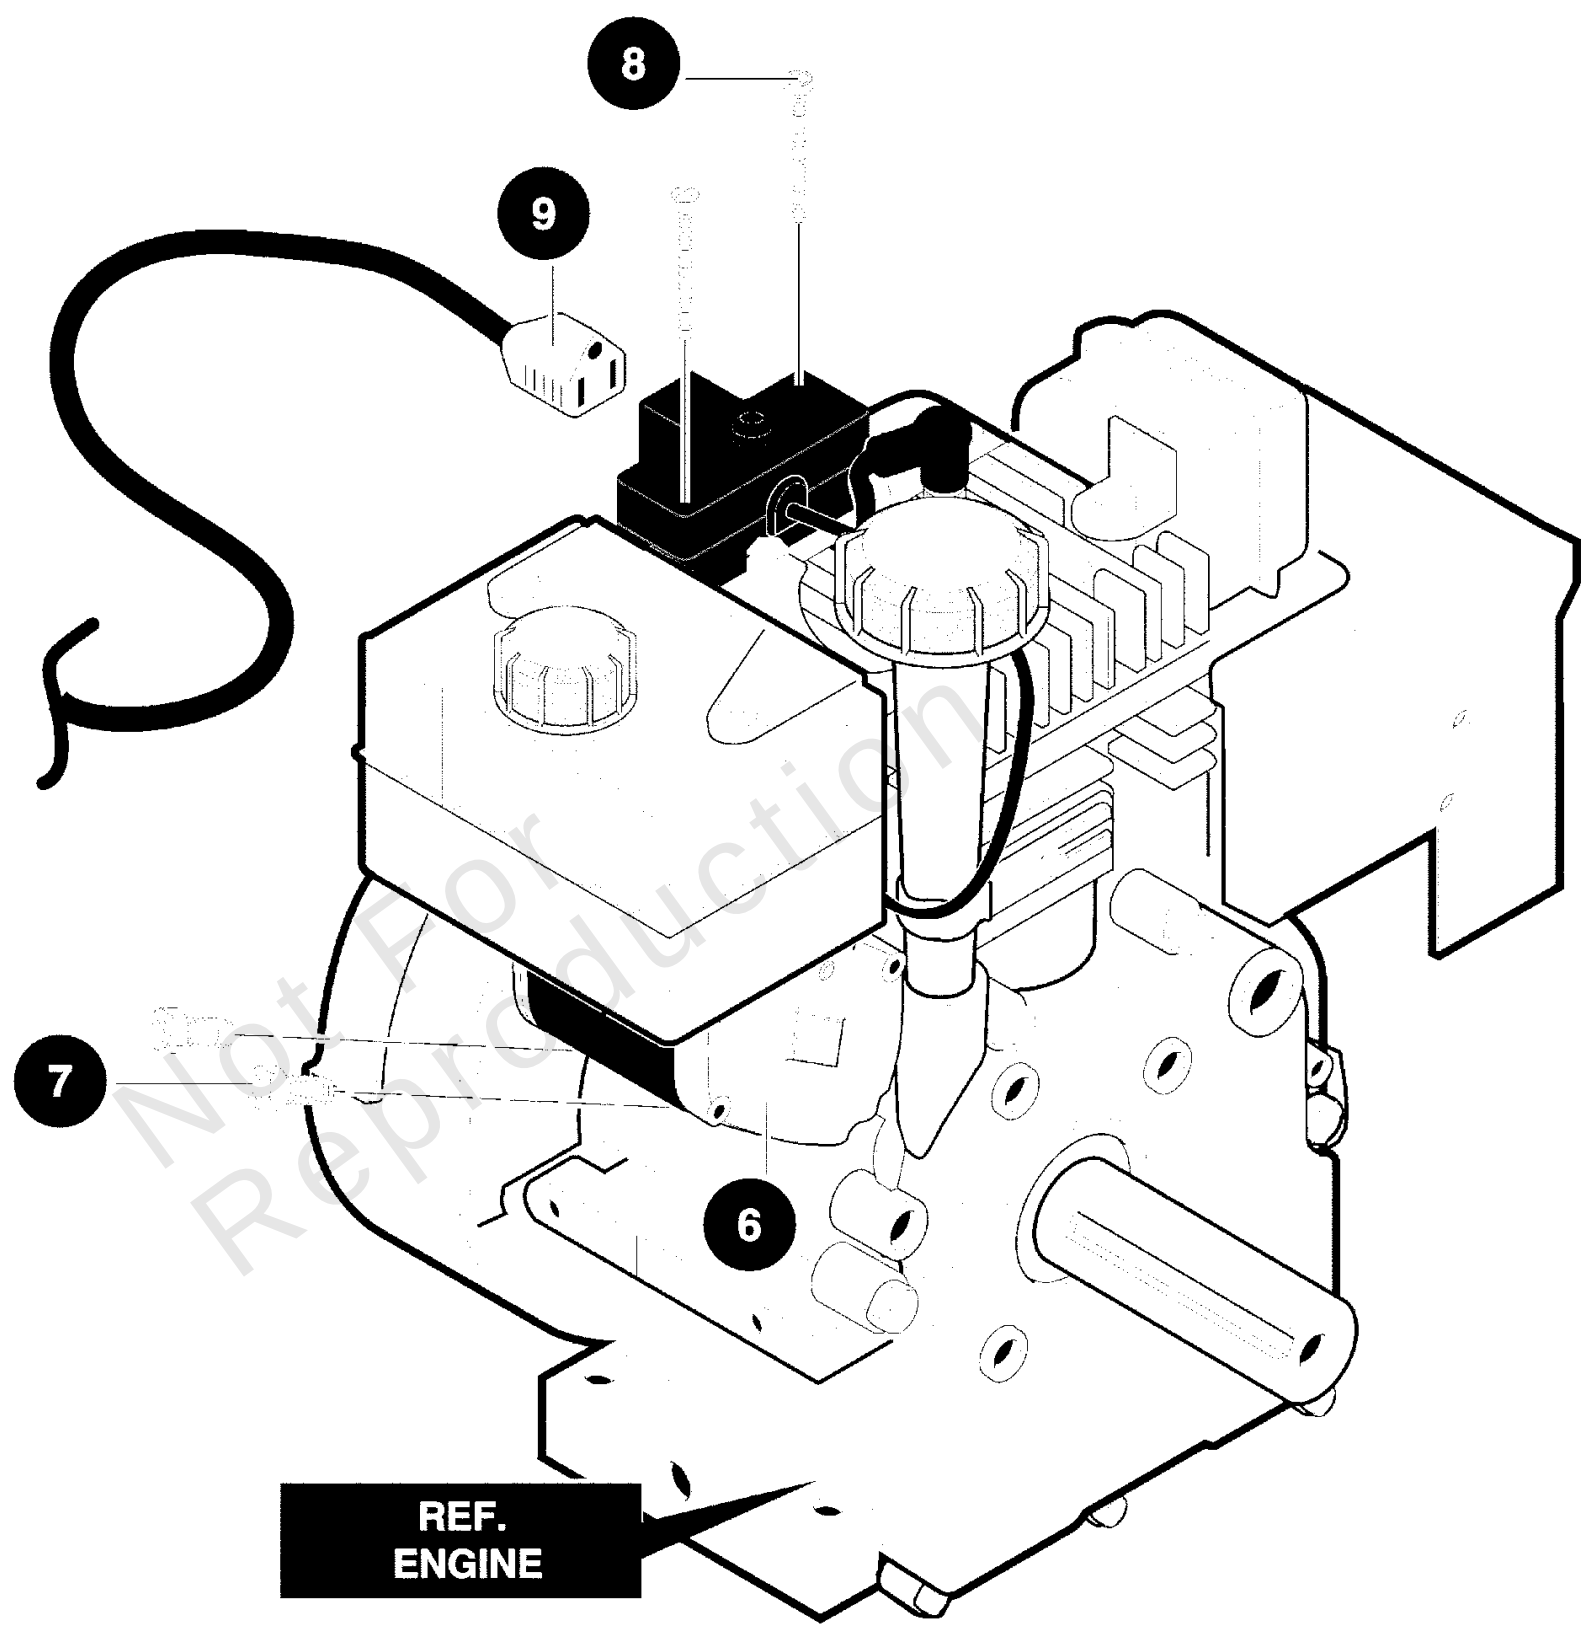

Electric Start Assembly

REF NO	PART NO	QTY	DESCRIPTION
6	6218		MOTOR, STARTER
7	6216		SCREW
8	6217		SCREW
9	6219MA		CORD, Electric, 10FT. 110V

Not For Reproduction

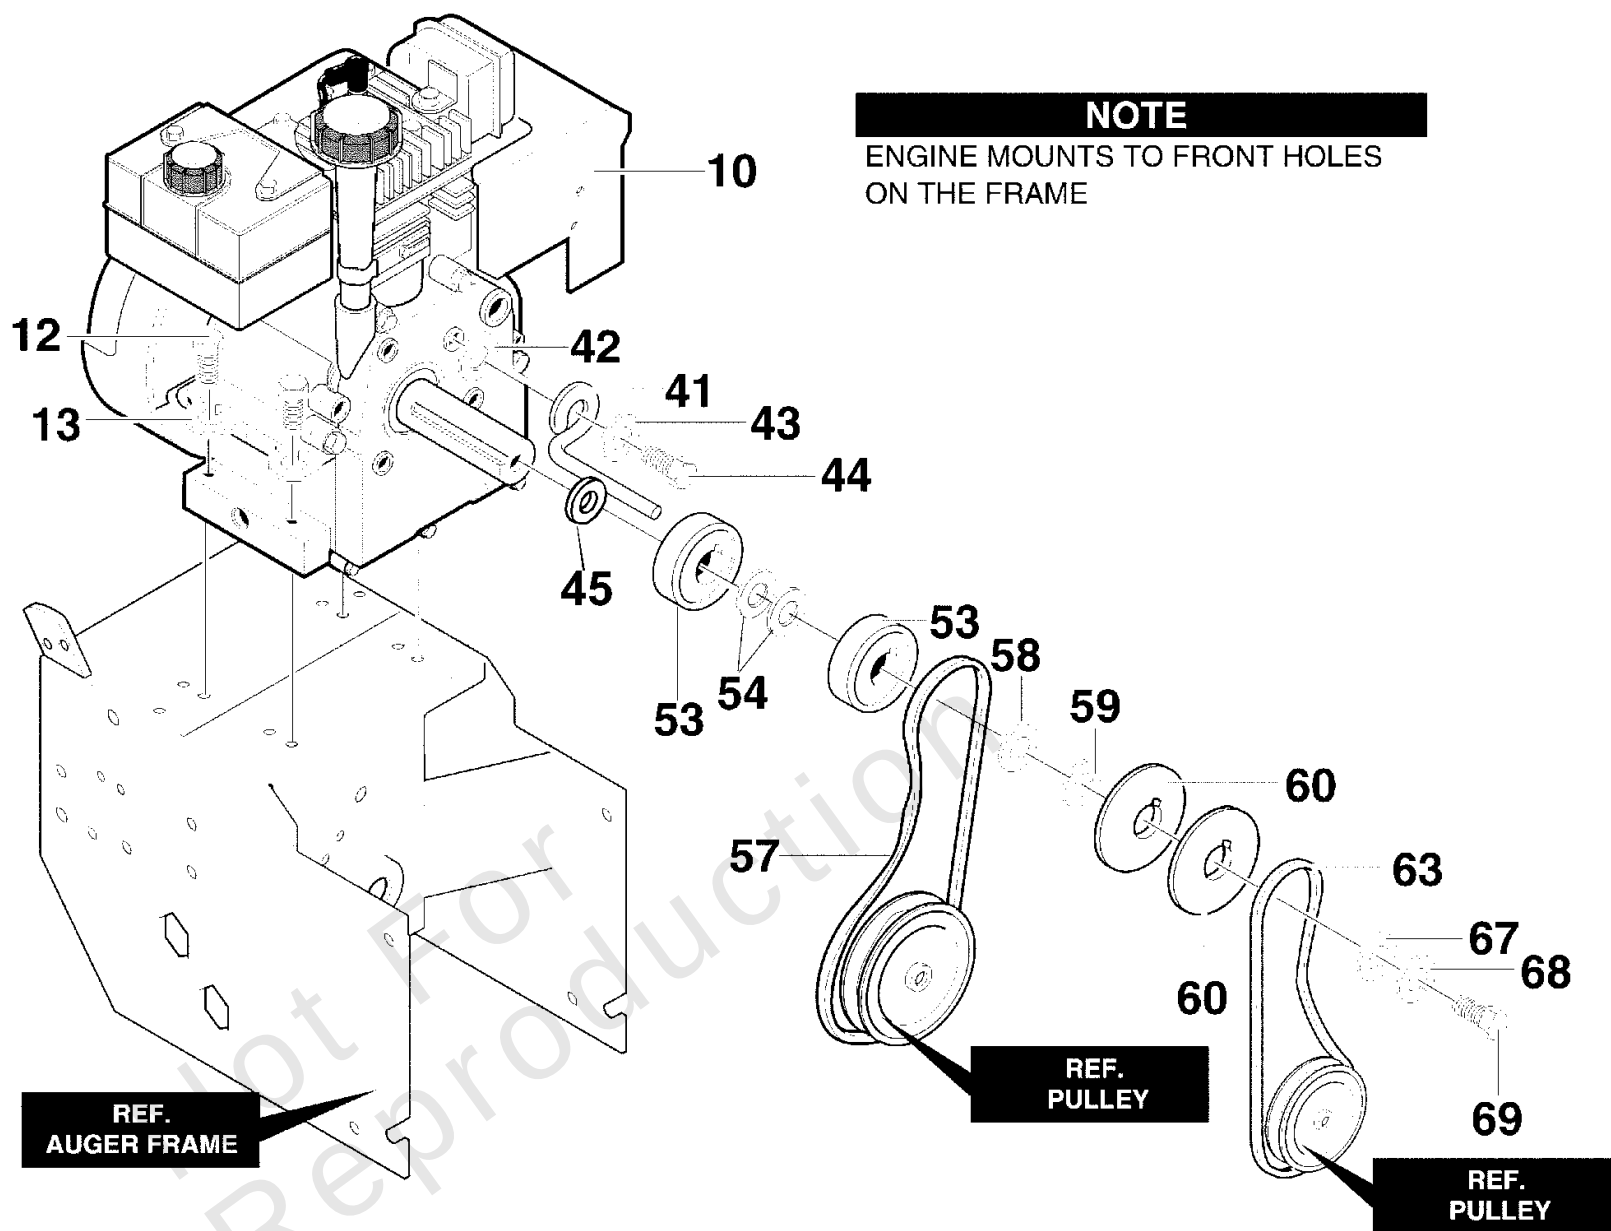


Engine Assembly

REF NO	PART NO	QTY	DESCRIPTION
10	-----		8HP ENGINE -(See Engine Manual)
12	710024		SCREW, 5/16-18
13	120638		WASHER, SPTLK .31X.58X.08
41	3949MA		GUIDE, ROD BELT
42	6711MA		WASHER, PLASTIC .315X
43	120638		WASHER, SPTLK .31X.58X.08
44	910828MA		SCREW, 5/16-24 x 1.00
45	762291MA		SPACER
53	579854MA		PULLEY, HALF
54	579861MA		WASHER, FLAT .752X.91X.02
57	579932MA		BELT, V 3L 33.13LG
58	712120MA		FLATWASHER .765X1.12X.06
59	586251MA		SPACER, SLEEVE
60	586253		PULLEY, ENGINE
63	585416MA		BELT
67	50677MA		WASHER, FLAT .375X1.25X.104
68	018X31MA		WASHER,HVSPTLK .38ID
69	39573MA		SCREW, 3/8-24 x 1.00
--	F-001081J		OWNER'S MANUAL

Frame Components Assembly

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 627804x6B

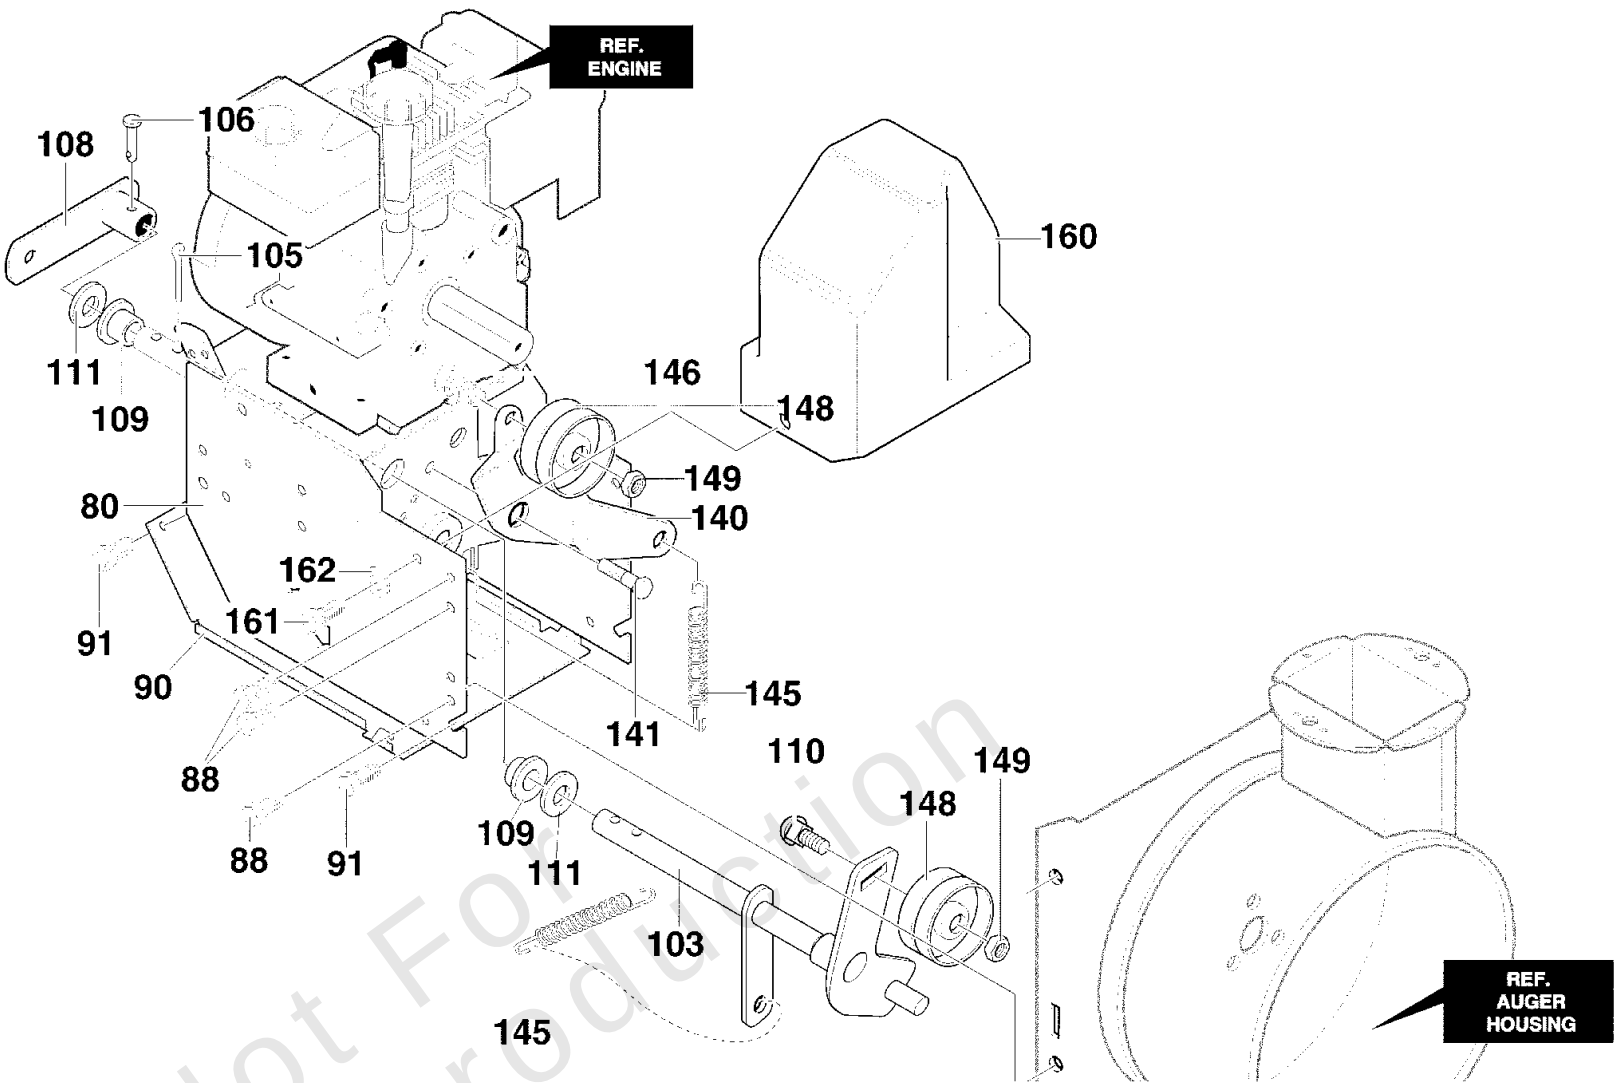


Frame Components Assembly

REF NO	PART NO	QTY	DESCRIPTION
80	761702-860		FRAME ASSY
88	780055MA		SCREW, 5/16-18 x 0.50
90	583031-853		COVER, BOTTOM
91	310169MA		SCREW, 1/4-20X .63 WA
103	762296MA		IDLER ASSEMBLY
105	711682MA		PIN, HAIR .38DIAx1.64LG
106	761761MA		PIN, CLEVIS 3/16" DIA
108	761766MA		ASSY., SPRING ATTACH WHEEL
109	53703MA		BEARING, FL.
110	585781MA		BOLT, 3/8-16X1.25 CARR.
111	711617		WASHER, FLAT
140	761701MA		LEVER, IDLER ARM TRACTION
141	329989MA		BOLT, .625X.135 HHSH 5/16-18
145	53704MA		SPRING, IDLER TRACTIO
146	761760		SCREW, 3/8-16 x 1.25
148	50793MA		PULLEY, IDLER
149	41529MA		NUT, 3/8-16 HXCTRLKJA
160	760479		COVER, BELT
161	310169MA		SCREW, 1/4-20X .63 WA
162	71067MA		WASHER

Gear Case Assembly

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 627804x6B

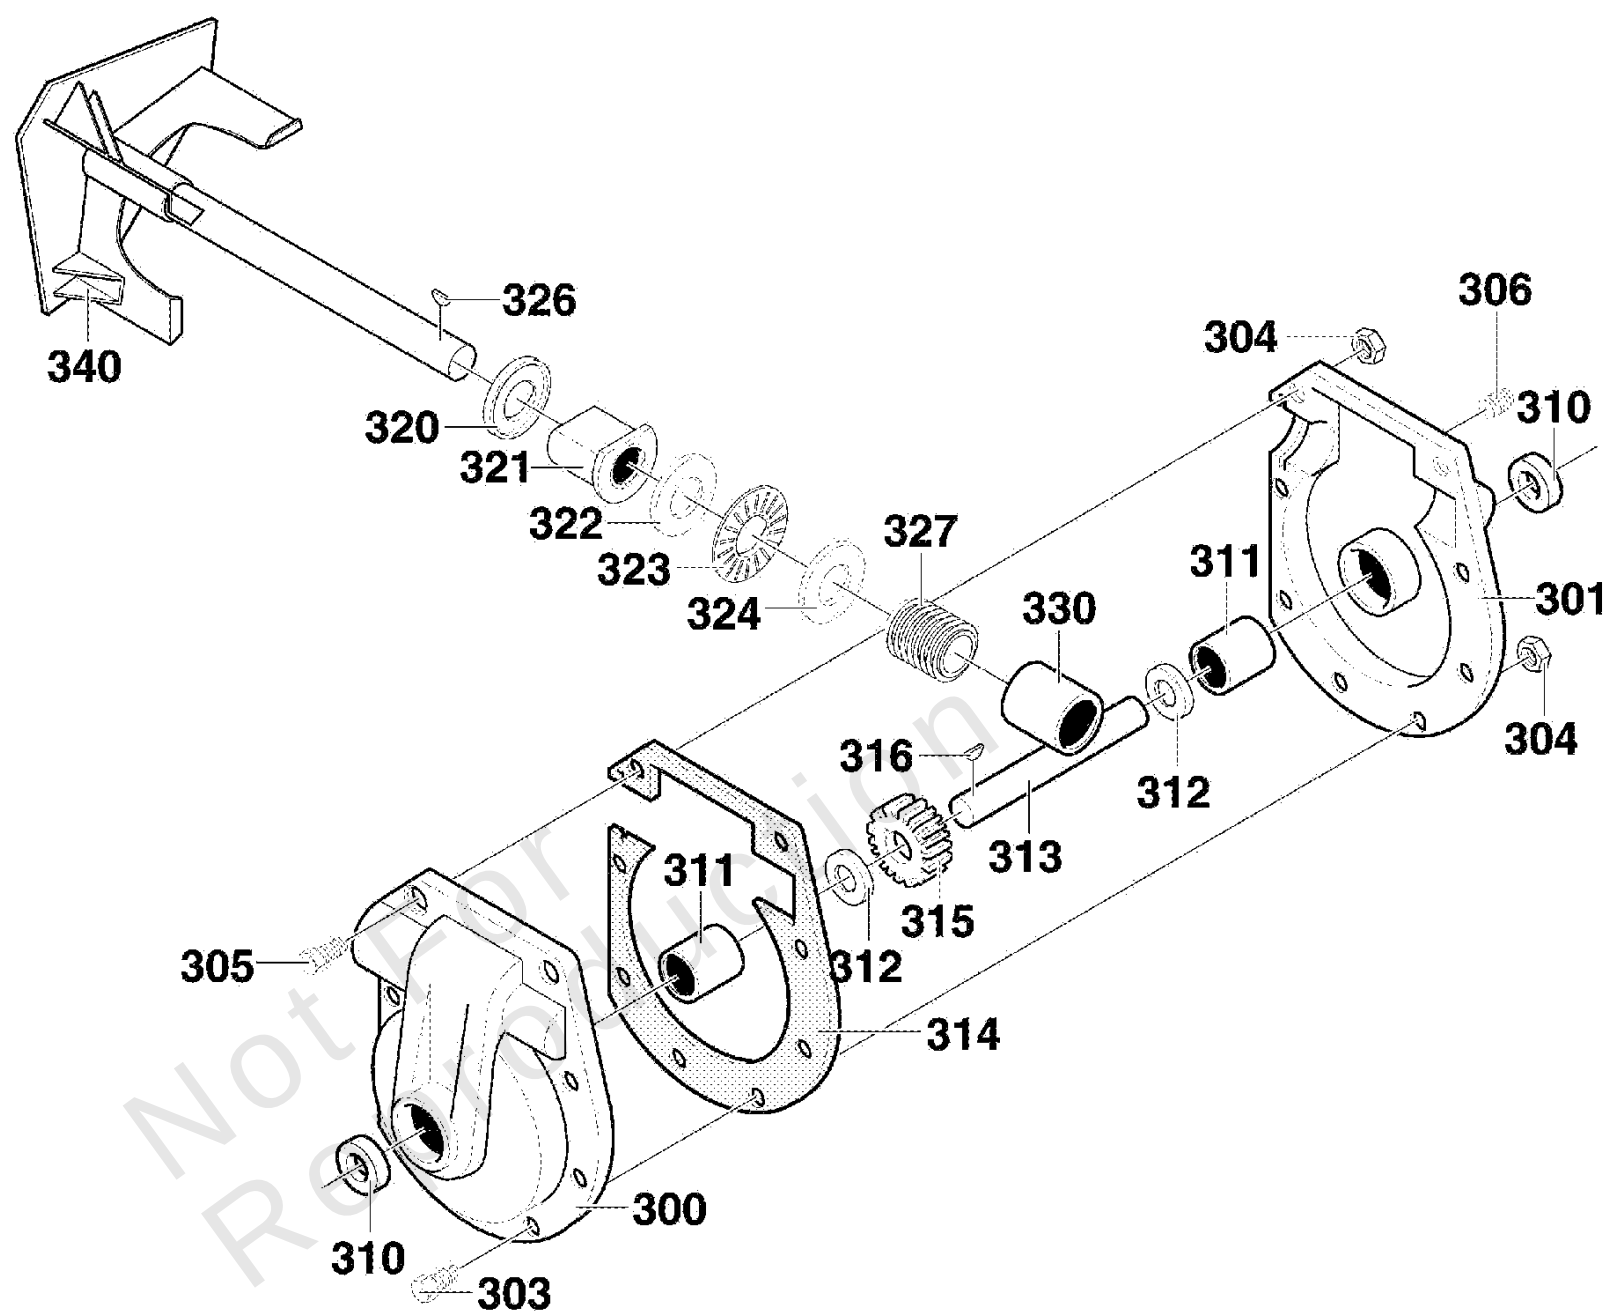


Gear Case Assembly

REF NO	PART NO	QTY	DESCRIPTION
300	896MA		CASE,GEAR RH 12AUG/10
301	895MA		CASE, GEAR LH 12"AUG/
303	910828MA		SCREW, 5/16-24 x 1.00
304	71100MA		NUT, 5/16-24 HEXWDFLLK
305	330434MA		SCREW, 5/16-24 x 1.50
306	313872		PLUG, PIPE
310	780151MA		SEAL, OIL CR 530552
311	313870MA		BEARING, SLEEVE
312	313871		WASHER, FLAT 1.00 x 1.54 x .09
313	760529MA		SHAFT,AUGER OUT 27 H1
314	897MA		GASKET, GEAR BOX
315	53730MA		GEAR, WORM
316	73905MA		KEY, WOODRUFF #91
320	313914		RING, QUAD
321	583126MA		BRNG, FL .753IDX1.128
322	48275MA		WASHER, FLAT .752X1.
323	313828		BEARING, ROLL
324	48275MA		WASHER, FLAT .752X1.
326	50795MA		KEY, HI-PRO 606 .75D
327	313862		GEAR, WORM
330	53731MA		BEARING
340	761692-853		IMPELLER

Handle Assembly

Note: Unless noted otherwise, use the standard torque specifications Mfg. No: 627804x6B

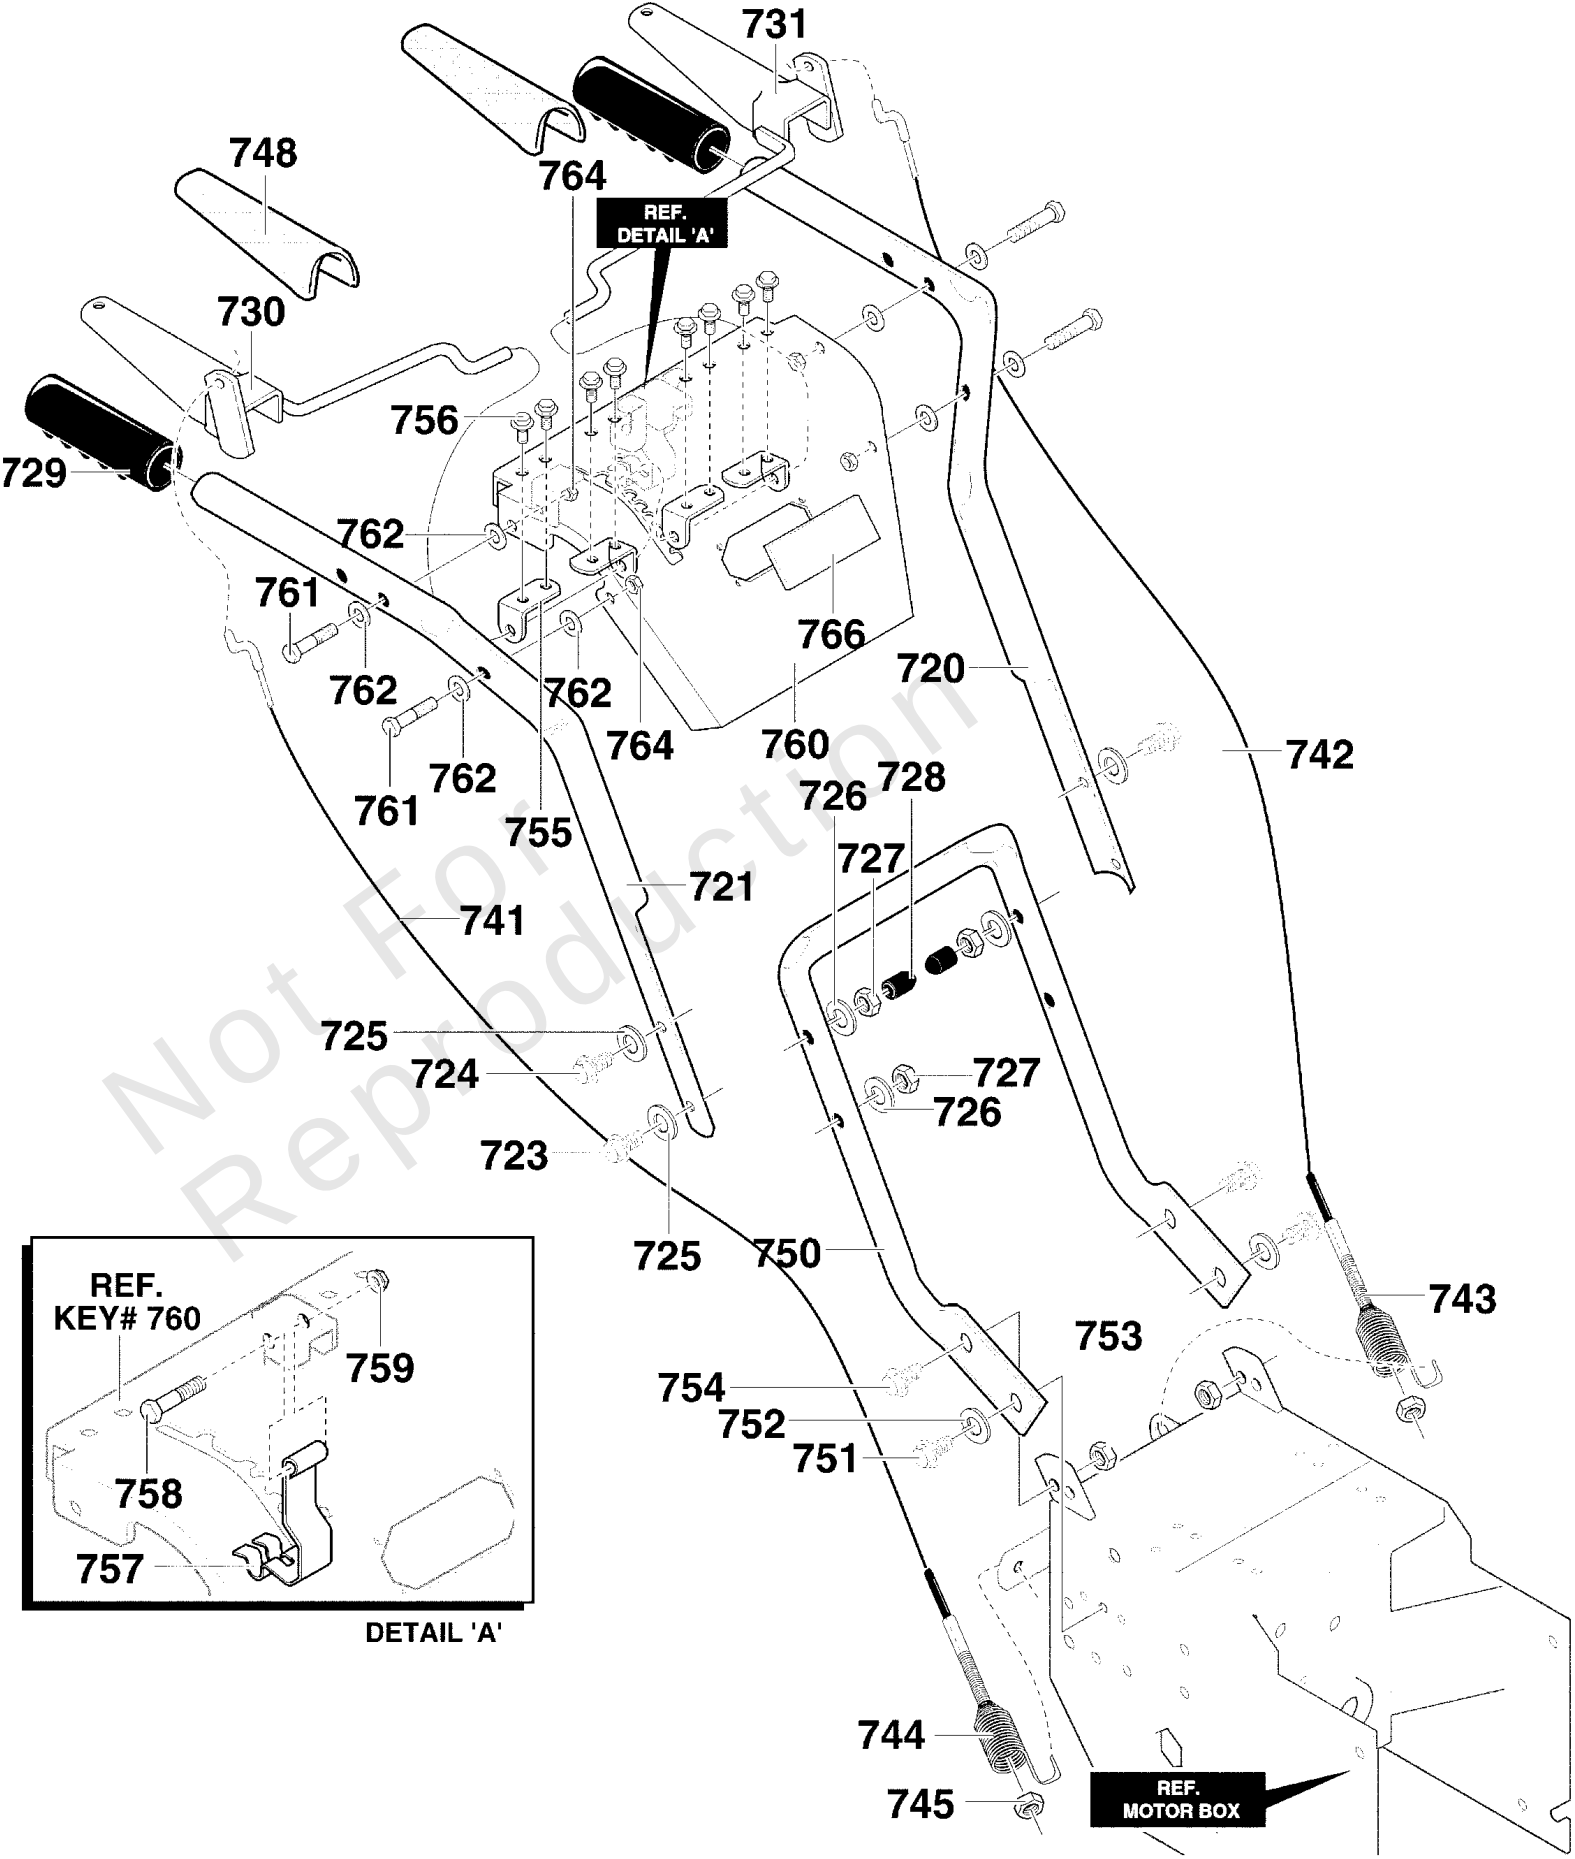


Handle Assembly

REF NO	PART NO	QTY	DESCRIPTION
720	5113-853		HANDLE, UPPER LH
721	5115-853		HANDLE, UPPER RH
723	71007		SCREW, 3/8-16 x 2.00
724	7288MA		SCREW, 3/8-16X3.00 HH
725	71072		WASHER, FLAT
726	018X31MA		WASHER, .38ID
727	780072MA		NUT, 3/8-16 REGHXCTRLK
728	7289MA		STOP,PLASTIC.375
729	761209MA		GRIP, HANDLE
730	761213		ASSY, CLUTCH LEVER RH
731	761212		ASSY, CLUTCH LEVER LH
741	761590MA		CABLE, CLUTCH 27.50"
742	1580MA		CABLE, CLUTCH 32.19"
743	579869MA		SPRING, TENSION
744	1673MA		SPRING, AUGER CLUTCH,
745	780029		NUT, 1/4-20 HEX NYLOCK
748	760992MA		GRIP, CLUTCH HANDLE
750	5543-853		HANDLE, LOWER
751	782967MA		SCREW, 5/16-18 x 0.75
752	120638		WASHER, .31X.58X.08
753	1498		NUT, 5/16-18RGHXCTRLK
754	782967MA		SCREW, 5/16-18 x 0.75
755	760262		BRACKET, ROD GUIDE
756	760858MA		SCREW 1/4-20X.38
757	760227MA		SPRING, CAM LOCK
758	45526		BOLT, HHSH 5/16-18
759	71038		NUT, 5/16-18 HEXNYL
760	760292-850		ASSY, PANEL
761	302900MA		SCREW 5/16-18X1.75
762	120393		FLATWASHER
764	710026		NUT 5/16-18 HEXWDFLLK
766	578978		PLATE, PANEL

Shift Yoke Assembly

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 627804x6B

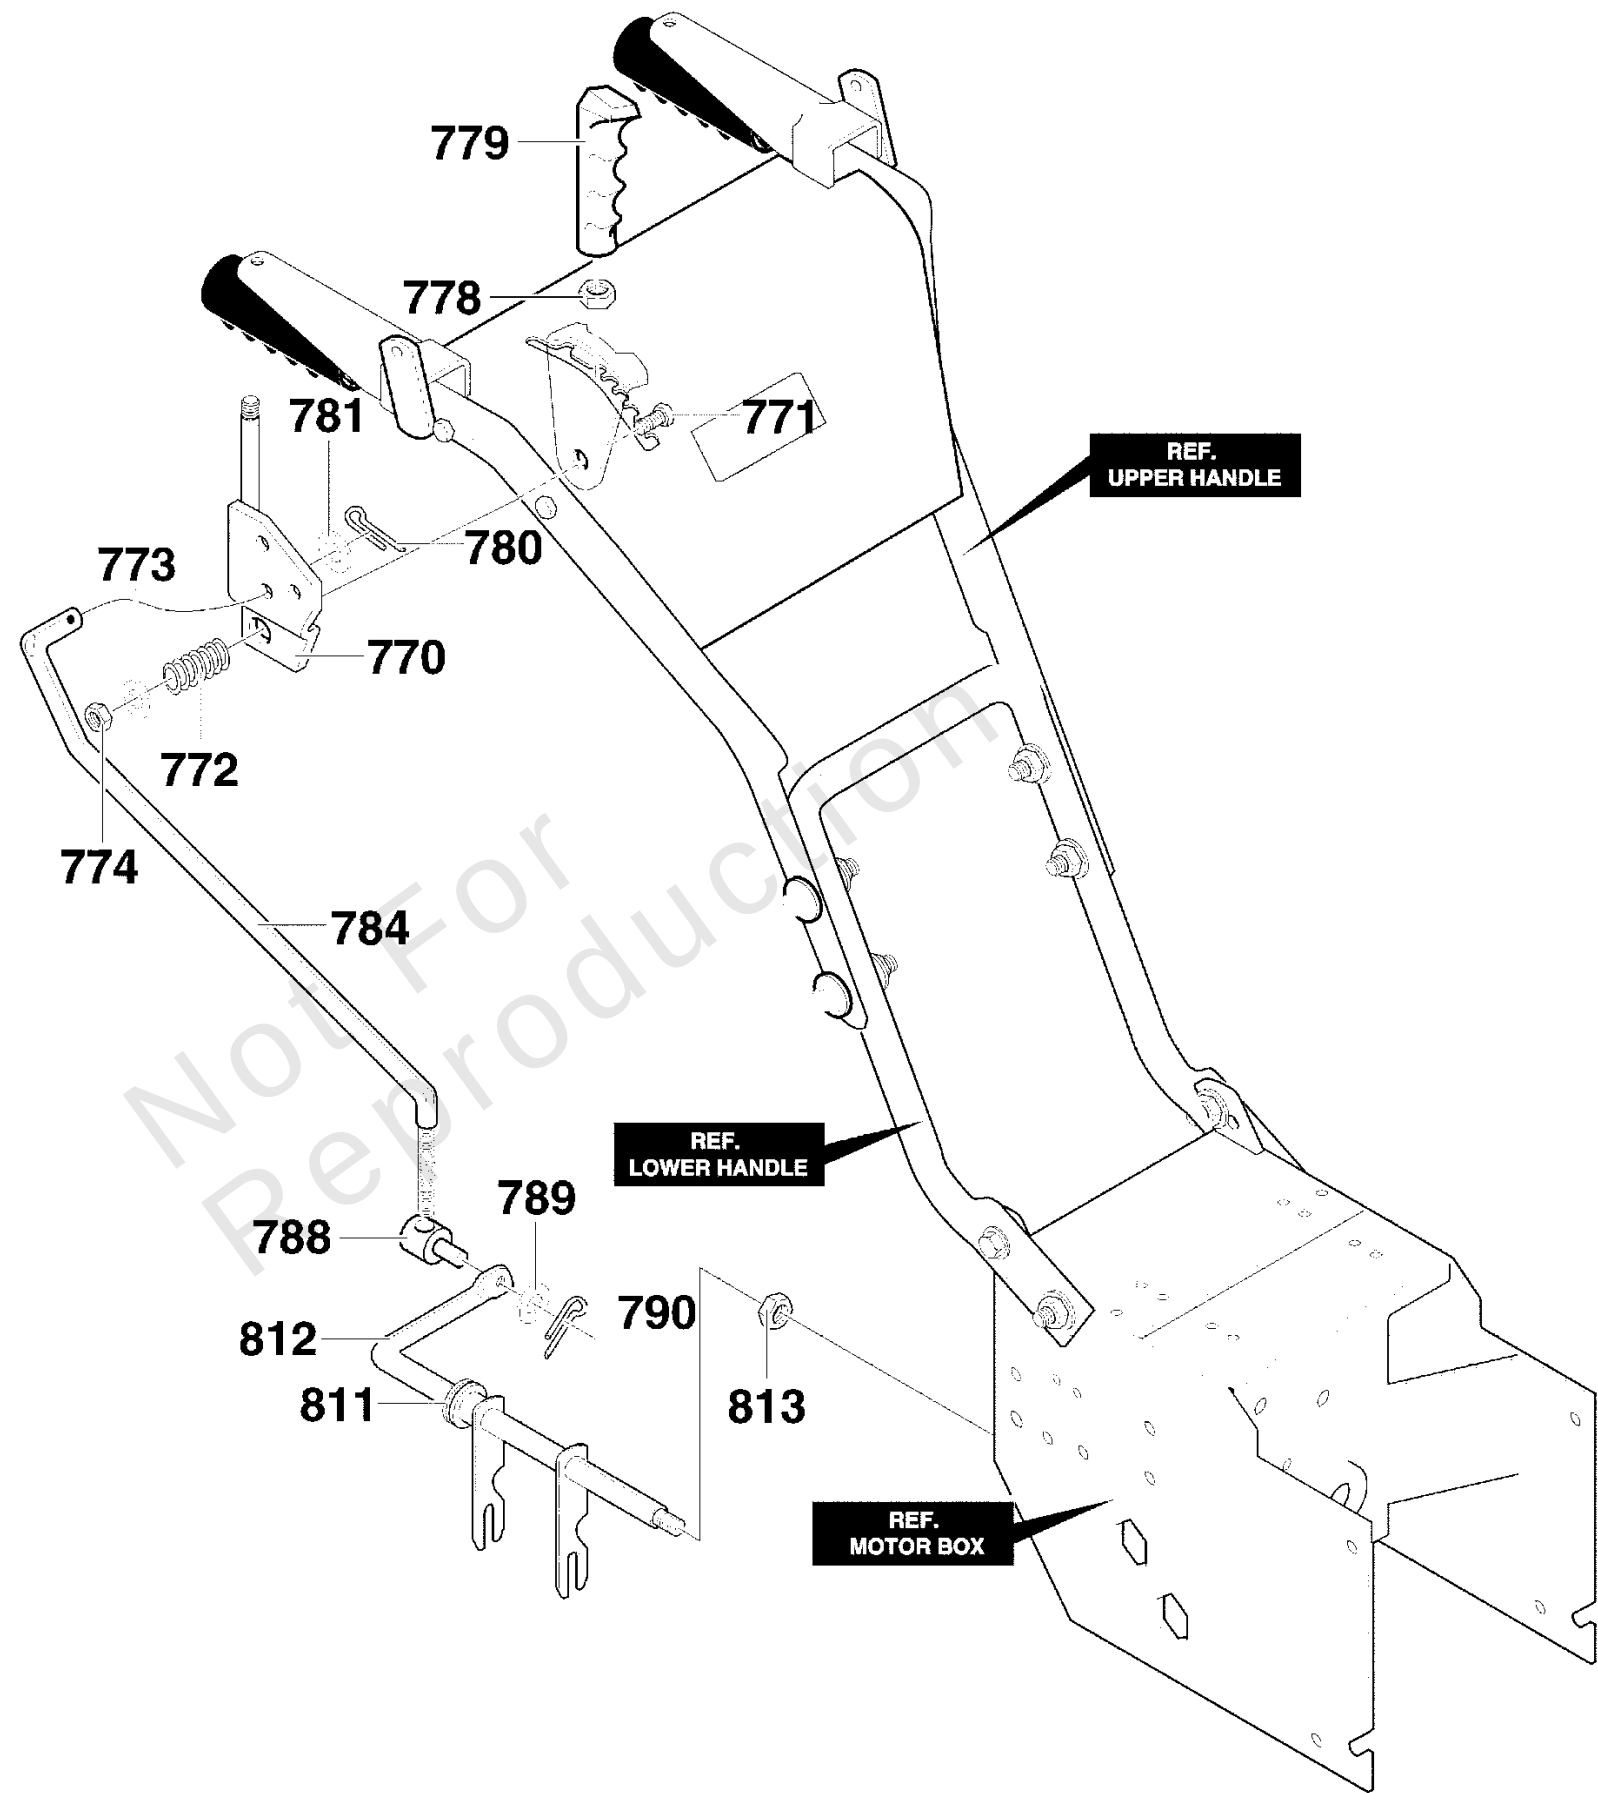


Shift Yoke Assembly

REF NO	PART NO	QTY	DESCRIPTION
770	85031		HANDLE ASSY SPD CTRL
771	71007		SCREW 3/8-16X2.00
772	313842		SPRING
773	71072		FLATWASHER
774	71046		NUT, 3/8-16 HEXNYL
778	780072MA		NUT, 3/8-16 REGHEX
779	306689MA		HANDLE 3/8-16
780	030X20MA		PIN, COTTER
781	120393		FLATWASHER
784	330635MA		ROD, SPEED CONTROL
788	584593		NUT, TRUNNION
789	120393		FLATWASHER
790	030X20MA		COTTER PIN
811	579944MA		BRNG FL .500ID X .88
812	337436		ROD, ASSY YOKE
813	071111		NUT, 3/8-16 HXCTRLK

Wheels Assembly

Note: Unless noted otherwise, use the standard torque specifications

Mfg. No: 627804x6B

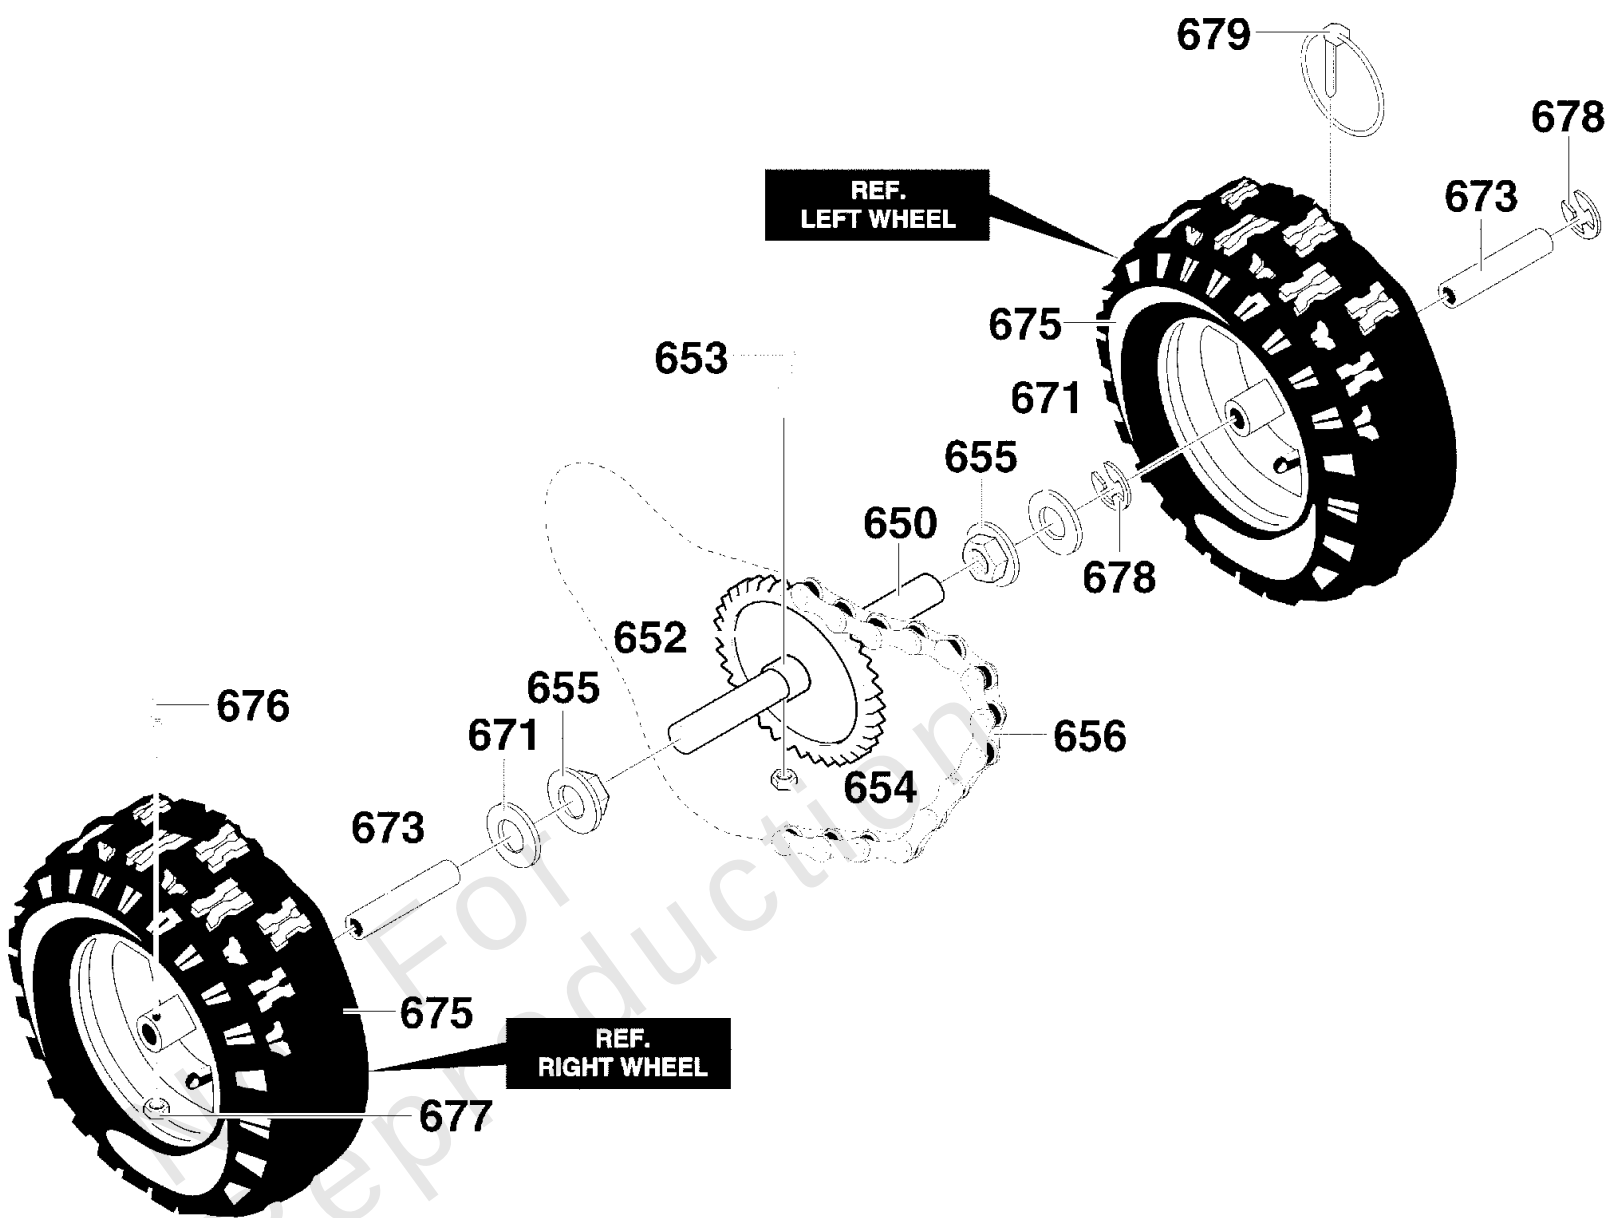




Wheels Assembly

REF NO	PART NO	QTY	DESCRIPTION
650	583017MA		SHAFT, AXLE
652	583007		SPRKT & HUB
653	73839MA		SCREW, 1/4-20X2.25
654	780029		NUT, 1/4-20 HEX NYLOCK
655	581730MA		BRNG, FL
656	583013MA		CHAIN, ROLLER
671	712120MA		FLATWASHER .765X1.12X.06
673	585591MA		BUSHING, WHEEL
675	583384MA		TIRE & RIM
676	577015MA		SCREW, SHR 1/4-20X1.7
677	780029		NUT, 1/4-20 HEX NYLOCK
678	239MA		RING, RET
679	73842MA		PIN, KLIK .25 X 1.38 DIA

Hardware Identification & Torque Specifications

Torque Specification Chart								
FOR STANDARD METRIC MACHINE HARDWARE (Tolerance ± 20%)								
Property Class	 Class 5.6		 Class 8.8		 Class 10.9		 Class 12.9	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
M3	5.88	.56	13.44	1.28	19.2	1.80	22.92	2.15
M4	13.44	1.28	30.72	2.90	43.44	4.10	52.56	4.95
M5	26.4	2.50	60.96	5.75	5.97	8.10	7.15	9.7
M6	44.64	4.3	7.3	9.9	10.3	14	12.1	16.5
M7	5.2	7.1	12.1	16.5	16.9	23	19.9	27
M8	7.7	10.5	17.7	24	25	34	29	40
M10	15	21	35	48	50	67	59	81
M12	26	36	61	83	86.2	117	103	140
M14	42	58	101	132	136	185	162	220
M16	64	88	147	200	210	285	250	340
M18	89	121	202	275	287	390	346	470
M20	126	171	290	390	405	550	486	660
M22	169	230	390	530	559	745	656	890
M24	217	295	497	375	708	960	840	1140
M27	320	435	733	995	1032	1400	1239	1680
M30	435	590	995	1350	1401	1900	1681	2280
M33	590	800	1349	1830	1902	2580	2278	3090
M36	759	1030	1740	2360	2441	3310	2935	3980
M39	988	1340	2249	3050	3163	4290	3798	5150

The guides and ruler furnished below are designed to help you select the appropriate hardware.

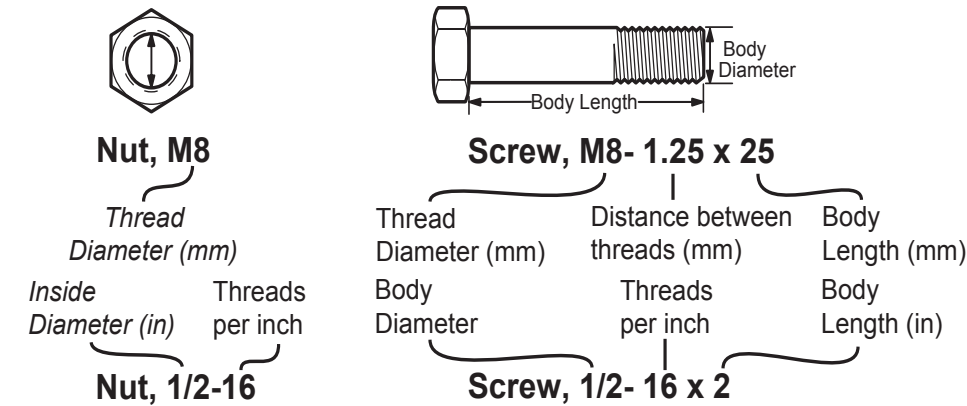

Standard Hardware Sizing

When a washer or nut is identified as 1/2" (M8), this is the *Nominal size*, meaning the *inside diameter* is 1/2 inch (8mm metric thread diameter); if a second number is present it represents the *threads per inch* (distance between threads).


When bolt or capscrew is identified as 1/2 - 16 x 2" (M8 - 1.25 x 50), this means the *Nominal size*, or body diameter is 1/2 inch (8mm metric thread diameter), the second number, 16, represents the *threads per inch*, (*distance between threads*). The final number is the body length of the bolt or screw, 2 inches (50mm).

Torque Specification Chart						
FOR STANDARD MACHINE HARDWARE (Tolerance ± 20%)						
Hardware Grade	 SAE Grade 2		 SAE Grade 5		 SAE Grade 8	
Size Of Hardware	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.	in/lbs ft/lbs	Nm.
8-32	19	2.1	30	3.4	41	4.6
8-36	20	2.3	31	3.5	43	4.9
10-24	27	3.1	43	4.9	60	6.8
10-32	31	3.5	49	5.5	68	7.7
1/4-20	66	7.6	8	10.9	12	16.3
1/4-28	76	8.6	10	13.6	14	19.0
5/16-18	11	15.0	17	23.1	25	34.0
5/16-24	12	16.3	19	25.8	29	34.0
3/8-16	20	27.2	30	40.8	45	61.2
3/8-24	23	31.3	35	47.6	50	68.0
7/16-14	30	40.8	50	68.0	70	95.2
7/16-20	35	47.6	55	74.8	80	108.8
1/2-13	50	68.0	75	102.0	110	149.6
1/2-20	55	74.8	90	122.4	120	163.2
9/16-12	65	88.4	110	149.6	150	204.0
9/16-18	75	102.0	120	163.2	170	231.2
5/8-11	90	122.4	150	204.0	220	299.2
5/8-18	100	136	180	244.8	240	326.4
3/4-10	160	217.6	260	353.6	386	525.0
3/4-16	180	244.8	300	408.0	420	571.2
7/8-9	140	190.4	400	544.0	600	816.0
7/8-14	155	210.8	440	598.4	660	897.6
1-8	220	299.2	580	788.8	900	1,244.0
1-12	240	326.4	640	870.4	1,000	1,360.0

NOTES

- These torque values are to be used for all hardware excluding: locknuts, self-tapping screws, thread forming screws, sheet metal screws and socket head setscrews.
- Recommended seating torque values for locknuts:
 - for prevailing torque locknuts - use 65% of grade 5 torques.
 - for flange whizlock nuts and screws - use 135% of grade 5 torques.
- Unless otherwise noted on assembly drawings, all torque values must meet this specification.

Common Hardware Types

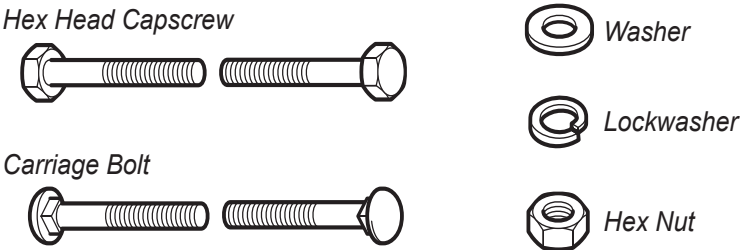

Wrench & Fastener Size Guide

 1/4" Bolt or Nut Wrench—7/16"	 5/16" Bolt or Nut Wrench—1/2"	 3/8" Bolt or Nut Wrench—9/16"	 7/16" Bolt or Nut Wrench (Bolt)—5/8" Wrench (Nut)—11/16"	 1/2" Bolt or Nut Wrench—3/4"
M6 Bolt or Nut Wrench—10mm	M8 Bolt or Nut Wrench—13mm	M10 Bolt or Nut Wrench—17mm	M12 Bolt or Nut Wrench—19mm	M14 Bolt or Nut Wrench—22mm

