

Supplementary
Owner's Manual for
BMW X5 M/
BMW X6 M



The Ultimate
Driving Machine



X5 M
X6 M

Supplementary Owner's Manual of the vehicle

We are happy that you have decided on a BMW X5 M /
BMW X6 M.

The more familiar you are with your BMW, the greater command
you will have of it in traffic.

We therefore ask you to:

Read the information contained in this Supplementary Owner's
Manual before you start off in your new BMW. It contains impor-
tant notes on vehicle operation that will allow you to make full use
of the technical advantages of your BMW.

We wish you a pleasant and safe driving experience

BMW AG

Contents

The fastest way to find information on a particular topic or item is by using the index, refer to page [44](#).

Using this Owner's Manual

- [4](#) Notes

At a glance

- [8](#) Cockpit

Controls

- [16](#) Adjusting
- [18](#) Driving
- [20](#) Everything under control
- [21](#) Technology for comfort, convenience and safety

Driving tips

- [28](#) Things to remember when driving
- [29](#) BMW X5 M / BMW X6 M technology

Mobility

- [32](#) Refueling
- [33](#) Wheels and tires
- [35](#) Under the hood
- [36](#) Replacing components

Reference

- [40](#) Technical data
- [44](#) Everything from A to Z

Notes

About this Owner's Manual

This Supplementary Owner's Manual contains all essential equipment, instructions, and technical data in which the BMW X5 M / BMW X6 M differs from the BMW X5 / BMW X6. For a description of equipment not contained in this Supplementary Owner's Manual, please refer to the Owner's Manual of the BMW X5 / BMW X6 or possibly to other brochures included with the onboard literature.

We have made every effort to ensure that you are able to find what you need in this Supplementary Owner's Manual as quickly as possible. The fastest way to find specific topics is to refer to the detailed index at the back of the manual. If you wish to gain an initial overview of your vehicle, you will find this in the first chapter.

Should you sell your BMW some day, please remember to also pass the Supplementary Owner's Manual on to the new owner; it is an important component of your vehicle.

Symbols used



Indicates precautions that must be followed precisely in order to avoid the possibility of personal injury and serious damage to the vehicle.



Indicates information that will assist you in gaining the optimum benefit from your vehicle and enable you to care more effectively for your vehicle.



Refers to measures that can be taken to help protect the environment.

◀ Marks the end of a specific item of information.

*Indicates special equipment, country-specific equipment and optional accessories, as well as equipment and functions not yet available at the time of printing.

"..." Identifies Control Display texts used to select individual functions.

>...< Verbal instructions to use with the voice activation system.

>>...<< Identifies the answers generated by the voice activation system.

Symbols on vehicle components



Indicates that you should consult the relevant section of this Owner's Manual for information on a particular part or assembly.

The individual vehicle

When purchasing your BMW, you have decided in favor of a model with individualized equipment and features. This Owner's Manual describes the entire array of options and equipment available with a specific BMW model.


Please bear in mind that the manual may contain information on accessories and equipment that you have not specified for your own vehicle. Sections describing options and special equipment are marked by asterisks * to assist you in identifying possible differences between the descriptions in this manual and your own vehicle's equipment.

If equipment of your BMW X5 M / BMW X6 M is not described in this Owner's Manual, please refer to the Owner's Manual of the BMW X5 / BMW X6.

Editorial notice

BMW pursues a policy of continuous, ongoing development that is conceived to ensure that our vehicles continue to embody the highest quality and safety standards combined with advanced, state-of-the-art technology. For this reason, in rare cases, the features described in this Supplementary Owner's Manual may differ from those in your vehicle.



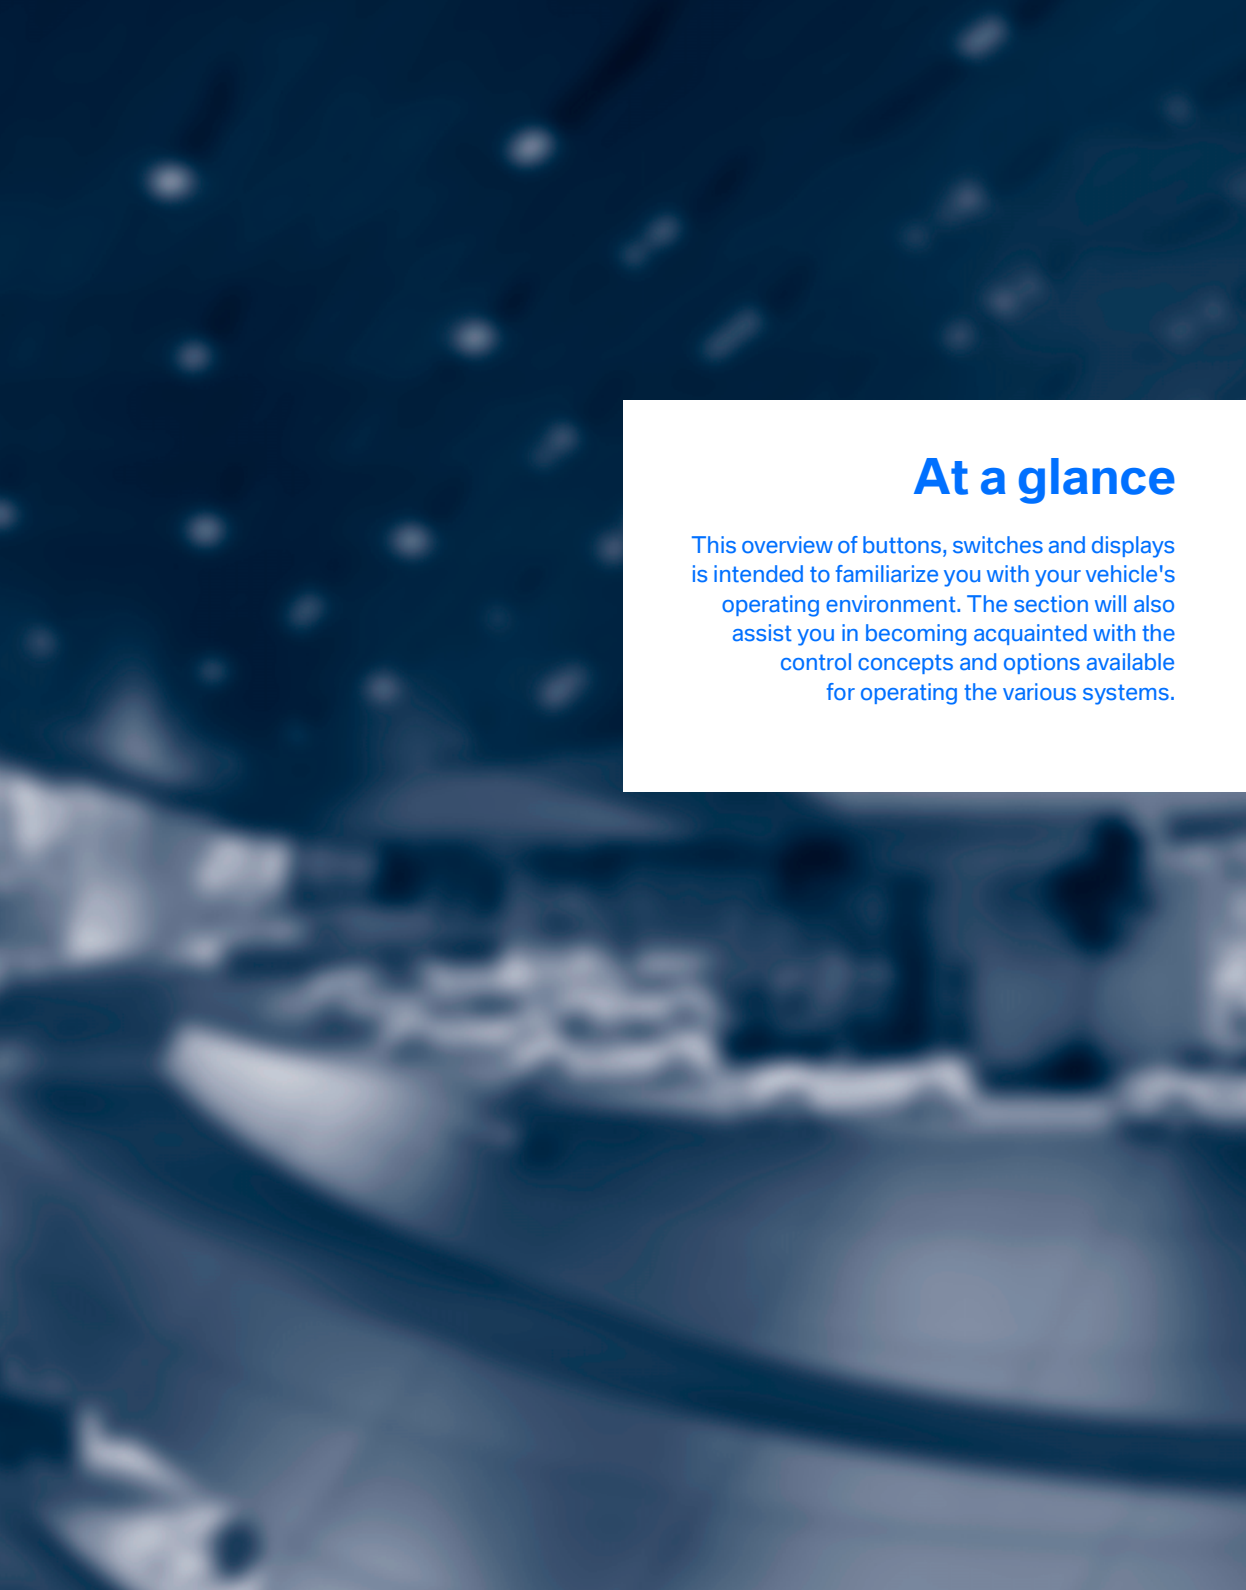


At a glance

This overview of buttons, switches and displays is intended to familiarize you with your vehicle's operating environment. The section will also assist you in becoming acquainted with the control concepts and options available for operating the various systems.

Cockpit

Around the steering wheel: controls and displays

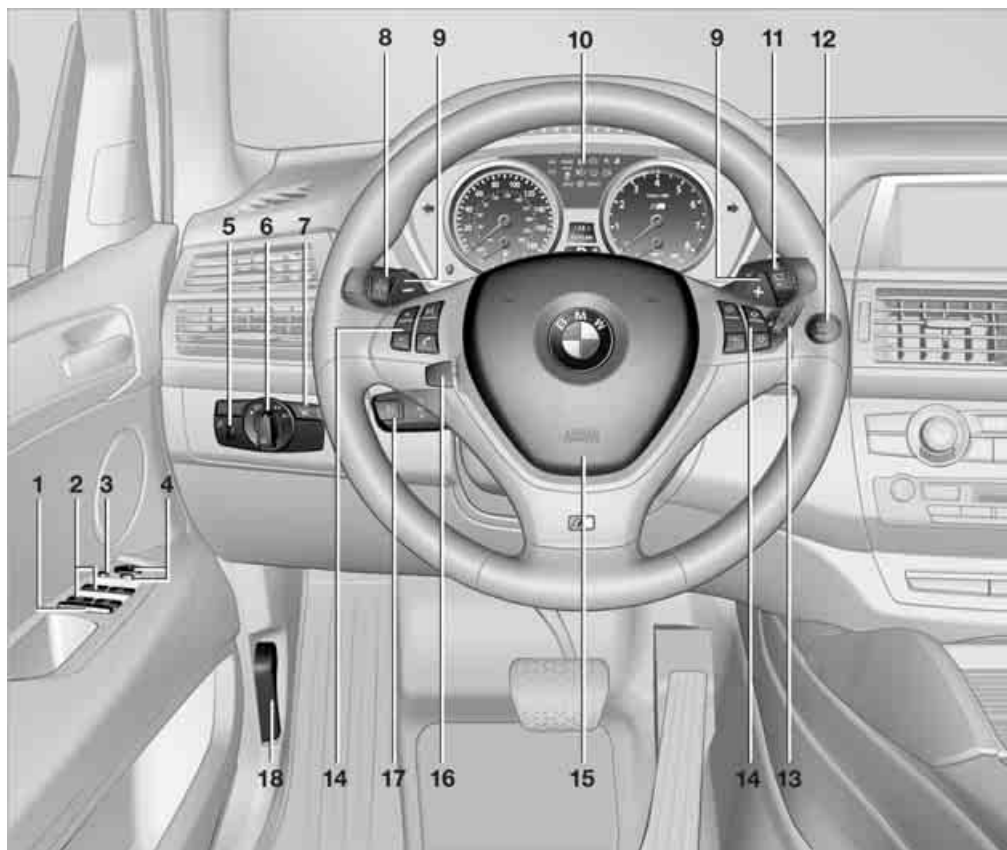

▶ For the description of components without page references, please refer to the respective keyword in the Owner's Manual of the BMW X5 / BMW X6. ◀

- 1 Rear window safety switch
- 2 Opening and closing windows
- 3 Folding exterior mirrors in and out*

- 4 Adjusting exterior mirrors
Automatic curb monitor*

- 5  Instrument lighting

- 6  Parking lamps

-  Low beams

-  Automatic headlamp control*
Adaptive Head Light*
High-Beam Assistant*

- 7  Head-Up Display*

- 8  Turn signal

-  High beams, headlamp flasher

-  High-beam assistant*

-  Roadside parking lamps*

-  Time, date, outside temperature,
Check Control

-  Computer

- 9 Shift paddles 18

- 10 Instrument panel 10

- 11  Windshield wiper
Rain sensor

-  BMW X5:
Rear window wiper

- 12  Starting/stopping engine and
switching ignition on/off

- 13 Ignition lock

- 14 Buttons on steering wheel

-  Telephone*:
Accepting and ending calls, begin
dialing* for selected phone num-
ber. Redialing when no phone
number is selected

-  Volume

-  Activating/deactivating voice acti-
vation system*

-  Changing radio station
Selecting track
Scrolling through the redial list

-  M Drive, accessing individual
settings 16

-  Steering wheel heating*

-  Next entertainment source

- 15 Horn, entire surface

- 16  Steering wheel adjustment

- 17  Cruise control

- 18 Releasing hood

Instrument panel



BMW MOTORSPORT

▶ For the description of components without page references, please refer to the respective keyword in the Owner's Manual of the BMW X5 / BMW X6. ◀

1 Indicator lamps for turn signals

2 Speedometer

3 Indicator and warning lamps [11](#)

4 Tachometer [20](#)

5 Engine oil temperature [20](#)

6 Display for

- ▶ Clock/date
- ▶ Outside temperature
- ▶ Computer
- ▶ Indicator and warning lamps
- ▶ Speed of cruise control

7 Display for

- ▶ Trip odometer/odometer
- ▶ M Engine Dynamic Control [19](#)
- ▶ Date and remaining travel distance for service requirements
- ▶ M Sport Automatic transmission positions
- ▶ HDC Hill Descent Control
- ▶ High-beam assistant*
- ▶ ▲ Check Control message present

8 Fuel gauge

9 Button for

- ▶ Resetting trip odometer
- ▶ Displaying service requirements

Indicator and warning lamps


The concept




The indicator and warning lamps can light up in different combinations and colors.

Some lamps are tested for proper function by briefly lighting up during starting of the engine or when the ignition is switched on.

Explanatory text messages

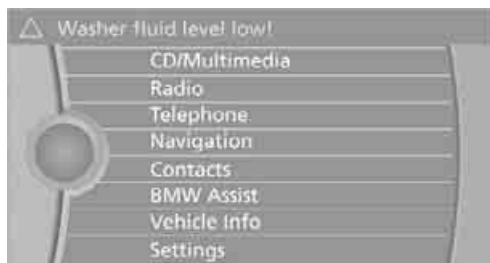

Text messages at the upper edge of the Control Display explain the meaning of the displayed indicator and warning lamps.

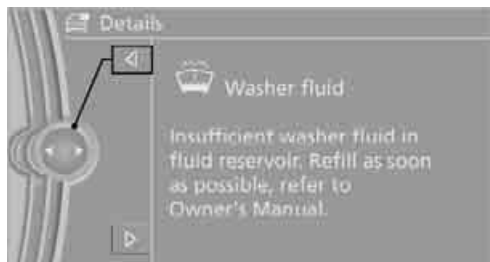

Additional information, e.g. on the cause of a malfunction and on the corresponding need to take action can be accessed via the Check Control, refer to the Owner's Manual for Vehicle.

Indicator lamps without text messages

The following indicator lamps indicate that certain functions are activated:




M Drive 16



M Dynamic Mode 21

Around the center console: controls and displays

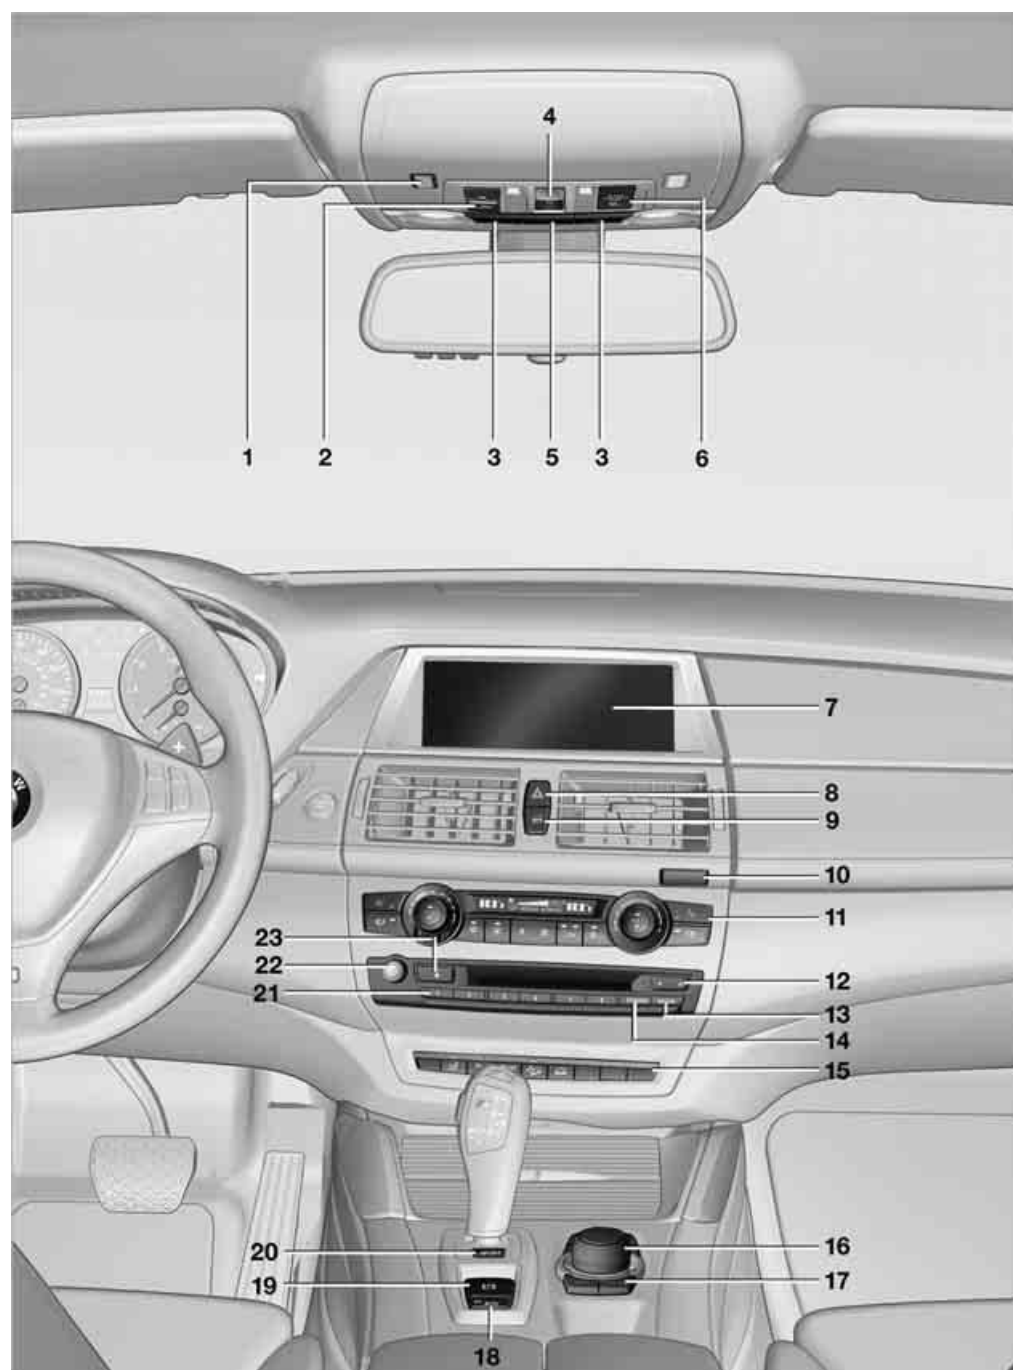



For the description of components without page references, please refer to the respective keyword in the Owner's Manual of the BMW X5 / BMW X6. ◀

- 1 Microphone for hands-free mode for telephone* and for voice activation system*
- 2 Initiating an Emergency Request call*
- 3 Reading lamps
- 4 Glass sunroof*
- 5 Interior lamps
- 6 Passenger airbag status lamp
- 7 Control Display
Displays for menu navigation
- 8 Hazard warning flashers
- 9 Central locking system
- 10 Opening glove compartment
- 11 Automatic climate control



Manual air distribution

AUTO

Automatic air distribution and volume



Cooling function



AUC Automatic recirculated-air control



Maximum cooling



Air volume



Defrosting windows



Rear window defroster



Seat heating



Active seat ventilation*

12 Changing

- ▶ Radio station
- ▶ Track

13 Selecting radio, CD and CD changer

14 Selecting AM or FM waveband

15



Active seat*



PDC Park Distance Control
Rear view camera with Top View*



DSC Dynamic Stability Control 21
M Dynamic Mode 21



HDC Hill Descent Control



Unlocking/opening liftgate*



Side View*

16 Controller

Can be turned, pressed, or moved in four directions

17 Buttons on the controller

Selecting menus directly

18 Automatic Hold

19 Parking brake


20 EDC Electronic Damping Control 22

21 Programmable memory buttons

22 Switching Entertainment sound output on/off and adjusting volume

23 Ejecting CD/DVD

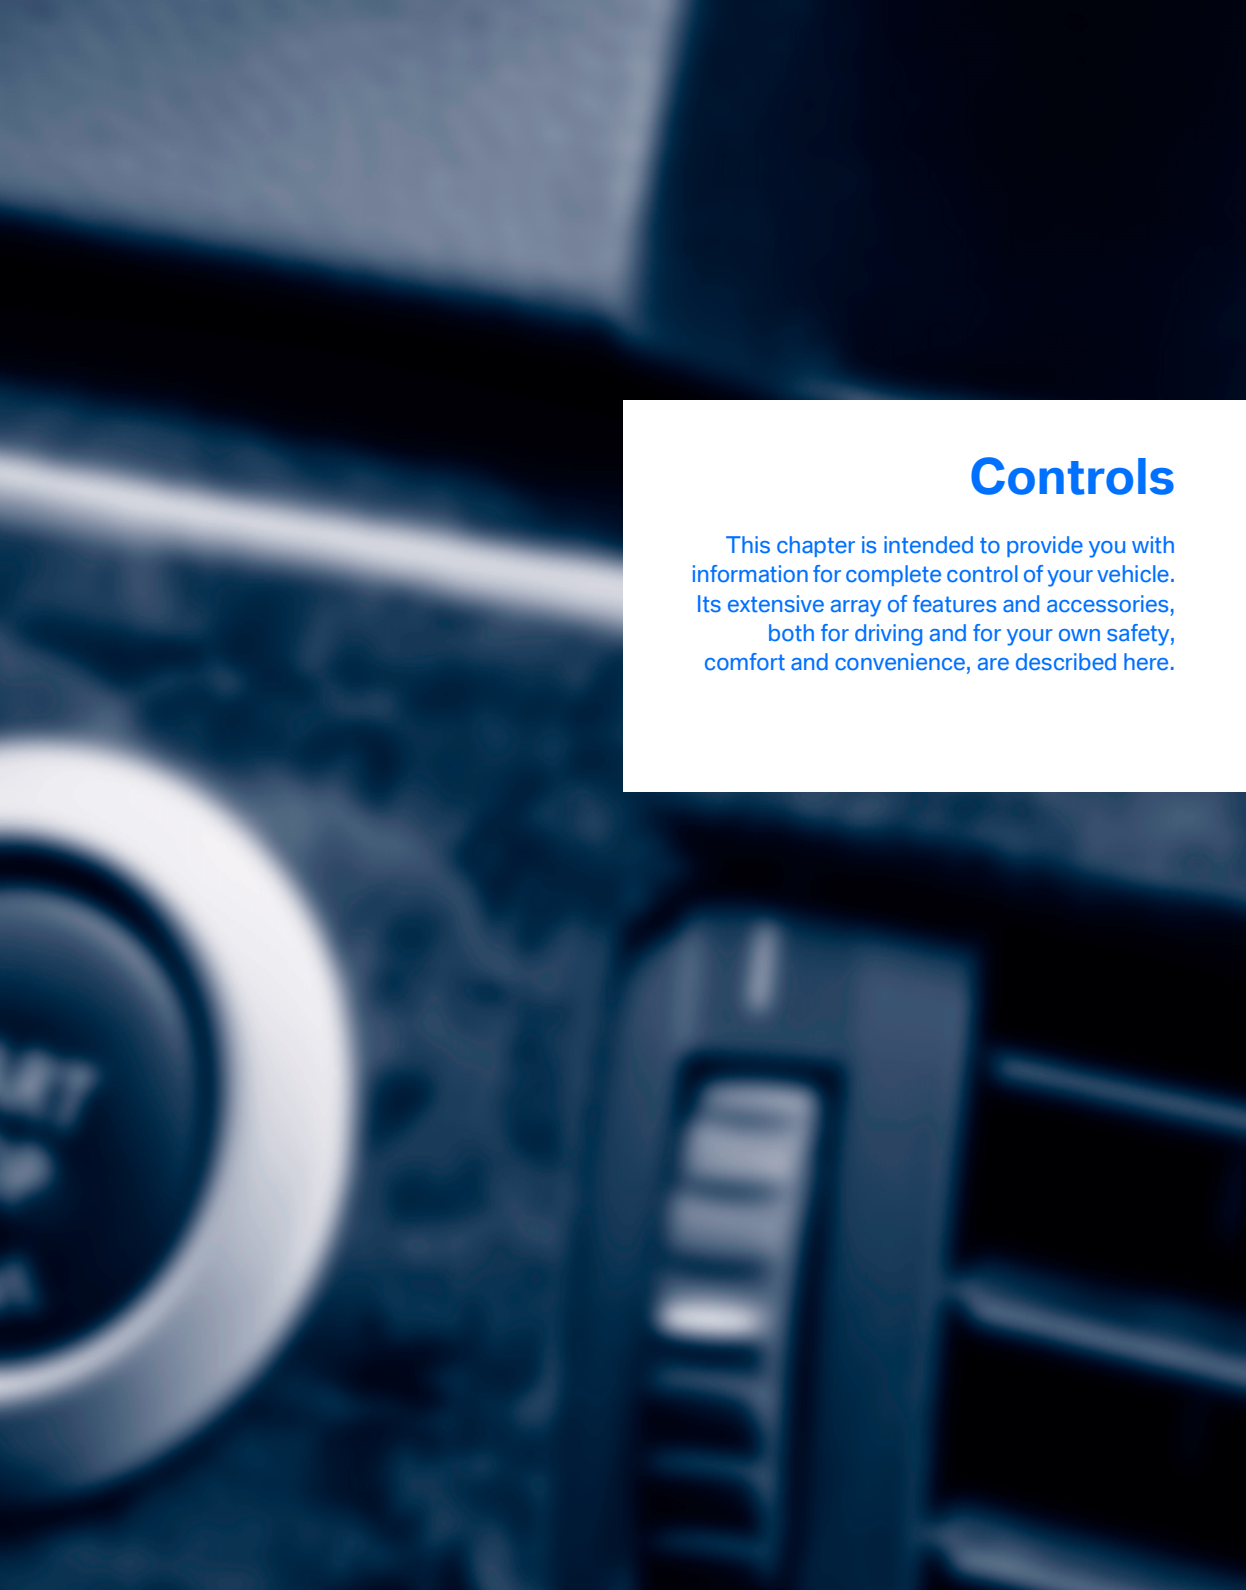

A close-up, blue-tinted photograph of a car's interior controls. In the lower-left foreground, a circular button with a silver-colored ring is visible, featuring the word "START" and a power symbol. To its right, a rectangular button with a series of vertical lines is partially visible. The background shows other dashboard and control elements, all slightly out of focus.

Controls

This chapter is intended to provide you with information for complete control of your vehicle. Its extensive array of features and accessories, both for driving and for your own safety, comfort and convenience, are described here.

Adjusting

M Drive

The concept


With M Drive, you can configure several individual settings for your vehicle on the Control Display. The settings influence the engine characteristics, driving dynamics control, damper adjustment, and Head-Up Display*.

- ▷ M Engine Dynamic Control 19
- ▷ DSC Dynamic Stability Control 22
- ▷ Head-Up Display 24
- ▷ EDC Electronic Damping Control 23

Configuring settings

With the ignition switched on, you can adjust M Drive on the Control Display.

1. "Settings"

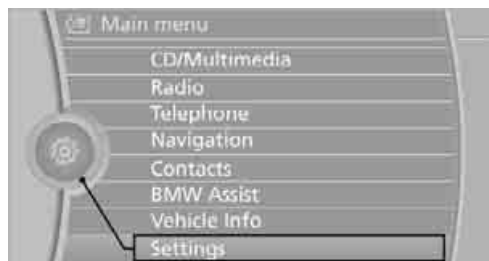

2. "M Drive"




The functions contained in M Drive are displayed:

- ▷ "EDC:"
Program for steering adjustment and


electronic damping control EDC, refer to page 22.

- ▷ "DSC:"
Dynamic Stability Control and M Dynamic Mode, refer to page 21.
- ▷ "POWER:"
M Engine dynamics control program, refer to page 19.
- ▷ "Head-up display:"
Select "M View", also refer to page 23.

3. Select the desired function, e.g. "DSC:"

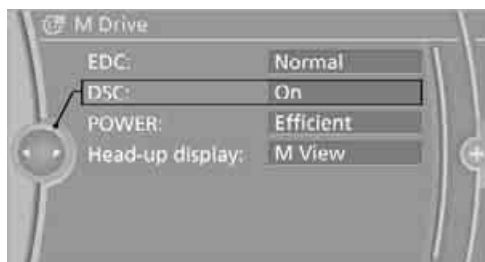

4. Select the desired setting.

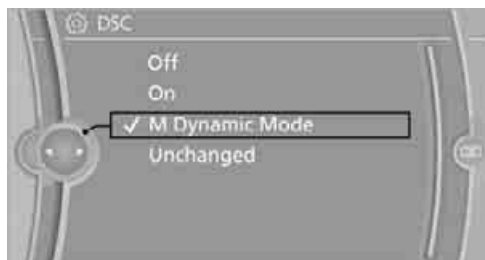

"Unchanged" maintains the current setting made from outside M Drive, e.g. using the button in the center console.

Activating settings

Press the  button on the steering wheel.

-  The indicator lamp in the instrument cluster lights up. The settings for M Drive made on the Control Display are active.

 If the indicator lamp flashes after the button is pressed, then M Drive could not be activated because the ABS Antilock Brake System or DSC Dynamic Stability Control is currently regulating driving stability. Press the  button again when the indicator lamp no longer flashes. ◀

Even with M Drive activated, you can change individual settings from outside M Drive, e.g. with the buttons in the center console. To reactivate all settings made for M Drive on the Control Display: press the  button twice.

With M Drive activated, changes made on the Control Display are applied immediately.

Deactivating settings

Press the  button on the steering wheel again. M Drive is deactivated. The indicator lamp in the instrument panel goes out.

Restoring settings

You can restore all settings for M Drive to the default values:

1. "Settings"
2. "M Drive"
3. Move the controller to the right repeatedly until the "Options" menu is selected.
4. "Reset"



5. Confirm by clicking "Yes".

Operating by voice activation*

You can also select the "M Drive" menu by the voice activation.

 › M Drive◀.
The menu is selected.

Driving

M Sport Automatic transmission

Transmission positions

D Drive, automatic position

Position for normal vehicle operation. All forward gears are shifted automatically. Gear shifts are carried out with an emphasis on comfort.

Sport program

Pressing the selector lever to the left switches you into the sport program. The sport program supports a performance-oriented driving style.

Manual mode M/S

Switch from D Drive into manual mode M/S:

- ▷ Press the selector lever to the left and shift gears using the selector lever
- ▷ Shift gears using the shifting paddles

 In the manual mode, the M Sport Automatic transmission will not upshift after the maximum engine speed is reached. ◀

Gear changes

Using shift paddles on steering wheel



- ▷ To upshift, briefly pull the right shift paddle +.
- ▷ To downshift, briefly pull the left shift paddle -.



In the manual mode, the M Sport Automatic transmission will not upshift after the maximum engine speed is reached. ◀

Shift lights in the Head-Up Display*

To permit the best possible acceleration of a sporty driving style, when the M Sport Automatic transmission is in the manual mode, shift lights in the Head-Up Display* indicate the optimum shifting time just before the maximum engine speed is reached, refer to Head-Up Display page 23.

Launch Control

On a road surface with good traction, Launch Control permits an optimum acceleration when starting off.



Do not use Launch Control too often; otherwise, the high stress on the vehicle will lead to premature component wear.

Only use Launch Control when the engine is warm; otherwise, increased wear may occur.

Do not use Launch Control when towing a trailer.

1. When the vehicle is stationary with the engine running, step on the brake pedal.
2. With the transmission in M/S mode, shift into M1.
3. Activate MDM mode or deactivate DSC Dynamic Stability Control, refer to page 21.
4. Select the "Sport" program of the M Engine dynamics control.
5. Floor the accelerator pedal completely. The engine speed is controlled for starting off. The flag symbol appears in the instrument panel.
6. When the brake pedal is released, the vehicle accelerates. Continue flooring the accelerator pedal.
7. Upshifting occurs automatically as long as the accelerator pedal remains completely floored.

Launch Control will be available again only after a certain amount of time.

Do not use Launch Control during the break-in period, refer to page 28.



To maintain vehicle stability, always activate DSC whenever possible. ◀

M Engine dynamics control/POWER

With M Engine Dynamic Control you can influence how sporty the reaction of your vehicle to accelerator pedal movements is to be. Two programs are available to you.

The "Efficient" program is activated after each engine start.

"Efficient" program

In the "Efficient" program, a lower fuel consumption is achieved. The engine and the M Sport Automatic transmission respond to accelerator pedal movements with an emphasis on comfort, which is ideal in city traffic or in snow, for example.

"Sport" program

The "Sport" program permits the engine and the M Sport Automatic transmission to respond more spontaneously to accelerator pedal movements. The acoustics of your BMW X5 M / BMW X6 M become more sporty. POWER is displayed in the instrument panel.

Adjustments via M Drive

1. "Settings"
2. "M Drive"
3. "POWER"
4. "Efficient" or "Sport"



Press the  button on the steering wheel, refer to M Drive on page 16. M Drive is activated, with the settings you have selected.



Be aware of the settings for DSC in M Drive; otherwise, driving stability can be impaired and there is the risk of accident. ◀

Cruise control

Unlike the description in the BMW X5 / BMW X6 Owner's Manual, the cruise control is not automatically deactivated in the M Dynamic Mode.

Everything under control

Tachometer



The yellow advance warning field, arrow **1**, changes depending on the engine temperature. As the engine temperature rises, the permissible engine speed also increases.

During the warm-up phase, avoid engine speeds in the advance warning field as much as possible.

When the engine speeds reach the red warning field, arrow **2**, the engine speed governor is activated to protect the engine.

Engine oil temperature



When the engine is warm, the engine oil temperature is between 175 °F / 80 °C and 250 °F / 120 °C.

When the engine oil temperature is too high, a message appears on the Control Display.

Technology for comfort, convenience and safety

Driving stability control systems

Unlike the description in the BMW X5 / BMW X6 Owner's Manual, your BMW X5 M / BMW X6 M does not have DTC Dynamic Traction Control.

DSC Dynamic Stability Control

DSC prevents traction loss in the driving wheels when starting off and accelerating. DSC also identifies unstable driving conditions, such as a loss of traction at the rear of the vehicle or sliding of the vehicle in its front wheels. In these cases, DSC helps the vehicle maintain a safe course within physical limits by reducing engine output and through braking actions in the individual wheels.

 The laws of physics cannot be repealed, even with DSC. An appropriate driving style always remains the responsibility of the driver. Therefore, do not reduce the additional safety margin further by taking risks. ◀

M Dynamic Mode MDM


The M Dynamic Mode is a mode of the DSC Dynamic Stability Control. It enables driving with greater longitudinal and lateral acceleration on dry road surfaces, however with limited vehicle stability. The system does not provide stabilizing intervention by reducing the engine output and braking at the wheels until the absolute driving limit is reached. These driving conditions may require the driver to make additional steering corrections.

The M Dynamic Mode is deactivated each time the engine is switched off.

 With the M Dynamic Mode switched on, stabilizing interventions are only carried out to a reduced degree. Take action yourself, otherwise there is a risk of an accident. ◀

 To maintain vehicle stability, drive with DSC switched on and the M Dynamic Mode switched off whenever possible. ◀

Activating MDM

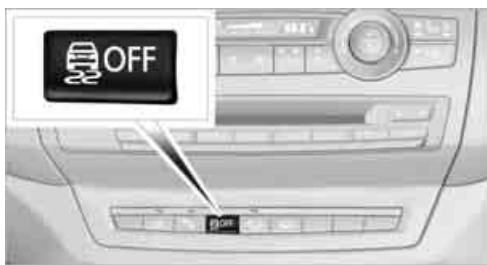

Press the button; the MDM indicator lamp in the instrument panel lights up.

Deactivating MDM




Press the button again.

The MDM indicator lamp in the instrument panel goes out.

Adjustments via M Drive

With the ignition switched on, you can adjust the M Dynamic Mode via "M Drive" on the Control Display.

1. "Settings"
2. "M Drive"
3. "DSC"
4. Select "M Dynamic Mode".

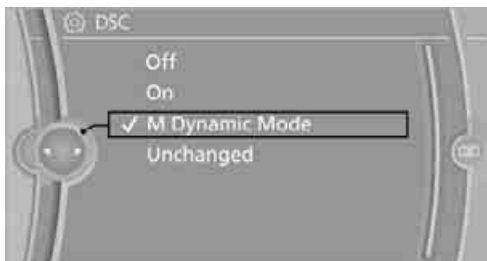

Press the  button on the steering wheel, refer to M Drive on page 16. M Drive is activated, with the settings you have selected.

The indicator lamp in the instrument cluster lights up.


 Be aware of the settings for DSC in M Drive; otherwise, driving stability can be impaired and there is the risk of accident. ◀

For better control

 The indicator lamp lights up: M Dynamic Mode is activated.

 The MDM indicator lamp lights up continuously and the DSC indicator lamp flashes: M Dynamic Mode regulates the driving and brake forces.

Deactivating DSC

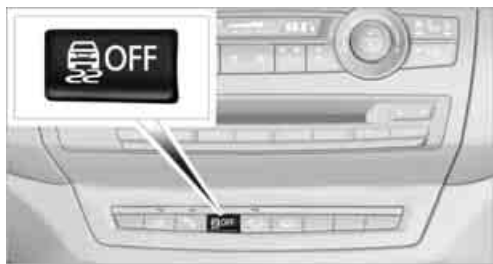

Press and hold the button until the indicator lamp for DSC lights up and DSC OFF is displayed in the instrument panel; do not press the button for longer than approx. 10 seconds. DSC and M Dynamic Mode are simultaneously deactivated. Stabilizing interventions are now not carried out.

A message appears on the Control Display.

You may find it useful to briefly deactivate DSC under the following special circumstances:

- ▶ When driving on snowy inclines, in slush, or on unplowed, snow-covered road surfaces
- ▶ When rocking a stuck vehicle free or starting off in deep snow or on loose ground
- ▶ When driving with snow chains

To increase vehicle stability, activate DSC again as soon as possible.

Activating DSC



Press the button again.

Adjustments via M Drive

With the ignition switched on, you can also adjust DSC via M Drive on the Control Display, also refer to page 16.

1. "Settings"
2. "M Drive"
3. "DSC"
4. Select the desired setting.

Press the  button on the steering wheel, refer to M Drive on page 16. M Drive is activated, with the settings you have selected.



To maintain vehicle stability, always activate DSC whenever possible. ◀

For better control



The indicator lamp flashes: DSC controls the drive forces and brake forces.

The indicator lamp lights up: DSC is malfunctioning.



The indicator lamp lights up: DSC and MDM are deactivated.

EDC Electronic Damping Control

The concept

If the influencing variables such as road surface quality or operating conditions such as steering, braking etc. change, the damping automatically adjusts to the new conditions within a fraction of a second.

You can select between two programs to influence the adjustment of the shock absorbers and steering.

"Normal" program

The "Normal" program offers a well-balanced adjustment of the shock absorbers and steering.

"Sport" program

Select the "Sport" program if you want a consistently sporty coordination of shock absorbers and steering.

Selecting program



Press the EDC button.

- ▷ Sport:
The LED in the button lights up.
- ▷ Normal:
The LED in the button goes out.

Adjustments via M Drive

You can also use M Drive to set the program you prefer.

1. "Settings"
2. "M Drive"
3. "EDC"
4. Select the desired setting.



Press the  button on the steering wheel, refer to M Drive on page 16. M Drive is activated, with the settings you have selected.

 Be aware of the settings for DSC in M Drive; otherwise, driving stability can be impaired and there is the risk of accident. ◀

Head-Up Display*

Switching on/off



Press this button to switch the Head-Up Display on or off.

Selecting M view

You can select the M view in the Head-Up Display via two different menus:


- ▷ "Displayed information"
- ▷ "M View"

Adjusting via displayed information

1. "Settings"
2. "Head-up display"
3. "Displayed information"



4. Select "M View".

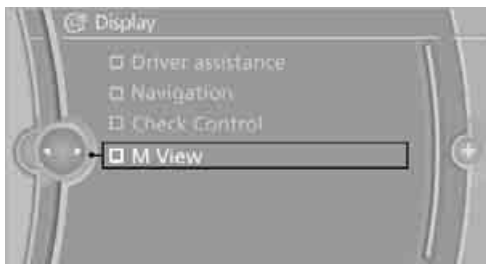

 "M View": the M view appears in the Head-Up Display. Information unavailable in the M view appears on the Control Display in gray and cannot be selected.

 "M View": the default view is displayed. The following information can be displayed:

- ▷ Current speed/cruise control*
- ▷ Navigation instructions*


- Check Control messages

For additional information on the Head-Up Display, refer to the Owner's Manual for Vehicle.

Adjustments via M Drive

You can also set the M view via M Drive.

1. "Settings"

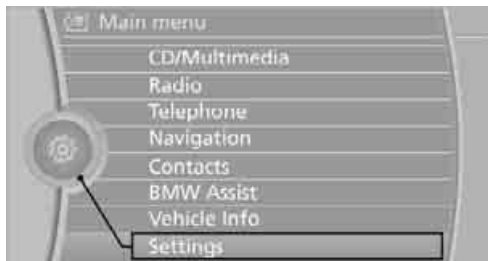

2. "M Drive"



3. "Head-up display"


4. "M View"



Press the  button on the steering wheel to activate the M view, also refer to M Drive on page 16.


 Be aware of the settings for DSC in M Drive; otherwise, driving stability can be impaired and there is the risk of accident. ◀

M view

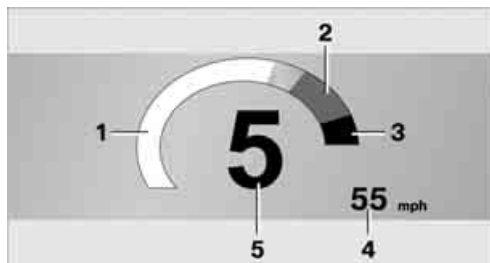

- 1 Current engine speed, highlighted
- 2 Advance warning field of tachometer
- 3 Red warning field of tachometer, also refer to Tachometer on page 20
- 4 Speed
- 5 Gear display

Shift lights

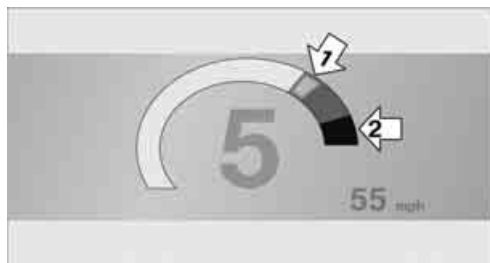

The current engine speed is highlighted on the tachometer.

- When approaching the maximum rpm, yellow illuminated fields 1 of the tachometer consecutively indicate the approaching upshift point.
- At the very latest, shift when the field 2 lights up in red.

When the permissible maximum rpm is reached, the entire tachometer begins to flash. When the maximum rpm is exceeded, the engine speed governor is activated to protect the engine. Always avoid engine speeds in this range.



The background of the page features a blurred image of a cloudy sky in shades of blue and white at the top, and a winding road or path in a darker blue tone at the bottom.

Driving tips

This section is designed to provide you with extra support by supplying information useful in dealing with specific driving and operating conditions.

Things to remember when driving

Break-in period

Please note the following ways in which your BMW X5 M / BMW X6 M differs from the description given in the Owner's Manual for the BMW X5 / BMW X6.

Do not use Launch Control, refer to page 18, during the break-in period.

Engine and differential

Always obey all official speed limits.

Up to 1,200 miles/2,000 km

Drive at varying engine and driving speeds, but do not exceed 5,500 rpm or 105 mph/170 km/h.

Avoid full-throttle operation and use of the transmission's kick-down mode during these initial miles.

From 1,200 miles/2,000 km to 3,000 miles/5,000 km

The engine and driving speed can gradually be increased up to a continuous vehicle speed of 135 mph/220 km/h. Only drive at top speed briefly, e.g. when passing.

Transmission

The function of the transmission is only at its optimized level after driving a distance of approx. 300 miles/500 km. During this time, do not exceed engine speeds of 5,500 rpm.

Following part replacement

Observe the break-in instructions again if components mentioned above must be replaced after subsequent driving operation.

General driving notes

Ground clearance



Make sure that there is always sufficient ground clearance, e.g. when entering underground garages or when driving over curb edges; otherwise, damage may occur to the front or rear spoiler. ◀

Driving on poor roads

When driving on rough terrain, use stone impact protective film to prevent damage to painted vehicle components such as side sills. Your BMW Sports Activity Vehicle Center will be happy to advise you.

BMW X5 M / BMW X6 M technology

M TwinPower Turbo engine



The M TwinPower Turbo engine is a high-performance V8 engine. With a 268.2 cu in/4.4 liter displacement, this engine generates a maximum output of 555 hp and a maximum torque of 500 lb ft/680 Nm. It features spontaneous response characteristics and a very broad usable engine speed range. The maximum engine speed is 6,800 rpm and is electronically controlled.

Warming up

During the warm-up phase, the high-performance V8 engine will have slightly rougher running characteristics and a temporarily elevated idle speed.

When the engine is cold, the exhaust system has a slightly metallic undertone due to the system design.

For additional information on warming up, refer to Tachometer and Engine oil temperature on page 20.

Drive train

The xDrive all-wheel-drive system produces a constantly variable torque distribution between the front and rear axle. The combination of xDrive and Dynamic Performance Control gives your BMW X5 M / BMW X6 M the highly dynamic driving characteristics typical of a BMW M series. The dynamics and steering precision in all road speed ranges can be increased even further by activating the M Dynamic mode.

Driving on a racetrack

Before you drive on a racetrack, BMW recommends:

- ▷ Participation in BMW driver training
- ▷ Having the vehicle checked at your BMW Sports Activity Vehicle Center

At high engine loads, high component temperatures may cause the system to reduce performance in order to protect the engine. Full performance is restored after cooling.

▷ Racetrack driving leads to increased wear. The BMW X5 M / BMW X6 M is not designed for use in motor sport competition. This added wear is not covered under the warranty. ◀

The production brake linings and wear indicators are not designed for racetrack driving. Your BMW Sports Activity Vehicle Center will be happy to advise you.



A close-up, artistic photograph of a car's wheel and suspension system, rendered in a monochromatic blue and white color scheme. The image is heavily blurred, creating a sense of motion and depth. The spokes of the wheel are prominent, along with the suspension arms and other mechanical parts. The lighting is dramatic, with strong highlights and deep shadows.

Mobility

This section helps you maintain your mobility by supplying important information on vital topics including fuels and lubricants, wheels and tires, service, maintenance and roadside assistance.

Refueling

Observe the following when refueling

Please note the following ways in which your BMW X5 M / BMW X6 M differs from the description given in the Owner's Manual for the BMW X5 / BMW X6.

Fuel specifications



Do not use leaded gasoline, otherwise permanent damage to the catalytic converter will result.

Do not use E85, i.e. fuel that consists of 85% ethanol, or Flex Fuel, otherwise permanent damage to the engine and the fuel supply system will result. ◀

Required fuel

Super Premium Gasoline/AKI 93

Always use this premium grade fuel to obtain maximum fuel economy and performance. The minimum approved fuel grade is AKI 91.



Do not use gasoline below the specified minimum quality, otherwise engine damage can result. ◀

BMW recommends BP fuels 

Wheels and tires

Information for your safety

The factory approved tires with emergency operation properties are matched to your vehicle and when used properly, offer both optimum driving safety and the desired driving comfort.

cle and when used properly, offer both optimum driving safety and the desired driving comfort.

Tire inflation pressures

BMW X5 M

Tire size	Pressure specifications in psi/kPa			
	Traveling speeds up to a max. of 100 mph/160 km/h		Traveling speeds including those exceeding 100 mph/160 km/h	
All pressure specifications in the table are indicated in psi/kilopascal with cold tires. Cold = ambient temperature				
Compact wheel*: T 155/80 R 19 114 M	60/420	60/420	60/420	60/420
255/50 R 19 107 H M+S XL	38/260	38/260	41/280	46/320
255/50 R 19 107 V M+S XL				
Front: 275/40 R 20 106 W XL	38/260	-	44/300	-
Rear: 315/35 R 20 110 W XL	-	38/260	-	44/300
Front: 285/35 R 21 105 W XL	38/260	-	45/310	-
Rear: 325/30 R 21 108 W XL	-	38/260	-	46/320

More details on the permissible load and weights can be found on page [43](#).

BMW X6 M

Tire size	Pressure specifications in psi/kPa			
	Traveling speeds up to a max. of 100 mph/160 km/h		Traveling speeds including those exceeding 100 mph/160 km/h	
All pressure specifications in the table are indicated in psi/kilopascal with cold tires. Cold = ambient temperature				
Compact wheel*: T 155/80 R 19 114 M	60/420	60/420	60/420	60/420
255/50 R 19 107 H M+S XL 255/50 R 19 107 V M+S XL	38/260	38/260	41/280	44/300
Front: 275/40 R 20 106 W XL	38/260	-	44/300	-
Rear: 315/35 R 20 110 W XL	-	38/260	-	44/300
Front: 285/35 R 21 105 W XL	38/260	-	45/310	-
Rear: 325/30 R 21 108 W XL	-	38/260	-	45/310
More details on the permissible load and weights can be found on page 43 .				

Snow chains*

Use of snow chains is only permitted in pairs, with winter tires of the size 255/50 R 19 on the rear wheels.



After snow chains are installed, do not initialize the Flat Tire Monitor* or reset Tire Pressure Control as these may result in incorrect readings.

When you are driving with snow chains, it can be beneficial to briefly deactivate DSC, refer to page [22](#). ◀

Under the hood

Engine compartment



- 1 Reservoir for washer fluid for the headlamp and windshield washer system
- 2 Filler neck for engine oil, refer to Owner's Manual for Vehicle
- 3 Jump starting terminal
- 4 Expansion tank for coolant

Replacing components

Bulb replacement, front

Parking lamps and roadside parking lamps, daytime driving lamps

35-Watt bulb, H8

 The bulb is pressurized. Therefore, wear safety glasses and protective gloves. Otherwise there is a danger of injuries if the bulb is accidentally damaged during replacement. ◀

1. Turn the cover to the left and remove.



2. Left side of vehicle:
Rotate the bulb holder to the right, refer to arrow, and remove.
Right side of vehicle:
Rotate the bulb holder to the left and remove.



3. Disconnect plug and replace bulb.
4. Install in the reverse order.

Side marker lamps

5-Watt bulb, WY5W XLL

1. Rotate the bulb holder to the left and remove.



2. Pull the bulb out of the bulb holder and replace.
3. Install in the reverse order.

Turn signals, front

24-Watt bulb, PY24W

1. Rotate bulb holder to the left and remove it along with the bulb.



2. Rotate the bulb to the right along with the socket and replace.
3. Install in the reverse order.



Reference

Use this section for the quickest access to the information you are seeking. The chapter contains the technical data and the index.


Technical data

Engine data


BMW X5 M / BMW X6 M		
Displacement	cu in/cm ³	268.2/4,395
No. of cylinders		8
Maximum output	hp	555
at engine speed	rpm	6,000
Maximum torque	lb ft/Nm	500/680
at engine speed	rpm	1,500-5,650

Dimensions

BMW X5 M

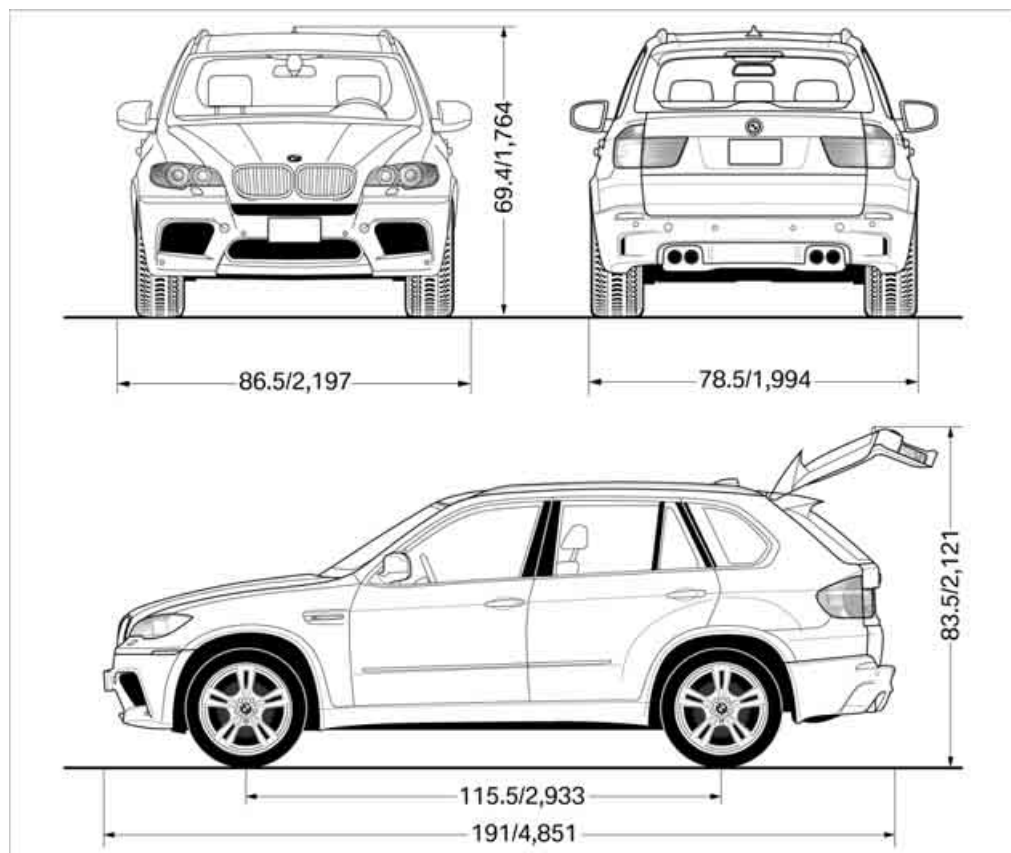

All measurements in inches/millimeters. Smallest turning circle dia. 42 ft/12.8 m.

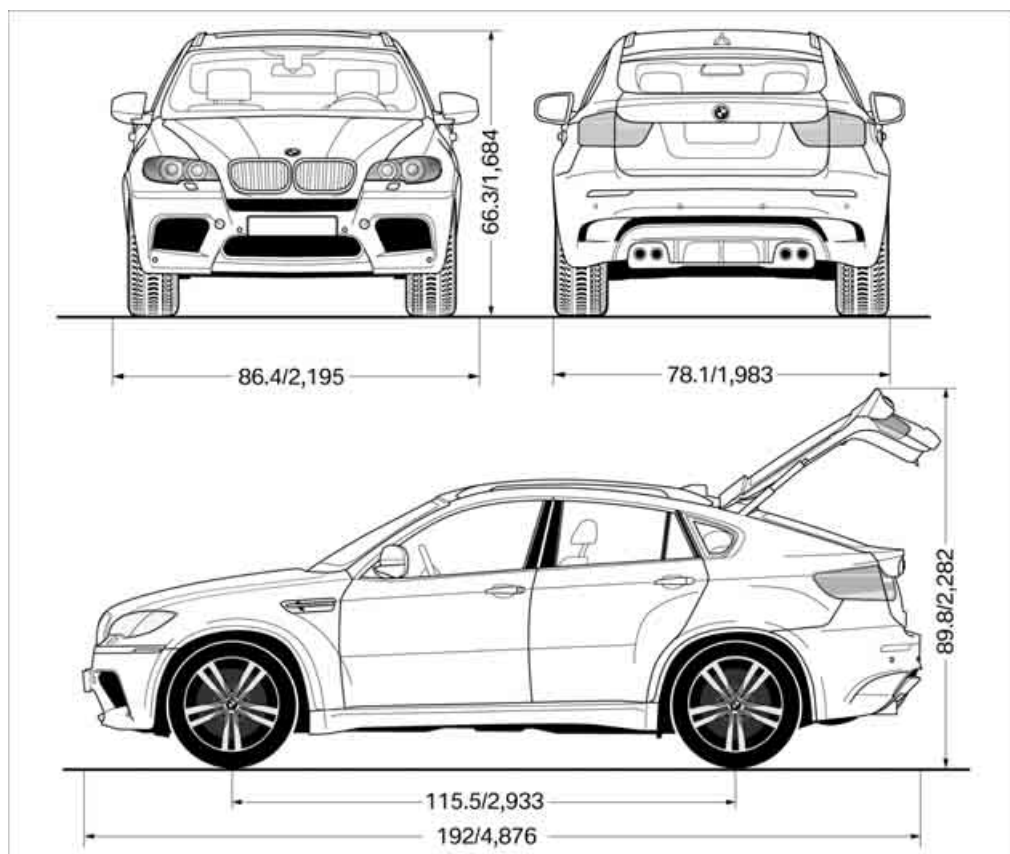

All measurements in inches/millimeters. Smallest turning circle dia. 42 ft/12.8 m.

Weights

BMW X5 M		
Curb weight	lbs/kg	5,368/2,435
Approved gross vehicle weight	lbs/kg	6,471/2,935
Load	lbs/kg	1,102/500
Approved front axle weight	lbs/kg	3,153/1,430
Approved rear axle weight	lbs/kg	3,505/1,590
Cargo bay capacity	cu ft/liters	21.9-61.8/620-1,750
Do not exceed the approved axle weights and the approved gross vehicle weight.		

BMW X6 M		
Curb weight	lbs/kg	5,324/2,415
Approved gross vehicle weight	lbs/kg	6,261/2,840
Load	lbs/kg	937/425
Approved front axle weight	lbs/kg	3,153/1,430
Approved rear axle weight	lbs/kg	3,307/1,500
Cargo bay capacity	cu ft/liters	20.1-51.1/570-1,450
Do not exceed the approved axle weights and the approved gross vehicle weight.		

Capacities

Notes			
Fuel tank	gal/liters	approx. 22.5/85	Fuel grade: page 32
of that reserve	gal/liters	approx. 3.2/12	
Windshield washer with headlamp washer system	US quarts/liters	approx. 6.9/6.5	For more details: Owner's Manual for Vehicle

Electrical system

BMW X5 M / BMW X6 M		
Battery capacity	Ah	90
Generator output	A/W	210/2,940

Everything from A to Z

Index

A

Acceleration assistant, refer to Launch Control [18](#)
 Accessories, refer to
 – Your individual vehicle [5](#)
 AKI, refer to Fuel specifications [32](#)
 Approved front axle weight, refer to Weights [43](#)
 Approved gross vehicle weight, refer to Weights [43](#)
 Assistance systems, refer to DSC Dynamic Stability Control [21](#)
 Axle weights, refer to Weights [43](#)

B

Breaking-in the differential, refer to Engine and differential [28](#)
 Breaking-in transmission, refer to Transmission [28](#)
 Break-in period [28](#)

C

Cargo bay
 – capacity [43](#)
 Center console, refer to
 Around the center console [12](#)
 Cockpit [8](#)
 Combination instrument, refer to Instrument panel [10](#)
 Comfort area, refer to Around the center console [12](#)
 Controls and displays [8](#)
 Copyright [2](#)
 Cruise control [19](#)

Curb weight, refer to Weights [43](#)
 Cylinders, refer to Engine data [40](#)

D

Dashboard, refer to Cockpit [8](#)
 Data [40](#)
 – dimensions [41](#)
 – engine data [40](#)
 – technical [40](#)
 Data, technical
 – capacities [43](#)
 – electrical system [43](#)
 – engine data [40](#)
 – weights [43](#)
 Dimensions [41](#)
 Displacement, refer to Engine data [40](#)
 Display elements, refer to Instrument panel [10](#)
 Displays, refer to Instrument panel [10](#)
 Displays and controls [8](#)
 Displays on the windshield, refer to Head-Up Display [23](#)
 Driving stability control systems [21](#)
 DSC Dynamic Stability Control [21](#)
 – indicator lamp [22](#)
 Dynamic Stability Control DSC
 – indicator lamp [22](#)

E

EDC Electronic Damping Control [22](#)
 Editorial notice [5](#)
 Electronic Damping Control EDC [22](#)

Engine
 – breaking-in [28](#)
 – data [40](#)
 – M Engine Dynamic Control [19](#)
 – speed [20](#)
 Engine compartment [35](#)
 Engine data [40](#)
 Engine oil temperature [20](#)
 Engine oil thermometer, refer to Engine oil temperature [20](#)
 Engine output, refer to Engine data [40](#)
 Engine speed, refer to Engine data [40](#)
 ESP Electronic Stability Program, refer to DSC Dynamic Stability Control [21](#)

F

Flat Tire Monitor
 – snow chains [34](#)
 Fuel
 – quality [32](#)
 Fuel, refer to Fuel specifications [32](#)

G

Gasoline, refer to Fuel specifications [32](#)
 General driving notes [28](#)
 Gross vehicle weight, refer to Weights [43](#)
 Ground clearance [28](#)

H

Hazard warning flashers [12](#)

Head-Up Display 23

– M view 24

– shift lights 18, 24

Height, refer to
Dimensions 41

Hood 35

Horn 8

I

Imprint 2

Indicator/warning lamps

– M Drive 16

– M Dynamic Mode 22

Individual equipment, refer to
Your individual vehicle 5

Instrument cluster, refer to
Cockpit 8

Instrument panel 10

Instrument panel, refer to
Cockpit 8

K

Knock control 32

L

Launch Control 18

Length, refer to
Dimensions 41

M

M Dynamic Mode MDM 21

– indicator lamp 22

M Engine Dynamic Control 19

M Sport Automatic
transmission 18

Manufacturer 5

MDM, refer to M Dynamic
Mode 21

M Drive 16

Measurements, refer to
Dimensions 41

M view 24

O

Octane rating, refer to Fuel
specifications 32

Oil temperature 20

Output, refer to Engine
data 40

P

Parts and accessories, refer to
Your individual vehicle 5

POWER, refer to M Engine
Dynamic Control 19

R

Refueling 32

Run-flat tires 33

S

Safety systems, refer to
– DSC Dynamic Stability
Control 21

Settings

– configuring, refer to M
Drive 16

Shifting, M Sport Automatic
transmission 18

Shift lights 18

Shift paddles on steering
wheel 18

Shock absorber control, refer
to EDC Electronic Damping
Control 22

Signal horn, refer to Horn 8

Speed dial, refer to
Speedometer 10

Speedometer 10

Sport program, M Sport
Automatic transmission 18

Stability control, refer to
– Driving stability control
systems 21

– DSC Dynamic Stability
Control 21

Steering wheel 8

– M Drive button 16

– shift paddles 18

Switches, refer to Cockpit 8
Symbols 4

T

Tachometer 20

Technical data 40

Temperature gauge
– engine oil 20

Tempomat, refer to Cruise
control 19

Tire inflation pressures 34

Torque, refer to Engine
data 40

Track width, refer to
Dimensions 41

Traction-assist feature, refer
to DSC Dynamic Stability
Control 21

Traction control, refer to
DSC Dynamic Stability
Control 21

Transmission

– Launch Control 18
– shift lights 18

Trunk capacity, refer to Cargo
bay capacity 43

Turning circle, refer to
Dimensions 41

Turn signals

– replacing bulbs 36

U

Upshift display, refer to Shift
lights 24

V

Vehicle

– breaking-in 28
– size, refer to Dimensions 41
– weights 43

Volume

– cargo bay, refer to
Weights 43

W

- Weights [43](#)
- Wheelbase, refer to
 - Dimensions [41](#)
- Wheels and tires [33](#)
- Width, refer to Dimensions [41](#)
- Windshield
 - displays, refer to Head-Up Display [23](#)

Y

- Your individual vehicle
 - settings, refer to M Drive [16](#)

More about BMW

bmwusa.com



The Ultimate
Driving Machine

01 41 2 604 335 Ue

