



EPSON PowerLite® S1

Small price. Big performance.

What if there was a projector that could deliver the brilliant, full-featured performance that your business presentations require—all in a sleek, economical model? Meet the EPSON PowerLite S1. This multifunctional SVGA performer offers an extraordinary value. In fact, it's so affordable, you may want to purchase one for each department, plus one to take on the road. With a convenient carrying handle, this 7 lb ultraportable is easy to transport. Compatible with both Windows® and Macintosh® systems, it facilitates flexible setup in any setting with multiple inputs for both computer and video presentations. And, with 1200 ANSI lumens and a 400:1 contrast ratio, it offers remarkable image quality, even in well-lit rooms.

Designed by the world leader in high-performance projectors, the EPSON PowerLite S1 delivers a phenomenal value without sacrificing quality or performance. And, it's backed by legendary Epson reliability, so you can be sure your projector will keep up with your most demanding presentation requirements.

Ultra bright 1200 ANSI lumens; weighs just 7 lb

- Incredible brightness from a sleek, ultraportable projector
- Even works in well-lit rooms or at presentations with large audiences

Superior image quality and performance

- Three EPSON 0.5" high-aperture LCDs for rich color saturation
- 400:1 contrast ratio for blacker blacks and whiter whites
- SVGA (800 x 600) resolution for sharp, vivid detail

Specialized feature set for home entertainment



- High-end component video compatibility
- 4:3/16:9 aspect ratio that supports various DVD formats
- Selectable projection modes for video games, home theater, and even well-lit settings

Easy setup and operation

- Convenient remote control that's stored within the projector
- Monitor out capability so you can display images on a monitor and screen simultaneously
- +/- 15° keystone correction for distortion-free images
- Digital zoom for position flexibility
- Whisper-quiet operation (33 db) to eliminate excessive sound during presentations
- Cable lock feature for security-conscious environments
- Color-coded cables mean easy connectivity for first-time users
- Power-on beep reassures you of projector status
- 6-second start-up time to avoid presentation delays and reduce pre-presentation jitters
- 20-second shut-down time so you're back on the road in no time
- Soft carrying case included

Outstanding EPSON service and support (free for the duration of the two-year warranty)

- 90-day lamp warranty for added dependability
- EPSON Road Service Program provides a replacement projector, typically within 24 hours
- EPSON PrivateLineSM dedicated toll-free support line available from 6 a.m. to 6 p.m. PST Monday – Friday
(Calls are answered live, typically in under a minute.)

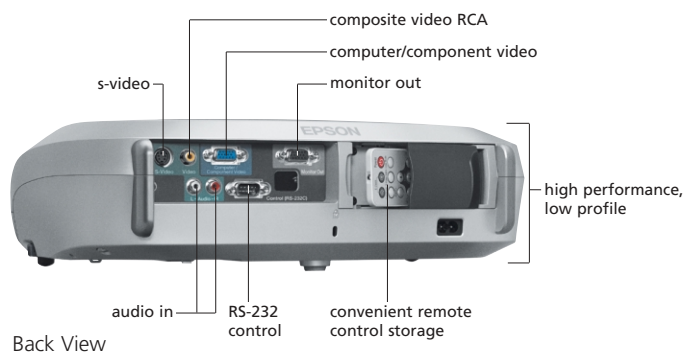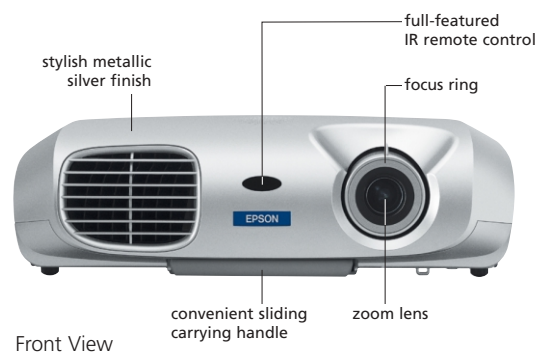

EPSON PowerLite S1 Specifications

Projection System		EPSON LCD technology
Projection Method		Front/rear/ceiling mount
LCD		
Size	0.5"	
Driving method	EPSON Poly-silicon TFT Active Matrix	
Pixel number	480,000 dots x 3 (800 x 600) LCDs	
Native resolution	SVGA	
Aspect ratio	4:3 (supports 16:9)	
Pixel arrangement	Stripe	
Projection Lens		
Type	Manual focus	
F-number	1.4	
Focal length	16.6mm	
Zoom ratio	Digital zoom 1.0-1.2	
Lamp		
Type	132W UHE	
Life (typical)	2000H	
Screen Width Ratio (Distance/Width)		1.45 to 1.8:1
Screen Size (Projected Distance)		30" to 300" (0.9m to 11.3m)
Keystone Correction		Vertical: ±15 degrees
Brightness (Typical)		1200 ANSI lumens
Contrast Ratio		400:1
Brightness Uniformity (Typical)		85%
Color Reproduction		24 bit; 16.7 mil
Audio Output		1W Monaural
Operating Temperature		41°F to 95°F (5°C to 35°C)
Power Supply Voltage		100-120V ±10%, 50/60Hz AC
Power Consumption		180W, 5W at powered off mode
Dimensions (includes lens and feet)		10.4" x 14.6" x 4.5"
Dimensions (excludes lens and feet)		10.4" x 14.6" x 4.2"
Weight		7.0 lb/3.2kg
Fan Noise		33db
Effective Scanning Frequency Range		
Pixel clock	13.5MHz to 162MHz	
Horizontal	15KHz to 92KHz	
Vertical	50Hz to 85Hz	
Remote Control		
Features	Source selection, power, aspect, color mode, volume, e-zoom, a/v mute, freeze, menu	
Operating angle	Right/Left ± 30 degrees	
	Upper/Lower ± 15 degrees	
Operating distance	19.7 ft (6m)	
RGB		
	Analog RGB I/O	
Display performance		
Native	800 x 600	
Resize	1024 x 768	
	640 x 480	
Input terminal		
Video	Mini D-sub 15 pin x 1	
Audio	RCA x 2 (White/Red)	
Output terminal		
Video	Mini D-sub 15pin (monitor out) x 1	

Video I/O		
Display performance	NTSC: 550 line	
	PAL: 550 line	
	(depends on observation of the multi burst pattern)	
Input signal	NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/SECAM	
	HDTV: 480i, 480p, 720p, 1080i	
Input terminal	Video	Composite video: RCA (Yellow) x 1
		S-Video: Mini DIN
		Component video: Mini D-sub 15pin (in common with Analog RGB connector)
	Video-RGB: Mini D-sub 15pin (in common with Analog RGB connector)	
	Audio	RCA (White/Red) x 2 (in common with Analog RGB Audio terminal)
Audio signal		500m Vrms/47Kohm
Control I/O		
I/O terminal		RS-232C
Security		Kensington®-style lock provision
Warranty		
Two-year limited warranty, 90-day lamp warranty, EPSON Road Service Program and EPSON PrivateLine dedicated toll-free support (U.S. and Canada only)		
Contents		
Power cable, computer cable, projector remote control, presentation remote control, soft carrying case, air filter, CD-ROM, Quick Setup Sheet.		
Product/Accessory Part Numbers		
EPSON PowerLite S1 projector	V11H128020	
Replacement lamp	V13H010L25	
Air filter set (5 sheets)	V13H134A03	
Projector remote control	V12H007T09	
Presentation remote control	V12H007T11	
Ceiling mount	ELPMB42	
Suspension adapter	ELPMBAPL	
False ceiling plate	ELPMBFCP	
Distribution amplifier	ELPDA01	
Component video cable	ELPKC19	
S-Video cable	ELPSV01	
Mac adapter set	ELPAP01	
Samsonite wheeled soft case	ELPKS35	
Samsonite soft shoulder case for projector and laptop	ELPKS43	
ATA molded hardshell case	ELPKS49	
50" portable screen	ELPSC06	
60" portable pop-up screen	ELPSC07	
80" portable pop-up screen	ELPSC08	
High resolution document imager	ELPDC02	
High resolution document camera	V12H064020	
Kensington security lock	ELPSL01	
Support—The EPSON ConnectionSM		
Pre-Sales Support U.S. and Canada	800-463-7766	
Automated Technical Support	800-922-8911	
Internet Web Site	www.epson.com	
Presenters ONLINESM		presentersonline.com

EPSON®

Epson America, Inc.
3840 Kilroy Airport Way, Long Beach, CA 90806

Specifications and terms are subject to change without notice. EPSON is a registered trademark of Seiko Epson Corporation. PowerLite is a registered trademark, and EPSON Connection, PrivateLine and Presenters Online are service marks of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. © Copyright 2003 Epson America, Inc. CPD-15595 25K 5/03 WP

Epson Canada, Ltd.
3772 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

Epson Latin America, Inc.
6303 Blue Lagoon Drive, Suite 195, Miami, FL 33126