

Package Contents

- 4K Ultra HD Active Deterrence Security Camera
- Mounting Kit*
- BNC / Power Extension Cable*
- Power Adapter**

* Per camera in multi-camera packs.

** A multi-camera power adapter that provides power to multiple cameras or individual power adapters may be provided depending on product configuration.

ATTENTION:

A REGULATED UL / CSA APPROVED power supply is REQUIRED for use with this camera (included). Use of a non-regulated, non-conforming power supply can damage this product and voids the warranty.

Using Deterrence Features

Use your Lorex app to manually activate the camera's white light and siren features when connected to a compatible Lorex recorder.




PREREQUISITE: Connect to your Lorex system using the app specified in your recorder documentation.


To activate deterrence features manually:

1. Launch the app and tap your recorder to view connected channels.
2. Tap a connected deterrence camera to open it in single-channel view.
3. Tap **(A)** to activate the white light, or tap **(B)** to activate the siren.

Lorex Home

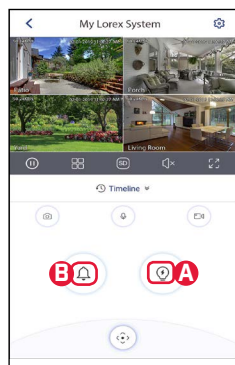

Lorex Cloud

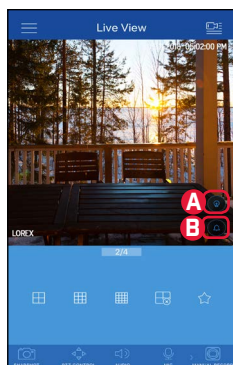

NOTE: You can also set schedules and active areas of the camera image where the white light will be triggered automatically when motion is detected. For full instructions, refer to the app manual on your product page at lorex.com.

Resources


Need Help?

Visit us online for up-to-date software and complete instruction manuals

- 1 Visit lorex.com
- 2 Search for the model number of your product
- 3 Click on your product in the search results
- 4 Click on the **Downloads** tab



Dimensions

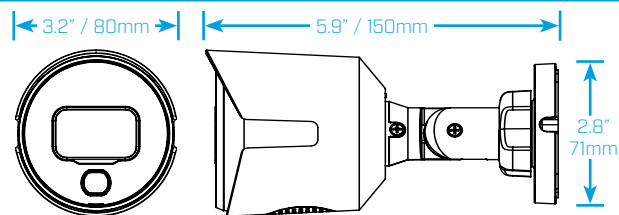

Safety Precautions

- Read this guide carefully and keep it for future reference.
- Follow all instructions for safe use of the product and handle with care.
- Use the camera within given temperature, humidity and voltage levels noted in the camera's specifications.
- Do not disassemble the camera.
- Do not point the camera directly towards the sun or a source of intense light.
- Use only the supplied regulated power supply provided with the product. Use of a non-regulated, non-conforming power supply can damage the product and void the warranty.
- Periodic cleaning may be required. Use a damp cloth only. Do not use any harsh, chemical-based cleaners.
- The supplied cable is rated for surface and in-wall mounting only. Cables for floor-to-floor installations are sold separately (CMR type). These and other cables are available at lorex.com.

Disclaimers

- For a full list of compatible recorders, visit lorex.com/compatibility.
- To ensure that you are viewing camera video in full 4K resolution (4K monitor required), check the video output resolution of your recorder. For full instructions, see your recorder's documentation at lorex.com.
- Not intended for submersion in water. Installation in a sheltered location recommended.
- This camera includes an Auto Mechanical IR Cut Filter. When the camera changes between Day/Night viewing modes, an audible clicking noise may be heard from the camera. This clicking is normal, and indicates that the camera filter is working.

LOREX®

4K Ultra HD Active Deterrence Security Camera

Quick Start Guide
English Version 2.0



C882DA SERIES

www.lorex.com

Copyright © 2019 Lorex Corporation
As our products are subject to continuous improvement, Lorex reserves the right to modify product design, specifications and prices, without notice and without incurring any obligation. E80E. All rights reserved.

C882DA_QSG_EN_R2


Installing the Camera

ATTENTION:

Test your camera prior to selecting a permanent mounting location by temporarily connecting the camera and cable to your recorder.


Before Installing the Camera

- Decide whether to run the cables through the wall / ceiling (drilling required) or along the wall / ceiling.
- If you run the cables along the wall / ceiling, you must run the cable through the **cable notch** on the base. This will keep the camera base flush to the surface when mounted.




To install your camera:

- Set the camera in the desired mounting position and mark holes for screws through the camera base.
- Drill the holes, then feed the cable through the mounting surface or cable notch.
NOTE: Insert the included drywall anchors if you are mounting the camera onto drywall.
- Mount the camera stand to the mounting surface using the provided screws. Make sure all screws are fastened tightly.
- Adjust the camera as shown below:

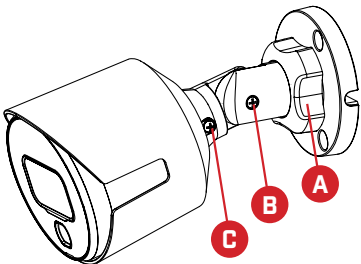

- A. ROTATING THE ARM:** Loosen the adjustment ring by turning it counter-clockwise. Rotate the arm of the camera up to 360°, then tighten the adjustment ring.
- B. BENDING THE ARM:** Use a Phillips head screwdriver (not included) to loosen the adjustment screw. Bend the arm of the camera up to 90°, then tighten the screw.
- C. LEVELING THE CAMERA:** Use the screwdriver to loosen the adjustment screw. Rotate the camera until it is level with the viewing area, then tighten the screw.
5. Remove the vinyl film from the camera lens when your installation is complete.

Connecting the Camera

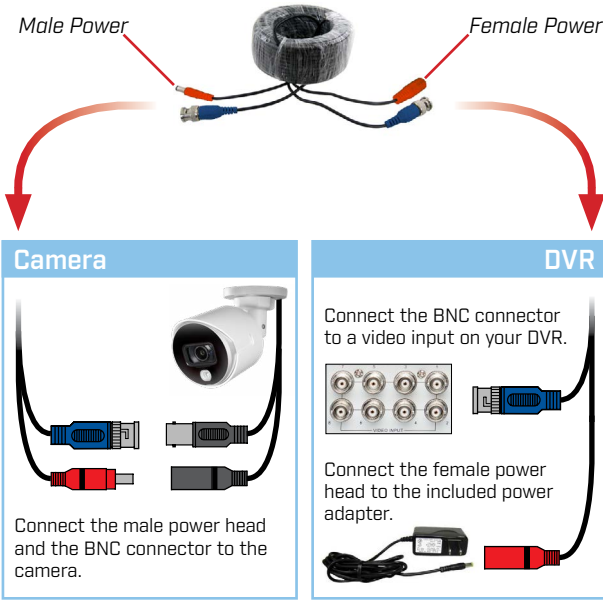


Power Adapter Types

A multi-camera power adapter that provides power to multiple cameras or individual power adapters may be provided, depending on product configuration.



* Images for representation only.

Setup Diagram

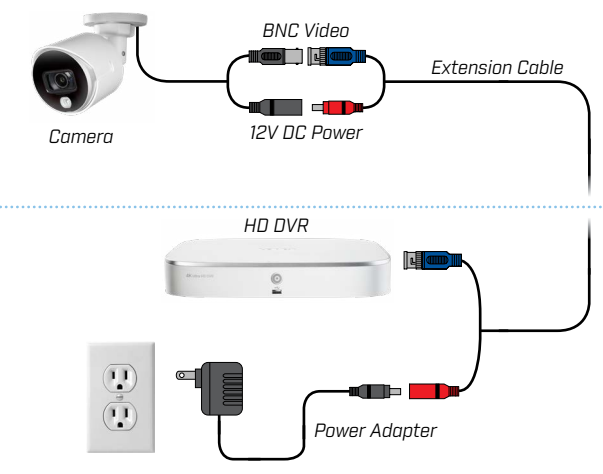

Cable Extension Options

Extend the cable run for your camera depending on the cable type used. Additional extension cables sold separately. See table below:

Option	Model Number	Cable Length
1	CB120URB	120ft (37m)
2	CB250URB	250ft (76m)

NOTES:

- The extension cable must be a single stretch of cable between the DVR and camera. You cannot connect multiple extension cables to each other.
- Indicators that your cable run may be too long:
 - Camera loses video when switching to night vision.
 - Video is permanently black & white (even during day time).
 - Video is unclear, soft, or distorted.
- For more information on extension cables, visit lorex.com.

Troubleshooting

Problem	Solution
Picture does not appear to be 4K	To ensure that you are viewing camera video in full 4K resolution (4K monitor required), check the video output resolution of your DVR. For full instructions, see your DVR's documentation at lorex.com.
No picture / signal	- The camera is only compatible with certain Lorex DVRs. For full compatibility, visit lorex.com/compatibility. - Ensure your monitor is on the correct input channel. Common terms for input channels: INPUT, AV CHANNEL, LINE1, LINE2, AUX. - Ensure connections are properly connected. - Ensure the camera power supply is plugged in.
Picture is too bright	- Ensure your camera isn't pointed directly at a source of light (e.g., sun or spot light). - Check the brightness settings of the DVR and monitor. - Move your camera to a different location.
Picture is too dark	Check the brightness and contrast settings of your DVR and monitor.
Night vision is not working	The night vision activates when light levels drop. The area may have too much light.
Picture is not clear	- Check the camera lens for dirt, dust, spiderwebs. Clean the lens with a soft, clean cloth. - Make sure that the cable run is within the limitations specified in the section "Cable Extension Options".
Bright spot in video when viewing camera at night	Night vision reflects when pointing a camera through a window. Move the camera to a different location.
The camera warning light is not switching on automatically	- Ensure that you have enabled and configured white light deterrence using a compatible DVR. See your DVR's documentation for full instructions. - Ensure the active areas and schedule for white light deterrence are set properly. The default schedule for the warning light is night times (between 5PM and 7AM).
The camera siren is not switching on automatically	The camera siren cannot switch on automatically. You can control the camera siren manually using a compatible Lorex DVR or app. Refer to your DVR's documentation for full instructions.
Person and vehicle detection is not working.	Support for person and vehicle detection is determined by your recorder. See your recorder's documentation to confirm support for this feature.