

WIRING INSTRUCTIONS


TITLE DOUBLE REDUCTION REVERSING "D" HANDLE TOOLS

MILWAUKEE ELECTRIC TOOL CORP.

13135 WEST LISBON RD. BROOKFIELD, WIS

DATE
Sept. '78

BULLETIN
58-01-0244

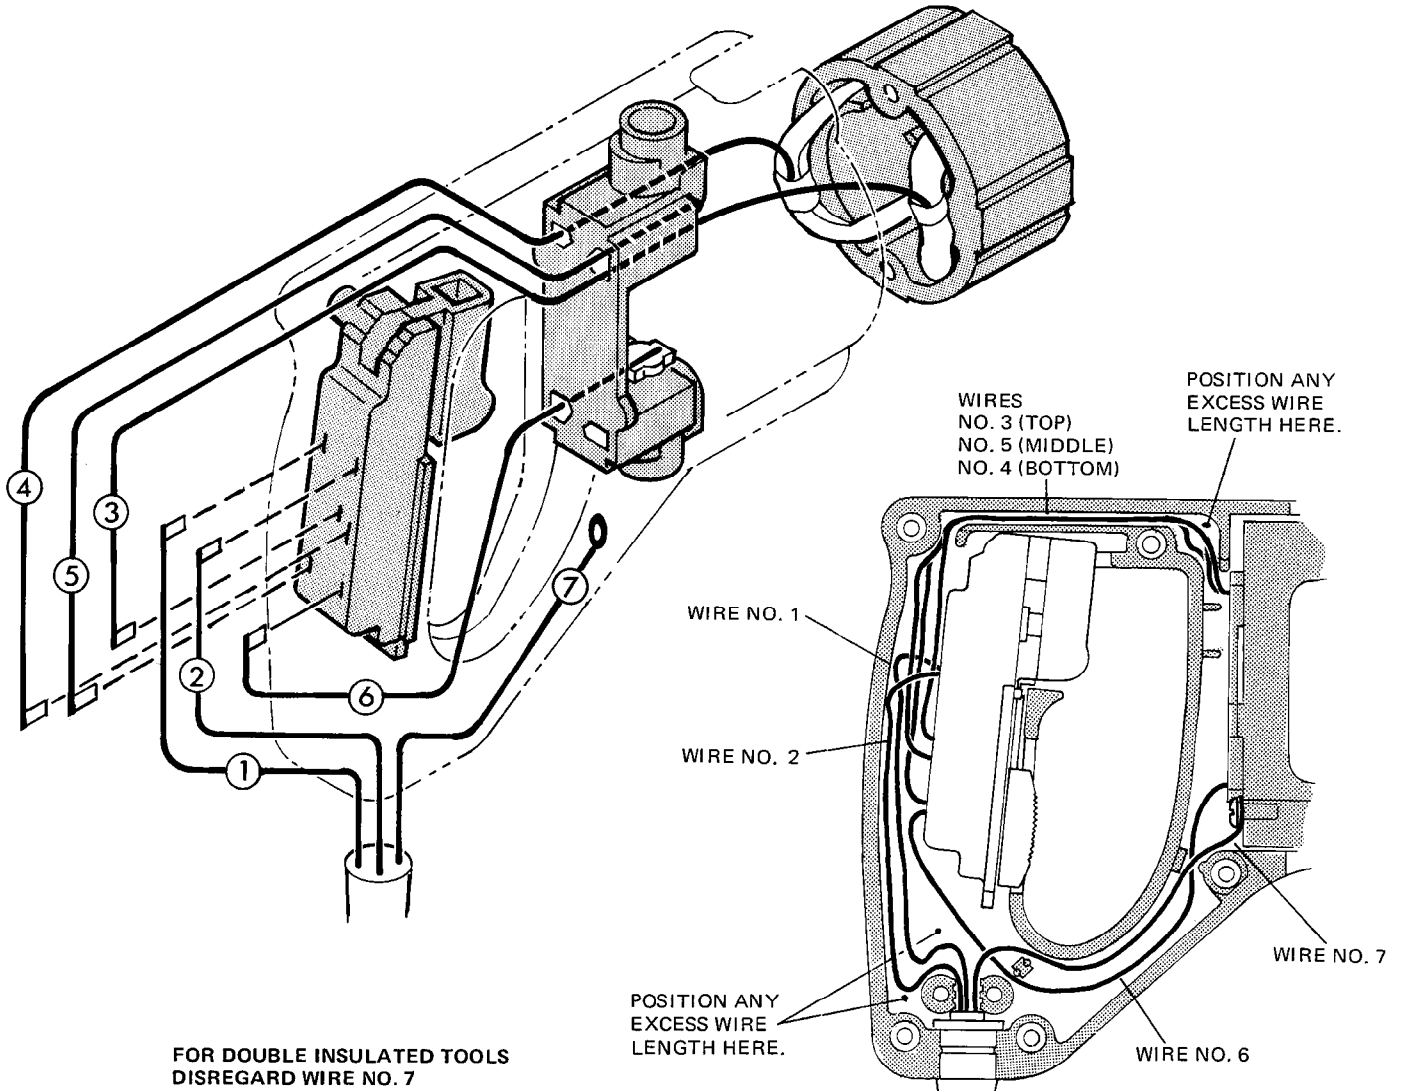

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation.
1	Black	Cord	4-3/4"	Strip 1/4" for T1
2	White	Cord	4-3/4"	Strip 1/4" for T1
3	Brown	Field	9"	Strip 1/4" for T1
4	Red	Field	9"	Strip 1/4" for T1
5	Yellow	18	9"	Strip 1/4" for T1/Strip 1/4" for T1
6	White	18	8-3/4"	Strip 1/4" for T1/Strip 1/4" for T1
7	Green	Cord	4-3/4"	Strip 3/16" for T2

NOTE:

All leads must be held to $\pm 1/8"$.
All field leads to be measured from
and perpendicular to laminations.
All lead lengths are before stripping.

TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	22-44-0090	8
T2	23-74-0390	1

CONNECTOR DESCRIPTION

Code	Part No.	Qty.