

WIRING INSTRUCTIONS


TITLE

SANDER

MILWAUKEE ELECTRIC TOOL CORP. 13135 WEST LISBON RD. BROOKFIELD, WIS.

DATE
Mar. 2012

BULLETIN
58-01-0313

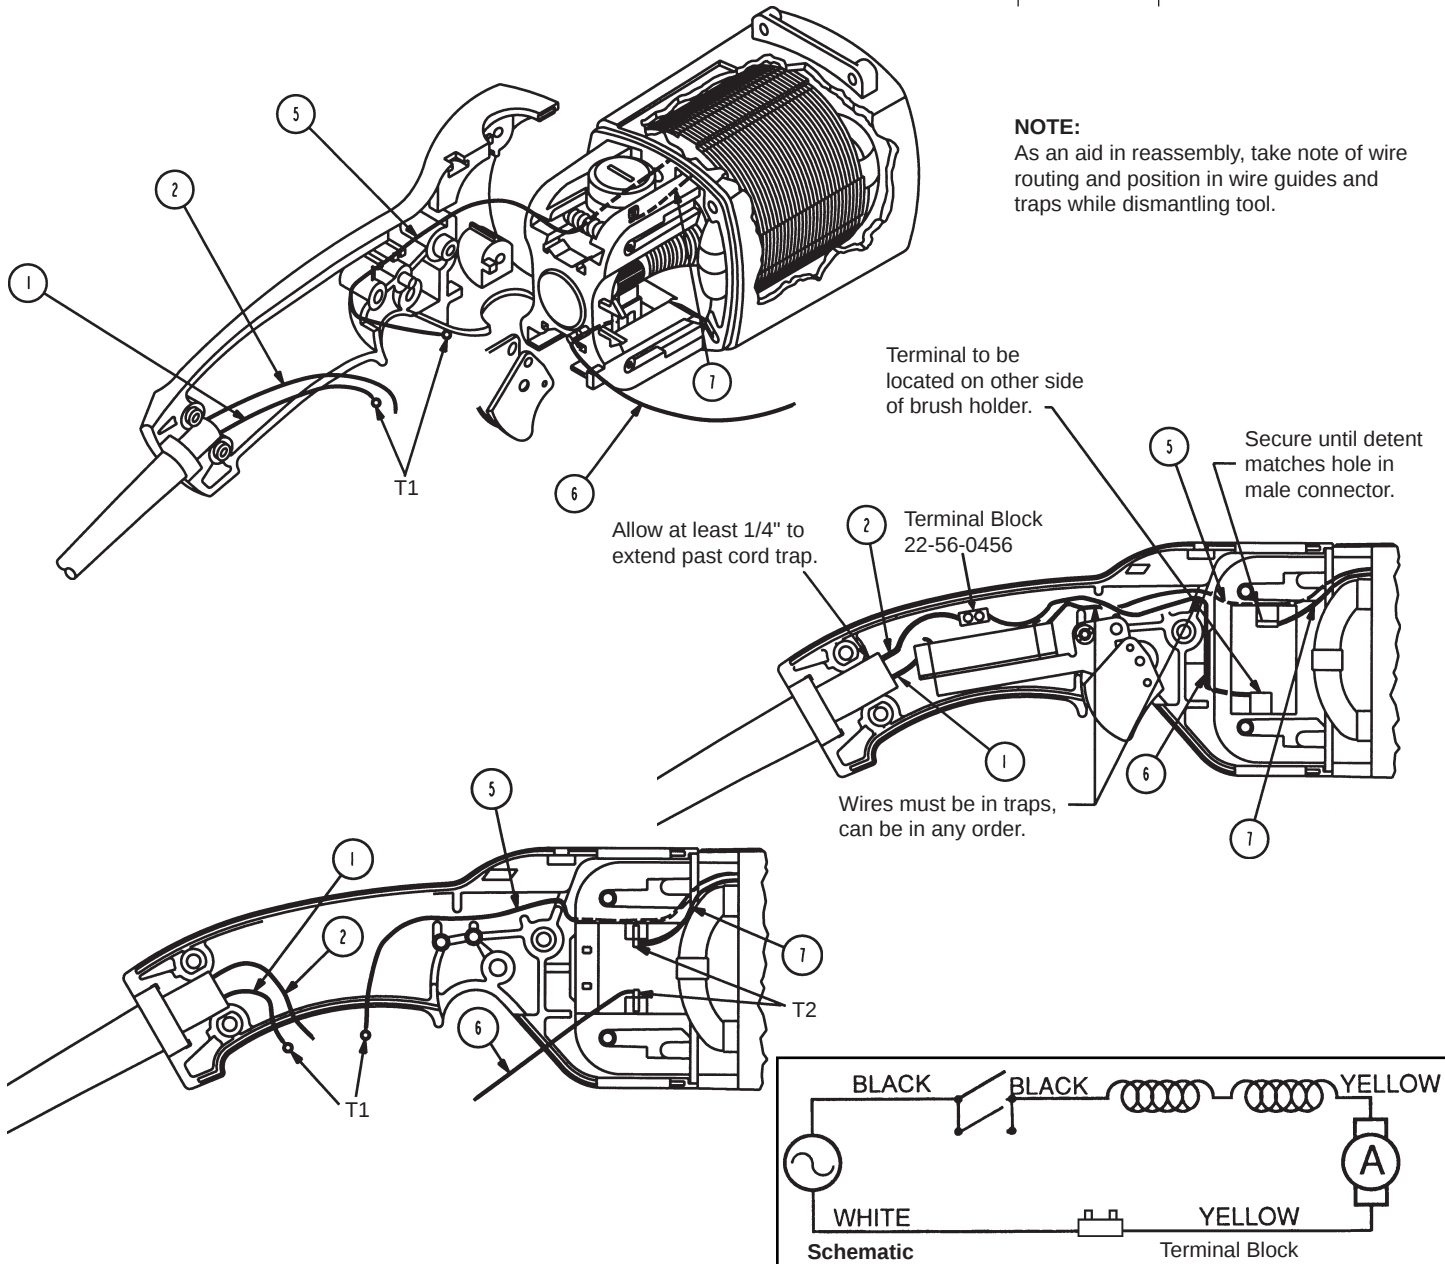

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Part No.	Gauge	Length	Terminals, Connectors and End Wire Preparation
1	Black	Cord	16	1-1/2"	Strip 3/16" for T1
2	White	Cord	16	1-1/2"	Strip 3/16" and tin for C1
5	Blk/Bl	Field	16	7"	Strip 3/16" for T1
6	Yellow	Brush	16	8"	Strip 3/16" and tin for C1
					Strip 1/8" for T2
7	Yel/Rd	Field	16	1-3/4"	Strip 1/8" for T2

BULK LEAD WIRE - BULLETIN 58-01-0003

NOTE:

All lead lengths are before stripping.
All field leads are to be measured from and perpendicular to laminations.
All leads must be held to $\pm 1/8"$ unless specified elsewhere.

TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	23-74-0840	2
T2	23-74-0750	2

CONNECTOR DESCRIPTION

Code	Part No.	Qty.
C1	22-56-0456	1