SONY

Multi Format Switcher System

MVS-8000X System
MVS-7000X System

(With CCP-8000 Series Center Control Panel)

User's Guide Volume 1 English

Software Version 12.10 and Later

1st Edition (Revised 2)

NOTICE TO USERS

© 2011, 2013 Sony Corporation. All rights reserved.
This manual or the software described herein, in whole or in part, may not be reproduced, translated or reduced to any machine readable form without prior written approval from Sony Corporation.

SONY CORPORATION PROVIDES NO WARRANTY WITH REGARD TO THIS MANUAL, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN AND HEREBY EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE WITH REGARD TO THIS MANUAL, THE SOFTWARE OR SUCH OTHER INFORMATION. IN NO EVENT SHALL SONY CORPORATION BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, WHETHER BASED ON TORT, CONTRACT, OR OTHERWISE, ARISING OUT OF OR IN CONNECTION WITH THIS MANUAL, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN OR THE USE THEREOF.

Sony Corporation reserves the right to make any modification to this manual or the information contained herein at any time without notice.
The software described herein may also be governed by the terms of a separate user license agreement.

Functions Newly Supported in Version 12.10

The functions newly supported in the MVS-8000X/7000X system version 12.10 are as follows.

Functions relating to operability

Classification	Functions supported	Menu No.	See page	
			Vol.1	Vol.2
Transitions	AUX MIX transitions	3232 7333.12	Chapter 3 Chapter 8	Chapter 20

Functions relating to the switcher

Classification	Functions supported	Menu No.	See page	
			Vol.1	Vol.2
M/E banks	6M/E system support [a)]	7316.11 82XX/ 86XX	Chapter 2 Chapter 10	Chapter 19
Format converter	Frame synchronizer	7313.4	–	Chapter 18
	720P frame delay function support	7313.4	–	Chapter 18
External device control	Odetics protocol support	7355.7	–	Chapter 12 Chapter 22

a) MVS-7000X only

Table of Contents

Volume 1

Chapter 1 MVS-8000X/7000X Functions

Introduction 19

Features of the MVS-8000X/7000X Multi Format Switcher System 20

Basic Video Processing 21

Transitions 21
Keys 23
Wipes 24
DME Wipes 24
Frame Memory 24
Color Backgrounds 24
Copy and Swap 25
Video Process 25
Color Corrector 25
Side Flags 25
Multi Program 2 25
3D Support 26

Creation of Special Effects and Management of Data and Operations 27

Digital Multi Effects (DME) 27
External Device Control 27
Keyframes 27
Snapshots 28
Utility 28
Shotbox 28
Macros 28
Files 28

Setup 29

Chapter 2 Menus and Control Panel

Names and Functions of Parts of the Control Panel 30

Control Panel: Example Configuration 1 (With Standard Transition Modules) 30
Control Panel: Example Configuration 2 (With Simple Transition Modules) 31
Control Panel: Example Configuration 3 (With Compact Transition Modules) 32
Cross-Point Control Block 32
Cross-Point Control Block in Key/AUX Bus Delegation Mode 36
Transition Control Block (Standard Type) 37
Flexi Pad Control Block (Standard Type) 40
Key Control Block 42
Device Control Block (Trackball) 45
Device Control Block (Joystick) 48
Device Control Block (Search Dial) 49
Keyframe Control Block 51
Numeric Keypad Control Block 54
Fade to Black Control Block 56
Auxiliary Bus Control Block (for AUX Buses) 56
Auxiliary Bus Control Block (for Router Control) 58
Menu Control Block 59
Memory Card/USB Adaptor Block 60
“Memory Stick”/USB Connections Block 60
Utility/Shotbox Control Block 61
Transition Control Block and Flexi Pad Control Block (Simple Type) 62
Independent Key Transition Control Block (Simple Type) 65
Downstream Key Control Block 66
Downstream Key/Fade-to-Black Control Block 67
Transition Control Block (Compact Type) 68
CCP-6224 2M/E Control Panel 71

CCP-6324 3M/E Control Panel 71
Cross-Point Control Block (CCP-6224/6324) in AUX Operating Mode 72
Multifunction Flexi Pad Control Block 73
Basic Menu Operations 75
Overview 75
About the Top Menu List 75
Accessing Menus 76
Example of Displaying a Menu 77
Interpreting the Menu Screen 77
Names and Functions of Parts of the Top Menu Window 80
Names and Functions of Parts of the Numeric Keypad Window 81
Names and Functions of Parts of the Keyboard Window 81
Names and Functions of Parts of the Color Pallet Window 82
Menu Operations 84
Selecting an Item 84
Selecting a Function 84
Setting Parameters 84
Switching Between the Main Menu Site and Subsidiary Menu Site 84
Going Back to the Previous Menu 85
Returning to Default State in Function Groupings 85
Returning Knob Parameters to Default State 85
Operation With a Mouse 85
Shortcut Menu 86
Registering a Menu To the Shortcut Menu 86
Recalling a Menu Using the Shortcut Menu 86
Customizing the Shortcut Menu 86

Chapter 3 Signal Selection and Transitions

Video Processing Flow 88
Signal Selection 89
Basics of Signal Selection 89
Bus Selection 89
AUX Panel-less Function 92
Signal Assignment and Selection 92
Signal Name Display 94
Transitions 95
Selecting the Next Transition 95
Transition Types 95
Procedure for Basic Transition Operation 96
Key Priority Setting 98
Setting the Key Priority in the Transition Control Block 98
Setting the Key Priority by a Menu Operation 100
Display of the Key Output Status and Key Priority 100
Selecting the Transition Type by a Menu Operation 102
Super Mix Settings 102
Color Matte Settings 103
Executing a Transition 105
Transition Indicator Function 105
Setting the Transition Rate 105
Pattern Limit 107
Executing an Auto Transition 109
Executing a Transition With the Fader Lever (Manual Transition) 109
Combinations of Auto and Manual Transitions 110
Non-Sync State 110
Fader Lever Operation in Bus Fixed Mode 110
Transition Preview 112
Independent Key Transitions 113
Basic Independent Key Transition Operations 115
Setting the Independent Key Transition Type by a Menu Operation 116
Setting the Independent Key Transition Rate 117
Fade to Black 118
Fade to Black Operation 118
Setting the Fade to Black Transition Rate 119
AUX Mix Transitions 119

Simple Transition 120
Basic Operations for Simple Transitions 120
Display of the Key Output Status and Key Priority 121
Split Fader 121
Independent Key Transitions With a Simple Transition Module 122

Chapter 4 Keys

Overview 123
Key Types 123
Key Modifiers 124
Key Memory 125
Key Default 126
Key Setting Operations Using Menus 126
Key Setting Menus 126
Key Type Setting 127
Selecting Key Fill and Key Source 128
Chroma Key Composition and Basic Settings 130
Key Adjustments (Menus) 131
Chroma Key Adjustments 131
Key Edge Modifications 134
Masks 137
Applying a DME Effect to a Key 139
Specifying the Key Output Destination 141
Key Modify Clear 141
Blink Function 141
Video Processing 142
Key Setting Operations with the Key Control Block 142
Selecting the Bank and Keyer 142
Selecting the Key Type 143
Parameter Adjustment with the Knobs 143
Selecting Key Fill 143
Selecting Key Source 144
Key Adjustments (Key Control Block) 144
Key Edge Modifications 144
Masks 146
Applying a DME Effect to a Key 146
Other Key Setting Operations 148
Key Adjustments (Multifunction Flexi Pad Control Block) 149
Resizer 152
Two-Dimensional Transformations and Rotation of Keys 152
Resizer Interpolation Settings 155
Resizer Crop/Border Settings 155
Applying Resizer Effects 156
Setting rotation of the resizer 159
Key Snapshots 160
Key Snapshot Operations 160
Key Snapshot Operations Using a Simple Transition Module 161

Chapter 5 Wipes

Overview 163
Types of Wipe Pattern 163
Basic Procedure for Wipe Settings 163
Wipe Settings Menu 163
Wipe Pattern Selection 163
Pattern Mix 164
Setting Wipe Modifiers 166
Wipe Modify Clear 174
Wipe Settings for Independent Key Transitions 175
Basic Procedure for Independent Key Transition Wipe Settings 175
Setting Independent Key Transition Wipe Modifiers 175
Wipe Snapshots 177
Wipe Snapshot Operations With the Flexi Pad 177
Wipe Snapshot Operations With the Menus 179
Wipe Pattern Operations in the Multifunction Flexi Pad Control Block 180
Recalling a Wipe Snapshot 180
Selecting the Wipe Pattern 180
Editing the Wipe Pattern 180

Saving, Canceling, and Deleting Edited Wipe Patterns 182

Chapter 6 DME Wipes

Overview 183
Types of DME Wipe Pattern..... 183
DME Wipe Pattern Variation and Modifiers 185
Relation Between DME Wipes and Other Effects..... 186
Basic Procedure for DME Wipe Settings 187
DME Wipe Settings Menu..... 187
DME Wipe Pattern Selection..... 187
Setting DME Wipe Modifiers..... 189
DME Wipe Modify Clear 192
DME Wipe Settings for Independent Key Transitions 193
Basic Procedure for Independent Key Transition DME Wipe Settings 193
Setting Independent Key Transition DME Wipe Modifiers..... 193
Resizer DME Wipe Setting 195
DME Wipe Snapshots 196
DME Wipe Snapshot Operations With the Flexi Pad..... 196
DME Wipe Snapshot Operations With the Menus 196
Creating User Programmable DME Patterns 197
User Programmable DME Transition Mode..... 197
DME Wipe Pattern Operations in the Multifunction Flexi Pad Control Block 200
Recalling a DME Wipe Snapshot 200
Selecting the DME Wipe Pattern..... 200
Editing the DME Wipe Pattern 200
Saving, Canceling, and Deleting DME Wipe Snapshots..... 201

Chapter 7 Frame Memory

Overview 202
Still Image Operations 204
Preparations..... 204
Interpreting the Frame Memory Menu..... 204
Selecting an Input Image..... 206
Selecting Outputs and Target Frame Memory 207
Capturing and Saving an Input Image..... 207
Recalling Still Images 209
Image Output..... 210
Continuously Capturing Still Images (Record)..... 211
Recalling a Continuous Sequence of Still Images (Animation)..... 211
Frame Memory Clip Function 213
Frame Memory Clip Operations..... 214
Preparations for Operation 214
Recalling Clips..... 214
Clip Playback 215
Clip Creation..... 217
Creating and Handling Frame Memory Folders 217
Clip Output..... 218
Recording and Playback of Ancillary Data..... 218
Clip Transition Operations..... 219
Image Data Management..... 221
Pair File Processing..... 221
Moving Files 221
Deleting Files 221
Renaming Files 222
External Hard Disk Drive Access 223
Hard Disk Formatting 223
Saving Files..... 223
Recalling Files..... 224
Managing Images Using a DDR/VTR..... 225
Using a DDR/VTR for High-speed Backup and Restoring..... 225
Extracting Images from Video Tape..... 226

Chapter 8 Color Backgrounds, Copy and Swap, and Other Settings

Color Background 228
Color Background Settings Menu 228
Basic Color Background Setting Operations 228
Copy and Swap 230
Overview of Copy and Swap 230
Copy and Swap Operations 231
Misc Menu Operations 233
Port Settings for Control From an External Device 233
Editing Keyboard Settings 233
Safe Title Settings 234
Displaying a List of Transition Rates and Changing the Settings 234
Setting the AUX Mix Transition Rate 235
AUX Menu Operations 236
AUX Bus Settings 236
Status Menu 236
Router Control Menu Operations 237
Checking the List of Inputs for Each Destination 237
Switching the Source for Each Destination 237
Video Process 238
Video Process Adjustments for Each Input Signal 238
Video Process Adjustments on a Particular Bus 238
Video Process Memory 238
Video Process Settings 238

Chapter 9 Color Corrector

Preparations 240
Overall Color Corrector Operations 241
Enabling Color Corrector 241
Copy and Swap Operations 241
Color Corrector Functions 242
Input Video Processing Operations 242
Primary Color Correction Operations 242
Secondary Color Correction Operations 245
Luminance Processing Operations 245
Spot Color Adjustment 246
Output Video Processing Operations 247
YUV Clip Operations 248
RGB Clip Operations 248

Chapter 10 Special Functions

Side Flags 250
Overview 250
Side Flag Settings 250
Wipe Action on Images with Side Flags 251
DME Wipe Action for an Image with Side Flags 251
Multi Program 2 253
Overview 253
Sequence of Operations in Multi Program 2 253
Basic Operations (Required) 254
Examples of Operations in the Multi Program 2 Mode (When Sharing a Switcher Bank) 256
Optional Operations 256
Functions Added in Multi Program 2 Mode 258
Differences between Multi Program 2 Mode and Standard Mode 259
Restrictions on Using Multi Program 2 Mode 259
3D Support 260
Overview 260
Preparations 261
Restrictions in 3D Mode 265
Video Creation in 3D Mode 266
M/E Configuration Switching 266

Chapter 11 DME Operations

DME 269
Three-Dimensional Transformations 269

Transformation Operation Modes 271
Graphics Display 273
Three-Dimensional Parameter Display 274
Special Effects 274
Global Effects 282
Devices for DME Support 282
Three-Dimensional Transformation Operations 283
Basic Operations 283
Three-Dimensional Parameter Display 285
Entering Three-Dimensional Parameter Values 286
Graphics Display Operation 287
Canceling Virtual Images 287
Applying Special Effects (Operations Common to Special Effects) 288
Applying Special Effects (Edge Effects) 289
Border Settings 289
Crop Settings 290
Beveled Edge Settings 291
Key Border Settings 292
Art Edge Settings 292
Flex Shadow Settings 296
Wipe Crop Settings 300
Color Mix Settings 302
Applying Special Effects (Effects on the Overall Video Signal) 303
Defocus Settings 303
Blur Settings 304
Multi Move Settings 305
Sepia Settings 306
Mono Settings 306
Posterization and Solarization Settings 306
Nega Settings 307
Contrast Settings 307
Mosaic Settings 307
Sketch Settings 307
Metal Settings 309
Dim and Fade Settings 309
Glow Settings 310
Mask Settings 310
Freeze Settings 312
Applying Special Effects (Nonlinear Effect Settings) 313
Wave Settings 313
Mosaic Glass Settings 315
Flag Settings 315
Twist Settings 315
Ripple Settings 316
Rings Settings 319
Broken Glass Settings 319
Flying Bar Settings 320
Blind Settings 320
Split Settings 321
Split Slide Settings 321
Mirror Settings 322
Multi Mirror Settings 322
Kaleidoscope Settings 323
Lens Settings 323
Circle Settings 324
Panorama Settings 324
Page Turn Settings 324
Roll Settings 325
Cylinder Settings 325
Sphere Settings 326
Explosion Settings 326
Swirl Settings 326
Melt Settings 327
Character Trail Settings 328
Applying Special Effects (Lighting and Recursive Effects) 329
Lighting Settings 329
Trail Settings 331
Motion Decay Settings 333
Keyframe Strobe Settings 334
Wind Settings 335
Spotlighting Settings 336
Applying Special Effects (Other Effects) 344
Background Settings 344
Separate Sides Settings 344
Shaped Video Settings 344
Invert Settings 345
Key Density Settings 346
Key Source Selection 346
Interpolation Settings 346

Corner Pinning Settings 347
Global Effect Operations 349
Overview 349
Operations Common to All Global Effects 349
Combiner Settings 350
Brick Settings 353
Shadow Settings 355

Appendix (Volume 1)

Wipe Pattern List 357
Standard Wipes 357
Enhanced Wipes 358
Rotary Wipes 358
Mosaic Wipes 359
Random/Diamond Dust Wipes 360
DME Wipe Pattern List 361
DME Wipe Patterns Available in One-Channel Mode 361
DME Wipe Patterns Available in Two-Channel Mode 366
DME Wipe Patterns Available in Three-Channel Mode 369
Resizer DME Wipe Pattern List 370
Menu Tree 371
Recalling Menus 371
M/E-1 to M/E-5 Menus 371
PGM/PST Menu 374
Frame Memory Menu 376
Color Bkgd Menu 376
AUX Menu 377
CCR Menu 377
Copy/Swap Menu 378
Misc Menu 378
Status Menu 378
DME Menu 379
Global Effect Menu 380
Router Menu 380
Device Menu 380
Macro Menu 381
Key Frame Menu 382
Effect Menu 383
Snapshot Menu 384
Shotbox Menu 385
File Menu 386
Engineering Setup Menu 387
User Setup Menu 392
Diagnostic Menu 392
Disabled Operation and Settings Menus 393
Using the M/E-4 or M/E-5 Bank 396
Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu 396
Using Keys 5 to 8 397
Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu 397
Selecting Keys 5 to 8 for Next Transition 398
Selecting Input Signals for Keys 5 to 8 in the Cross-Point Control Block 398
Menus Accessed by Pressing a Button Twice 399
Menus Allowing a Return to Default Settings 405
Spotlighting 409
Texture Patterns 409
Shape Patterns 409
Functional Differences With Models of DME 410

Volume 2

Chapter 12 External Devices

Control of External Devices 416
Shared Functions for External Device Control 416
Control of P-Bus Devices 417
Creating and Editing the P-Bus Timeline 417
P-Bus Trigger 419
Control of GPI Devices 420
GPI Timeline Creation and Editing 420

Control of VTRs, Extended VTRs, and Disk Recorders 421
Manual Operation 421
Controlling the Tape/Disk Transport 422
Checking VTR/Disk Recorder/Extended VTR Information 424
Cueup & Play 425
VTR/Disk Recorder/Extended VTR Timeline 428
Disk Recorder/Extended VTR File Operations 432

Chapter 13 Keyframe Effects

Regions 434
Registers 435
Keyframes 436
Effects 436
Saving and Recalling Effects 436
Effect Attributes 436
Effect Editing 436
Time Settings 437
Paths 438
Effect Execution 440
Master Timelines 441
Sequence of Keyframe Operations 441
Displaying the Timeline Menu 442
Interpreting the Timeline Menu 442
Settings in the Timeline Menu 443
Recalling a Register 444
Specifying the Region and Edit Points 448
Selecting the Region in Which Editing Applies 448
Setting the Edit Points 449
Creating and Editing Keyframes 450
Creation 450
Insertion 450
Modification 450
Deletion 452
Movement 452
Copying 452
Pause 453
Keyframe Loop (Repeated Execution of a Specified Range) 453
Undoing an Edit Operation 454
Duration Mode Setting 454
Transition Mode Settings for User Programmable DME 454
Keyframe Creation and Editing in the Multifunction Flexi Pad Control Block 457
Time Settings 458
Setting the Keyframe Duration 458
Setting the Effect Duration 459
Setting the Delay 459
Path Settings 460
Basic Procedure for Path Settings 460
Executing Effects 461
Executing Effects in the Keyframe Control Block 461
Setting the Run Mode 462
Executing an Effect in the Flexi Pad Control Block 462
Executing an Effect in the Multifunction Flexi Pad Control Block 463
Saving Effects 463
Creating and Saving a Master Timeline 464
Creating and Saving a Master Timeline Using the Buttons in the Numeric Keypad Control Block 464
Creating and Saving a Master Timeline Using the Buttons in the Multifunction Flexi Pad Control Block 465
Creating and Saving a Master Timeline With the Menu 466
Register Operations in the Menus 467
Effect Attribute Settings 467
Effect Status Display 468
Effect Register Editing 468
Displaying a List of Effect Registers for Editing 470

Chapter 14 Snapshots

Overview 472
Snapshot Types 472
Snapshot Attributes 472
Snapshot Operations From the Numeric Keypad Control Block 474
Saving and Recalling Snapshots 474
Snapshot Operations in the Flexi Pad Control Block 476
Banks and Registers 476
Saving and Recalling Snapshots 477
Snapshot Operations in the Multifunction Flexi Pad Control Block 479
Saving and Recalling Snapshots 479
Snapshot Operations in the Menus 482
Selecting a Region or Reference Region in a Menu 482
Setting Snapshot Attributes 482
Snapshot Status Display 484
Setting Key Snapshot Attributes 484
Creating and Saving a Master Snapshot ... 485
Snapshot Register Editing 485
Displaying a List of Snapshot Registers for Editing 485
Operations in the Misc >Snapshot Menu 485

Chapter 15 Utility/Shotbox

Utility Execution 487
Executing a Utility With the User Preference Buttons (Menu Control Block) 487
Executing a Utility in the Utility/Shotbox Control Block 487
Executing Utilities With the Cross-Point Buttons in the Key 2 Row 488
Shotbox 489
Shotbox Register Creation 489
Creating a Shotbox Register in the Numeric Keypad Control Block 489
Creating a Shotbox Register in the Multifunction Flexi Pad Control Block 490
Creating a Shotbox Register Using the Menus 491
Shotbox Execution 493
Shotbox Execution From the Numeric Keypad Control Block 493
Shotbox Execution in the Flexi Pad Control Block or the Multifunction Flexi Pad Control Block 493
Shotbox Execution in the Utility/Shotbox Control Block 494
Executing a Shotbox Function With the Key 2 Row Cross-Point Buttons 494
Shotbox Register Editing 495

Chapter 16 Macros

Macros 496
Overview 496
Macro Creation and Editing 497
Macro Execution 498
Macro Operations in the Numeric Keypad Control Block and the Keyframe Control Block 499
Recalling a Macro Register and Executing a Macro 500
Creating and Editing a Macro 500
Saving a Macro 503
Macro Operations in the Standard Type Flexi Pad Control Block 504
Recalling a Macro Register and Executing a Macro 505
Creating and Saving a Macro 506
Macro Operations in the Simple Type Flexi Pad Control Block 507
Recalling a Macro Register and Executing a Macro 507
Creating and Editing a Macro 508
Saving a Macro 509
Macro Operations in the Multifunction Flexi Pad Control Block 510
Recalling a Macro Register and Executing a Macro 510
Creating and Editing a Macro 511

Macro Editing Using Menus 511
Macro Register Editing 511
Online Editing of Macro Events 511
Offline Editing of Macro Events..... 514
Macro Attachment Assigning 516
Setting and Canceling a Macro Attachment 518
Displaying the Macro Attachment List..... 520
Executing a Macro by Macro Attachment 521
Menu Macros 522
Recalling a Menu Macro Register and Executing a Menu Macro 522
Menu Macro Creation and Editing 524
Menu Macro Register Editing..... 526
Macro Timeline 526
Creating and Editing a Macro Timeline.... 527

Chapter 17 Files

Overview of File Operations 529
Operations on Individual Files..... 532
Displaying the Individual File Operation Menus 532
Viewing Detailed File Information..... 532
Selecting Regions..... 533
Selecting a Device for Operations 533
Saving Files..... 533
Loading Files 534
Copying Files 535
Renaming Files 536
Deleting Files 537
Converting Between Frame Memory Clips and Extended Clips..... 537
Saving the List of Frame Memory Files to Hard Disk or Memory Card..... 538
File Batch Operations..... 539
Displaying the Batch Operation Menu 539
Batch Saving Files 539
Batch Loading Files 539
Batch Copying Files..... 539
Importing and Exporting Files 540
Displaying the Import/Export Menu 540
Importing Frame Memory Data 540
Exporting Frame Memory Data 541
Directory Operations 542
Displaying the Directory Menu..... 542
Creating a New Directory 542
Renaming a Directory 542
Deleting a Directory..... 542
Copying Files Between Different Unit IDs..... 543
Saving Files Recalled by Autoload 544

Chapter 18 System Setup (System)

Setup for the Whole System 545
Network Settings (Network Config Menu)..... 546
Making the Network Settings 546
System Settings (System Config Menu)..... 547
Selecting the System Operation Mode..... 547
Specifying the Switcher Controlled by the Control Panel 547
Specifying the DME Connected to the Switcher 548
Enabling the FM Data Port of the Switcher 548
Setting the Signal Format (Format Menu)..... 549
Setting the Signal Format..... 549
Allowing 59.94(2x) Format Signals on an AUX Bus 549
Switching the Input Reference Signal for HD System 550
Setting Conversion Formats..... 550
Setting the Screen Aspect Ratio (Format Menu)..... 552
Selecting the State After Powering On (Start Up Menu) 553
Saving and Recalling Setup Data..... 553
Selecting the State at Start-up 554
Saving User-Defined Settings..... 554
Setting Automatic Loading of Register Data at Power On (Autoload Function) 554

Reset and Initialization (Initialize Menu)..... 555
Installation and Device Setup (Install/Unit Config Menu)..... 555
Installing Software..... 555
Making Settings Required to Use the Software 556
Adding User Texture Patterns 558
Saving a Frame Memory Clip With Ancillary Data 561
Setting the DME Input/Output Signal Format 561
System Maintenance (Maintenance Menu)..... 562
Setting the Date and Time 562
Using a Memory Card 562
Carrying Out the Primary Setting..... 562
Reloading a USB Driver..... 563
Initializing the Hard Disk 563
Locking the Setup Menu Settings..... 563
Locking File Loading Operations..... 564

Chapter 19 Control Panel Setup (Panel)

Overall Control Panel Settings (Config Menu)..... 566
Panel Setup 566
Interchanging the Bank Order or Disabling Operation..... 566
Assigning Two M/E Banks to One M/E Bank 567
Assigning the Key Delegation in the Downstream Key Control Block..... 567
Linking Switcher Bus and Router Destination 568
Linking Transitions Between Keyers 569
Linking the Next Transition Selection Buttons 570
Selecting the Module to Be the Reference for Device Control Block..... 570
Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block 570
Setting Transition Control Block Button Assignments 572
Setting the Assignment of Macro Operation Buttons 572
Assigning the Dual Background Bus Mode Switching Function 572
Assigning the Utility/Shotbox Mode Switching Function 573
Assigning the Function to Disable Cross-Point Button Operations to a Button..... 573
Assigning the AUX Bus Control Mode Switching Function 573
Assigning Keys to the DSK1 and DSK2 Buttons in the Downstream Key/Fade-to-Black Control Block 574
Assigning Keys to the Independent Key Transition Control Block (Simple Type) 574
Assigning Functions to Key Control Block Buttons 575
Assigning Preview Output to Preview Selection Buttons..... 575
Assigning Functions to the Device Control Block 576
Inhibiting Utility 2 Bus and Key Operations 577
Inhibiting DME Channel Selection Operations 577
Assigning Functions to the Menu Control Block Top Menu and User Preference Buttons 577
Assigning Functions to the Buttons in the Multifunction Flexi Pad Control Block 578
Assigning a Function to the Independent Key Transition Control Block (Simple Type) 579
Cross-Point Settings (Xpt Assign Menu)..... 580
Creating Cross-Point Assign Tables..... 580
Copying Cross-Point Assign Tables..... 583
Selecting Cross-Point Assign Tables..... 584

Exporting Source Names and Destination Names 584
Making Settings for Audio Mixer 584
Assigning a Cross-Point Button to Enable/Disable Side Flags 585
Auxiliary Bus Control Block Settings (Aux Assign Menu) 586
Assigning a Bus to an AUX Delegation Button 586
Using the Auxiliary Bus Control Block for Router Control 586
Setting Button Assignments (Prefs/Utility Menu) 589
Assigning Functions to User Preference Buttons 589
Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block 593
Assigning a Function to the Key 2 Row Cross-Point Buttons 597
Interfacing With External Devices (Device Interface Menu) 597
Making Control Panel GPI Input Settings 597
Making Control Panel GPI Output Settings 599
Setting the Control Mode for P-Bus Devices 600
Setting the SCU Editor Panel Port 600
Making DCU Serial Port Settings 600
Sharing Disk Recorder/Extended VTR File Lists 601
Setting the AUX Bus Override Operating Mode 601
Operation Settings (Operation Menu) ... 602
Setting the On-Air Tally 602
Assigning a Key or AUX Bus to a Button in the Key 1 or Key 2 Row 602
Setting the Transition Rate Display Mode 603
Making Settings Relating to Effects 603
Setting the First Keyframe When a Rewind is Executed 603
Setting the Source and Destination Names 603
Settings for the Flexi Pad and Wipe Snapshot Menu 604
Setting the Button Operation Mode 604
Setting the Operation Mode of the [ALL] Button in the Transition Control Block 605
Setting Trackball, Joystick, Search Dial, and Double-Click Sensitivity 605
Specifying Main Split Fader 606
Setting the Macro Execution Mode 606
Screen Saver and Other Settings (Maintenance Menu) 607
Screen Saver Settings 607
Adjusting the Brightness 607
Setting Whether or not to Sound a Beep when a Touch Operation is Carried Out 607
Calibrating the Touch Panel 607
Setting the Menu to be Shown When the Menus Are Started 607
Setting the Mouse Wheel Scrolling Direction for Parameter Setting 608
Selecting the Mouse Button Used for Adjusting the Knob Parameters 608

Chapter 20 Switcher Setup (Switcher)

Settings for Switcher Configuration (Config Menu) 609
Adjusting the Reference Phase 609
Specifying the Video Switching Timing 609
Setting the Operation Mode 610
Setting User Regions 611
Assigning PGM/PST Logically to an M/E 611
Setting the Assignments of DME Channels to Use on the Individual M/E Banks 611
Setting the Side Flag Video Material and Operation 612
Signal Input Settings (Input Menu) 613
Making Through Mode Settings 613
Making Video Process Settings 613
Enabling the Illegal Color Limiter 614

Selecting the Primary Input to be Used in the Format Converter 614
Setting the Frame Delay Function 614
Selecting the Format Converter Conversion 614
Signal Output Settings (Output Menu) 618
Assigning Output Signals 618
Setting the Output Signal 618
Enabling AUX Mix Transitions 621
Settings Relating to Video Switching (Transition Menu) 622
Selecting the Bank to Make the Settings 622
Settings Relating to Keys, Wipes, Frame Memory and Color Correction (Key/Wipe/FM/CCR Menu) 624
Switching Video Process Memory On or Off 624
Settings for the Show Key Function 624
Settings for Key Auto Drop Function 624
Automatically Naming and Saving to Frame Memory 625
Selecting the Bank to Make the Settings 625
Settings Relating to Function Links (Link Menu) 626
Setting a Cross-Point Button Link 626
Making Link Table Settings 627
Linking Cross-Point Buttons and GPI Output Ports 627
Making a Setting for Linking Two M/E Banks 628
Making a Link Setting for Key Transition 629
Interfacing With External Devices (Device Interface Menu) 630
Making 9-Pin Port Device Interface Settings 630
Making Switcher Processor GPI Input Settings 631
Making Switcher Processor GPI Output Settings 632
Enabling or Disabling AUX Bus Control 633
Setting the Interface Between the DME and the Switcher 633
Setting the AUX Bus Output and Reentry Input 634
Selecting the Mode for Turning Off Keys Upon Receiving the Editor Command 634

Chapter 21 DME Setup (DME)

Settings Relating to Signal Inputs (Input Menu) 635
Setting the Initial Crop 635
Setting an Illegal Color Limit for Matte Signals 635
Making DME System Phase Adjustment 635
Setting the TBC Window Center Position 636
Settings Relating to Signal Outputs (Output Menu) 636
Adjusting the DME1 and DME2 Output Video Clip Levels 636
Setting the Monitor Output 636
Interfacing With External Devices (Device Interface Menu) 637
Making DME GPI Input Settings 638
Making DME GPI Output Settings 639

Chapter 22 DCU Setup (DCU)

Setup Relating to DCU 640
Settings Relating to Parallel Inputs (Input Config Menu) 640
Assigning a GPI Input Port 640
Releasing the Assignment of a GPI Input Port 641
GPI Input Setting (GPI Input Assign Menu) 641
Making DCU GPI Input Settings 641
Parallel Output Settings (Output Config Menu) 643
Assigning a GPI Output Port 643

Releasing the Assignment of a GPI Output Port 644
GPI Output Settings (GPI Output Assign Menu)..... 644
Making DCU GPI Output Settings 644
Serial Port Settings (Serial Port Assign Menu)..... 645
Making Serial Port Settings 645
Making Detailed Settings on the External Device Connected to the Serial Port 646

Chapter 23 Setup Relating to Router Interface and Tally (Router/Tally)

Router Interface Settings (Router Menu)..... 652
Assigning Switcher Inputs and Outputs to S-Bus Space 652
Setting External Boxes 1 to 12..... 653
Tally Group Settings (Group Tally Menu)..... 654
Wiring Settings (Wiring Menu)..... 654
Making New Wiring Settings 654
Changing the Wiring Settings..... 655
Deleting Wiring Settings..... 655
Sorting Wiring Settings..... 655
Tally Generation Settings (Tally Enable Menu)..... 655
Making New Tally Generation Settings ... 655
Modifying Tally Generation 656
Deleting Tally Generation Settings..... 656
Tally Copy Settings (Tally Copy Menu)..... 656
Making New Tally Copy Settings..... 656
Modifying Tally Copy Settings 656
Deleting Tally Copy Settings..... 657
Parallel Tally Settings (Parallel Tally Menu)..... 657
Making or Modifying Parallel Tally Settings 657
Deleting Parallel Tally Settings 658
Serial Tally Settings (Serial Tally Menu)..... 658
Setting or Changing the Serial Tally Settings 658
Making the Serial Tally Source Address Settings 658
Clearing a Source Address Setting..... 659

Chapter 24 User Setup

Source Patch..... 660
Sequence of Source Patch Operations 660
Exporting a User Source Name File to the Memory Card..... 660
Creating a Patch Table (Conversion Table)..... 661
Replacing Signal Pairs Using the Patch Table 662

Chapter 25 DIAGNOSIS

Checking the Communications Status 663
Communications Status Display 663

Appendix (Volume 2)

Simple Connection of the MKS-8080/8082 AUX Bus Remote Panel 664
Procedure for Simple Connection..... 664
Setting Status of the MKS-8080/8082 in Simple Connection 664
Macro File Editing Rules 665
Macro File Syntax..... 665
Syntax of Event and Continue Statements..... 666
File Name..... 666
Saving and Recalling a File 666
Errors..... 666

Correspondence Between Events and Symbols 667
Symbols and Parameters 668
Example of File Contents 672
About the Macro Attachment List Display 673
M/E and PGM/PST Banks 673
Auxiliary Bus Control Block 674
Other Blocks 675
Menu Operations Not Recorded in a Menu Macro 676
Data Saved by [Setup Define] and [Initial Status Define] 677
Data Saved by [Setup Define] 677
Data Saved by [Initial Status Define] 681
Error Messages 684
Error Messages Displayed in the Error Status/Error Log Menu 684
Error Messages Appearing in a Message Box 685
Error Messages Shown in the Error Information Menu 696

Index 698

MVS-8000X/7000X Functions

Chapter 1

Introduction

This manual is the User's Guide for the MVS-8000X/7000X Multi Format Switcher system.
This manual describes principally the operation of the system using the CCP-8000 of center control panels.
The User's Guide for this system comprises two volumes. For the contents of each volume, see the "Table of Contents" at the front of each volume.

Devices and system nomenclature

In this manual, when discussing the principal components of the MVS-8000X/7000X system, in place of the formal product names, abbreviated names characterizing the functions and features are sometimes used. When distinctions between system configurations must be drawn, the terms in the following table are used.

Principal components and naming

The formal product names of the principal components of the MVS-8000X/7000X system, and the terms used in this manual are as follows.

Formal product name	Term used in this manual
MVS-8000X/7000X Multi Format Switcher Processor	Switcher or switcher processor
DME Board Set MKS-7470X	DME or DME Board set or MKS-7470X/7471X
Additional DME Board MKS-7471X	
MVE-8000A Multi Format DME Processor	DME or DME processor or MVE-8000A
MVE-9000 Multi Format DME Processor	DME or DME processor or MVE-9000
CCP-8000, CCP-6224, CCP-6324 Center Control Panel	Control panel or center control panel
DCU-8000 (MKS-8700) Device Control Unit	DCU or MKS-8700
DCU-2000 (MKS-2700) Device Control Unit	DCU or MKS-2700

System nomenclature

The following terms are used for systems, depending on the combination of installed options, and the signal format.

System configuration and features	Term for system
System with installed option boards and settings to support HDTV format	HD system
System with installed option boards and settings to support SDTV format	SD system
A system in which the center control panel has six M/E banks	6M/E system
A system in which the center control panel has five M/E banks	5M/E system
A system in which the center control panel has four M/E banks	4M/E system
A system in which the center control panel has three M/E banks	3M/E system
A system in which the center control panel has two M/E banks	2M/E system

Related manuals

MVS-8000X-C/7000X-C Switcher Processor Pack
- MVS-8000X-C/7000X-C Operation Manual
- MVS-8000X-C/7000X-C Installation Manual

MVE-8000A DME Processor Pack
- MVE-8000A Operation Manual
- MVE-8000A Installation Manual

MVE-9000-C DME Processor Pack
- MVE-9000-C Operation Manual
- MVE-9000-C Installation Manual

CCP-6000/8000 Center Control Panel Pack
- CCP-6000/8000 Operation Manual
- CCP-6000/8000 Installation Manual

DCU-8000 Device Control Unit Pack
- DCU-8000 Operation Manual
- DCU-8000 Installation Manual

DCU-2000 Device Control Unit Pack
- DCU-2000-C Operation Manual
- DCU-2000-C Installation Manual

Features of the MVS-8000X/7000X Multi Format Switcher System

The MVS-8000X/7000X Multi Format Switcher system boasts extensible high performance and multifunctionality. The following are some of the principal features of this system.

System configuration flexibility

Multiformat support

This system supports both HDTV and SDTV signal formats. The format selection can be switched by a simple control panel operation.

Extensible system configuration

By suitable combination of options, the switcher can be configured with various inputs and outputs, and different numbers of M/E banks. The system offers the flexibility to change and expand as required.

You can connect up to two MVE-8000A or MVE-9000 extensible DME processors, which provides any number from one to a maximum of eight channels of DME functionality.

When the signal format is 1080P, you can also connect up to four MVE-8000A units, which provides a maximum of eight channels of DME functionality.

For the MVS-7000X, by installing the optional MKS-7470X/7471X DME board set, you can use a maximum of four channels of DME functionality.

You can use a maximum of eight channels of DME functionality in the whole switcher system.

Powerful external device interfaces

By connecting to a Sony routing switcher or similar, a large system can be built. From the control panel, it is also possible to operate other equipment, including VTRs and disk recorders.

Powerful tally system

The complete system including routing switcher provides an all-inclusive tally system. The system can be adapted to different applications and settings, using multiple tally outputs, including both on-air and recording tallies.

Comprehensive video manipulation

M/E banks

Each mix/effects bank (M/E bank) is equipped with eight keyers, and each keyer is capable not only of chroma keying, but also independent key transitions separate from the background transitions. The eight keys can be freely combined, to carry out four different program outputs.

Powerful frame memory functions

The frame memory can hold approximately 1000 frames in an HDTV system (approximately 2000 frames in 720P/59.94 format), or approximately 5000 frames in an SDTV system in 480i/59.94 format, or approximately 4000 frames in 576i/50 format, and allows eight frames (four frames in 1080P format) to be recalled simultaneously.

Link operation with DME

You can use a wide range of DME functions, including DME wipes and processed key functions as though they were part of the standard switcher functions.

Designed for use in a live broadcasting environment

Flexible control panel layout

Because of its modular design, the various sections of the control panel can be laid out as required. This allows a flexible layout appropriate to the system operation.

High-performance user interface

The menu control block provides a large color LCD panel, with rapid touch-panel menu selection.
The source name displays and buttons in the Flexi Pad™ and shotbox control blocks have color backlit LCD displays. The signal names, and graphical representations of the patterns associated with buttons provide intuitive feedback, and allow the immediate decisions that are required in a live operating environment.

Basic Video Processing

This section introduces basic functions used for video processing on the switcher.

Transitions

In the M/E banks and PGM/PST bank, the switch from the current video stream (appearing on the corresponding program monitor) to a new video stream is referred to as a transition.
In the M/E banks and PGM/PST bank, you can change one of the images, the background, and keys 1 to 8 (downstream keys 1 to 8 in the PGM/PST bank), and also vary combinations of these simultaneously.


Notes

When the signal format is 1080P, four keyers can be used (keys 1 to 4).

The following are examples of transition.

Changing the background

A background transition switches from the video currently selected on the background A bus (the current video) to the video selected on the background B bus (the new video).

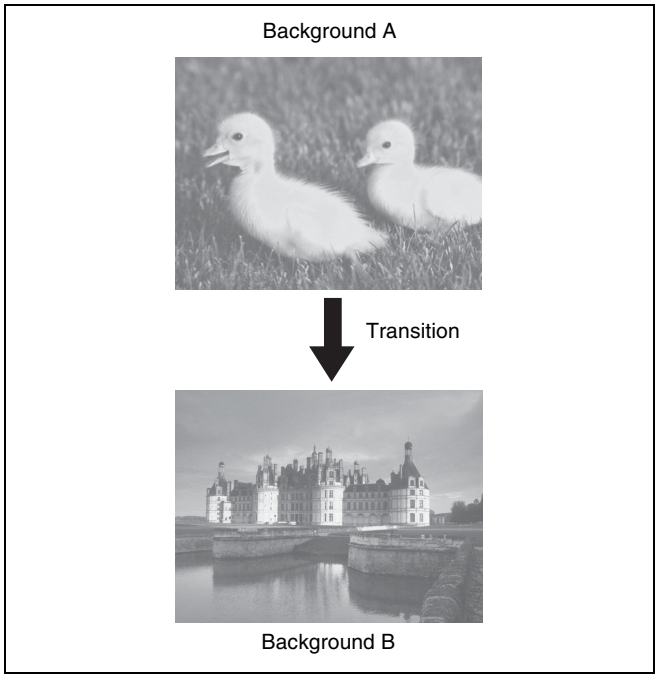


In the default selection of flip-flop mode *(see page 110)*, the background always switches in the direction from the A bus to the B bus. When the transition completes, the


cross-point selections on the A and B buses are interchanged.

Inserting and deleting a key

You can insert one or more of the eight keys (downstream keys on the PGM/PST bank).
If you select a key which is already inserted, the transition will delete the key.
A simultaneous combination of deleting and inserting keys is also possible.

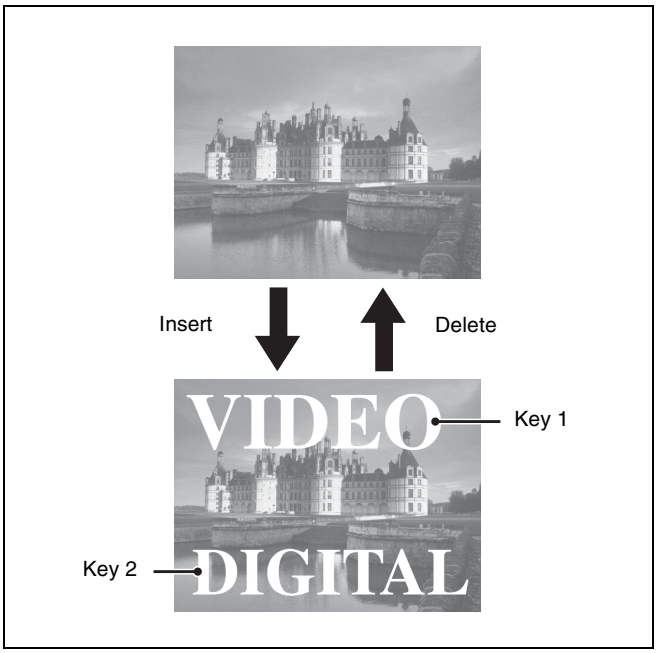


Inserting or deleting key 1 and key 2

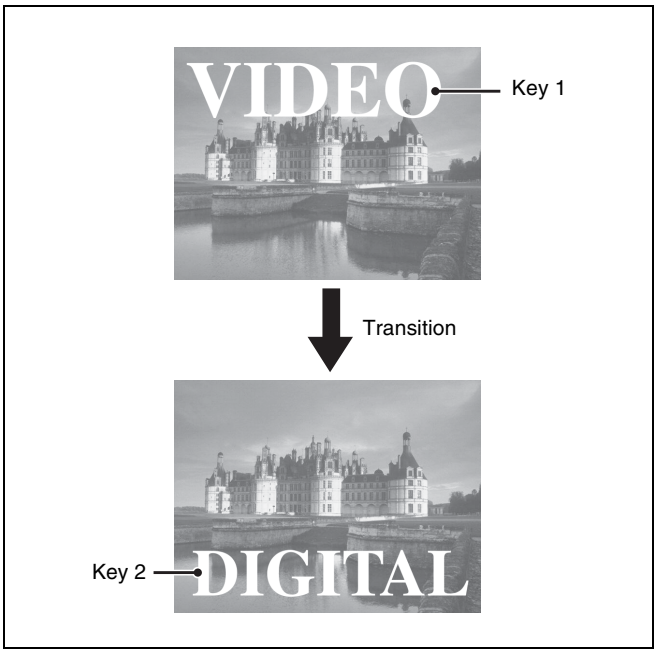


Deleting key 1 and inserting key 2

Simultaneously changing the background and keys

You can change any of the eight keys (downstream keys on the PGM/PST bank) and the background at the same time.

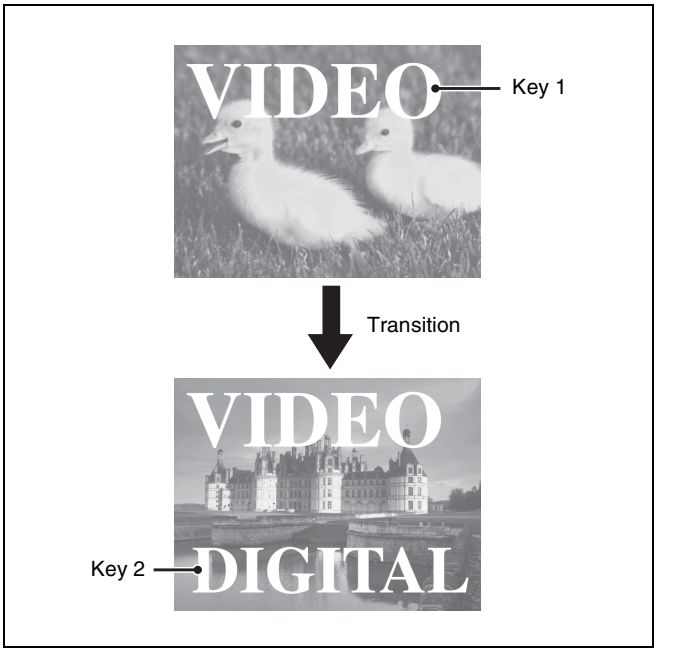

Changing the background and key 2 simultaneously

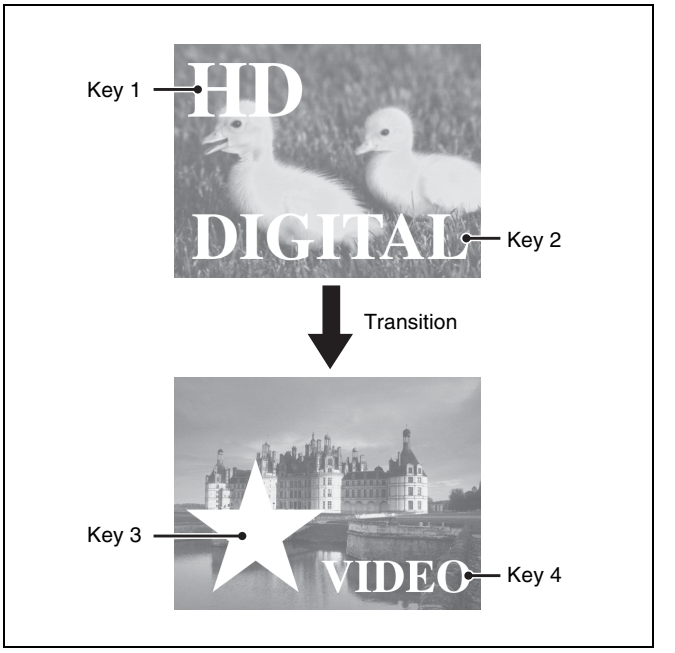

Changing the background and keys 1 to 4 simultaneously

Selecting the transition type determines the way in which the transition occurs. The following are the transition type.

- Mix
- NAM (non-additive mix)
- Super mix
- Preset color mix (color matte)
- Wipe
- DME wipe

- Clip transition
- Cut

There are two modes for carrying out a transition: auto transitions are carried out by a button operation, and manual transitions are carried out using the fader lever. It is also possible to combine these two modes.

Independent Key Transitions

In addition to common transitions, it is possible to carry out independent transitions on the keyers of the M/E banks and PGM/PST bank. These are called “independent key transitions.”


By carrying out an independent key transition in combination with a common transition, different transition types can be used for the background and keys.

The following description compares the independent key transition with a common transition, taking a simultaneous change of the background and key as an example.

Video used in the transition



Background A




Background B



Key to insert

Effect of a common transition


In the case shown in the previous illustration, carrying out a common transition produces the following change in the image.

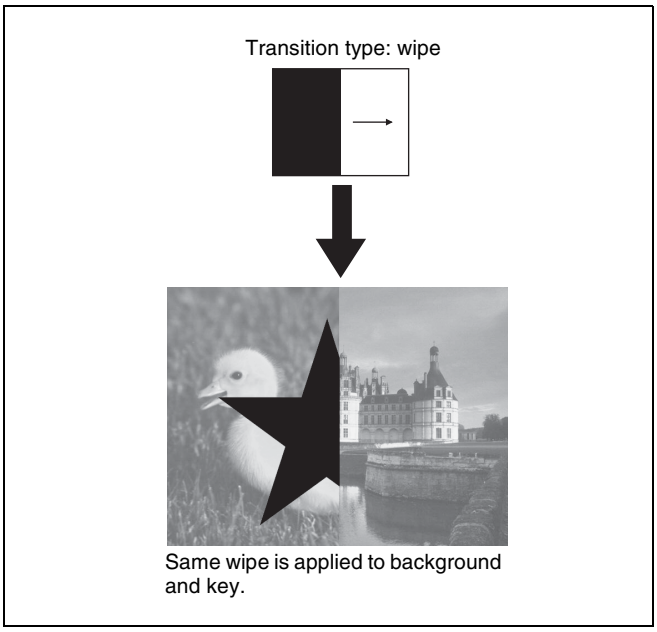

Effect of a common transition

Effect of use with an independent key transition

The key is inserted with an independent key transition as the background changes with a common transition, providing the following result.

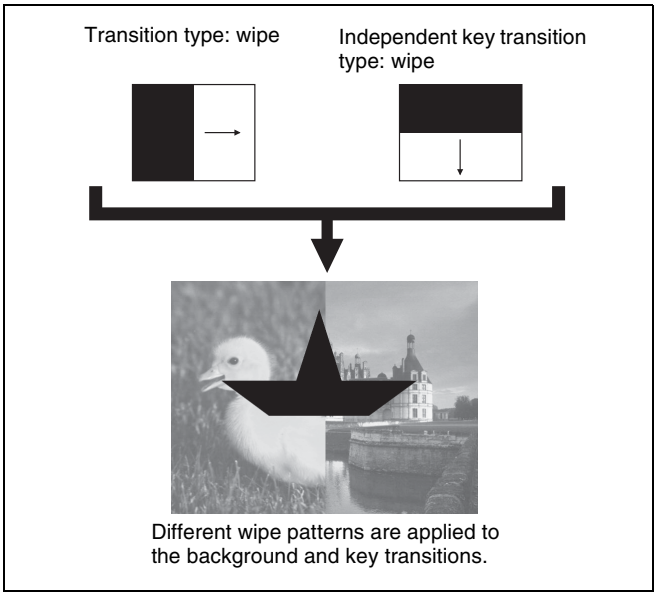

Effect of a background transition and independent key transition

For details, see Chapter 3 “Signal Selection and Transitions” (page 88).

Keys

A key is an effect in which a part of the background image is replaced by an image or superimposed text. The signal determining how the background is cut out is termed the “key source,” and the signal that replaces the cut-out part

is termed the “key fill.” The system component responsible for processing a key is referred to as a keyer. Each switcher bank has eight keyers, each providing the same functionality.

On each switcher bank, you can use the following key types (methods of processing the key source).
- Luminance key
- Linear key
- Color vector key
- Chroma key
- Wipe pattern key
- Key wipe pattern key

Key modifiers

You can apply borders and other modifiers to the edge of the key image.

Masks

A mask allows a part of the image to be replaced by the background or a key. To prevent unwanted holes in the background, or if a key is not the desired shape, you can correct this with a mask.

Resizer

This function allows you to apply effects, similar to a DME, such as zoom, movement, or aspect ratio change to a part of a created key. You can use the following operations.
- Two-dimensional transform of a key
- Rotation of keys
- Resizer interpolation settings
- Resizer crop/border settings
- Resizer effect settings (wide key border, drop shadow, edge enhancement, mosaic, defocus, mask)

For details, see “Keys” (page 123).

Wipes

A wipe is a transition from the current video stream to a new video stream, using a wipe pattern.
Changing the background by means of a wipe is referred to as a “background wipe,” and inserting or deleting a key with a wipe is termed a “key wipe.”
There are two types of wipe: those that can be selected in a common transition, and those that can be selected in an independent key transition.

The patterns that can be used for a wipe are as follows.
- Standard wipe patterns
- Enhanced wipes
- Rotary wipes
- Mosaic wipe pattern
- Random and diamond dust wipe patterns

You can combine two selected patterns (referred to as “main” and “sub”) to create a new pattern (pattern mix). You can also specify the wipe direction, or set the pattern position, applying various changes and modifiers to the selected wipe pattern.

For details, see “Wipes” (page 163).

DME Wipes

A DME wipe is a wipe transition that uses a DME effect to change from one video image to the next.
There are two types of DME wipe: those which can be selected for a normal transition, and those which can be selected for an independent key transition.
The patterns that can be used for a DME wipe are as follows.

Slide, Squeeze, Split, Door, Flip tumble, Mirror, Sphere, Character trail, Wave, Ripple, Page turn, Page roll, Frame in-out, Picture-in-picture, 2D trans, 3D trans, Sparkle, Split slide, Mosaic, Defocus, Brick, and User programmable DME

You can also specify the wipe direction, or set the pattern position, applying various changes and modifiers to the selected DME wipe pattern.

Resizer DME wipes

Using the resizer, you can carry out key DME wipes.

For details, see “DME Wipes” (page 183).

Frame Memory

Frame memory is a function for using a still image or video (frame memory clip) as material for editing.
You can create a still image by capturing a frame of input video or a clip by specifying a range of input video. The created images and clips can be written to memory for playback, editing, and output.

For details, see “Frame Memory” (page 202).

Color Backgrounds

This function can be used to obtain color background video.
Two color signals generated from the dedicated generators can be switched or mixed, and then output.

For details, see “Color Background” (page 228).

Copy and Swap

This function can be used to copy and swap the settings among the M/E-1 to M/E-3, and PGM/PST banks or between keyers.
The following settings can be copied or swapped.

- Overall settings for the M/E and PGM/PST banks
- Keyer settings
- Wipe settings in a transition control block
- Wipe settings in an independent key transition control block
- DME wipe settings in a transition control block
- DME wipe settings in an independent key transition control block
- Matte color settings (color 1, color 2, and how to compose them)
- Color settings
- DME channel settings
- Format converter input settings (copy only)
- Format converter output settings (copy only)

For details, see "Copy and Swap" (page 230).

Video Process

The term "video process" is applied to adjustments to the gain, hue, black level of the input video signal. There are two types of adjustment; adjustment of an individual input signal and adjustment as image effects on a particular bus.

For details, see "Video Process" (page 238).

Color Corrector


The color corrector enables video signal color correction (black balance/white balance adjustment, gamma correction, knee correction, etc.).
The color corrector includes the following adjustments.

- Input video processing
- Primary color correction
- Secondary color correction
- Luminance processing
- Spot color adjustment
- Output video processing
- YUV/RGB clip

For details, see "Color Corrector" (page 240).

Side Flags

The term "side flags" refers to the areas to left and right of an image with aspect ratio 4:3 embedded within a 16:9 frame, when these areas are filled with a separate image selected from the utility 1 bus.

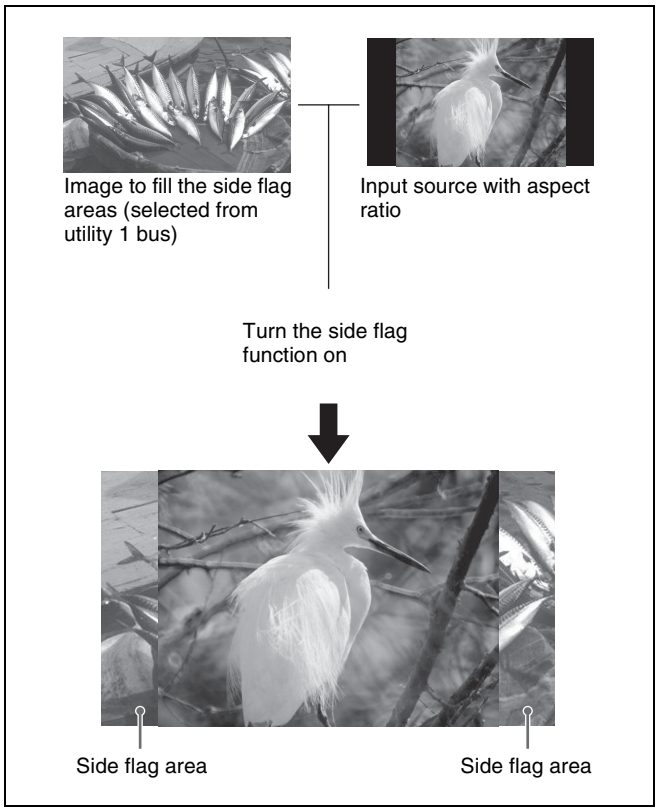


For details, see "Side Flags" (page 250).


Multi Program 2

By operating the switcher in Multi Program 2 mode, a single switcher mix/effects bank can be used to create two separate video outputs, referred to as "main" and "sub." You can set backgrounds, keys, and transitions for each of main and sub. For example, during broadcast of sports events, two versions of the scene can be provided as shown below, and switched simultaneously.

Program output for “Main”

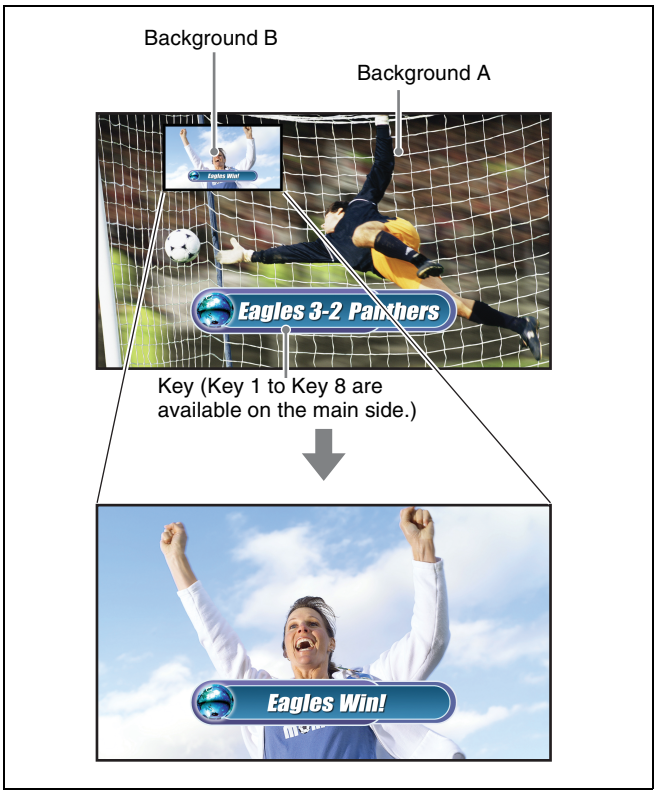

Program output for “Sub”

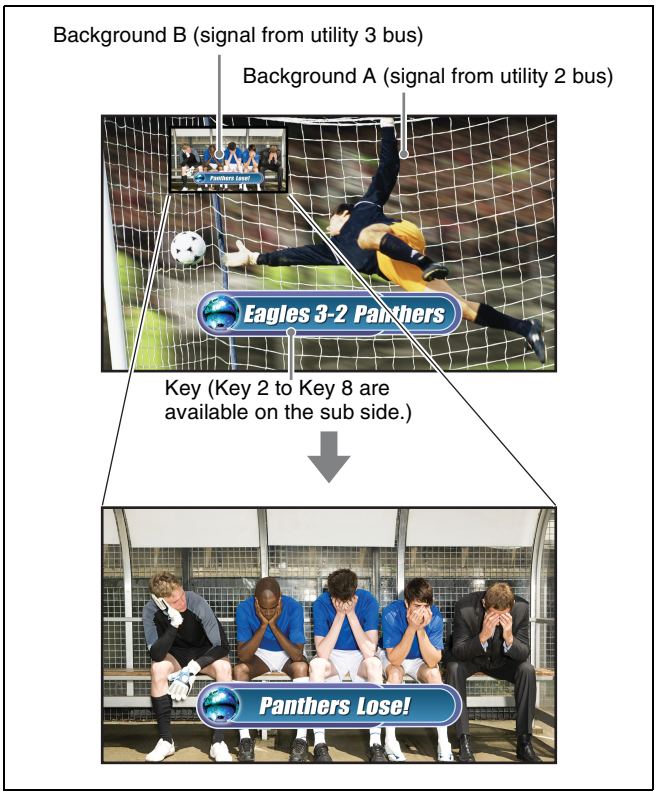

For details, see “Multi Program 2” (page 253).

3D Support

Installing the switcher upgrade software in an MVS-8000X/ 7000X, and the DME upgrade software in an MVE-8000A, MVE-9000, or MKS-7470X/7471X, enables the processing of video in 3D mode.

For details, see “3D Support” (page 260).

Creation of Special Effects and Management of Data and Operations

This section introduces functions used for creation of special effects, control of external devices or switcher operations, and data management.

Digital Multi Effects (DME)

When used with the switcher, DME allows you to add three-dimensional effects such as image movement, rotation, magnification and shrinking, as well as a wide variety of special effects.
Each channel can be used on its own or in combination with other channels, which allows you to create advanced effects with more complexity.

The following types of DME special effects are available.
- **Edge effects:** Border, Crop, Beveled Edge, Key Border, Art Edge, Flex Shadow
- **Effects for entire image:** Defocus, Blur, Multi Move
- **Effects for video image:** Sepia, Mono, Posterization, Solarization, Nega, Contrast, Mosaic, Mask, Sketch, Metal, Dim and Fade, Glow
- **Freeze effects**
- **Nonlinear effects:** Wave, Mosaic Glass, Flag, Twist, Ripple, Rings, Broken Glass, Flying Bar, Blind, Split, Split Slide, Mirror, Multi Mirror, Kaleidoscope, Lens, Circle, Panorama, Page Turn, Roll, Cylinder, Sphere, Explosion, Swirl, Melt, Character Trail
- **Lighting effects:** Lighting, Spotlighting
- **Recursive effects:** Trail, Motion Decay, Keyframe Strobe
- **Background color**
- **Separate Sides** (effects for front and back sides)
- **Signal inversion** (Invert effect)
- **Key density adjustment**
- **Key source selection**

Global effects

Global effects are special effects created by combining the images of successive channels. The following types of global effects are available.
- Combiner
- Brick
- Shadow

For details, see "DME Operations" (page 269).

External Device Control

In this system, you can operate while controlling the following types of external device:
- Devices supporting P-Bus (Peripheral II protocol)
- Devices supporting GPI
- VTRs
- Disk recorder (Sony disk 9-pin protocol and video disk communications protocol, Odetics protocol)
- Extended VTR (Abekas A53 protocol)


For details on the devices that can be connected, consult your Sony representative.

You can control an external device by previously registering timeline keyframes.

For details, see Chapter 12 "External Devices" (Volume 2).

Keyframes

A keyframe represents an instantaneous state of an image; it can be saved in a register and recalled for reuse.
By arranging a number of keyframes on the time axis, and interpolating between successive keyframes, you can create a "keyframe effect" in which there is a continuous change from each keyframe to the next.
The following figure shows three keyframes created with a wipe pattern (the circle) in different positions. This is interpolated to create the effect shown.

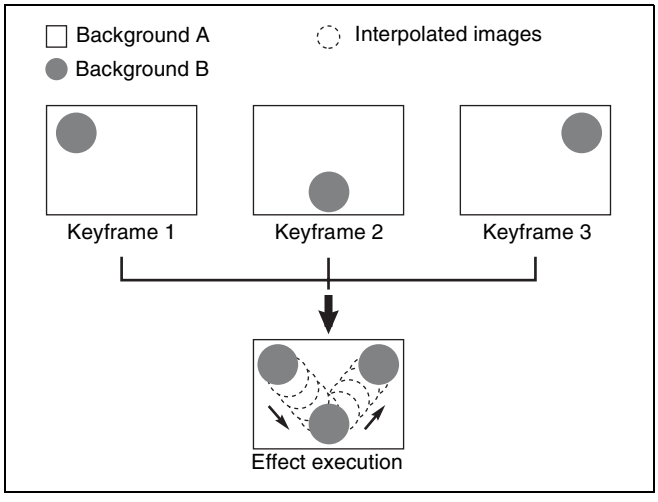

Example of keyframes and effect execution

You can save the sequence of keyframes representing a single effect in a register. Then by recalling this register, you can replay the same effect.

For details, see Chapter 13 "Keyframe Effects" (Volume 2).

Snapshots

The term “snapshot” refers to a function whereby the various settings required to apply a particular effect to an image are saved in a register as a set of data, for recall as required, to recover the original state.

Snapshots are divided as follows.
- Snapshots applying to a particular region (functional block of the switcher or DME)
- Master snapshot
- Key snapshot
- Wipe snapshot
- DME wipe snapshot

An individual snapshot may also have attached special conditions relating to switcher or DME operation when the snapshot is recalled.
These conditions are called “attributes” of the snapshot, and can be added when the snapshot is saved or recalled.

For details, see Chapter 14 “Snapshots” (Volume 2).

Utility

The utility function refers to a function whereby you can assign an arbitrary action or a shortcut for frequently used menu to a particular button, then instantly recall the action or menu by pressing the button.

For details, see “Utility Execution” in Chapter 15 (Volume 2).

Shotbox

The term “shotbox” refers to a function whereby for each specified region *(see “Regions” in Chapter 13 (Volume 2))* any snapshot or keyframe effect can be recalled simultaneously.

For details, see “Shotbox” in Chapter 15 (Volume 2).

Macros

The term “macro” refers to the function whereby a sequence of signal selections and other operations on the control panel is saved as data in memory (macro register), so that it can be recalled as required to automatically execute the same sequence of operations.
The individual control panel operations constituting a macro are termed “events.”
Macros also provide the following functions.

Menu macros

The term “menu macro” refers to the function whereby a sequence of menu operations is saved as data in memory, so that it can be recalled as required to automatically execute the same sequence of operations.

Macro timeline

By recording macro recall and execute action on a timeline, in the same way as for keyframes in an effect, you can automatically execute them in a sequence.

Macro attachment

Macro attachment is a function whereby a macro register is assigned to a control panel button or a particular position of a fader lever, linking the execution of the button function or a fader lever operation with a macro execution.

For details, see Chapter 16 “Macros” (Volume 2).

Files

You can save register data, including setup information and snapshot information, as a file on a hard disk or memory card, and recall it as required.
You can operate on individual files or registers, or together in a batch.
Regarding frame memory, it is possible to capture image data stored in an external device into frame memory.

The following files can be saved and recalled.
- Operation mode setup data for system as a whole and individual devices
- Device status data for system startup
- Key memory setting data
- Video process memory setting data
- Keyframe effect setting data
- Snapshot setting data
- Wipe snapshot setting data
- DME wipe snapshot setting data
- Key snapshot setting data
- Shotbox setting data
- Macro setting data
- Macro attachment data
- Menu macro setting data
- Frame memory image data

For details, see Chapter 17 “Files” (Volume 2).

Setup

Various settings are required, in order to operate the switcher, control panel, DME, external devices, and so on, connected together in a single system.
This is referred to as “setup,” and you can carry out the setup operations from the Engineering Setup menu.

The settings in the Engineering Setup menu are grouped under the following headings.

System setup (System)

For details, see Chapter 18 “System Setup” (Volume 2).

Panel setup (Panel)

For details, see Chapter 19 “Control Panel Setup (Panel)” (Volume 2).

Switcher setup (Switcher)

For details, see Chapter 20 “Switcher Setup (Switcher)” (Volume 2).

DME setup (DME)

For details, see Chapter 21 “DME Setup (DME)” (Volume 2).

DCU setup (DCU)

For details, see Chapter 22 “DCU Setup (DCU)” (Volume 2).

Router/tally setup (Router/Tally)

For details, see Chapter 23 “Setup Relating to Router Interface and Tally (Router/Tally)” (Volume 2).

User setup (User Setup)

For details, see Chapter 24 “User Setup (User Setup)” (Volume 2).

Menus and Control Panel

Chapter 2

Names and Functions of Parts of the Control Panel

The maximum number of M/E banks supported by the MVS-8000X/7000X system is given below.

MVS-8000X
Five M/E banks maximum (PGM/PST, M/E-1 to M/E-4)


MVS-7000X
Six M/E banks maximum (PGM/PST, M/E-1 to M/E-5)

Notes

- On the MVS-8000X, M/E-5 cannot be used. M/E-5 operation and settings are disabled, even if they appear in the menu.
  See "Disabled Operation and Settings Menus" (page 393) in Appendix.
- To select M/E-4 or M/E-5 using control panel buttons, it is first necessary to assign the buttons in the Setup menu.
  For details of assignment, see "Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.

Control Panel: Example Configuration 1 (With Standard Transition Modules)

The MVS-8000X/7000X system control panel comprises a number of modules.
The following illustration shows a typical 32-button, 4-M/E configuration, with standard transition modules used in the transition control block.

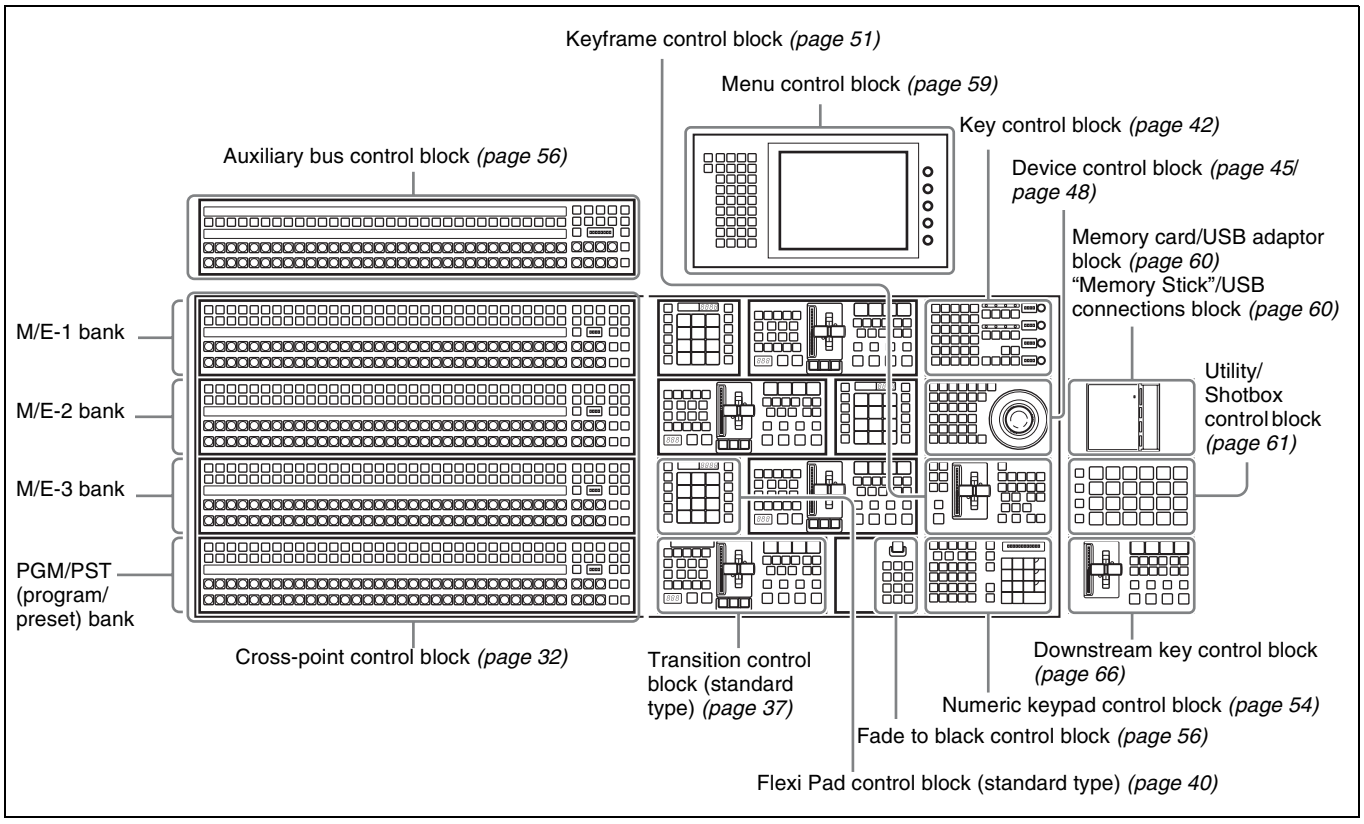


Control panel configuration 1 (with standard transition modules)

Control Panel: Example Configuration 2 (With Simple Transition Modules)

The following illustration shows a typical configuration, with simple transition modules used in the transition control block.


Except for the simple modules, this is the same configuration as in example configuration 1.

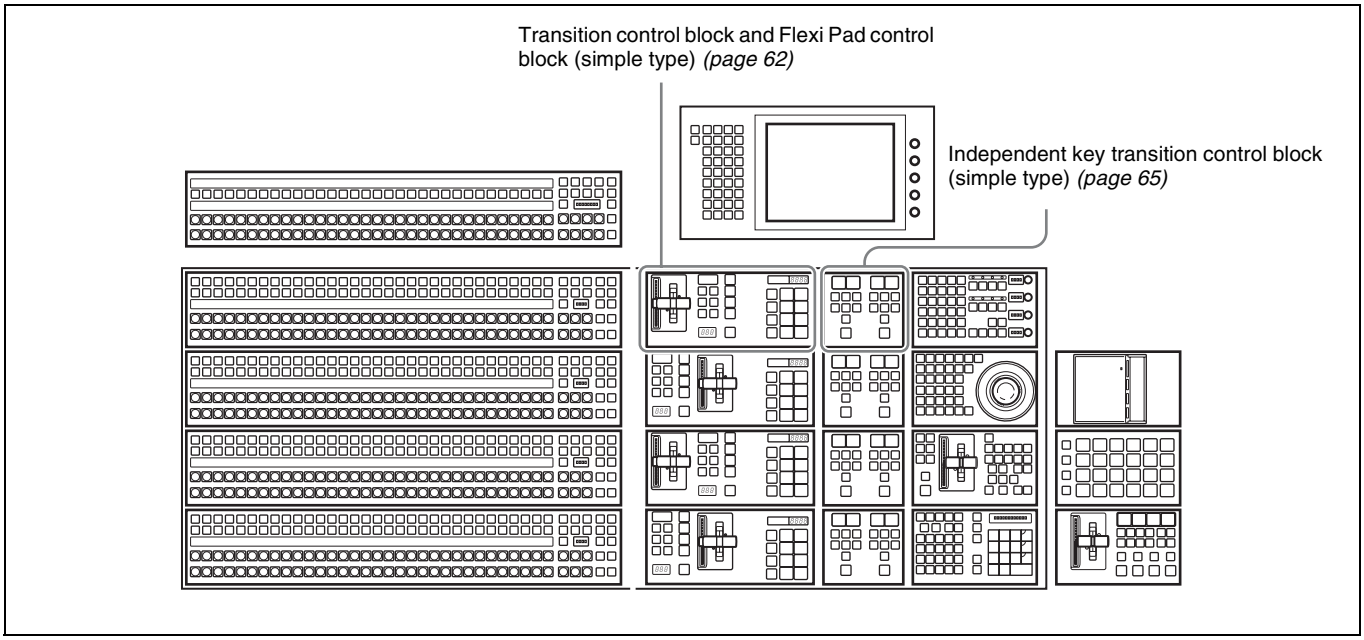

Control panel configuration 2 (with simple transition modules)

Control Panel: Example Configuration 3 (With Compact Transition Modules)

The following illustration shows a typical configuration, with compact transition modules used in the transition control block.

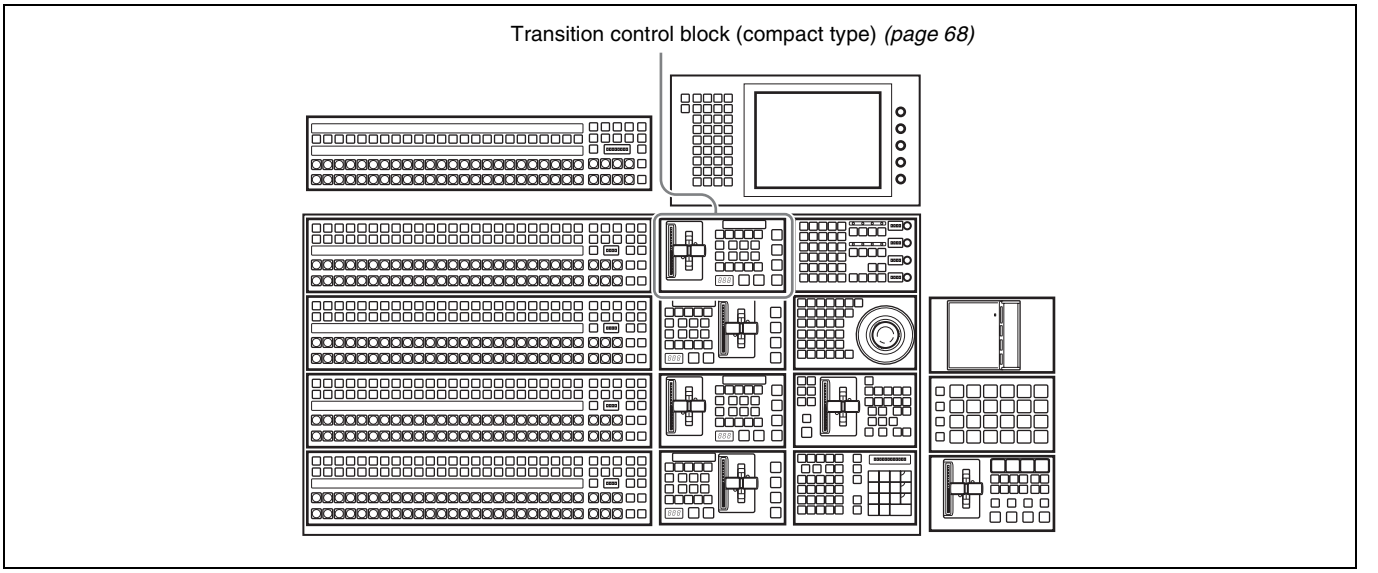


Control panel configuration 3 (with compact transition modules)

Cross-Point Control Block

In the cross-point control block, you can select the signals to be used in this M/E bank or PGM/PST bank.
There are also modules without the source name displays shown in the following figure.
All operations except those of the [SHIFT] button are the same as for a module with source name displays.


Notes

In the case of the MVS-8000X, only the premium inputs (inputs to the switcher premium input connectors 1 to 20) can be selected as key signals on the M/E-4 bank.

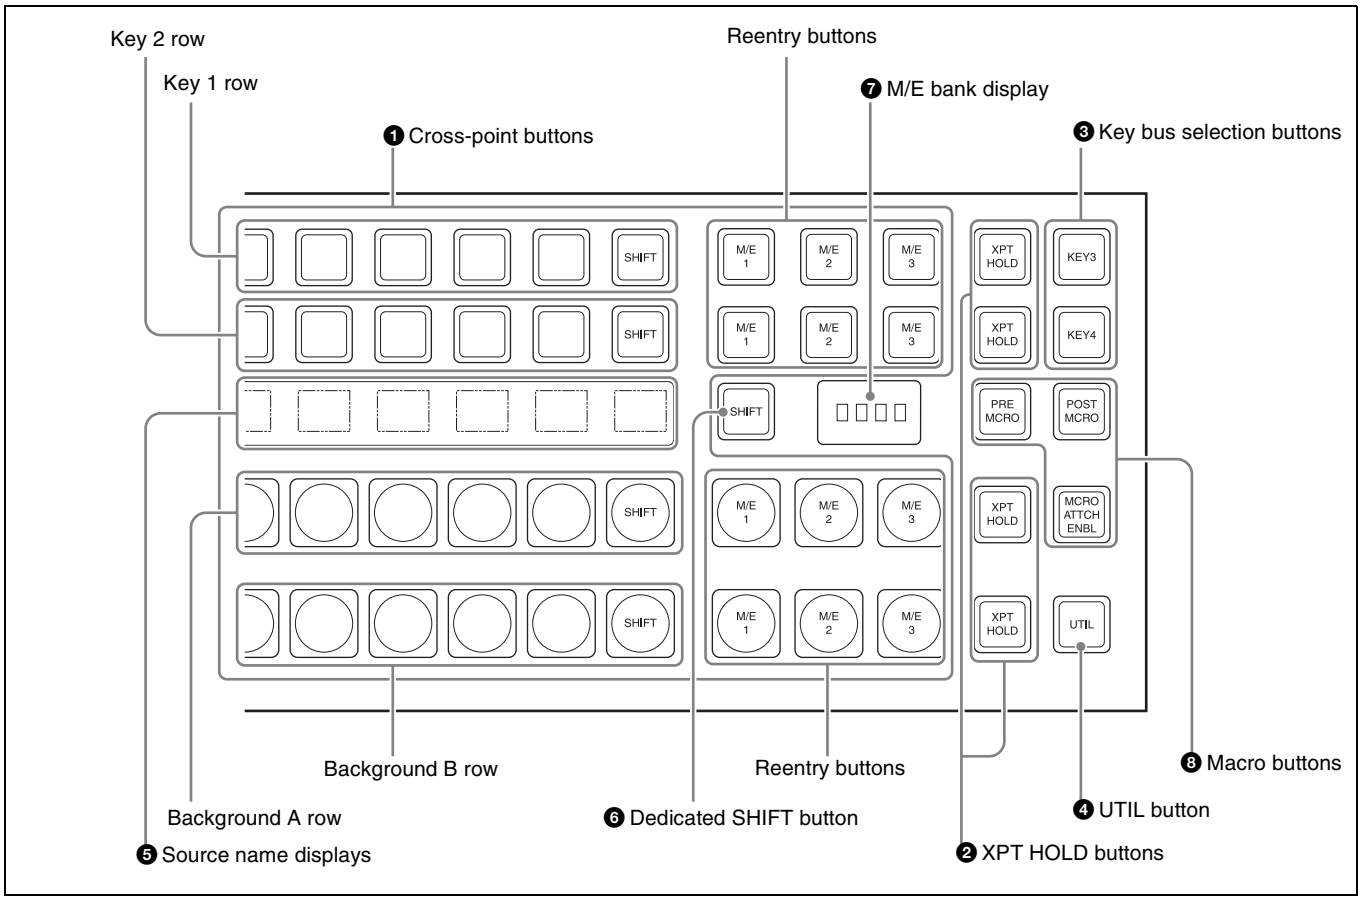

❶ Cross-point buttons

These buttons select the signals used for video creation on this M/E bank or PGM/PST bank. Each row of buttons corresponds to one or more signal buses within the switcher.

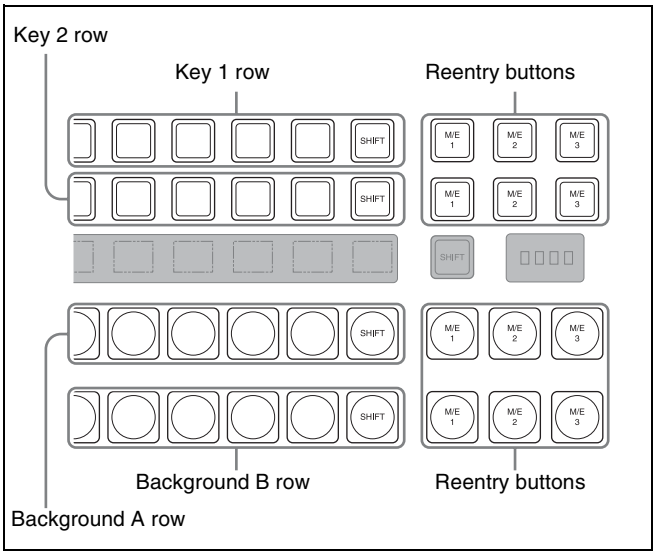

For details of assignment and selection of keys 5 to 8, see the following sections in Appendix: "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) and "Selecting Input Signals for Keys 5 to 8 in the Cross-Point Control Block" (page 398).

Name	Description
Key 1 row	• The buttons in this row select the key 1 or key 3 signals to be inserted into the video on this M/E bank or PGM/PST bank. • To select the key 1 fill signal, check that the right-hand [KEY3] button in the M/E bank (or the [DSK3] button in the PGM/PST bank) is off, then press the button assigned to the desired signal. • To select the key 3 fill signal, press the [KEY3] button, turning it on. • While the [UTIL] button on the right hand side is held down, these buttons are assigned to the DME external video bus allowing you to select the signal on that bus.

Name	Description
Key 2 row	• The buttons in this row select the key 2 or key 4 signals to be inserted into the video on this M/E bank or PGM/PST bank. • To select the key 2 fill signal, check that the right-hand [KEY4] button in the M/E bank (or the [DSK4] button in the PGM/PST bank) is off, then press the button assigned to the desired signal. • To select the key 4 fill signal, press the [KEY4] button, turning it on. • While the [UTIL] button on the right hand side is held down, these buttons are assigned to the DME utility 1 or 2 bus as follows. **When the [KEY4] button is off:** DME utility 1 bus **When the [KEY4] button is on:** DME utility 2 bus
Background A row	• Press to select the signal as the current background video on this M/E bank or PGM/PST bank. • While the [UTIL] button on the right hand side is held down in Hold mode, these buttons are assigned to the utility 1 bus, and can be used to select the signal on that bus.
Background B row	• Press to select the signal as the background video after the transition on this M/E bank or PGM/PST bank. • While the [UTIL] button on the right hand side is held down in Hold mode, these buttons are assigned to the utility 2 bus, and can be used to select the signal on that bus.
Reentry buttons	• These allow you to select the video created on another bank as background A or B or one of the keys 1 to 8. • For example, to use the video created on the M/E-1 bank as background B on the M/E-2 bank, press the reentry button [M/E 1] in the background B row of buttons on the M/E-2 bank.

Cross-point button numbers
Cross-point button and reentry buttons are respectively numbered *(see page 92)*.

Assigning signals to button
You can assign a signal to each button using the Setup menu.

For details, see "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume 2).

Visual indications on cross-point buttons

For details, see "Colors of lit cross-point buttons" (page 94).

Assigning a delegation function to the key 1 row

You can assign the key/AUX bus delegation function to the key 1 row so that signals can be selected in the key 2 row.

For details, see "Assigning a Key or AUX Bus to a Button in the Key 1 or Key 2 Row" in Chapter 19 (Volume 2).


❷ XPT (cross-point) HOLD buttons

Turning one of these buttons on enables you to recall a keyframe or snapshot while keeping the current cross-point selection unchanged.
Function of this button varies depending on the operation mode selected in the Setup menu.

For details, see "Selecting the Bank to Make the Settings" in Chapter 20 (Volume 2).

❸ Key bus selection buttons

With the following buttons you can assign the key 1 or key 2 cross-point buttons to the key 3 or key 4 fill bus.

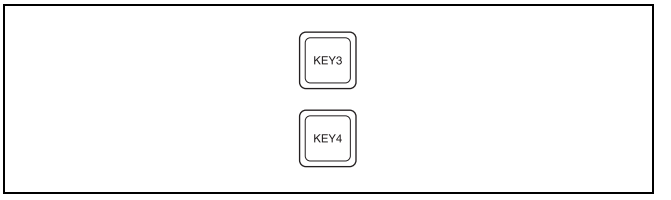

Name	Description
KEY3 button	Press this button, turning it on, to assign the key 1 cross-point buttons to the key 3 fill bus.
KEY4 button	Press this button, turning it on, to assign the key 2 cross-point buttons to the key 4 fill bus.

Pressing one of the key delegation buttons [KEY1] to [KEY4] in the transition control block (standard type) twice in rapid succession changes the state of the corresponding one of these buttons, so that you can make cross-point selections on the key bus *(see page 40)*.
Using these buttons and the dedicated [SHIFT] button, you can assign keys 5 to 8 to cross-point buttons *(see page 398)*.

❹ UTIL (utility) button

While this button is held down, the cross-point buttons are assigned to the following buses, respectively.
Background A row: utility 1 bus
Background B row: utility 2 bus
Key 1 row: DME external video bus
Key 2 row: DME utility 1 bus when the [KEY4] button is off, or DME utility 2 bus when the [KEY4] button is lit.
In a Setup menu, you can select either of the following two modes for these buttons.
• The button takes effect while being held down.

- Every time the button is pressed, it toggles between the on and off states for key 1 and key 2 rows. For background A and background B rows, utility buses remain disabled.

❺ Source name displays

These show the names of the signals which can be selected on the cross-point buttons, in two or four characters, or in auto mode.

While the [SHIFT] button on the right hand side or the [SHIFT] button assigned to the column of cross-point buttons is enabled, the source name of the signal assigned to the column of cross-point buttons in shift mode appears. You can select green, orange, or yellow for the background color of the source name display, for each source separately. You can set the source name display mode and background color in the Setup menu.

❻ Dedicated SHIFT button

This button has the following three functions.

Selection buttons for key 5 to 8 signals: When this button is enabled, you can select key 5 and 7 signals in the key 1 row, and key 6 and 8 signals in the key 2 row. Each time you press the button toggles between enabled and disabled.

Source name display shift button: When this button is enabled, the source name display shows the shifted signal name. Each time you press the button toggles between enabled and disabled. In a module with no source name display, this button is disabled.

Bus shift button: When this button is enabled, it acts as a shift button for all buses on this M/E (PGM/PST) bank. Each time you press the button toggles between enabled and disabled.


You can select the mode in the Setup menu.

❼ M/E bank display

This indicates the notional mix/effect bank name to which the particular M/E bank is assigned, as a four-character identifier.

❽ Macro buttons

With the following buttons you can enable macro attachments, and select the mode for using macro attachments.

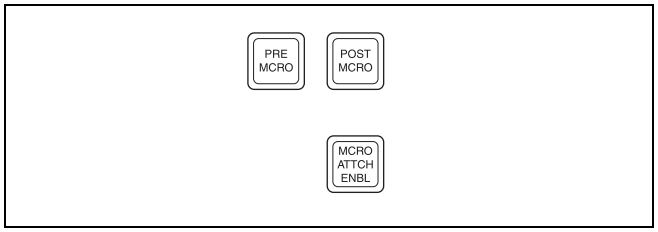


Name	Description
PRE MCRO (pre macro)	• Use this button to set a macro attachment in pre macro mode. • For setting in macro only mode, use this in combination with a macro only set button assigned to the utility/shotbox control block or a user preference button. Alternatively, without using the button, you can make the selection simply, by pressing simultaneously with the [POST MCRO] button. • Function of this button varies as follows depending on the operation mode selected in the Setup menu. - Switching dual background bus mode - Switching utility/shotbox mode - Disabling cross-point button operations *For details, see "Setting the Assignment of Macro Operation Buttons" in Chapter 19 (Volume 2).* **Notes** For the CCP-6224/6324, [AUX CTRL] is assigned to this button *(see page 73)*.
POST MCRO (post macro)	• Use this button to set a macro attachment in post macro mode. • For setting in macro only mode, use this in combination with a macro only set button assigned to the utility/shotbox control block or a user preference button. Alternatively, without using the button, you can make the selection simply, by pressing simultaneously with the [PRE MCRO] button. *For details, see "Setting the Assignment of Macro Operation Buttons" in Chapter 19 (Volume 2).* **Notes** For the CCP-6224/6324, [AUX DSPLY] is assigned to this button *(see page 73)*.
MCRO ATTCH ENBL (macro attachment enable)	When this button is on, the macro attachments set for the buttons of the M/E bank are enabled. You can make a setup setting such that enabled buttons light.

Cross-Point Control Block in Key/AUX Bus Delegation Mode

You can assign key and AUX buses to the key 1 row buttons in the cross-point control block for use as delegation buttons so that signal selection can be made in the key 2 row.
In this case, the buttons in the cross-point control block operate as follows.

For details of assignment, see "Assigning a Key or AUX Bus to a Button in the Key 1 or Key 2 Row" in Chapter 19 (Volume 2).

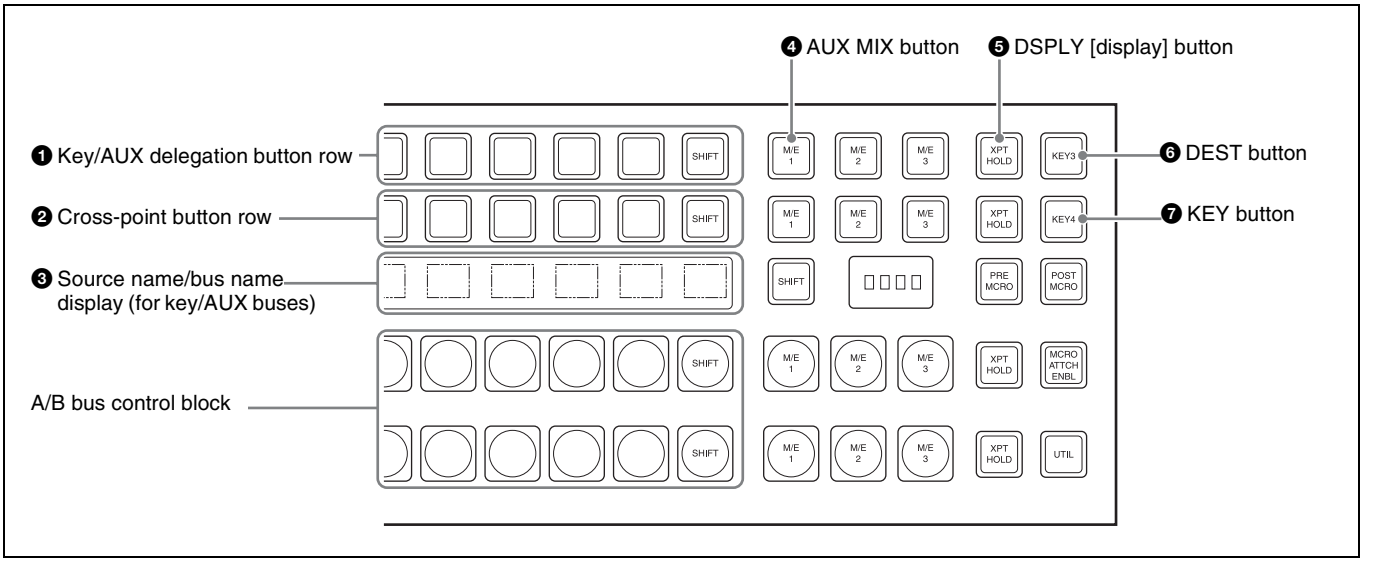

❶ Key/AUX delegation button row

These buttons select a key bus or AUX bus.
In setup you can assign the following buses.
KEY1 to KEY8, DSK1 to DSK8, UTILITY 1, UTILITY 2, EXT DME, DME UTIL 1, DME UTIL 2, EDIT PVW AUX 1 to 48, FMS 1, FMS 2, DME 1 V/K to DME 8 V/K, CCR 1, CCR2

❷ Cross-point button row

These buttons select a cross-point on the bus selected with the key/AUX delegation buttons.

Notes

- When you press a button in the cross-point button row while holding down the button to which any of KEY1 to KEY8 and DSK1 to DSK8 buses is assigned in the Key/AUX delegation button row, you can select the cross-point of the key source bus.
- When you select a cross-point while holding down the button to which any of DME 1 V/K to DME 4 V/K buses is assigned in the Key/AUX delegation button row, you can select the image on the reverse side of the currently viewed DME image.

❸ Source name / bus name display (for key/AUX buses)

When the [DSPLY] button is on, these show the names of the signals corresponding to the current bus delegation.

The following displays may also appear, depending on the state of other buttons.

Button name			Display
[DSPLY]	[DEST]	[KEY]	
Off	Off	-	A/B bus signal names
On	Off	Off	Key/AUX bus video signal name or key signal names [a]
On	On	-	Key/AUX bus names
On	Off	On	Key/AUX bus video signal name or key signal names [b]

a) When you are holding down the button to which any of KE1 to KEY8 and DSK1 to DSK8 buses is assigned in the key/AUX delegation button row, the video signal name is displayed. To display the key signal names when other bus is selected, keep the [KEY] button held down.
b) When you are holding down the button to which any of KEY1 to KEY8 and DSK1 to DSK8 buses is assigned in the key/AUX delegation button row, the key signal names are displayed. To display the key signal names when other bus is selected, keep the [KEY] button held down.

❹ AUX MIX button

When AUX bus is selected using buttons in the Key/AUX delegation button row, press this button, turning it on, to execute an AUX mix transition.

For details of AUX mix transition operation, see "AUX Mix Transitions" (page 119).


❺ DSPLY [display] button
Press to light this button, in order that the source name / bus name displays show the signal names or bus names corresponding to the current bus delegation.

❻ DEST button
When both the [DSPLY] button and this button are on, the key bus names or AUX bus names are displayed.


❼ KEY button
When you press a cross-point button while holding down this button, the key signal is selected.

Transition Control Block (Standard Type)

In the transition control block, you can modify the output of the M/E bank or PGM/PST bank, and perform transitions. Both common transition and independent key transition operations are possible.

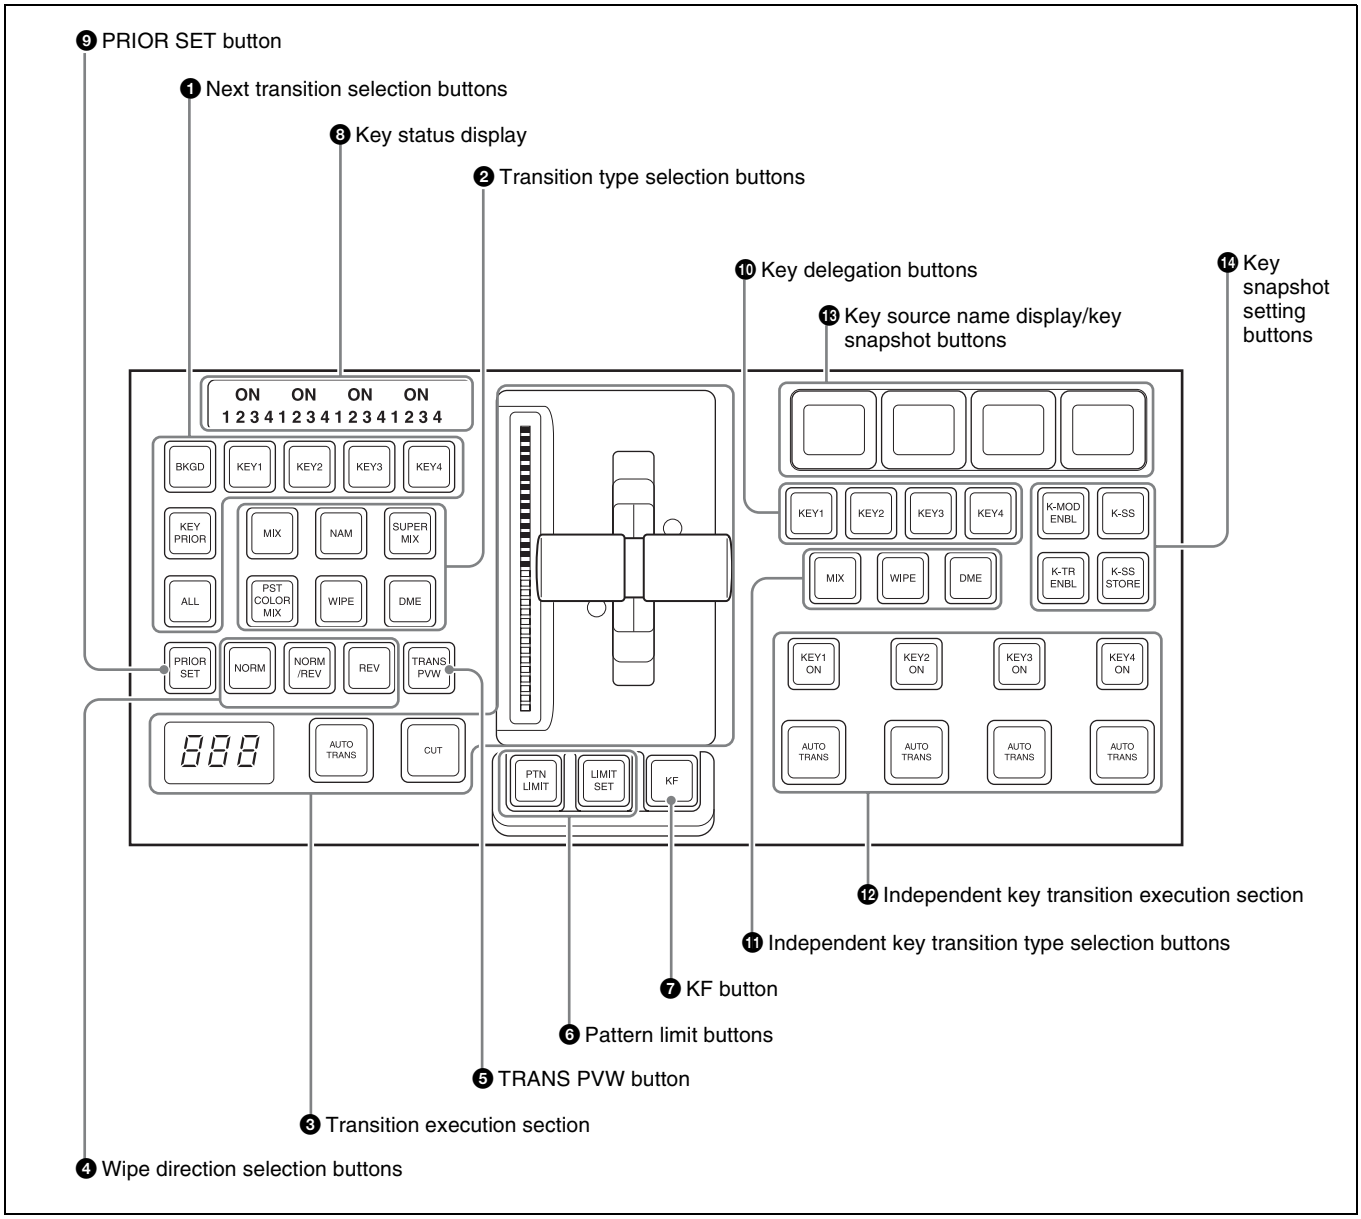

❶ Next transition selection buttons
Press these buttons, turning them on, to determine what the next transition will apply to.

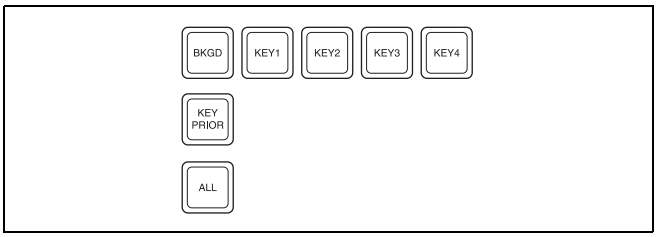

Name	Description
BKGD	Next transition changes the background.
KEY1 to KEY8 (DSK1 to DSK8 in the PGM/PST bank)	• Press this button, turning it on, to make the next transition insert or remove the corresponding key (keys 1 to 8). • If a key is currently inserted it will be removed, and vice versa. • In the PGM/PST bank, this inserts or removes downstream keys 1 to 8. *For details of assignment and selection of keys 5 to 8, see the following sections in Appendix: "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) and "Selecting Keys 5 to 8 for Next Transition" (page 398).*
KEY PRIOR (priority)	When this button is lit, the setting of the key priority after the next transition is enabled. The key priority after the next transition appears in the key status display.
ALL	Pressing this button turns on a preselected set of the [BKGD], [KEY1] to [KEY8], and [KEY PRIOR] buttons. Make this setting in the Setup menu.

❷ Transition type selection buttons


Press one of these buttons, turning it on, to determine the type of the next transition *(see page 95)*.

For the method of assigning transition types, see "Transition Control Block Button Assignments" in Chapter 19 (Volume 2).

When multi-program mode is selected in the Setup menu, two or more of the following buttons may light.

For details of multi-program mode, see "Setting Transition Control Block Button Assignments" in Chapter 19 (Volume 2).


You can also assign a function to these buttons to select whether or not the fader levers are used as keyframe faders.

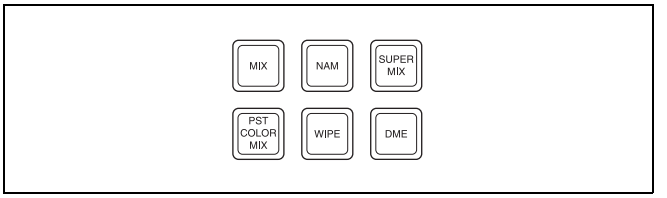

Name	Description
MIX	In a background transition, the new video fades in as the current video fades out.
NAM (non-additive mix)	The current and new video signals are compared, and the signal with the higher luminance level is given priority in the output.
SUPER MIX	The current video is maintained at 100% output for the first half of the transition as the new video is mixed while increasing progressively to 100%.
PST (preset) COLOR MIX	The color matte (unpatterned display) is inserted during transition, replacing the current video by the color matte, and then replacing the color matte by the new video.
WIPE	The current video is replaced by the new video, using the wipe pattern selected in the Wipe menu.
DME (DME wipe)	A wipe type of transition is carried out, using the DME effect selected in the DME Wipe menu.
FM1&2CLIP, FM3&4CLIP, FM5&6CLIP, FM7&8CLIP	A recorded clip is played back together with the transition. At this point, you can also carry out a transition (wipe or mix (dissolve)) simultaneously together with the clip.
KF (keyframe)	Press this button, turning it on, to enable using the fader lever as a keyframe fader.

❸ Transition execution section

This section is used to carry out a transition and check the progress of the transition.

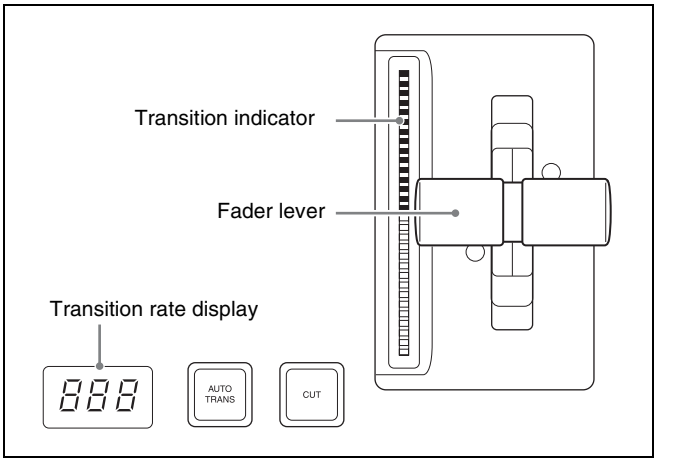

Name	Description
Transition indicator	This comprises multiple LEDs, which show the progress of the transition.
Fader lever	• Move up or down to carry out the transition. • When a transition type selection button to which the [KF] button function has been assigned is lit, you can use this as a keyframe fader.

Name	Description
Transition rate display	• This shows the “transition rate” (the time from the beginning of a transition to its completion) set for an auto transition, in frames. • You can set the transition rate using the numeric keypad control block, Flexi Pad control block, or menu.
AUTO TRANS (transition) button	• Pressing this button carries out an auto transition of the set transition rate (duration). The transition starts immediately, and the button lights amber. • When the transition completes, the button goes off.
CUT button	Pressing this button carries out the transition as a cut (i.e. instantaneously).

❹ Wipe direction selection buttons

When a wipe or DME wipe is selected as the transition type, you can press to light these buttons to select the wipe direction.



Name	Description
NORM (normal)	The wipe proceeds in the direction from black to white as shown on the pattern in the lists of patterns *see “Wipe Pattern List” (page 357)* and *“DME Wipe Pattern List” (page 361)*, or in the direction of the arrow.
REV (reverse)	The wipe proceeds in the opposite direction to that when the [NORM] button is pressed.
NORM/REV (normal/ reverse)	The wipe direction alternates between normal and reverse every time a transition is executed.

❺ TRANS PVW (transition preview) button


When this button is lit, you can check in advance the video changes during the transition, on the preview output from the M/E or PGM/PST bank.

During the preview, you can use the fader lever, [AUTO TRANS] button, and [CUT] button. One of the following functions of this button can be selected in a Setup mode.

- When the transition completes, the system returns to the normal mode.
- The transition preview mode is maintained while this button is pressed.
- Switching is made between the transition preview mode and normal mode every time this button is pressed.

❻ Pattern limit buttons

The following buttons are used to set a pattern limit.



Name	Description
PTN (pattern) LIMIT	Pressing this button, turning it on, enables the pattern limit function.
LIMIT SET	• Use this button to set a pattern limit when the [PTN LIMIT] button is off. • Move the fader lever to the position of a particular pattern size, and stop it there, then press this button to set the pattern limit range.

❼ KF (keyframe) button

Pressing this button to turn it on allows you to use the fader lever as a keyframe fader.

❽ Key status display

For each of the next transition selection buttons, [KEY1] to [KEY4], the corresponding ON indicator lights when the key is inserted. It also shows the priority (1 to 4) of each key.

❾ PRIOR (priority) SET button

While this button is held down, you can set the key priority.

The setting mode when this button is pressed depends on whether or not the [KEY PRIOR] button is lit, as follows.

- When the [KEY PRIOR] button is off, the current key priority is set.
- When the [KEY PRIOR] button is lit, the key priority after the next transition is set.

Press the [KEY PRIOR] button as required, to switch between these two modes.

In either mode, hold down the [PRIOR SET] button, and press the button ([KEY1] to [KEY8]) corresponding to the key you want to bring to the front.

Notes

The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups. For example, it is not possible to set a priority sequence of keys 1, 5, and 2.

For details, see “Setting the Key Priority in the Transition Control Block” (page 98).

The following controls are used as the independent key transition control block.

❿ Key delegation buttons


These buttons delegate this independent key transition control block to a desired keyer. Press one of the [KEY1] to [KEY8] buttons (or the [DSK1] to [DSK8] buttons in the PGM/PST bank), turning it on.
You can press more than one button to select two or more keyers.
While these buttons are held down, you can select a key source with the cross-point buttons for the key bus.
Pressing one of these buttons twice in rapid succession changes its state so that you can make cross-point selections on the corresponding key bus.

For details of assignment of keys 5 to 8, see "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) in Appendix.

⓫ Independent key transition type selection buttons

Press one of the following buttons, turning it on, to select the independent key transition type.
You can assign any transition types to these buttons in setup

For details, see "Setting Transition Control Block Button Assignments" in Chapter 19 (Volume2).

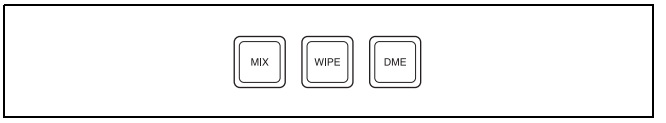


Name	Description
MIX	Faded in or out.
WIPE	Inserted or deleted with a wipe.
DME (DME wipe)	Inserted or deleted with a DME wipe.
CUT	Instantaneously insert or remove the key selected with the delegation buttons.

⓬ Independent key transition execution section

The following buttons are used to insert or delete a key, and carry out an auto transition.

For details of assignment of keys 5 to 8, see "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) in Appendix.

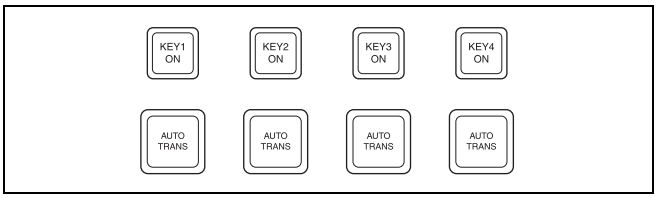


Name	Description
KEY1 ON to KEY8 ON (DSK1 ON to DSK8 ON in the PGM/PST bank)	• Press the corresponding one of these buttons to cut key 1 to key 4 in or out instantaneously. • When the key corresponding to the button appears in the final program output, the button lights red, and otherwise lights amber.
AUTO TRANS (transition)	• These correspond to keys 1 to 4 from left to right; press one to carry out an auto transition. • The transition rate for an independent key transition can be set in the numeric keypad control block, in the Flexi Pad control block, or in a menu.

⓭ Key source name display/key snapshot buttons

These display the source name selected on the corresponding keyer. In key snapshot mode, press these buttons, corresponding to registers 1 to 8 for the selected keyer, to save or recall a key snapshot.

⓮ Key snapshot setting buttons


The following buttons are used to operate a key snapshot.

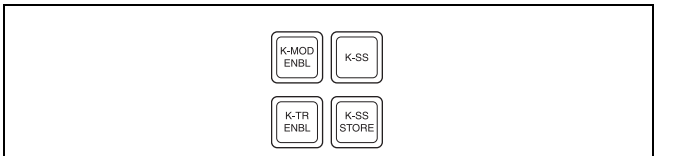

Name	Description
K-SS (key snapshot)	This enables key snapshot mode.
K-SS STORE (key snapshot store)	To save a key snapshot, hold down this button, and press the key source name display/key snapshot button corresponding to the register you want to save.
K-MOD ENBL (key modifier enable)	To recall key adjustment values and key modifier settings when recalling a key snapshot, press this button, turning it on.
K-TR ENBL (key transition enable)	To recall independent key transition settings when recalling a key snapshot, press this button, turning it on.


Flexi Pad Control Block (Standard Type)

The Flexi Pad control block is used for saving and recalling wipe snapshots, DME wipe snapshots, and snapshots, for recalling effects, and shotbox content, and for entering the transition rate.

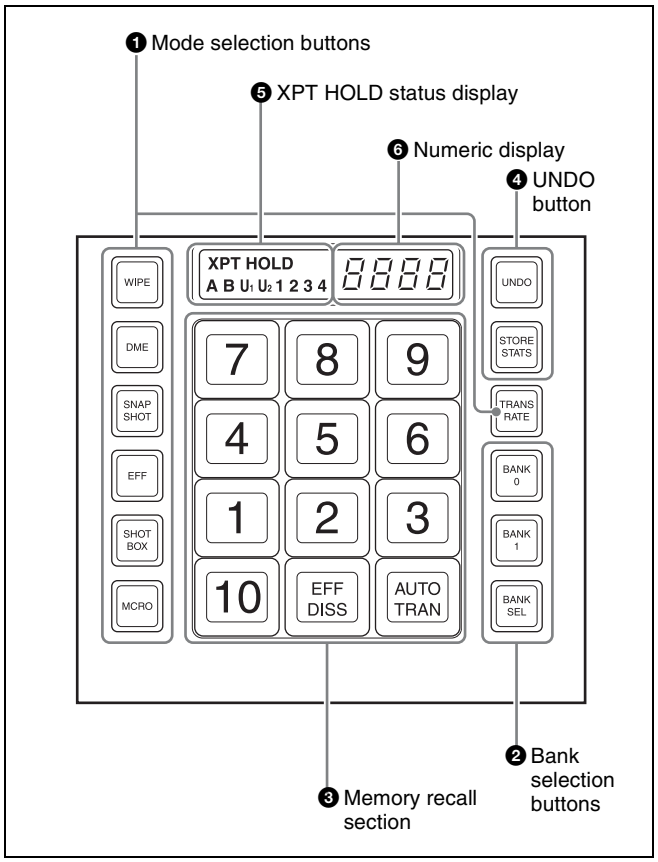

❶ Mode selection buttons


Pressing the following buttons selects the operation mode.

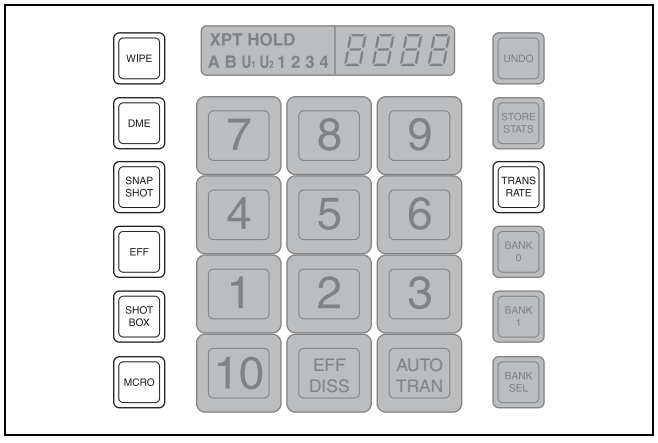

Name	Description
WIPE	To save or recall a wipe snapshot, or recall the pattern number of a wipe pattern, use this in combination with the buttons of the memory recall section.
DME	To save or recall a DME wipe snapshot, or recall the pattern number of a DME wipe pattern, use this in combination with the buttons of the memory recall section.
SNAPSHOT	To save or recall a snapshot, use this in combination with the buttons of the memory recall section.
EFF (effect)	To recall the master timeline or run an effect, use this in combination with the buttons in the memory recall section.
SHOTBOX	To recall or execute a shotbox, use this in combination with the buttons of the memory recall section.
MCRO (macro)	To save, recall or edit a macro, use this in combination with the buttons of the memory recall section.
TRANS RATE (transition rate)	• To enter the transition rate, press this button, turning it on. • To enter the independent key transition rate, hold down this button, and press the key delegation button in the independent key transition control block. • To select whether the value is entered in frames or as a timecode value, switch the [TC] button in the memory recall section on or off.

❷ Bank selection buttons

The following buttons are used to select a bank, and assign the memory recall section to the registers of the selected bank.

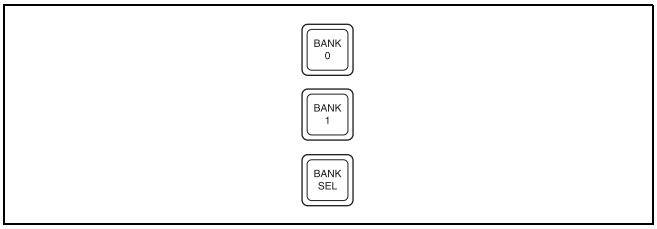


Name	Description
BANK0 (bank 0)	Assigns the memory recall section to bank 0, of registers 1 to 10.
BANK1 (bank 1)	Assigns the memory recall section to bank 1, of registers 11 to 20.
BANK SEL (bank selection)	After pressing this button, press a button in the memory recall section to select banks 0 to 9.

❸ Memory recall section

This consists of 12 buttons with LCDs. These display changes, according to various operation modes.

❹ UNDO button

The following buttons are used to return a register to its state before the register recall operation.

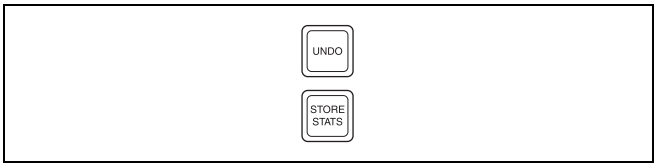


Name	Description
UNDO	• After recalling a register, press this button to return to the state before recalling the register. • When contents have been saved to a register, hold down the [STORE STATS] button and press this button to return the register to its state before the save operation.
STORE STATS (store status)	• When a save or delete operation has been carried out on a register, this button lights amber. • After saving to a register, hold down this button and press the relevant register button to delete the data in the register. • Again, after a save operation on a register, hold down this button and press the [UNDO] button to restore the register to its state before the save operation.

❺ XPT HOLD (cross-point hold) status display
A bus for which cross-point hold is set appears as a green light.


❻ Numeric display
Depending on the operation mode, this shows the pattern number of a wipe or DME wipe, a bank number, a register number, a transition rate, and so on in up to four digits.

Key Control Block

Each of the M/E banks and the PGM/PST bank includes eight keyers (for keys 1 to 8), and you can delegate this control block to any desired keyer. In this control block, you can adjust and modify keys.

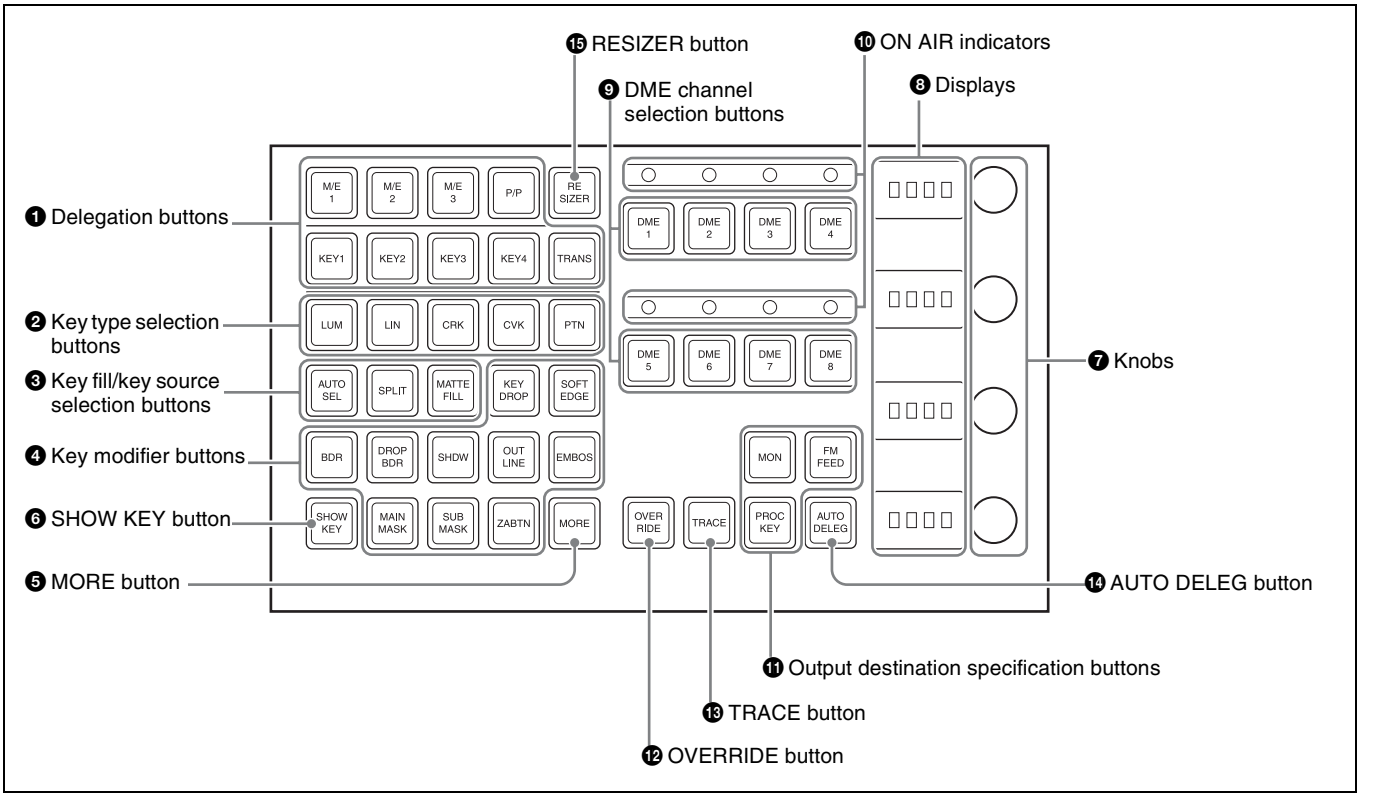

❶ Delegation buttons
Pressing the following buttons selects a keyer and an M/E or PGM/PST bank to which the key control block is delegated.

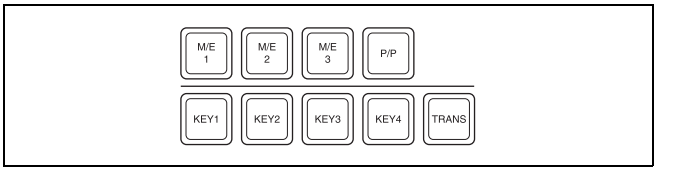

Name	Description
M/E delegation	Press one of the [M/E 1] to [M/E 5], and [P/P] buttons to select the bank (an M/E bank or the PGM/PST bank) to which the key control block is delegated. *For details of [M/E 4] or [M/E 5] button assignment, see "Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.*
Key delegation	Press one of the [KEY1] to [KEY8] buttons to delegate the key control block to the corresponding keyer. *For details of assignment of keys 5 to 8, see "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) in Appendix.*
TRANS	• By pressing this button, you can check the DME channel used for DME wipes on the M/E or PGM/PST bank. • By pressing this button, then pressing one of the DME channel selection buttons, you can preset the DME channel to be used when a DME wipe is selected as the transition type for the transition. • When presetting the DME channel for an independent key transition, hold down this button, then press one of the [KEY1] to [KEY8] buttons, turning the two buttons on, beforehand.


❷ Key type selection buttons

Press one of these buttons, turning it on, to select the desired key type.
Depending on the selected key type, various parameters are displayed, and you can set the values with the knobs.
The following key types can be selected.
LUM: luminance key
LIN: linear key
CRK: chroma key
CVK: color vector key
PTN: key wipe pattern key

For details, see "Key Types" (page 123).

❸ Key fill/key source selection buttons


Pressing the following buttons selects key fill and key source.



Name	Description
AUTO SEL (selection)	• Use the signal selected on the key fill bus, and the paired key source signal. The setting of key fill and key source pairs is carried out in the Setup menu. • To use the signal selected on the key fill bus as key source (self keying), press the [AUTO SEL] button and [SPLIT] button at the same time, so that both are off.
SPLIT	• To use the signal selected on the key fill bus as key fill, and a signal separate from the signal assigned in a pair with key fill for key source, press this button, turning it on. • To select the signal on the key source bus, hold down this button, and press a button in the key 1 or key 2 row in the cross-point control block. • To use the signal selected on the key fill bus as key source (self keying), press the [AUTO SEL] button and [SPLIT] button at the same time, so that both are off.
MATTE FILL	• To use a color matte from the internal generator as key fill, press this button, turning it on. You can adjust the color matte using the knobs. • When this button is off, the signal selected on the key fill bus is used as key fill.

❹ Key modifier buttons

To add an edge modifier to the key, press one of these buttons, turning it on.
Depending on the button pressed, parameters appear in the displays, and you can set the values with the knobs.
To select a normal edge as the edge type, turn off the [BDR], [DROP BDR], [SHDW], [OUTLINE], and [EMBOS] buttons.



Name	Description
KEY DROP	• When the selected edge type is "normal" and soft edge is off or when drop border or shadow is selected, turning this button on lowers the key fill and key source position by four or eight scan lines as set in the key menu. To select 4H or 8H, use the Key menu. • When the selected edge type is "normal" and soft edge is selected or when border, outline, or emboss is selected, this button lights automatically.

Name	Description
BDR (border) a)	Apply a border of a uniform thickness to the whole key.
DROP BDR (drop border) a)	Apply a border to two sides of the key (for example, below and to the right, or below and to the left).
SHDW (shadow) a)	Apply a shadow to two sides of the key (for example, below and to the right, or below and to the left).
OUTLINE	• Use the outline of the key. • Use the key fill signal selected for the key in the edge portions.
EMBOS (emboss)	• Apply an embossing effect to the periphery of the key. • When emboss is selected, you can use the dedicated color matte signal for the emboss function.
MAIN MASK	Press this button, turning it on, to enable the key mask using the main pattern.
SUB MASK	Press this button, turning it on, to enable the key mask using the sub pattern.
ZABTN (zabton)	Press this button, turning it on, to insert a translucent pattern behind the key.
SOFT EDGE	Press this button, turning it on, to soften the key edge portions.

a) When one of these buttons is selected, you can use a special color matte or a signal selected on the utility 1 bus for the edge.

❺ MORE button
When there are more than four parameters, this button lights amber. When it is pressed, it changes from amber to green and the fifth and subsequent parameters are assigned to the knobs, allowing them to be adjusted.

❻ SHOW KEY button
While this button is held down, a key processed key source signal is output from the specified output port. You can make the output specification independently for the edit preview and the preview of each M/E or PGM/PST bank in the Setup menu.

❼ Knobs
Turn the knobs to adjust the parameter values.


❽ Displays
Each display shows the initial letters of the parameter name and the parameter value (maximum three digits including a minus sign for a negative value).

❾ DME channel selection buttons
Press one of these buttons, turning it on, to delegate a DME channel to the keyer.
The number of valid DME channel selection buttons depends on the number of channels installed in the DME processor.

A maximum of four consecutively numbered DME channels from the two sets, DME 1 to 4 and DME 5 to 8, can be assigned to one keyer.
On the MVS-8000X, when the signal format is 1080P only, the consecutive channel combinations that can be selected are any of DME1 and DME2, DME3 and DME4, DME5 and DME6, or DME7 and DME8.
On the MVS-7000X, when the signal format is 1080P, the above restriction also applies if using the MVE-8000A. There is no such restriction for the MKS-7470X/7471X.
DME channel assigned to a keyer cannot be selected on another keyer.
However, using the override function it is possible to allocate a channel already allocated to another keyer to the currently selected keyer. If DME channel allocations have been made in a Setup menu, these buttons cannot be used to make DME channel allocations. Using the trace function, it is possible to check which keyer a DME channel is allocated to.

❿ ON AIR indicators
These light red when the corresponding DME channels are included in the final program output.

⓫ Output destination specification buttons
Pressing the following buttons selects and checks the output signal.

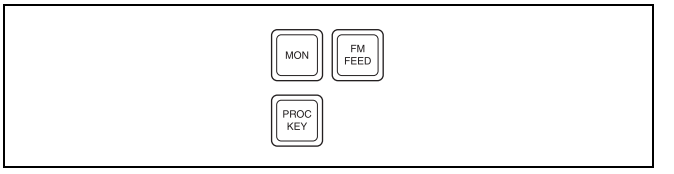

Name	Description
MON (DME monitor)	• Hold down this button and press the selection button for the DME channel you want to assign to the monitor output; you can then monitor the output signal on the DME monitor output. • While this button is held down, the DME channel selection buttons light as follows, allowing you to check the monitor assignment. **Lit amber:** DME channel that can currently be monitored **Lit green:** DME channel currently assigned to the monitor output

Name	Description
FM FEED (frame memory feed)	• When you press this button, it lights momentarily amber, then for the currently selected keyer, the key processed signals are selected for frame memory sources 1 and 2. • If a DME is selected on the currently selected keyer, the key fill and key source signals to which a DME effect is applied are assigned; otherwise the key fill and key source are assigned. • Carrying out a frame memory feed causes the [PROC KEY] button to light amber.
PROC KEY (processed key)	• When this button is on, the key fill/source signal subjected to key processing or signal subjected to a DME effect on the currently selected keyer can be selected as a reentry signal (PROC V or PROC K) for the M/E or PGM/PST bank, on the auxiliary bus or the like. • If a DME is selected on the currently selected keyer, the key fill and key source signals to which a DME effect is applied are assigned; otherwise the key fill and key source are assigned.

⓬ OVERRIDE button
To select a DME channel already allocated to another keyer or transition to the currently selected keyer (or transition), hold down this button, and press the DME channel selection button.

⓭ TRACE button
When a DME channel is already allocated to another keyer or transition, hold down this button, and press the corresponding DME channel selection button, to switch to the state in which the keyer (or transition) to which the DME channel is allocated is currently selected.


⓮ AUTO DELEG (auto delegation) button
When this button is on, the key delegation selection state of the key control block is linked to the key delegation selection state of the independent key transition control block.

⓯ RESIZER button
Enables or disables resizer.
When this is set to On, you can turn the knob to shrink, magnify, or move a key.
You can also rotate the key by pressing the following buttons assigned in the Setup menu in advance.
ROT X button: Rotate the key in the horizontal direction.
ROT Y button: Rotate the key in the vertical direction.


For details on resizer, see page 152.

Device Control Block (Trackball)

The device control block is used for three-dimensional transform operations using a DME, for wipe pattern position setting, and for VTR/disk recorder/frame memory clip operation.

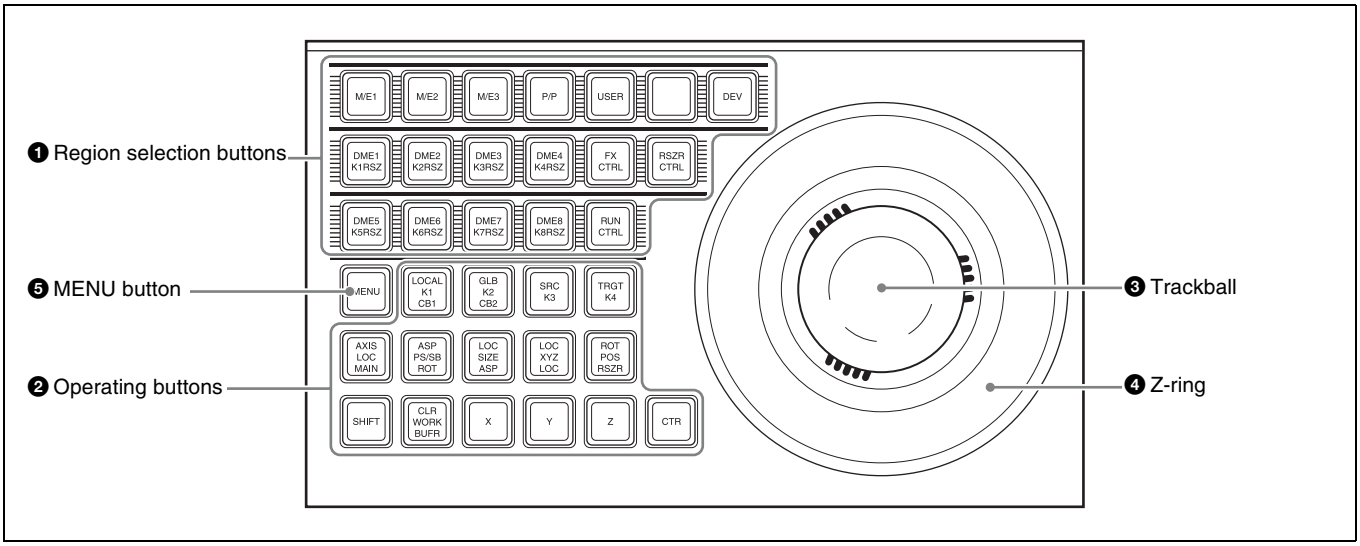

❶ Region selection buttons
The operation mode allocated to the device control block depends on the selection state of the region selection buttons.

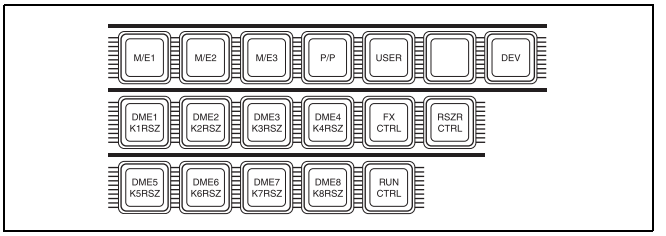


Selected buttons	Overview of assigned operation
[M/E1] to [M/E5], [P/P]	• This enables the wipe pattern position setting (positioner) operation mode in the device control block. • You can select multiple buttons simultaneously. *For details of [M/E4] or [M/E5] button assignment, see "Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.*
[USER]	This enables pattern position setting used for color backgrounds.
[DME1] to [DME8]	• This enables the three-dimensional transform operation mode in the device control block. • Press a button, turning it on, to select a DME channel. • You can select multiple buttons simultaneously. • The number of valid buttons depends on the number of DME processor channels installed.
[DEV]	• This enables the VTR/disk recorder/frame memory operation mode in the device control block. • Each button functions as follows. (From upper left to right in the above figure) - [M/E1] to [M/E3]: DEV1 (device 1) to DEV3 (device 3) - [P/P]: DEV4 (device 4) - [USER]: FM1CLIP (frame memory clip 1) - [Unused]: FM2CLIP (frame memory clip 2) - [DME1] to [DME4]: DEV5 (device 5) to DEV8 (device 8) - [FX CTRL]: FM LOOP (frame memory loop) - [DME5] to [DME8]: DEV9 (device 9) to DEV12 (device 12) • To exit from this mode, press the [DEV] button again, turning it off.
[RUN CTRL]	This enables the effect run control mode in the device control block.
[RSZR CTRL]	• This enables the resizer control mode in the device control block. • In resizer control mode, select the key with the region selection button [K1RSZ] to [K8RSZ].

Selected buttons	Overview of assigned operation
[FX CTRL]	Leave this button off for operation. *Alternatively, for details of operation of this button, refer to the help information for the MPES-FX01 Programmable Effector software.*

❷ Operation buttons

The following buttons are used to carry out the corresponding operations. Function of each button varies with the operation mode.

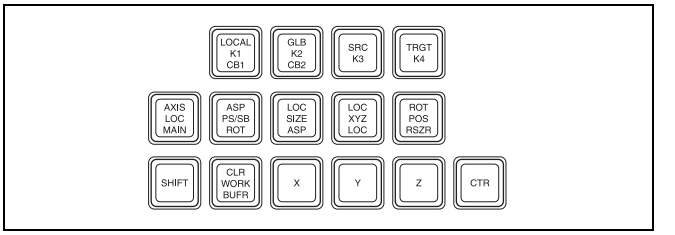

When the positioner operation mode is enabled

For details of assignment of keys 5 to 8, see "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) in Appendix.

Name	Description
K1 CB1 a) b)	• Press this button to enable wipe pattern position setting for key 1 (DSK1). • When the [USER] button is selected, pattern position setting for color background 1 is enabled.
K2 CB2 a) b)	• Press this button to enable wipe pattern position setting for key 2 (DSK2). • When the [USER] button is selected, pattern position setting is enabled for color background 2.
K3 a) b)	Press this button to enable wipe pattern position setting for key 3 (DSK3).
K4 a) b)	Press this button to enable wipe pattern position setting for key 4 (DSK4).
MAIN a)	Press this button to enable main wipe pattern position setting for normal transitions.
SB a)	Press this button to enable sub wipe pattern position setting for normal transitions.
POS	• Press this button to enable pattern movement in the X-axis and Y-axis directions with the trackball. • When the [USER] button is selected, this enables the trackball to move the pattern in the X-axis and Y-axis directions, and the Z-ring to adjust the size of the pattern.
X, Y, Z	These restrict the axes affected by the trackball and Z-ring to the X-, Y- or Z-axis.

Name	Description
CTR (center)	• When this button is pressed, the pattern position returns to the center. • When the [USER] button is selected, the pattern size also returns to 50.00.
CLR WORK BUFR	Press this button twice in rapid succession to reset all parameters on the target M/E or PGM/PST to their initial values.

a) Among these buttons, you can select multiple buttons.
b) By setting the operation mode in setup, you can select keys 5 to 8 with these buttons. In this case, it is not possible to select more than one of keys 1 to 8.

When the three-dimensional transform operation mode is enabled
The buttons are used for three-dimensional DME transformations.

For details, see "Three-Dimensional Transformation Operations" (page 283).

When the VTR/disk recorder/frame memory operation mode is enabled
The buttons are used for VTR control or playback of frame memory clips.

For details, see "Controlling the Tape/Disk Transport" in Chapter 12 (Volume 2).

When the resizer control mode is enabled

Name	Description
LOC SIZE (ASP: aspect)	• Pressing this button and operating the trackball or Z-ring changes the aspect ratio of a key to which the resizer function is applied to. • When this button is held down, the trackball or Z-ring operation is switched to fine control (fine mode).
LOC XYZ (LOC: location)	• Pressing this button and operating the trackball or Z-ring moves, shrinks, or magnifies a key to which the resizer function is applied. • When this button is held down, the trackball or Z-ring operation is switched to fine control (fine mode).
ROT (RSZR: resizer)	Press this button, turning it on, to enable the resizer.
ASP PS (ROT: Rotation)	• Pressing this button and operating the trackball or Z-ring rotates the key to which the resizer function is applied or adjusts perspective. • When this button is held down, the trackball or Z-ring operation is switched to fine control (fine mode).
SHIFT/CLR WORK BUFR (clear work buffer)	• Pressing this button once returns the two-dimensional transformation settings to the defaults. • Pressing the [CLR WORK BUFR] button twice, or holding down the [SHIFT] button and pressing the [CLR WORK BUFR] button returns all resizer parameter values to the defaults.
X, Y, Z	These restrict the axes affected by the trackball and Z-ring to the X-, Y- or Z-axis.
SHIFT/CTR (center)	• Pressing this button once changes the two-dimensional transformation settings to the closest detent values. • Pressing the [CTR] button twice, or holding down the [SHIFT] button and pressing the [CTR] button returns the two-dimensional transformation values to the defaults.

❸ Trackball
The effect of operation depends on the operating mode as follows.

When the positioner operation mode is enabled
By moving this, you can move the pattern in the X-axis and Y-axis directions.

When the three-dimensional transform operation mode is enabled
Move the trackball to control the X- and Y-axes in a three-dimensional transform.
When the [SRC] or [TRGT] button is held down, the trackball operation is switched to fine control (fine mode).

When the resizer control mode is enabled
By turning the trackball, you can move in the X and Y directions of the key to which the resize is applied, change the aspect ratio, and rotate around the X-axis and Y-axis.
When the [LOC SIZE], [LOC XYZ], or [ASP PS] button is held down, the trackball operation is switched to fine control (fine mode).

❹ Z-ring
The effect of operation depends on the operating mode as follows.

When the positioner operation mode is enabled
When the [USER] button is selected, by turning the ring you can adjust the size of the pattern.

When the three-dimensional transform operation mode is enabled
Turn this ring to control the Z-axis in a three-dimensional transform.
When the [SRC] or [TRGT] button is held down, the Z-ring operation is switched to fine control (fine mode).

When the effect run control mode is enabled
By turning the Z-ring, you can run the keyframe effect, independent of the STOP NEXT KF, EFF LOOP, and similar settings in the keyframe control block. Turn clockwise to run the effect in the normal direction, and counterclockwise for the reverse direction.

When the VTR/disk recorder/frame memory operation mode is enabled
Turning the Z-ring controls the tape transport/disk drive/frame memory clip operations, at a speed determined by the operating buttons. Turn clockwise for the normal direction, and counterclockwise for the reverse direction.


When the resizer control mode is enabled
By turning the ring, you can zoom the key to which the resizer is applied, and change the aspect ratio and perspective.

When the [LOC SIZE], [LOC XYZ], or [ASP PS] button is held down, the trackball operation is switched to fine control (fine mode).

❺ MENU button
Press this button, turning it on, to enable adjusting the parameters allocated to the knobs in the menu using the trackball and Z-ring.
In the case of the DME menu, the operation applies to the selected DME channel.
In VTR/disk recorder/frame memory operation mode, press this button, setting it to On. This makes it possible to carry out timeline start/stop point setting operation for the device selected with the device selection buttons (timeline setting mode).

Device Control Block (Joystick)

All functions of the joystick type device control block are equivalent to the functions of the trackball type, except that the trackball and Z-ring operations are carried out with the joystick.

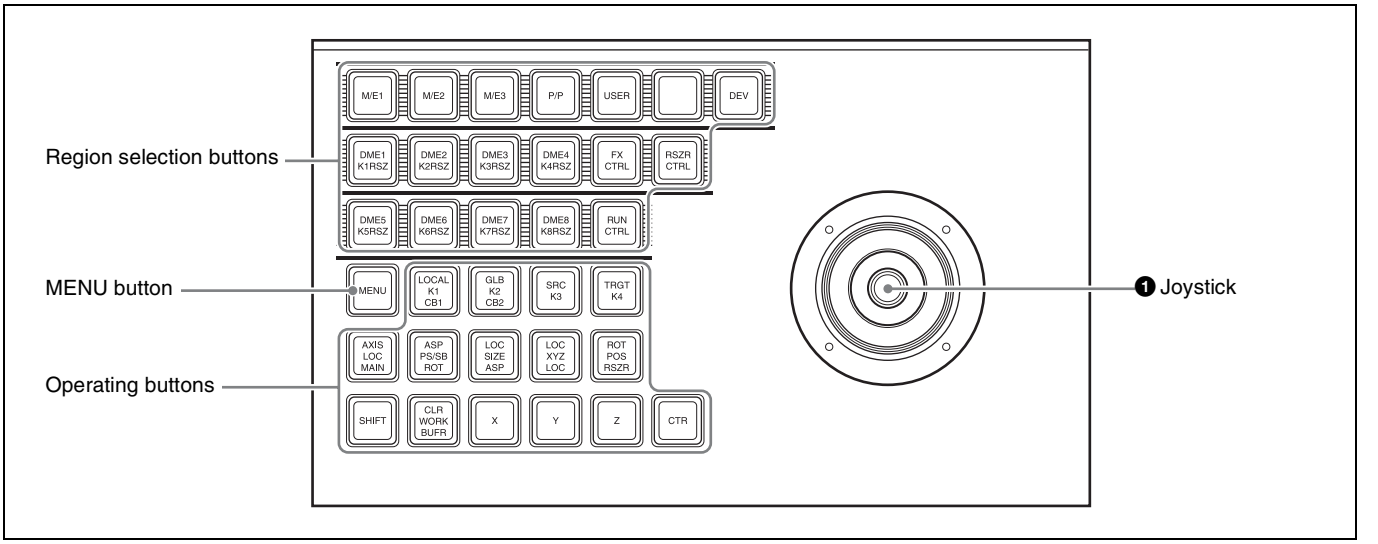

❶ Joystick

When the positioner operation mode is enabled
By moving this, you can move the pattern in the X-axis and Y-axis directions.
When the [USER] button is selected, by turning the end of the joystick you can adjust the size of pattern.

When the three-dimensional transform operation mode is enabled
By moving this, you can carry out operations in the X-, Y-, and Z-axes.
When the following buttons are held down, the joystick operation is switched to fine control (fine mode).
- The button on the end of the joystick
- [SRC] button
- [TRGT] button

When the effect run control mode is enabled
By moving the joystick sideways, you can run the keyframe effect, independent of the STOP NEXT KF, EFF LOOP and similar settings in the keyframe control block. Move to the right to run the effect in the normal direction, and to the left for the reverse direction.


When the VTR/disk recorder/frame memory operation mode is enabled
Moving the joystick sideways controls the tape transport/disk drive/frame memory clip operation, at a speed determined by the operating buttons.

When the resizer control mode is enabled
Move for operations in the X-, Y-, and Z-axes.
When the following buttons are held down, the joystick operation is switched to fine control (fine mode).

- The button on the end of the joystick
- [LOC SIZE] button
- [LOC XYZ] button
- [ASP PS] button

Device Control Block (Search Dial)

Using the device control block (search dial), you can directly operate an XDCAM, disk recorder, VTR, other external device, frame memory clip, or shotbox. The device control block (trackball) and device control block (joystick) can be used together.

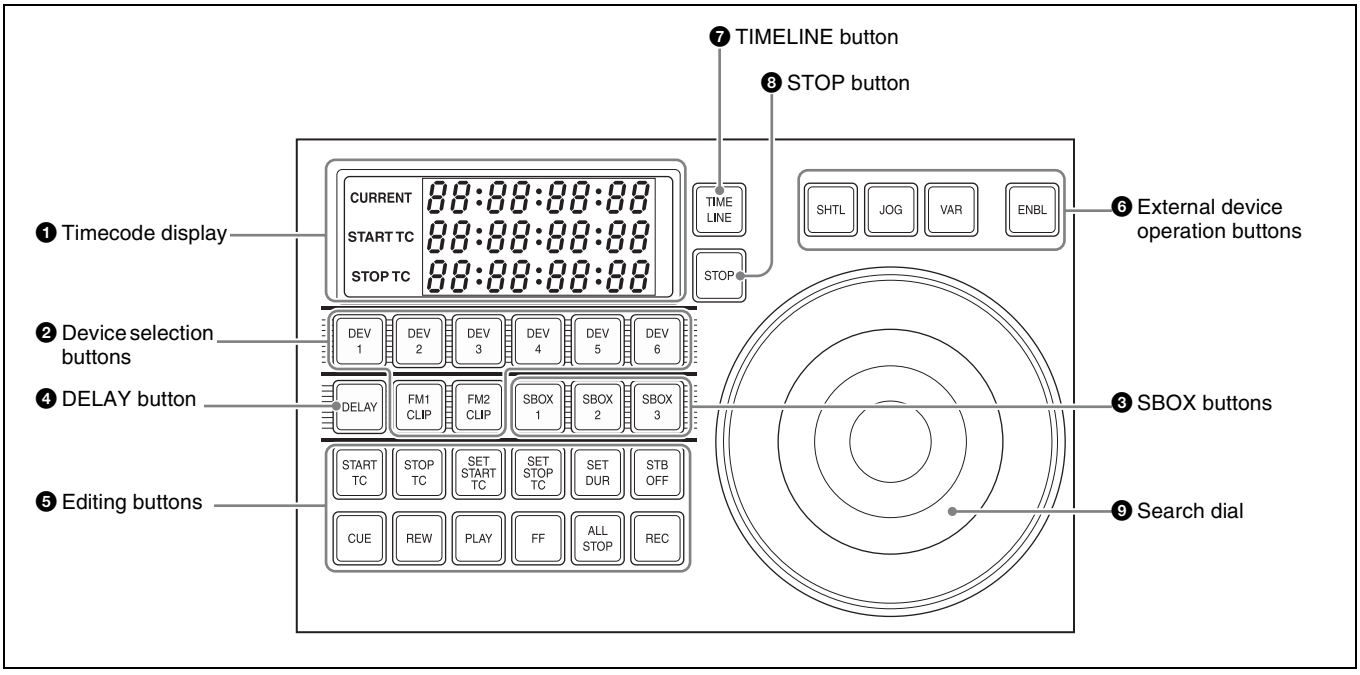

❶ Timecode display

This shows the current time (CURRENT) and the start and stop point timecode values for the current reference device (START TC, STOP TC). When you press a device selection button, the button lights, selecting the assigned device as the reference device, and displaying its setting value.
In the case of the SBOX buttons, the display does not change. When the operation applies to a VTR/disk recorder, the displayed setting value depends on whether the [TIMELINE] button is on or off, as follows.

When the [TIMELINE] button is on: Displays the start and stop points of the last set keyframe on the timeline. When the keyframe number is changed and the last register and keyframe change, the display also changes (timeline setting mode).


When the [TIMELINE] button is off: Displays the Cueup & Play (rewind action) start and stop points.

❷ Device selection buttons

These buttons are used for selecting assigned external devices or frame memory clips.
Each button can only be assigned to a single device. Carry out the assignment in the Setup menu.

For details, see "Assigning Functions to the Device Control Block" in Chapter 19 (Volume 2).

To select an assigned device, press the corresponding button, which lights green. To select more than one device simultaneously, hold down the button for the first selection, while pressing the buttons for the other selections in turn. The second and subsequent selected buttons light amber. If you press another button without holding down the first selected button, the second button will be the reference device and light green.

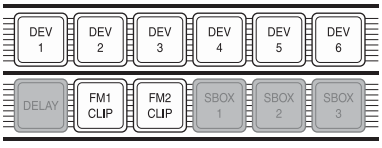

Name	Description
DEV1 to DEV6	Assign external devices DEV1 to DEV12.
FM1 CLIP, FM2 CLIP	Assign frame memory clips FM1 to FM8.

❸ SBOX (shotbox) buttons

Assign a shotbox saved in registers 1 to 99. When you press a button, the assigned shotbox is selected, and executed. Carry out the assignment in the Setup menu.

For details, see "Assigning Functions to the Device Control Block" in Chapter 19 (Volume 2).

You can freely assign the portions for device selection, SBOX, and [DELAY] buttons in setup.


❹ DELAY button

When pressed, this button lights green, the numeric keypad control block display changes to DELAY__ : , and you can set the start delay time for the selected device. The setting range is from 00:00 to 59:29 (depends on the video format). This button goes off when another timecode setting button ([START TC], [STOP TC], [SET START TC], [SET STOP TC], or [SET DUR]) is pressed.
The [DELAY] button can be set as a device selection button or an SBOX button in the Setup menu. Carry out the assignment in the Setup menu.

For details, see "Assigning Functions to the Device Control Block" in Chapter 19 (Volume 2).

❺ Editing buttons

These buttons set start and stop points. These operations are only valid while a device is selected with the device selection buttons.

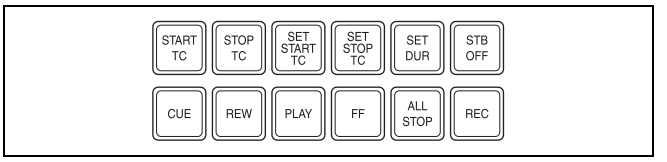

Name	Description
START TC	Press this button to set the timecode of the start point at that time. The timecode of the start point is updated to the current time each time this button is pressed. When the device the operation applies to is a VTR/disk recorder, the start point updated by the setting of the [TIMELINE] button is as follows. **When the [TIMELINE] button is On:** start point of the timeline **When the [TIMELINE] button is Off:** start point of Cueup & Play
STOP TC	Press this button to set the timecode of the stop point at that time. The timecode of the stop point is updated to the current time each time this button is pressed. When the device the operation applies to is a VTR/disk recorder, the stop point updated by the setting of the [TIMELINE] button is as follows. **When the [TIMELINE] button is On:** stop point of the timeline **When the [TIMELINE] button is Off:** stop point of Cueup & Play
SET START TC, SET STOP TC, SET DUR	• When pressed, these buttons light green, "START TC", "STOP TC" or "DUR" appears in the numeric keypad control block display, and you can enter a timecode from the numeric keypad. If you enter a numeric value and press the [ENTER] button, the button goes off, whereas if you press the [ENTER] button without entering a numeric value, the numeric keypad control block display shows "--:--:--:--". If the timecode has been set correctly, the entered numeric value appears in the timecode display. • To exit the numeric value entry mode, either repeat pressing the same button, or press a different numeric keypad control block linked button, or a mode selection button such as the [EFF] and [SNAPSHOT] buttons in the numeric keypad control block.
STB (standby) OFF	• When pressed, this button flashes amber, and the device selected with the device selection buttons exits from the standby mode. • This button cannot be used for frame memory clip operations.
CUE	• When pressed, this button flashes amber together with the [ALL STOP] button, and the device selected with the device selection button is cued up to the start point of the material. • When more than one device is selected, the amber flashing continues until the reference device is cued up, and when the cueing up is finished, this button lights green.
REW	When pressed, this button lights amber, and material of the device selected with the device selection buttons is rewound.
PLAY	• When pressed, this button lights amber, and the device selected with the device selection buttons plays. The playback stops not only if the [STOP] button is pressed, but also if any of the [STB OFF], [SHTL], [JOG], [CUE], [REW], [PLAY], [FF], and [ALL STOP] buttons is pressed. • When the [VAR] button is pressed while the device is playing back, the device plays at one times normal speed in variable mode.
FF	When pressed, this button lights amber, and the material of the device selected with the device selection buttons is fast forwarded.
ALL STOP	• When pressed, all device material playback stops. • During cueing up of any of the devices, this button flashes amber, and when all cueing up operations are completed, it lights green.

Name	Description
REC	• When pressed simultaneously with the [PLAY] button, this button lights red (the [PLAY] button lights amber), and the image from the selected device is recorded. • This button cannot be used for frame memory clip operations.

❻ External device operation buttons

Pressing the following buttons selects the search dial mode.



Name	Description
ENBL (enable)	When this is pressed, turning it on, the search dial [VAR], [JOG], and [SHTL] button operations are enabled.
VAR (variable)	Sets the search dial to variable mode.
JOG	Sets the search dial to jog mode.
SHTL (shuttle)	Sets the search dial to shuttle mode.

❼ TIMELINE button

Press to switch the device selected with the device selection buttons to timeline setting mode.

❽ STOP button

When pressed, this lights amber, and operation of the device selected with the device selection buttons stops.


❾ Search dial

Use this for search and other operations on the material of an external device.

For details, see "Controlling Tape/Disk Transport" in Chapter 12 (Volume 2).

Keyframe Control Block

In the keyframe control block, you can carry out effect editing and execution.

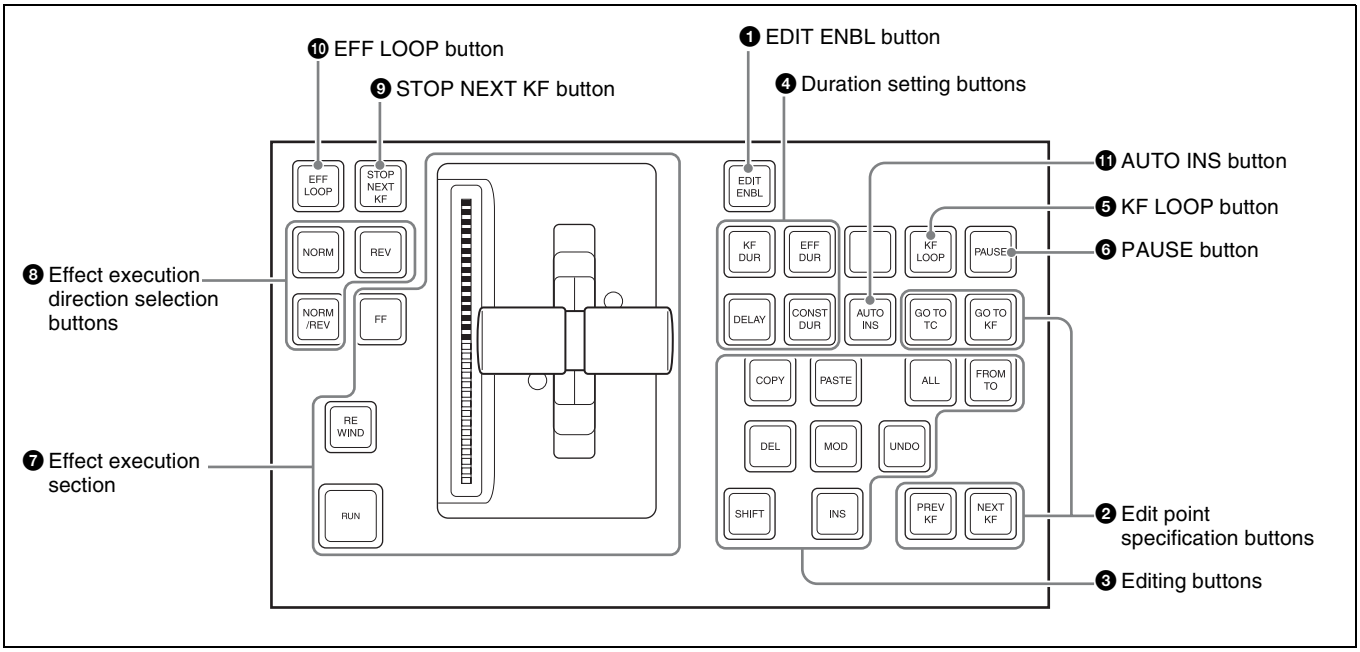


❶ EDIT ENBL (edit enable) button

Press this button, turning it on, to enable effect editing operations with the keyframe control block.
When macro editing is carried out, this button lights red.

❷ Edit point specification buttons


The following buttons are used to set an edit point.

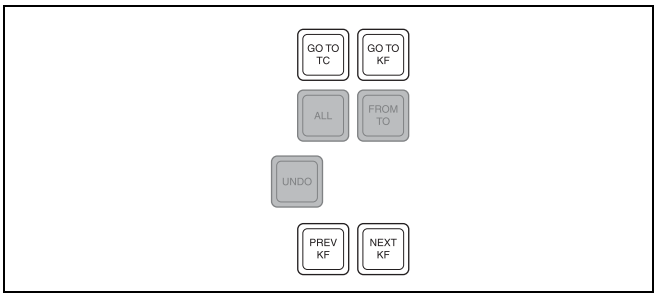

Name	Description
GO TO TC (Go to timecode)	Press this button, turning it on, to enter a numeric value from the numeric keypad control block, and move the edit point to the specified timecode position.
GO TO KF (Go to keyframe)	• Press this button, turning it on, to enter a numeric value from the numeric keypad control block, and move the edit point to the specified keyframe. • During macro editing, pressing this button moves the edit point to the event number specified by numeric entry with the numeric keypad control block.
PREV KF (previous keyframe)	• When this button is pressed, the edit point moves to the keyframe immediately before the current time (the position where the effect is currently stopped). • During macro editing, pressing this button moves the edit point to the event immediately before the current event.
NEXT KF (next keyframe)	• When this button is pressed, the edit point moves to the keyframe immediately after the current time. • During macro editing, pressing this button moves the edit point to the event immediately after the current event.

❸ Editing buttons

The following buttons are used to edit keyframes.

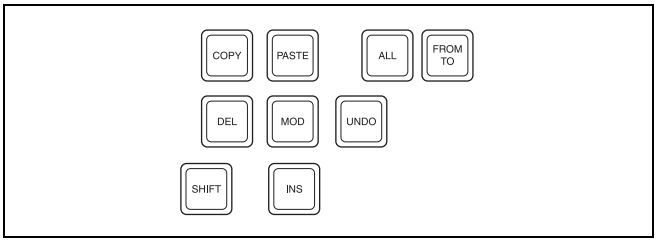

Name	Description
ALL	Press this button, turning it on, to select all keyframes (during macro editing, all events) in the effect.
FROM TO	Press this button, turning it on, to enter numeric values from the numeric keypad control block, and select a specified range of keyframes (during macro editing, the specified range of events).
INS (insert)	• When this button is pressed, a new keyframe is inserted after the current keyframe. • Pressing this button while holding down the [SHIFT] button inserts a new keyframe before the current keyframe. • During macro editing, pressing this button registers an event after the current event. • During macro editing, holding down the [SHIFT] button and pressing this button inserts a new event before the current event.
MOD (modify)	• When this button is pressed, the selected keyframe is modified with the values of the current keyframe. • When the edit point is between two keyframes, the immediately preceding keyframe is modified. • You can also select multiple keyframes, and modify them in a single operation. At this time, pressing this button while holding down the [SHIFT] button modifies all selected keyframes with the changed values taken as relative values. • During macro editing, pressing this button amends the selected event. • You can also select multiple events, and edit them in a single operation.
DEL (delete)	• When this button is pressed, the selected keyframe is deleted. • When the edit point is between two keyframes, the immediately preceding keyframe is deleted. • During macro editing, pressing this button deletes the selected event. • You can also select multiple keyframes or macro events, and delete them in a single operation.
COPY	• When this button is pressed, the selected keyframe (during macro editing, macro event) is copied. • You can also select multiple keyframes or macro events, and copy them in a single operation.
PASTE	• When this button is pressed, the deleted or copied keyframe (during macro editing, macro event) is inserted after the current keyframe (during macro editing, macro event). • Pressing this button while holding down the [SHIFT] button inserts the deleted or copied keyframe (during macro editing, macro event) before the current keyframe (during macro editing, macro event).
SHIFT	Hold down this button, and press the [INS] button, [MOD] button, or [PASTE] button, to obtain the shifted function for the button.

Name	Description
UNDO	When this button is pressed, the last executed keyframe (during macro editing, macro event) insertion, modification, or deletion, or paste operation is canceled.

❹ Duration setting buttons

The following buttons are used to set the duration of a keyframe.



Name	Description
KF DUR (keyframe duration)	Press this button, turning it on, to set the keyframe duration of the selected keyframe, by numeric value entry from the numeric keypad control block.
EFF DUR (effect duration)	Press this button, turning it on, to set the effect duration from the numeric keypad control block.
DELAY	Press this button, turning it on, to enter a delay value from the numeric keypad control block.
CONST DUR (constant duration)	• Select the duration mode. • When this is lit, the mode is constant duration mode, and when off, variable duration mode.

❺ KF LOOP (keyframe loop) button

Press this button, turning it on, to execute the effect the specified number of times through the keyframes in the specified range.


❻ PAUSE button

When this button is pressed, a pause is applied to the selected keyframe.

When editing a macro, press this button, turning it on, to include a pause event in the macro. The pause length can be set in the numeric keypad control block.

❼ Effect execution section


This section is used to execute an effect, and check the progress of the effect execution.

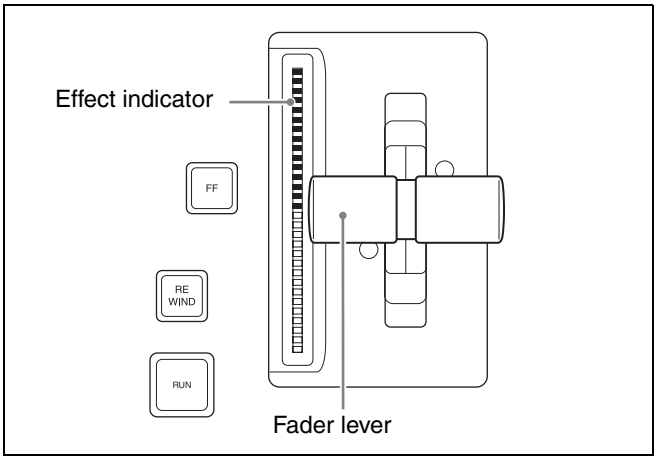

Name	Description
RUN button	• When this button is pressed, the effect is run from the first keyframe to the last keyframe. However, if a pause is set on a keyframe, the effect stops at that point. • Press this button again to resume execution, and continue to the next pause point or the end of the effect.
Effect indicator	This comprises multiple LEDs, which show the progress of the effect.
Fader lever	Moving this up or down manually runs the effect.
REWIND button	When this button is pressed, the currently recalled effect is rewound to the first keyframe.
FF (fast forward) button	When this button is pressed, the currently recalled effect is advanced to the last keyframe.

❽ Effect execution direction selection buttons

The following buttons are used to set the direction of effect execution.



Name	Description
NORM (normal)	• When this button is lit, effect execution runs from the first keyframe to the last keyframe. • This button automatically goes off when the [REV] button is pressed, turning it on.
REV (reverse)	• When this button is lit, effect execution runs from the last keyframe to the first keyframe. • This button automatically goes off when the [NORM] button is pressed, turning it on.
NORM/REV (normal/ reverse)	Press this button, turning it on, to reverse the direction of the effect when it reaches the last keyframe or first keyframe.


❾ STOP NEXT KF (stop next keyframe) button
When this button is pressed, turning it on, the effect execution range is from the current time to the next keyframe.

❿ EFF LOOP (effect loop) button
When the effect reaches the last keyframe with this button on, it returns to the first keyframe and repeats.


⓫ AUTO INS (auto insert) button
When editing a macro, press this button, turning it on, to enable the auto insert function, so that every control panel operation you carry out is added to the macro as an event.

Numeric Keypad Control Block

The numeric keypad control block is used for region selection, for saving and recalling snapshots, effects and shotboxes, for entering numeric values for trackball operation and keyframe operation, and for transition rate entry.

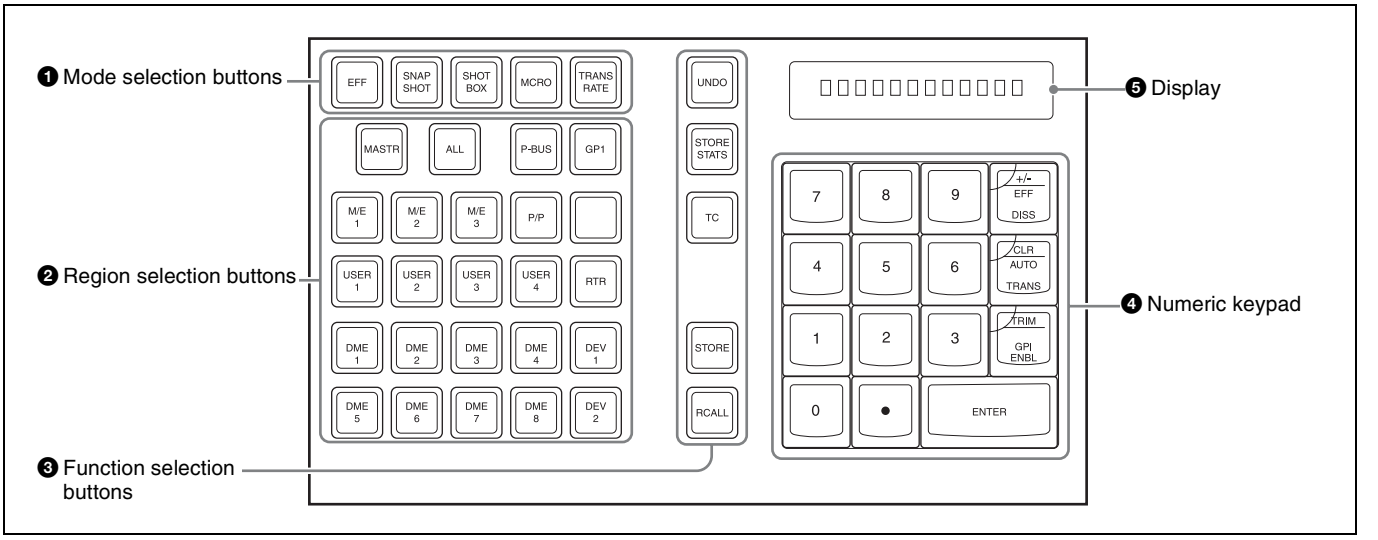


❶ Mode selection buttons
Pressing the following buttons changes the mode.



Name	Description
EFF (effect)	Press to save or recall an effect.
SNAPSHOT	Press to save or recall a snapshot.
SHOTBOX	Press to save or recall a shotbox.
MCRO (macro)	Press to save, recall or edit a macro.
TRANS RATE (transition rate)	• Press to set the transition rate. • Hold down this button, and press one of the key delegation buttons [KEY1] to [KEY8] in the transition control block to set an independent key transition rate.

❷ Region selection buttons
These select the functional block (“region”) of the control panel to which operations apply.
You can select more than one region at the same time.
The first button you press is taken as the reference region, and lights green, while the next pressed button lights amber.
With the exception of the [MASTR] and [ALL] buttons, you can change the region assignment to the buttons as desired in the Setup menu.

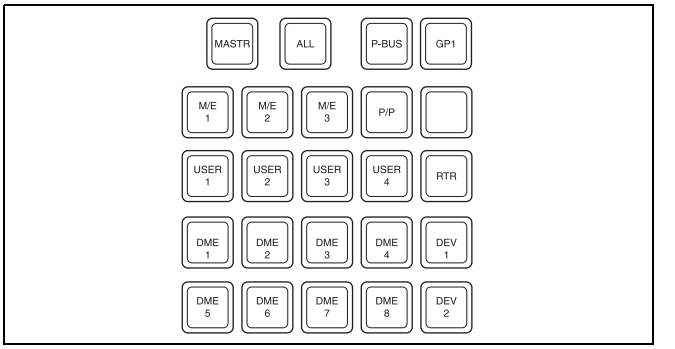


Name	Description
MASTR (master)	Press this, turning it on, to save region information in a master snapshot register or master timeline register, or to recall such region information.

Name	Description
ALL	• Select all regions. • When any region is already selected, pressing this button makes all regions unselected.
M/E 1 to M/E 5, P/P	Select the corresponding regions, M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST. *For details of [M/E 4] or [M/E 5] button assignment, see "Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.*
USER 1 to USER 8	Select a User region.
DME1 to DME8	Select a DME channel.
P-BUS	Select the P-Bus region.
GPI	Select the GPI region.
RTR	Select the router region.
DEV1 to DEV12	Select the Device 1 to Device 12 regions respectively.
MCRO	Select the macro region.

❸ Function selection buttons

The following buttons are used to switch the function.

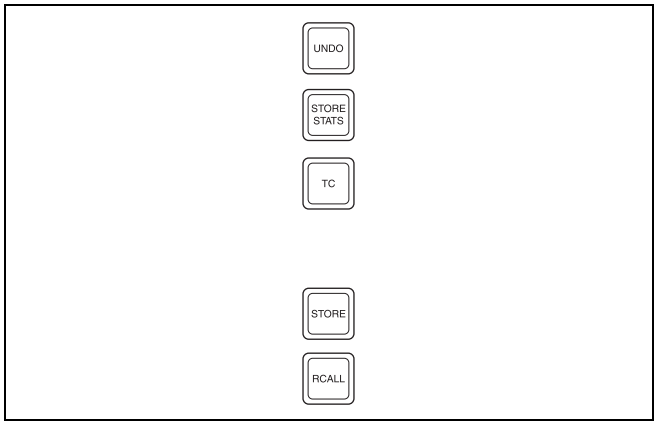


Name	Description
UNDO	After recalling a register, press this button to return to the state before recalling the register.
STORE STATS (store status)	• This lights amber when data is stored in a register. • After saving data to a register, hold down this button and press the [UNDO] button to return the register to the state before the data was saved.
TC (timecode)	Press this button, turning it on, to switch transition rate entry to the timecode entry mode.
STORE [a]	Press this button to switch to the mode for saving a snapshot, effect, shotbox or macro in a register.
RCALL (recall) [a]	Press this button to switch to the mode for recalling a snapshot, effect, shotbox or macro from a register.

a) [STORE] button or [RCALL] button flashes amber when one or more of the regions assigned to the Region selection buttons are not selected by the Region Select menu.

❹ Numeric keypad

In addition to the buttons for numeric input, this includes buttons for adding attributes to snapshots.




Name	Description
0 to 9	Used to input numeric digits.
. (period)	• Enters the decimal point. • When the [TC] button is lit, enters "00." • When the [EFF] button, [SNAPSHOT] button or [SHOTBOX] button is lit, this is used to find an empty register.
+/–/EFF DISS (effect dissolve)	• Invert the sign, negative or positive. • When the [SNAPSHOT] button is lit, applies the effect dissolve attribute to a snapshot.
CLR/AUTO TRANS (clear/auto transition)	• Clear an input value, returning to the previous state. • When the [SNAPSHOT] button is lit, applies the auto transition attribute to a snapshot.
TRIM/GPI ENBL (enable)	• After entering a difference value to be added to an existing setting, press this button to confirm the change. • When the [SNAPSHOT] button is lit, adds a GPI output attribute to the snapshot.
ENTER	Confirm an entered value.

❺ Display

This shows the selected region name, register number, and entered numeric values.

Fade to Black Control Block

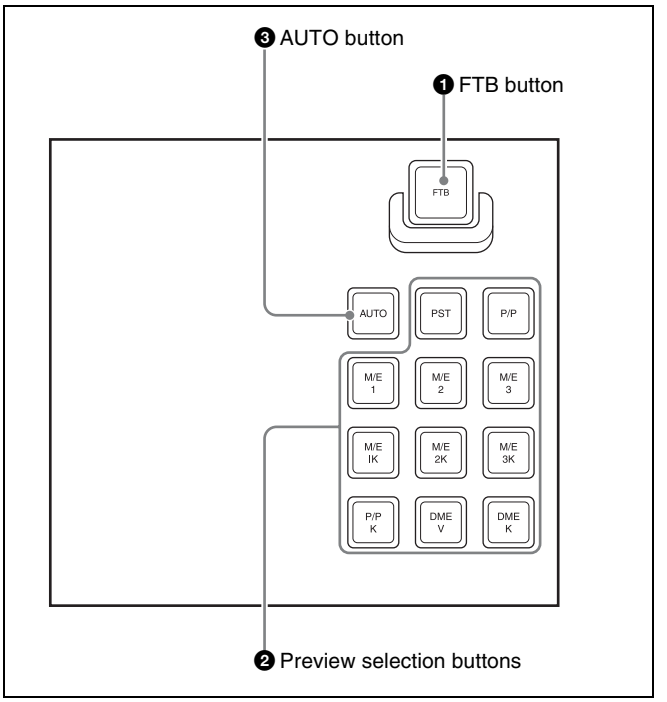

❶ FTB (fade to black) button
Press this button to fade to black the program output of the PGM/PST bank, at the set transition rate. You can set the fade to black transition rate in the menu.

❷ Preview selection buttons
Each of these buttons can be assigned to any preview output in setup.
Each button can be assigned to any preview output in setup.


For details, see "Assigning Preview Output to Preview Selection Buttons" in Chapter 19 (Volume 2).

Name	Description
PST (preset)	When this button is pressed, the signal selected on the background B row of the PGM/PST bank is selected on the edit preview bus.
M/E 1 to M/E 5, P/P (M/E 1 to M/E 5, P/P preview)	The preview signal (M/E-1 PVW, M/E-2 PVW, M/E-3 PVW, M/E-4 PVW, M/E-5 PVW, P/P PVW) of the M/E or PGM/PST bank corresponding to the pressed button is selected on the edit preview bus. *For details of [M/E 4] or [M/E 5] button assignment, see "Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.*
M/E 1K to M/E 5K, P/P K (M/E 1 to M/E 5, P/P key preview)	The key preview signal (M/E-1 K-PVW, M/E-2 K-PVW, M/E-3 K-PVW, M/E-4 K-PVW, M/E-5 K-PVW, P/P K-PVW) of the M/E or PGM/PST bank corresponding to the pressed button is selected on the edit preview bus. *For details of [M/E 4] or [M/E 5] button assignment, see "Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.*
DME V (DME monitor video)	When this button is pressed, the DME monitor output video signal (DME MON V) is selected on the edit preview bus.
DME K (DME monitor key)	When this button is pressed, the DME monitor output key signal (DME MON K) is selected on the edit preview bus.

❸ AUTO button
When this button is pressed, the M/E or PGM/PST bank preview signal selected on the edit preview bus is automatically switched to the program signal depending on the on-air status.

Auxiliary Bus Control Block (for AUX Buses)

There are also models without the selected source name displays and source name displays shown in the following figure.
All operations except those of the [DEST] button and [SHIFT] button are the same as for a model with selected source name displays and source name displays.

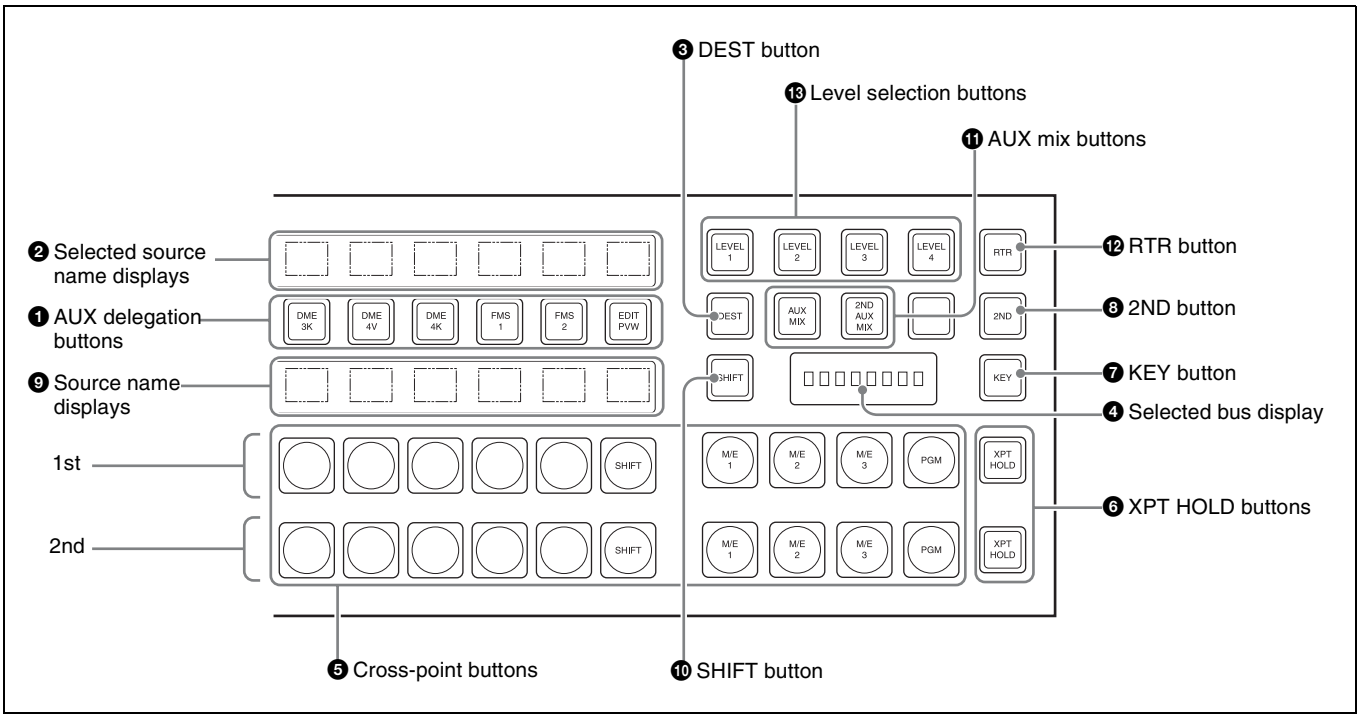

❶ AUX delegation buttons

Press one of these buttons, turning it on, to select the bus to which to assign the cross-point buttons in the auxiliary bus control block.

For buses that can be selected, see "Bus Selection" (page 89).

❷ Selected source name displays

These show the name of the currently selected signal (source) on the bus corresponding to the delegation button.

❸ DEST (destination) button

Press this button, turning it on, to display the names of buses allocated to the delegation buttons in the selection source name displays.
In the case of a module without selected source name displays, this button is invalid.

❹ Selected bus display

This shows the name of the bus selected by the auxiliary bus delegation buttons.

❺ Cross-point buttons

The cross-points in the auxiliary bus control block are arranged in two rows: an upper row (1st row) and a lower row (2nd row), and are allocated to the buses selected with the AUX delegation buttons. The 1st row contains the cross-point buttons for unshifted buses, and the 2nd row contains the cross-point buttons for shifted buses.
When the DME 1 V/K to DME 8 V/K buses are selected with the AUX delegation buttons, the 1st row cross-point buttons are for the currently showing side of DME, and the 2nd row are for the reverse side.

By holding down the [2ND] button and making an AUX delegation selection, you can allocate the 2nd row to a different bus from the 1st row.
In this case, if the 32nd button is set to be a [SHIFT] button (in a 32-button system), you can select the shifted cross-point buttons in the 1st and 2nd rows.

❻ XPT HOLD (cross-point hold) buttons

Press one of these buttons, turning it on, to enable cross-point hold.

❼ KEY button

While this button is held down, you can use the cross-point row of buttons to select key signals.

❽ 2ND button

After selecting a bus with an AUX delegation button, hold down this button, and select another AUX delegation, thus allocating a different bus in the 2nd row from the 1st row.

❾ Source name displays

These show the names of the source signals which can be selected by the cross-point buttons. While the [SHIFT] button is enabled, the shifted signal name is displayed. If a different bus is allocated to the 2nd row, while the [2ND] button is held down, the 2nd row signal name is displayed. While the [KEY] button is held down, the source name of the key signal assigned to the cross-point buttons appears.

❿ SHIFT button

While this button is enabled, the shifted signal names appear in the source name display. Pressing this buttons toggles the source name display between the shifted signal names and unshifted signal names.

In the case of a module without source name displays, this button is invalid.

⓫ AUX mix buttons
When AUX bus is selected using the AUX delegation button, press this button to execute an AUX mix transition.

For details of AUX mix transition operation, see "AUX Mix Transitions" (page 119).

Button	Description
AUX MIX	When the [2ND] button is off, press this button, turning it on, to execute an AUX mix transition. When the [2ND] button is on, press this button, turning it on, to execute an AUX mix transition on the 1st row.
2ND AUX MIX	If the bus assigned in the 2nd row is different from the bus assigned in the 1st row, press this button, turning it on, to execute an AUX mix transition on the 2nd row.


⓬ RTR (router) button
Press this button, turning it on, to assign the auxiliary bus control block to router control.

For details of the names and functions of parts for router control, see the next section.

⓭ Level selection buttons
Used when the auxiliary bus control block is carrying out router control.

Auxiliary Bus Control Block (for Router Control)

Press the [RTR] button, turning it on, to assign the auxiliary bus control block to router control.

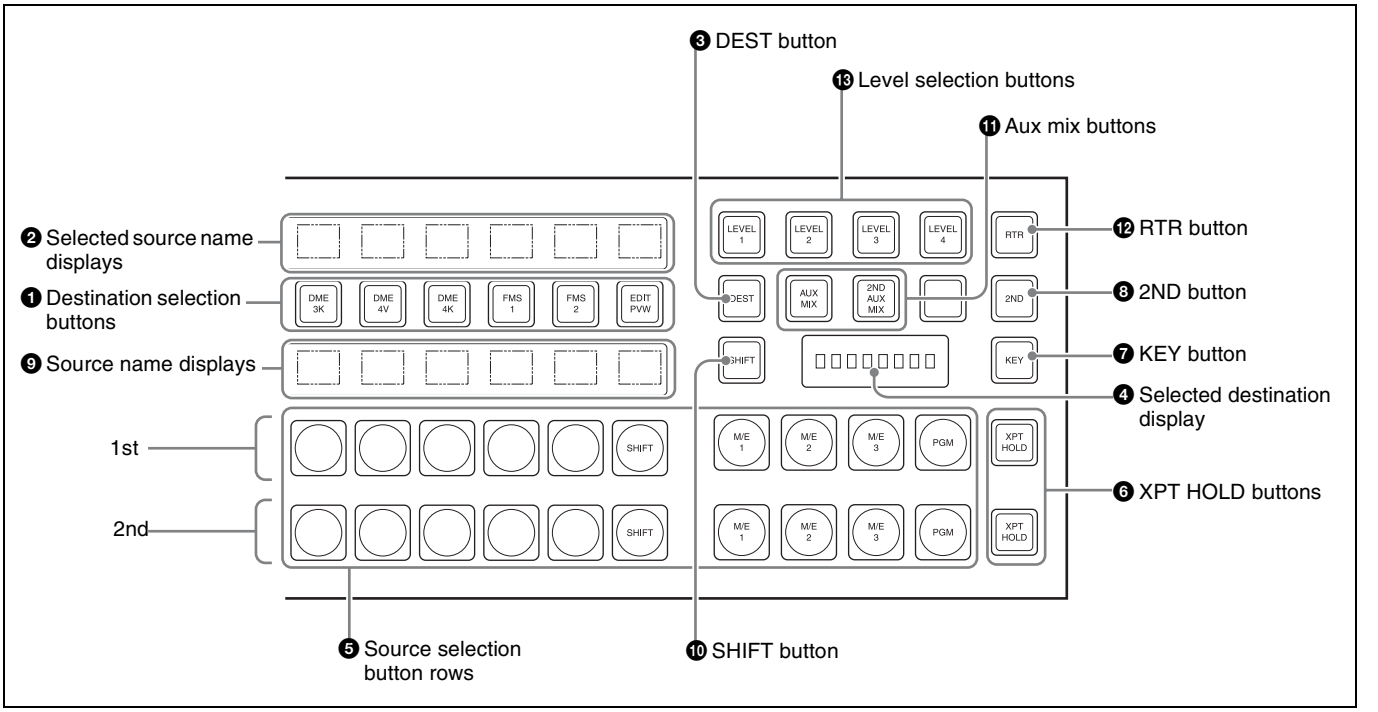

❶ Destination selection buttons
Press a button, turning it on, to select the destination to which the router source is assigned.
The button pressed to assign a destination to a source selection button in the 1st row lights amber. When another button is pressed to assign a different destination to a source selection button in the 2nd row, it lights green.

❷ Selected source name displays
These show the source name selected for the destination.

If the source names and destination names are set in the Setup menu to "Sw'er Local" mode, then the description names appear here.

❸ DEST (destination) button
Press this button, turning it on, to display the names of the destinations assigned to the destination selection buttons in the selected source name displays.

❹ Selected destination display
This shows the name of the destination selected by the destination selection buttons. If a protected destination is selected, the indication "PROTECT" appears.

❺ Source selection button rows
The destination selected with a destination selection button is assigned to a source selection button. Press a source selection button to select a source. The 1st row of buttons are source selection buttons for the unshifted destinations, and the 2nd row are shifted source selection buttons. By holding down the [2ND] button, and selecting a destination, you can assign a different destination from the 1st row to the 2nd row. In the 1st row, the button to which a destination is assigned lights amber. If a different destination is assigned to a button in the 2nd row, the button lights green.
When the 32nd button is set as a [SHIFT] button (in a 32-button system), you can select the shifted sources in the 1st and 2nd rows. Also, by using the [KEY] button, you can expand the source selection as follows.

Source selection	[SHIFT]	[KEY]	Selection operation
1 to 31	Off	Off	Press the source selection button.
32 to 62	On	Off	Press the [SHIFT] button, then press the source selection button.
63 to 93	Off	On	Hold down the [KEY] button, and press the source selection button.
94 to 124	On	On	Hold down the [KEY] button, and press the [SHIFT] button, turning it on (the [SHIFT] button locks here, even when in Hold mode), then press the source selection button.

❻ XPT HOLD (cross-point hold) buttons
Not used in router control mode.

❼ KEY button
When this button is enabled by a setting in the Setup menu, holding it down during a source selection expands the function of the [SHIFT] button.

See "Using the Auxiliary Bus Control Block for Router Control Setting Button" in Chapter 19 (Volume 2).

❽ 2ND button
After selecting a destination with the destination selection buttons, hold down this button and make another destination selection to assign a different destination from the 1st row to the 2nd row.

❾ Source name displays
These display the names of signals (sources) that can be selected with the cross-point buttons. While the [SHIFT] button is active, the shifted signal names appear. While the [KEY] button is held down, the expanded signal names appear.
When a different destination is assigned to the 2nd row, the 2nd row signal names appear only while the [2ND] button is held down.


❿ SHIFT button
While this button is active, the source name displays show the shifted signal names. Press this button to toggle between the shifted and unshifted states.

⓫ AUX mix buttons
Used when the auxiliary control block is operating on AUX buses.

⓬ RTR (router) button
Press this button, turning it on, to assign the auxiliary bus control block to router control.

⓭ Level selection buttons
To each of the four buttons, plural S-Bus levels are assigned in the Setup menu. Press a button, turning it on, to make operations apply to those S-Bus levels.


Menu Control Block

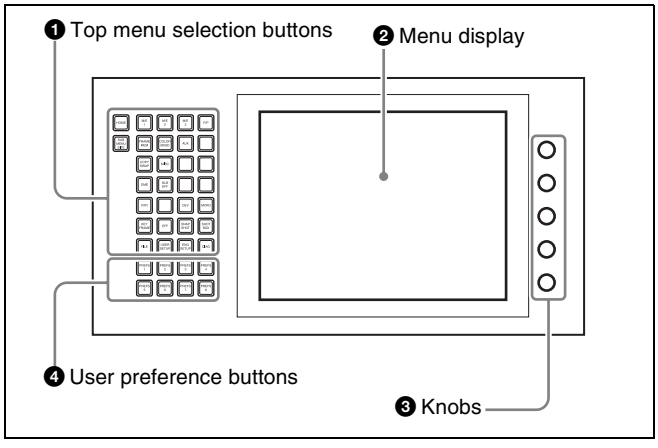

❶ Top menu selection buttons
These select the menu appearing in the menu display.

It is also possible to change the assignment of these buttons in setup.

For details, see "Assigning Functions to the Menu Control Block Top Menu and User Preference Buttons" in Chapter 19 (Volume 2).

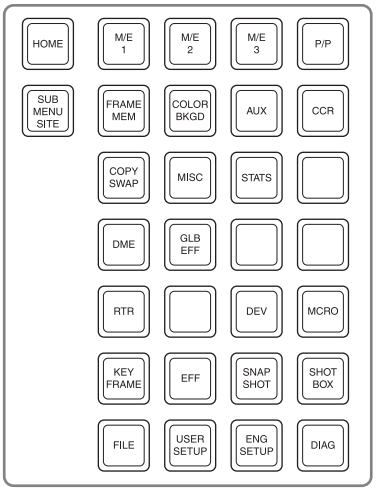

❷ Menu display
This shows the menu currently in use.


❸ Knobs
These adjust the parameter values appearing in the menu.

❹ User preference buttons
These recall the functions or menus assigned to them in the Setup menu.
In the default setup, nothing is assigned to the [PREFS 1] to [PREFS 7] buttons.
It is also possible to change the assignment of these buttons in setup.

For details, see "Assigning Functions to User Preference Buttons" in Chapter 19 (Volume 2).

PREFS 8 button: When this button is on, control of an editor from the Remote1 port on the rear panel of the switcher is possible. However, even when it is off, control of the Edit PVW bus is always possible.

Memory Card/USB Adaptor Block

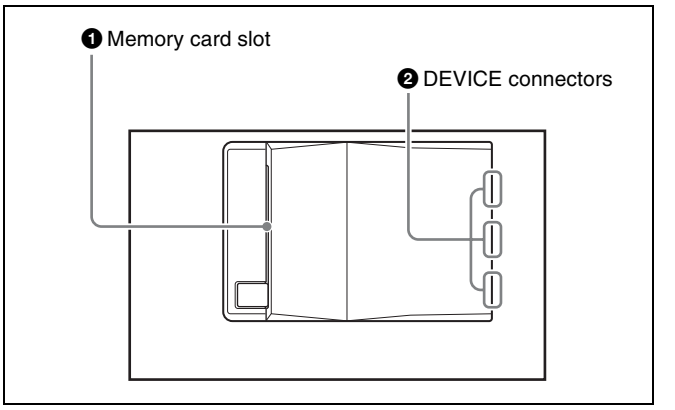


❶ Memory card slot
This slot accepts a PCMCIA Type II compliant memory card. You can use it in software installation, and for saving and reading in data, such as snapshot, keyframe, effect, and setup data.

❷ DEVICE connectors
There are three USB connectors.
You can connect a device such as a mouse, keyboard, or USB storage that is equipped with a USB interface to any of these connectors.

For details on the devices that can be connected, consult your Sony representative.

"Memory Stick"/USB Connections Block

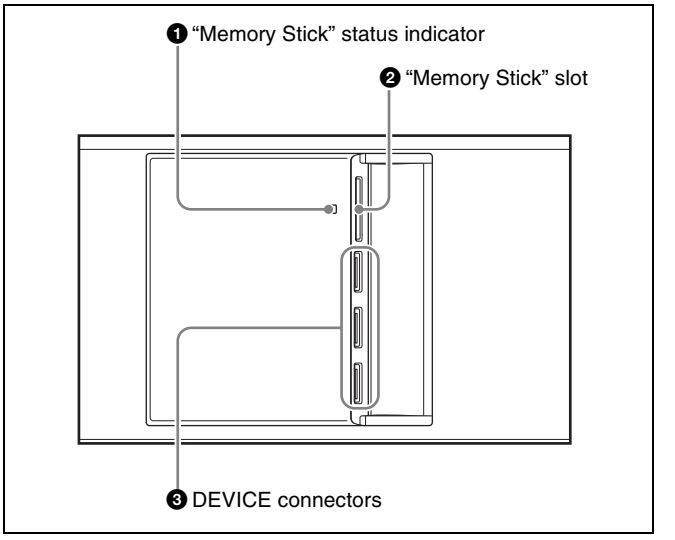

❶ "Memory Stick" status indicator
Lights in red during access to a "Memory Stick."

Notes

Do not power the unit off or remove a “Memory Stick” when the “Memory Stick” status indicator is lit.

❷ “Memory Stick” slot
Insert “Memory Sticks.” You can use it in software installation, and for saving and reading data, such as snapshot, keyframe, effect, and setup data.

See the next item, “About “Memory Sticks”” for more information about the usable “Memory Sticks” and their handling.

❸ DEVICE connectors
There are three USB connectors.
You can connect a device such as a mouse, keyboard, or USB storage that is equipped with a USB interface to any of these connectors.

For details on the devices that can be connected, consult your Sony representative.

About “Memory Sticks”

Usable “Memory Sticks”

This unit has been confirmed to operate with those of the following “Memory Sticks” that have a capacity of 8 GB (gigabytes) or less. However, operation with all “Memory Sticks” is not guaranteed.

- “Memory Stick”
- “Memory Stick PRO”
- “Memory Stick Duo”
- “Memory Stick PRO Duo”

Notes


- When using a “Memory Stick PRO,” high-rate data transfer using parallel interface is not supported.
- A “MagicGate Memory Stick” can also be used, but this system does not support the MagicGate function.
- When using a “Memory Stick Duo,” be sure to use it with a “Memory Stick Duo Adaptor” (MSAC-M2 or equivalent). If you insert a “Memory Stick Duo” without using the adaptor, there is the possibility that the stick cannot be removed, resulting in a serious accident.

Handling “Memory Sticks”

When using “Memory Sticks,” pay attention to the following points.

- Do not touch the connector of the “Memory Stick” with anything, including your finger or metallic objects.
- Do not attach anything other than the supplied label to the “Memory Stick” labeling position.
- Attach the label so that it does not stick out beyond the labeling position.
- Carry and store the “Memory Stick” in its case.
- Do not strike, bend, or drop the “Memory Stick.”
- Do not disassemble or modify the “Memory Stick.”
- Do not allow the “Memory Stick” to get wet.
- Do not use or store the “Memory Stick” in a location that is:
  - Extremely hot, such as in a car parked in the sun
  - Under direct sunlight
  - Very humid or subject to corrosive substances

Utility/Shotbox Control Block

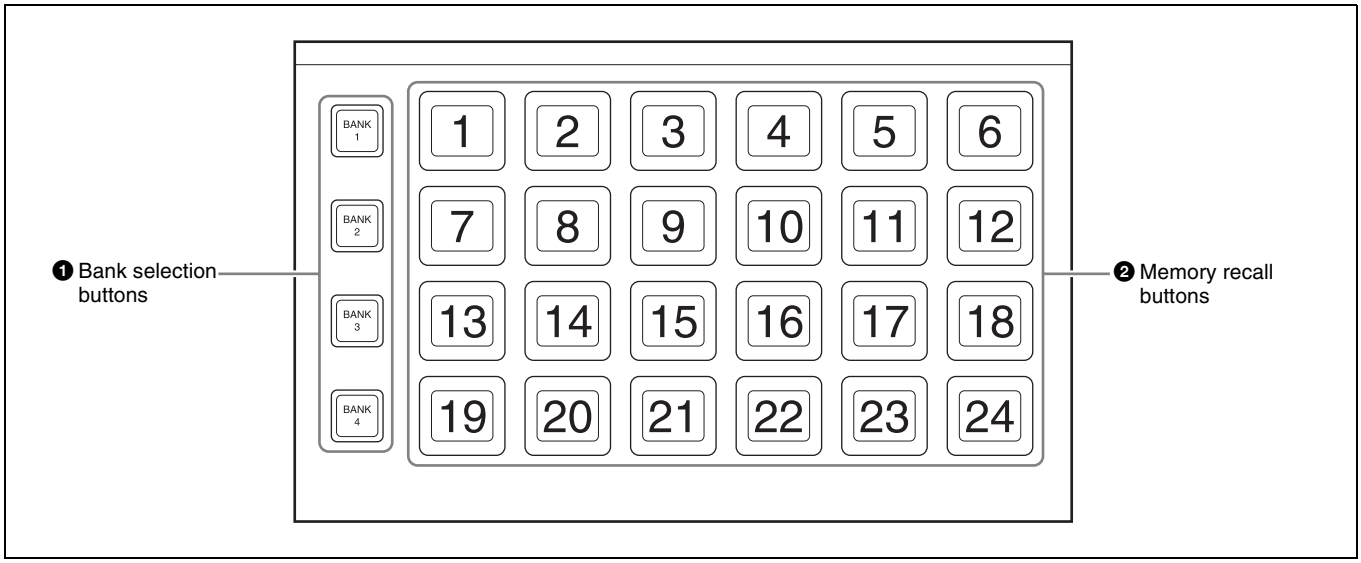

❶ Bank selection buttons
Press any of the [BANK1] to [BANK4] buttons to select a bank of 24 memory recall buttons. The selected button lights amber.

❷ Memory recall buttons

You can use these buttons to recall frequently used menus, utility functions, shotbox registers, or macro registers that you have assigned.

When a utility function is allocated to a button, the button lights orange (or green depending on the status), and the allocated function name appears.

Pressing the button executes the allocated function. When the function constitutes a switching on/off operation, the button lights green; otherwise, it only momentarily lights green.


When a shotbox register or macro register recall is assigned to a button, the button lights orange, and the assigned register name appears (if the register is empty, the button goes off). In the case of a shotbox function, pressing the button executes the assigned shotbox function, and the button lights yellow. In the case of a macro register, pressing the button executes the assigned macro, and the button flashes yellow.

You can also assign enabling and disabling of macro attachment to use as the [MCRO ATTCH ENBL] button. You can make a setup setting such that when the [MCRO ATTCH ENBL] button is On, the buttons for which a macro attachment is set light.

For details, see "Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block" in Chapter 19 (Volume 2).


Transition Control Block and Flexi Pad Control Block (Simple Type)

The simple versions of the transition control block and Flexi Pad control block shown in the following figure is designed to allow simplified operations than with the standard type. The transitions carried out using these simple-type control blocks are also referred to as "simple transitions" in this User's guide.

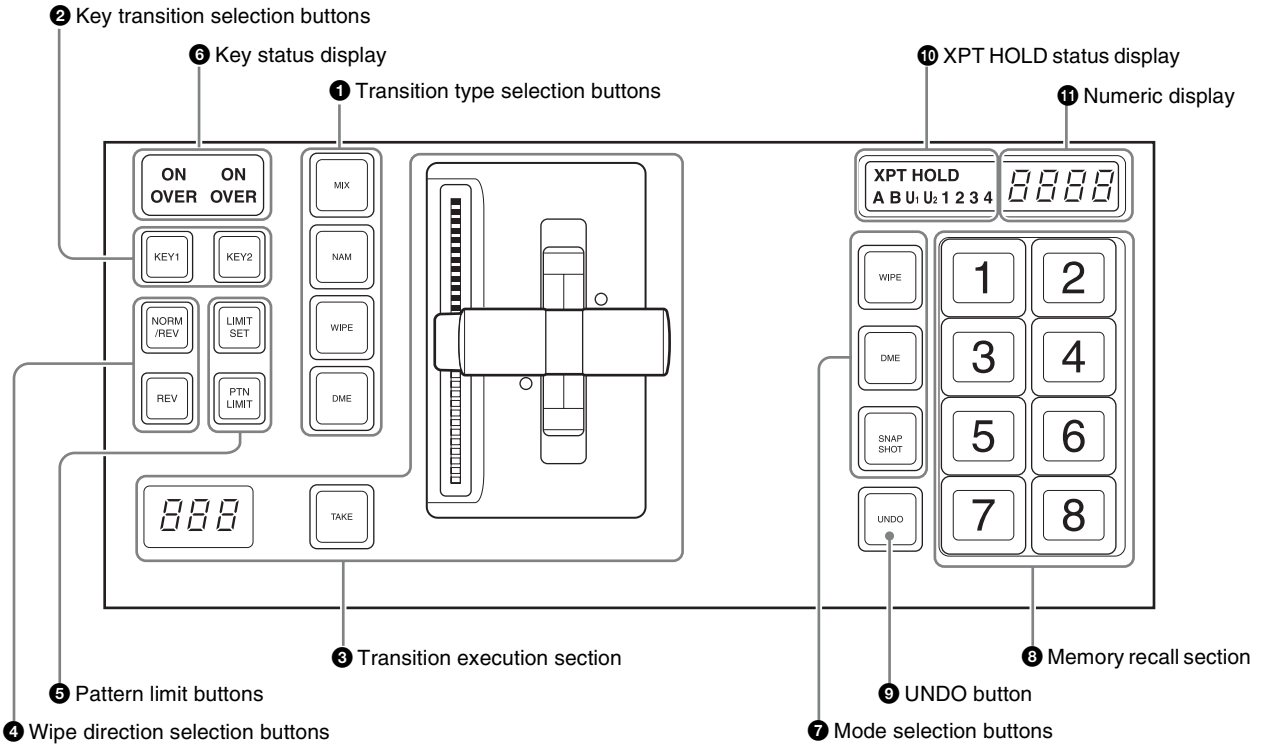

Shown above is the right-hand type transition control block (with the right-hand fader lever).

Transition control block and flexi pad control block (with [INH] button)

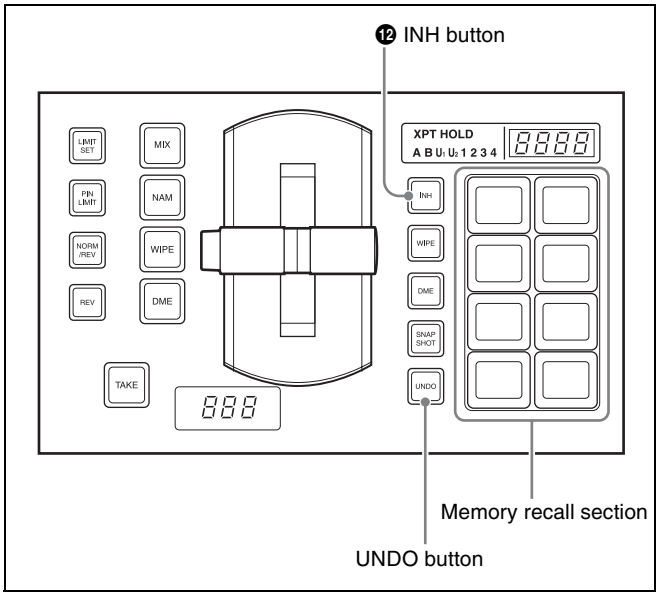

❶ Transition type selection buttons


You can assign these buttons in setup to any transition type.

For details, see "Overall Control Panel Settings (Config Menu)" in Chapter 19 (Volume 2).

Press any of the following buttons, turning it on, to select the transition type.
Press one of these buttons, turning it on, to determine the type of the next transition for a background.
To select the key transition type *(see page 95)*, hold down the [KEY1] or [KEY2] button, and press one of the following buttons, turning it on.
When multi-program mode is selected in the Setup menu, two or more of the following buttons may light.

For details, see "Setting the Operation Mode" in Chapter 20 (Volume 2).

You can also assign a function to these buttons to select whether or not the fader levers are used as key frame faders.

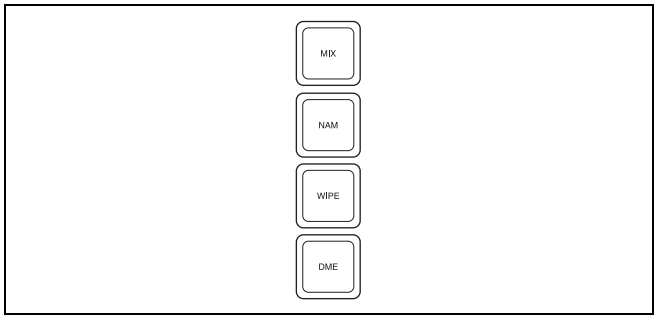


Name	Description
MIX	In a background transition, the new video fades in as the current video fades out.
NAM (non-additive mix)	The current and new video signals are compared, and the signal with the higher luminance level is given priority in the output.
WIPE (DME wipe)	The current video is replaced by the new video, using the wipe pattern selected in the Wipe menu.
DME	A wipe type of transition is carried out, using the DME effect selected in the DME Wipe menu.
FM1&2CLIP, FM3&4CLIP, FM5&6CLIP, FM7&8CLIP	A recorded clip is played back together with the transition. At this point, you can also carry out a transition (wipe or mix (dissolve)) simultaneously together with the clip.
KF (keyframe)	Press this button, turning it on, to enable using the fader lever as a keyframe fader.

❷ Key transition selection buttons

To insert or delete key 1 on the next transition, hold down the [KEY1] button, and select the type of transition using the transition type selection buttons. If the key is currently not inserted, the transition will insert it, and if the key is currently inserted, the transition will delete it. You can use the [KEY2] button in a similar way.
While these buttons are held down, you can select a key source with the cross-point buttons on the key bus.
Pressing one of these buttons twice in rapid succession changes the state of the corresponding key bus so that a cross-point can be selected.

❸ Transition execution section

This section is used to execute a transition, and check the progress of the transition.

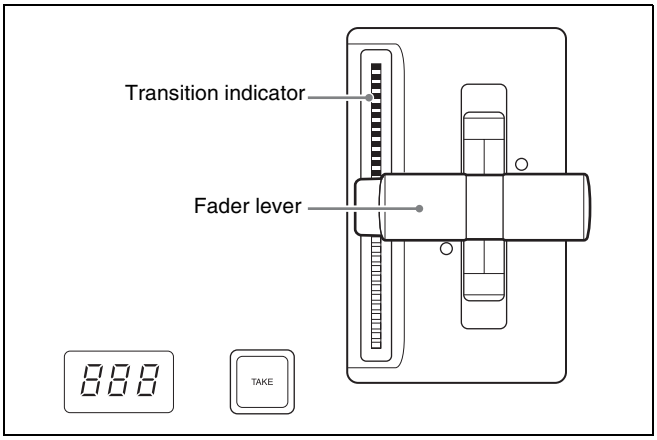


Name	Description
Fader lever	• Move this vertically to carry out a transition. • When a transition type selection button to which the [KF] button function has been assigned is lit, you can use this as a key frame fader. • When the split fader function is enabled, by pressing the projection on the left side of the grip you can release the lock and separate the two halves of the fader lever. With the split fader lever, in a background mix transition, you can control the background A and B buses independently.
Transition indicator	This comprises multiple LEDs, which show the progress of the transition.
Transition rate display	• This displays the transition rate (the time from the beginning of the transition to its completion) set for an auto transition, in frames. • You can set the transition rate using the numeric keypad control block or menu.
TAKE button	• Pressing this button carries out an auto transition of the set transition rate. The transition starts immediately, and the button lights amber. • When the transition completes, the button goes off.

❹ Wipe direction selection buttons

For details, see "Wipe direction selection buttons" (page 39).

❺ Pattern limit buttons

The following buttons are used to set a pattern limit.

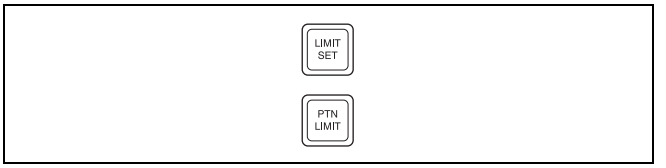

Name	Description
LIMIT SET	• Move the fader lever to the position of a particular pattern size, and stop it there, then press this button to set the pattern limit range. • This button is enabled when the [PTN LIMIT] button is off.
PTN (pattern) LIMIT	When a wipe or DME wipe is selected, pressing this button, turning it on, enables the pattern limit function.


❻ Key status display

For each of keys 1 and 2, when the key is inserted, the corresponding ON indicator lights. The OVER indicators show the priority between keys 1 and 2, by lighting when the corresponding key is on top. For example, when key 1 appears over key 2 on the program monitor, the OVER indicator for key 1 lights.

The following is the Flexi Pad control block.

❼ Mode selection buttons

The following buttons are used to save and recall a snapshot, wipe snapshot, and DME wipe snapshot.

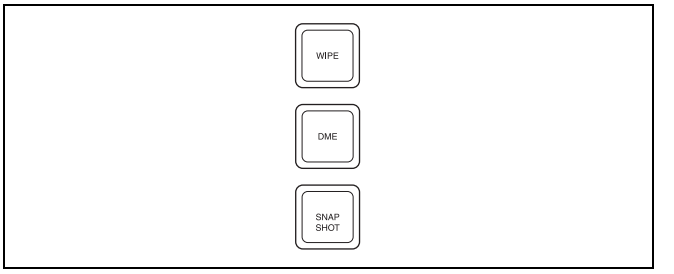

Name	Description
WIPE	When saving or recalling a wipe snapshot, use this in combination with the buttons of the memory recall section.
DME	When saving or recalling a DME wipe snapshot, use this in combination with the buttons of the memory recall section.
SNAPSHOT	When saving or recalling a snapshot, use this in combination with the buttons of the memory recall section.

❽ Memory recall section

This consists of eight buttons with LCDs, whose display changes according to the operation mode. Use these in combination with the mode selection buttons to save or recall wipe snapshots, DME wipe snapshots, or snapshots.

❾ UNDO button

After recalling a register, press this button to return to the state before recalling the register.

With a setup setting, this can be switched to a mode selection button for macro setting, and used in combination with the buttons in the memory recall section for recalling and executing a macro.

❿ XPT HOLD (cross-point hold) status display

A bus for which cross-point hold is set appears as a green light.

⓫ Numeric display

Depending on the operation mode, this shows a wipe or DME wipe pattern number, or a register number in up to four digits.

In macro mode, this provides indications for macro editing.


⓬ INH (inhibit) button

Pressing this button, turning it on, disables the buttons in the memory recall section and the [UNDO] button.

Independent Key Transition Control Block (Simple Type)


The left side of this control block controls key 3, and the right side controls key 4.
The control block for key 3 only is described as an example, but the operations on the key 4 control block are the same.
In setup you can assign any key to either side of this control block.
You can also assign the key selection function (key delegation) for keys 1 to 8 to any buttons in this control block.

For details, see "Assigning Keys to the Independent Key Transition Control Block (Simple Type)" in Chapter 19 (Volume 2).

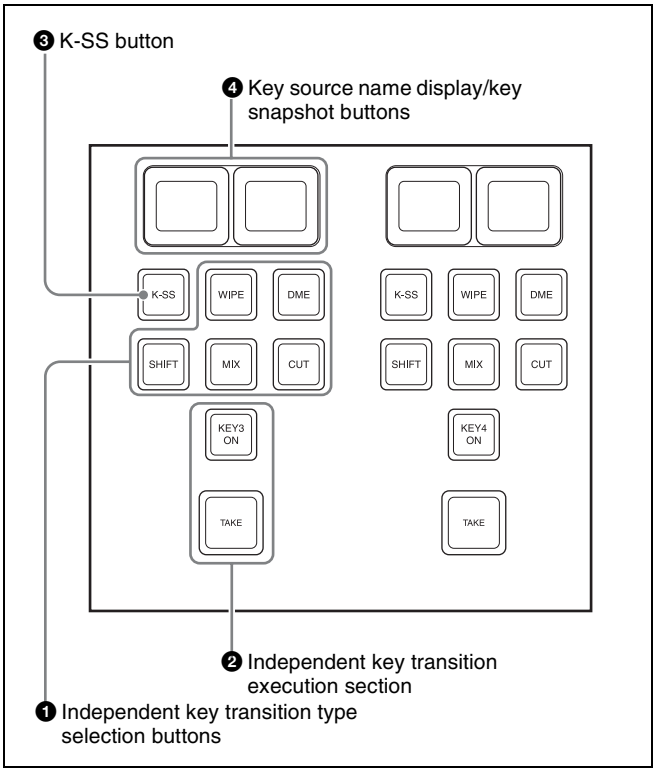

❶ Independent key transition type selection buttons


Press one of the following buttons, turning it on, to select the independent key transition type.

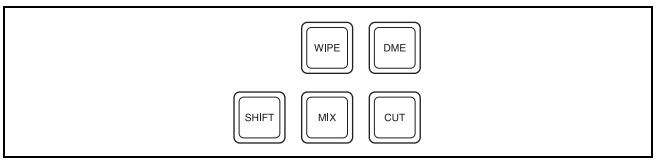

Name	Description
MIX	Faded in or out.
WIPE	Inserted or deleted with a wipe.
DME	Switches the key with a DME wipe.
CUT	Inserted or deleted instantaneously.
SHIFT	• When setting is made in the Setup menu to allow a different transition type for inserting or deleting a key, it is possible to display and set the transition type after the next transition while this button is held down. • While this button is held down, you can select a key source with the cross-point buttons for the key bus. • If you press this button twice in rapid succession, the key bus selection button [KEY3] in the cross-point control block lights, and a key 3 key bus cross-point can be selected. • If you press this button, while holding down the [TRANS RATE] button in the numeric keypad control block, you can set the independent key transition rate on the control block.

❷ Independent key transition execution section

The following buttons are used to carry out independent key transition operations.

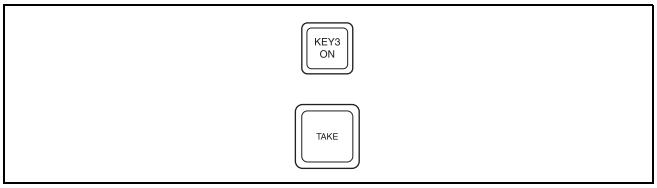

Name	Description
KEY3 ON	• This inserts or deletes key 3 instantaneously. • When key 3 is present in the final program output from the switcher, this lights red, and otherwise lights amber.
TAKE	This carries out an auto transition on key 3.

❸ K-SS (key snapshot) button


This enables key snapshot mode. In key snapshot mode, it is possible to save and recall key snapshots.

❹ Key source name display/key snapshot buttons

These show the signal name of the key fill selected for key 3 and the transition rate on two buttons. In key snapshot mode, these correspond to registers 1 and 2 for key 3; press to save or recall a key snapshot.
To save a key snapshot, with the [K-SS] button lit amber, hold down [SHIFT] button and press one of the key snapshot buttons.
This saves a key snapshot in the button you pressed, which lights yellow.
By assigning [K-SS 3/4] to a key in the Setup menu, you can press the button to switch between key snapshot registers 1/2 and 3/4.

For details, see the section "Assigning a Function to the Independent Key Transition Control Block (Simple Type)" in Chapter 19 (Volume 2).

Downstream Key Control Block

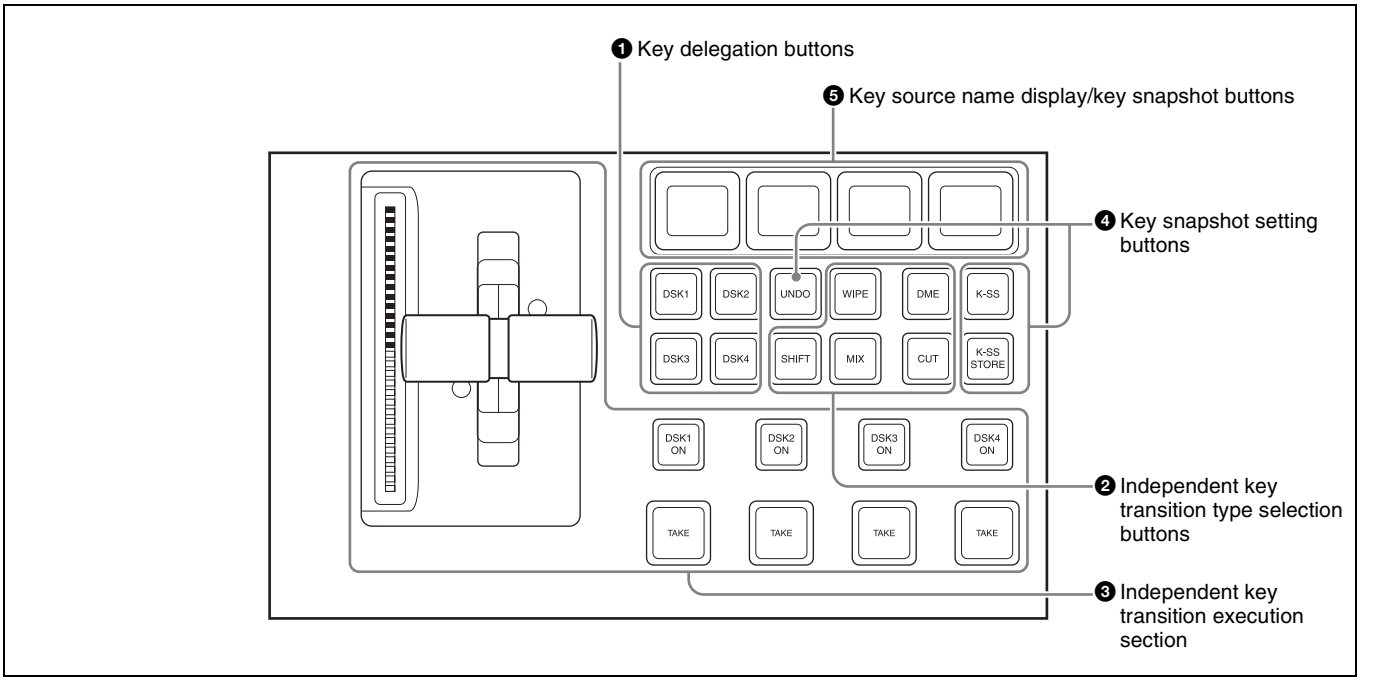


❶ Key delegation buttons

Press one of the [DSK1] to [DSK4] buttons to delegate this control block to the corresponding keyer.
Using the Setup menu, it is possible to assign these to DSK5 to DSK8 or M/E keys 1 to 8.
While these buttons are held down, you can select a key source with the cross-point buttons for the key bus.
Pressing one of these buttons twice in rapid succession changes its state so that you can make cross-point selections on the corresponding key bus.

❷ Independent key transition type selection buttons


Press one of these buttons, turning it on, to select the downstream key transition type.

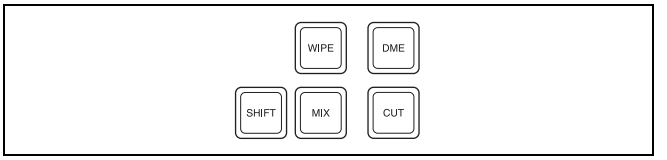

Name	Description
MIX	Carry out a dissolve with the key selected with the key delegation buttons.
WIPE	Carry out a wipe with the key selected with the key delegation buttons.
DME	This switches the key selected with the key delegation buttons, using a DME wipe.
CUT	Instantaneously insert or delete the key selected with the key delegation buttons.
SHIFT	When setting is made in the Setup menu to allow a different transition type for inserting or deleting a key, it is possible to display and set the transition after the next transition while this button is held down.

❸ Independent key transition execution section


This section is used to carry out an independent key transition, and check the progress of the transition.

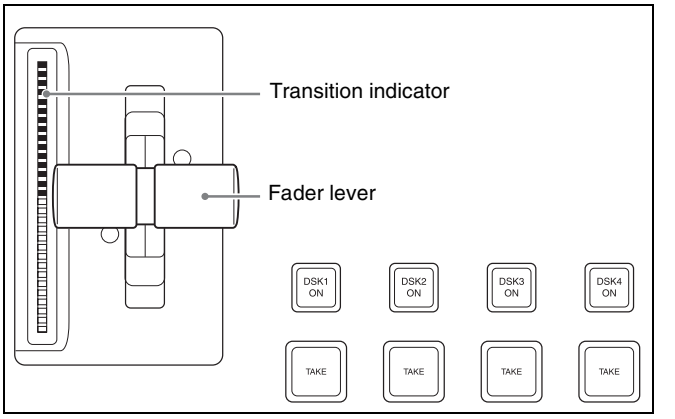

Name	Description
DSK1 (downstream key 1) ON to DSK4 ON buttons	• Press these to instantaneously cut the downstream keys 1, 2, 3, and 4 in. • When a key is already inserted, pressing the button cuts it out. • When the key corresponding to the button appears in the final program output, the button lights red, and otherwise lights amber.
TAKE buttons	• These correspond to downstream keys 1, 2, 3, and 4 from left to right; press to execute an auto transition. The transition starts immediately, and the button lights amber. • When the transition completes, the button goes off.
Fader lever	Move this vertically to carry out a manual downstream key transition.
Transition indicator	This comprises multiple LEDs, which show the progress of the downstream key transition.

❹ Key snapshot setting buttons

Pressing the following buttons carries out key snapshot operations.

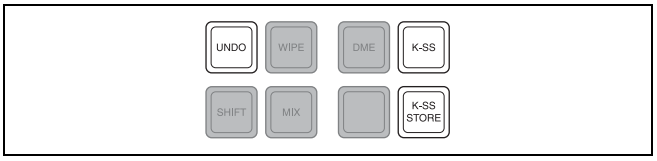


Name	Description
K-SS (key snapshot)	This enables key snapshot mode.
K-SS STORE (key snapshot store)	To save a key snapshot, hold down this button, and press the key source name display/key snapshot button for the register you want to save.
UNDO (key snapshot recall undo)	This undoes the last key snapshot recall.

❺ Key source name display/key snapshot buttons

These display the selected source name for each corresponding keyer. In snapshot mode, they correspond to registers 1 to 4 of the selected keyer, and pressing the button saves or recalls a key snapshot.

Downstream Key/Fade-to-Black Control Block

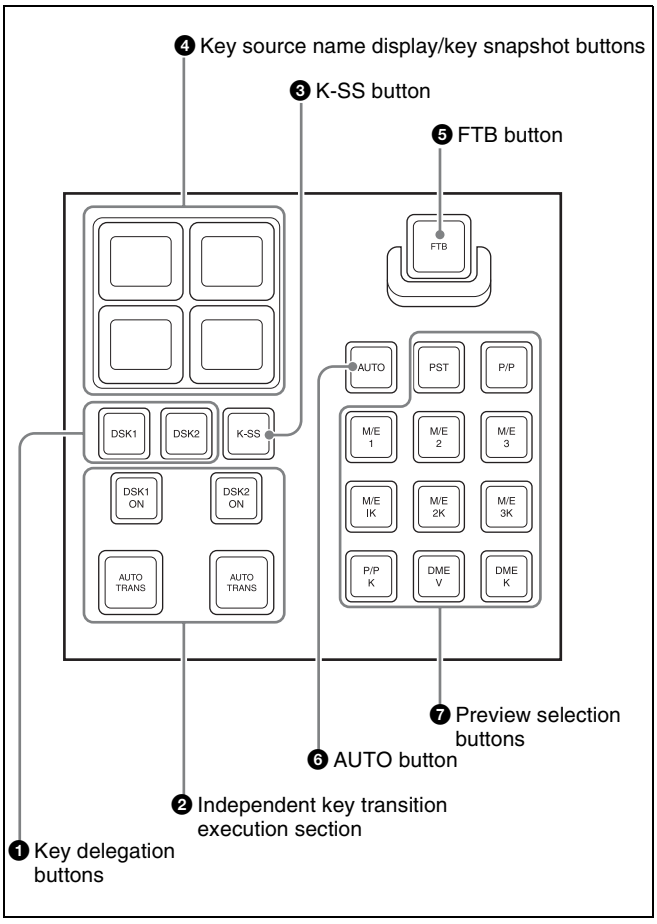

❶ Key delegation buttons


Press the [DSK1] or [DSK2] button to select the keyer. Each button can be assigned to any key in setup.

For details, see "Assigning Keys to the DSK1 and DSK2 Buttons in the Downstream Key/Fade-to-Black Control Block" in Chapter 19 (Volume 2).

While these buttons are held down, you can select a key source with the cross-point buttons on the key bus. Pressing one of these buttons twice in rapid succession changes its state so that you can make cross-point selections on the corresponding key bus in the PGM/PST bank.

❷ Independent key transition execution section

Pressing the following buttons carries out transition operations of the corresponding downstream key.

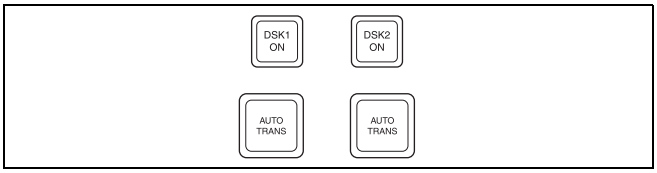

Name	Description
DSK1 ON, DSK2 ON	• Press these to cut in the corresponding downstream key 1 or 2. • When the key is already inserted, pressing the button cuts it out. • Each button lights red when the corresponding key is inserted in the program output (final output from the switcher), and lights amber at other times.
AUTO TRANS	• The left button applies to DSK1 and the right button to DSK2; press these buttons to carry out an auto transition. • The transition immediately starts, and the button lights amber. • When the transition completes, the button goes off.

❸ K-SS (key snapshot) button
Pressing this button, turning it on, enables the key snapshot mode. In this mode, you can save and recall key snapshots.


❹ Key source name display/key snapshot buttons
Each column of two buttons relates to the corresponding downstream key 1 or 2. The upper button displays the name of the key fill signal selected for the key, and the lower button shows the transition rate.
In key snapshot mode, these buttons correspond to registers 1 to 4 of the keyer selected with the key delegation buttons, and pressing a button recalls the key snapshot. To save a key snapshot, hold down the [STORE] button in the numeric keypad control block, and press the button for the desired register.

❺ FTB (fade to black) button
Press this button to fade to black the program output of the PGM/PST bank, at the set transition rate. You can set the fade to black transition rate in the menu.

❻ AUTO button
When this button is pressed, the M/E or PGM/PST bank preview signal selected on the edit preview bus is automatically switched to the program signal depending on the on-air status.

❼ Preview selection buttons
Press one of these buttons to select a signal on the edit preview bus. Each of these buttons can be assigned to any key in setup.


For details, see "Assigning Preview Output to Preview Selection Buttons" in Chapter 19 (Volume 2).

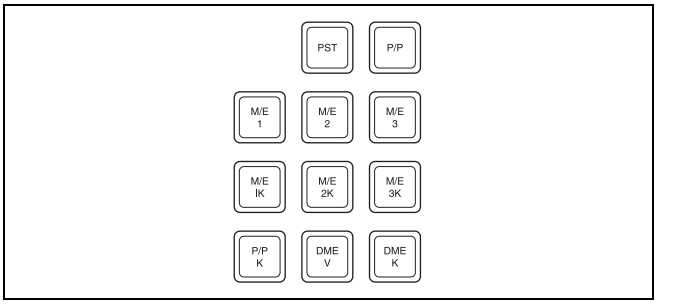

Name	Description
PST (preset)	When this button is pressed, the signal selected on the background B row of the PGM/PST bank is selected on the edit preview bus.
M/E 1 to M/E 5, P/P (M/E 1 to M/E 5, P/P preview)	The preview signal (M/E-1 PVW, M/E-2 PVW, M/E-3 PVW, M/E-4 PVW, M/E-5 PVW, P/P PVW) of the M/E or PGM/PST bank corresponding to the pressed button is selected on the edit preview bus. *For details of [M/E 4] or [M/E 5] button assignment, see "Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.*
M/E 1K to M/E 5K, P/P K (M/E 1 to M/E 5, P/P key preview)	The key preview signal (M/E-1 K-PVW, M/E-2 K-PVW, M/E-3 K-PVW, M/E-4 K-PVW, M/E-5 K-PVW, P/P K-PVW) of the M/E or PGM/PST bank corresponding to the pressed button is selected on the edit preview bus. *For details of [M/E 4] or [M/E 5] button assignment, see ""Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu" (page 396) in Appendix.*
DME V (DME monitor video)	When this button is pressed, the DME monitor output video signal (DME MON V) is selected on the edit preview bus.
DME K (DME monitor key)	When this button is pressed, the DME monitor output key signal (DME MON K) is selected on the edit preview bus.


Transition Control Block (Compact Type)

The compact version of the transition control block shown in the following figure has fewer buttons than the standard type. Independent key transition operations can also be controlled with the compact transition control block.

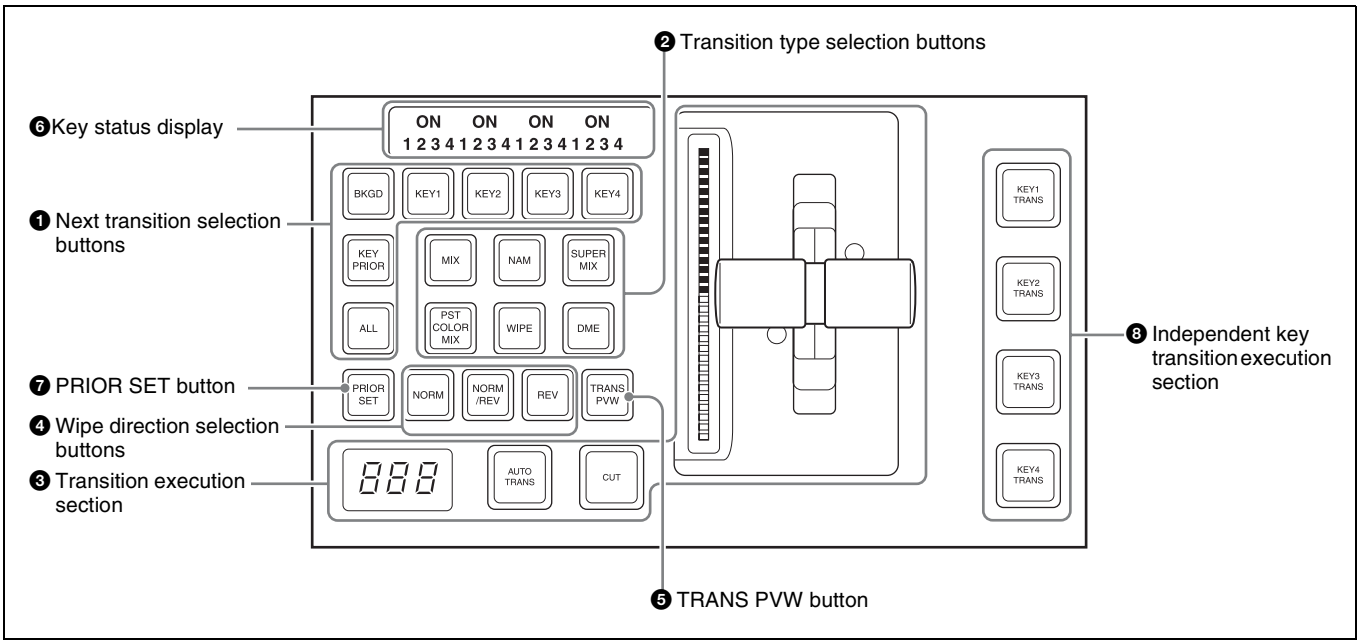

❶ Next transition selection buttons

Press these buttons, turning them on, to determine what the next transition will apply to.



Name	Description
BKGD	Next transition changes the background.
KEY1 to KEY8 (DSK1 to DSK8 in the PGM/PST bank)	• Press this button, turning it on, to make the next transition insert or remove the corresponding key (keys 1 to 8). • If a key is currently inserted it will be removed, and if it is not currently inserted, it will be inserted. • In the PGM/PST bank, this inserts or removes downstream keys 1 to 8. *For details of assignment and selection of keys 5 to 8, see the "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) and ""Selecting Keys 5 to 8 for Next Transition" (page 398).*
KEY PRIOR (priority)	• When this button is lit, the setting of the key priority after the next transition is enabled. • The key priority after the next transition appears in the key status display.
ALL	• Pressing this button turns on a preselected set of the [BKGD], [KEY1] to [KEY8], and [KEY PRIOR] buttons. • Make this setting in the Setup menu.

❷ Transition type selection buttons


You can assign these buttons in setup to any transition type.

For details, see "Setting Transition Control Block Button Assignments" in Chapter 19 (Volume 2).

Press one of these buttons, turning it on, to determine the type of the next transition *(see page 95)*.
When multi-program mode is selected in the Setup menu, two or more of the following buttons may light.

For details, see "Settings for Switcher Configuration (Config Menu)" in Chapter 20 (Volume 2).

You can also assign a function to these buttons to select whether or not the fader levers are used as keyframe faders.

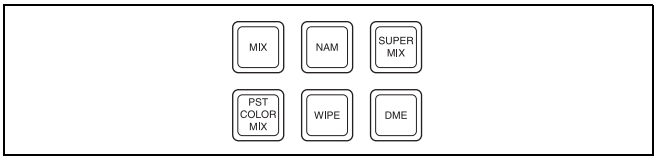


Name	Description
MIX	In a background transition, the new video fades in as the current video fades out.
NAM (non-additive mix)	The current and new video signals are compared, and the signal with the higher luminance level is given priority in the output.
SUPER MIX	The current video is maintained at 100% output for the first half of the transition as the new video is mixed while increasing progressively to 100%.

Name	Description
PST (preset) COLOR MIX	The color matte (unpatterned display) is inserted during transition, replacing the current video by the color matte, and then replacing the color matte by the new video.
WIPE (DME wipe)	The current video is replaced by the new video, using the wipe pattern selected in the Wipe menu.
DME	A wipe type of transition is carried out, using the DME effect selected in the DME Wipe menu.
FM1&2CLIP, FM3&4CLIP, FM5&6CLIP, FM7&8CLIP	A recorded clip is played back together with the transition. At this point, you can also carry out a transition (wipe or mix (dissolve)) simultaneously together with the clip.
KF (keyframe)	Press this button, turning it on, to enable using the fader lever as a keyframe fader.

❸ Transition execution section

This section is used to carry out a transition, and check the signal status during the transition.

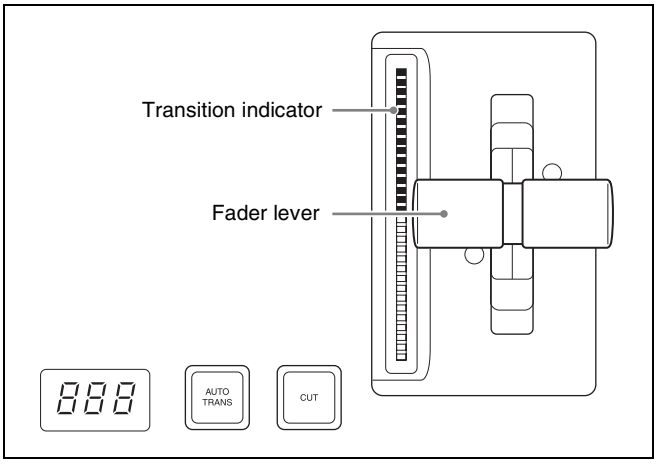

Name	Description
Transition indicator	This comprises multiple LEDs, which show the progress of the transition.
Fader lever	• Move this vertically to carry out a manual transition. • When the [KF] button or a transition type selection button to which the KF button function has been assigned is lit, you can use this as a keyframe fader.
Transition rate display	• This shows the “transition rate” (the time from the beginning of a transition to its completion) set for an auto transition, in frames. • You can set the transition rate using the numeric keypad control block, Flexi Pad control block, or menu.
AUTO TRANS (transition) button	• Pressing this button carries out an auto transition of the set transition rate (duration). The transition starts immediately, and the button lights amber. • When the transition completes, the button goes off.
CUT button	Pressing this button carries out the transition as a cut (i.e. instantaneously).

❹ Wipe direction selection buttons

For details, see “Wipe direction selection buttons” (page 39).

❺ TRANS PVW (transition preview) button

When this button is lit, you can check in advance the video changes during the transition, on the preview output from the M/E or PGM/PST bank.

During the preview, you can use the fader lever, [AUTO TRANS] button, and [CUT] button. One of the following functions of this button can be selected in the Setup menu.

- When the transition completes, the system returns to the normal mode.
- The transition preview mode is maintained while this button is pressed.
- Switching is made between the transition preview mode and normal mode every time this button is pressed.

❻ Key status display

For each of keys 1 to 4, the corresponding ON indicator lights when the key is inserted. It also shows the priority (1 to 4) of each key.

❼ PRIOR (priority) SET button

While this button is held down, you can set the key priority.

The setting mode when this button is pressed depends on whether or not the [KEY PRIOR] button is lit, as follows.

- When the [KEY PRIOR] button is off, the current key priority is set.
- When the [KEY PRIOR] button is lit, the key priority after the next transition is set.

Press the [KEY PRIOR] button as required, to switch between these two modes.

In either mode, hold down the [PRIOR SET] button, and press the button ([KEY1] to [KEY8]) corresponding to the key you want to bring to the front.

Notes

The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups. For example, it is not possible to set a priority sequence of keys 1, 5, and 2.


For details, see "Setting the Key Priority in the Transition Control Block" (page 98).

❽ Independent key transition execution section KEY1 TRANS (transition) to KEY8 TRANS (DSK1 TRANS to DSK8 TRANS in the PGM/PST block)

buttons: Press the corresponding one of these buttons to cut key 1 to key 8 in or out automatically at the set transition rate. When the key corresponding to the button appears in the final program output, the button lights red, and otherwise lights amber. During a transition, the button lights green.

CCP-6224 2M/E Control Panel

In this system, you can use the built-in CCP-6224 2M/E Control Panel. This panel has two cross-point control blocks, two transition control blocks (compact type), one device control block (trackball), and one Multifunction Flexi Pad control block.

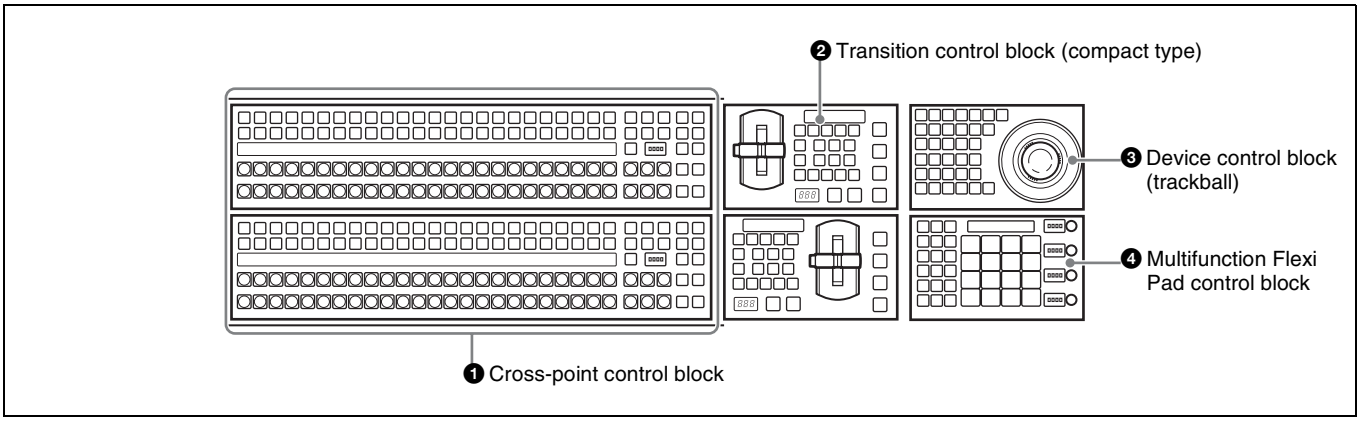

❶ Cross-point control block

For details of cross-point control block operation, see "Cross-Point Control Block" (page 32).

For operations in AUX control mode, see "Auxiliary Bus Control Block (for AUX Buses)" (page 56) and "Cross-Point Control Block (CCP-6224/6324) in AUX Operating Mode" (page 72).

❷ Transition control block (compact type)

For details of operations, see "Transition Control Block (Compact Type)" (page 68).

❸ Device control block (trackball)


For details of operations, see "Device Control Block (Trackball)" (page 45).

❹ Multifunction Flexi Pad control block

For details of operations, see "Multifunction Flexi Pad Control Block" (page 73).

CCP-6324 3M/E Control Panel

In this system, you can use the built-in CCP-6324 3M/E Control Panel. This panel has three cross-point control blocks, three transition control blocks (compact type), one device control block (trackball), and one Multifunction Flexi Pad control block.

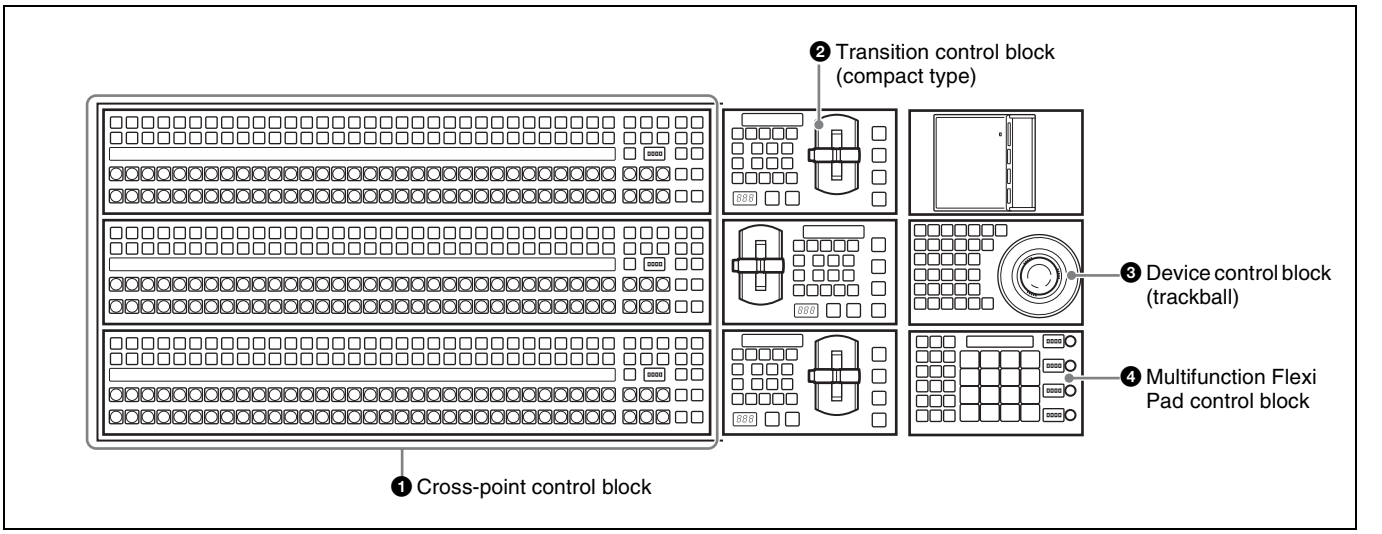

❶ Cross-point control block

For details of operations, see "Cross-Point Control Block" (page 32) and "CCP-6224 2M/E Control Panel" (page 71).

❷ Transition control block (compact type)

For details of operations, see "Transition Control Block (Compact Type)" (page 68).

❸ Device control block (trackball)


For details of operations, see "Device Control Block (Trackball)" (page 45).

❹ Multifunction Flexi Pad control block

For details of operations, see "Multifunction Flexi Pad Control Block" (page 73).

Cross-Point Control Block (CCP-6224/6324) in AUX Operating Mode

On the CCP6224/6324, by pressing the [AUX CTRL] button on the 24-point cross-point control block, the button functions are changed to functions that select AUX buses and corresponding source signals (AUX panel-less function).

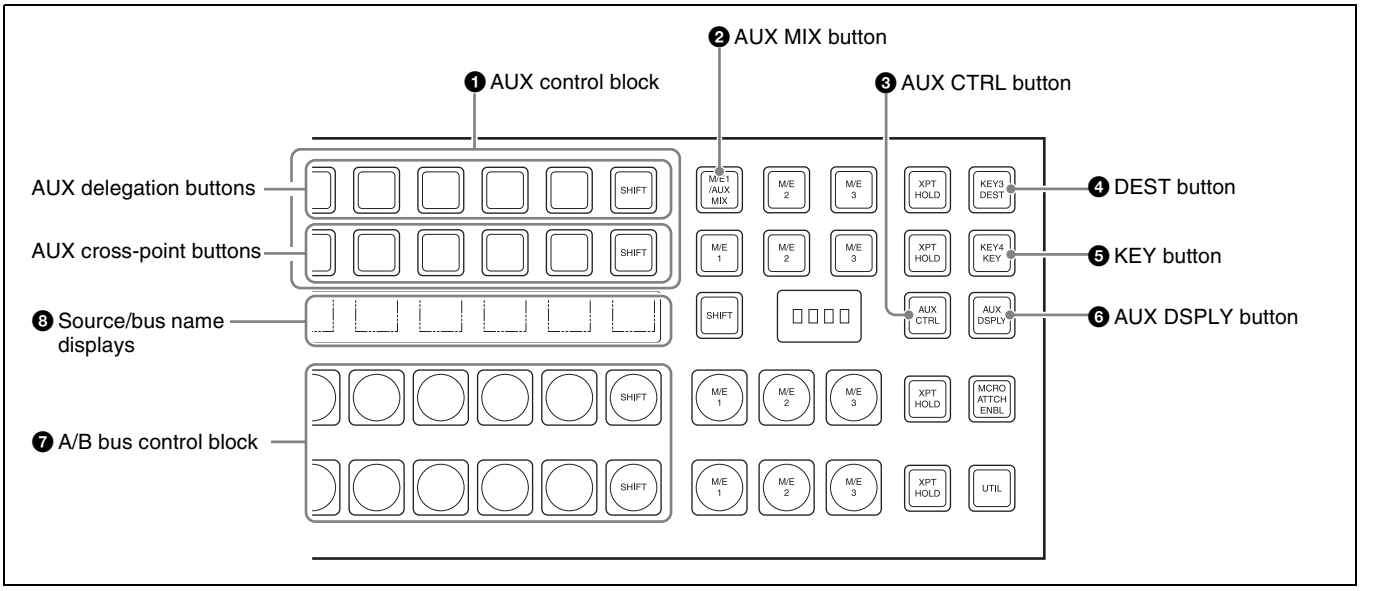


❶ AUX control block

This selects the AUX bus and the assigned source signals.

This cross-point control block can be switched to AUX control mode with the [AUX CTRL] button, and the key 1 row used as AUX delegation buttons, and the key 2 row

used as AUX bus cross-point selection buttons, with the source name display showing the source names or the bus names (AUX panel-less function).

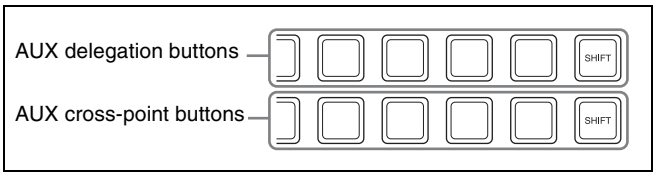

Name	Description
AUX delegation buttons	• These select the AUX bus. • When you press a button, turning it on, this selects the assigned bus as the AUX bus. • You can make the rightmost button a [SHIFT] button, in which case each button can be used to select two buses. *For details of the buses that can be selected, see "Bus Selection" (page 89).*
AUX cross-point buttons	• These select the source signal to be assigned to the AUX bus. • When you press a button, turning it on, this selects the assigned video/key source signal and assigns it to the bus selected with the AUX delegation buttons. • To select a key, hold down the [KEY] button and press the AUX cross-point button to which the desired key signal is assigned. • You can make the rightmost button a [SHIFT] button, in which case each button can be used to select two video/key source signals. • When one of the DME 1 V/K to DME 4 V/K buses is selected with the AUX delegation buttons, this selects the video side currently visible on the DME, and if you hold down the AUX delegation button, you can also select the reverse side of the video.

❷ AUX MIX button

When AUX bus is selected using the AUX delegation button, press this button, turning it on, to execute an AUX mix transition.

For details of AUX mix transition operation, see "AUX Mix Transitions" (page 119).

❸ AUX CTRL (AUX control) button

This switches the cross-point control block to the AUX operating mode.

❹ DEST (destination) button

When you press this button, turning it on, the source name displays show the names of the buses assigned to the AUX delegation buttons.

❺ KEY button

When you press this button, turning it on, the source name displays show the names of the key source signals assigned to the AUX cross-point buttons, and they are now selectable.

❻ AUX DSPLY (AUX display) button

This switches the source name displays to the AUX operating mode (by default showing the video source signal names).

❼ A/B bus control block

Select the source signals for the background A/B buses.


❽ Source/bus name displays

In the AUX operating mode, these show the information in the following table, according to the states of the [AUX DSPLY], [DEST], and [KEY] buttons.

[AUX DSPLY]	[DEST]	[KEY]	Indication
Off	Off	Off	Background A/B bus source signal names
On	Off	Off	Video source signal names for AUX bus
On	On	Off	Bus names for AUX bus
On	Off	On	Key source signal names for AUX bus


Multifunction Flexi Pad Control Block

You can use the Multifunction Flexi Pad control block for creating and recalling snapshots, wipe snapshots, DME wipe snapshots, key snapshots, effects, shotboxes, and macros, and making transition rate settings and key adjustments.

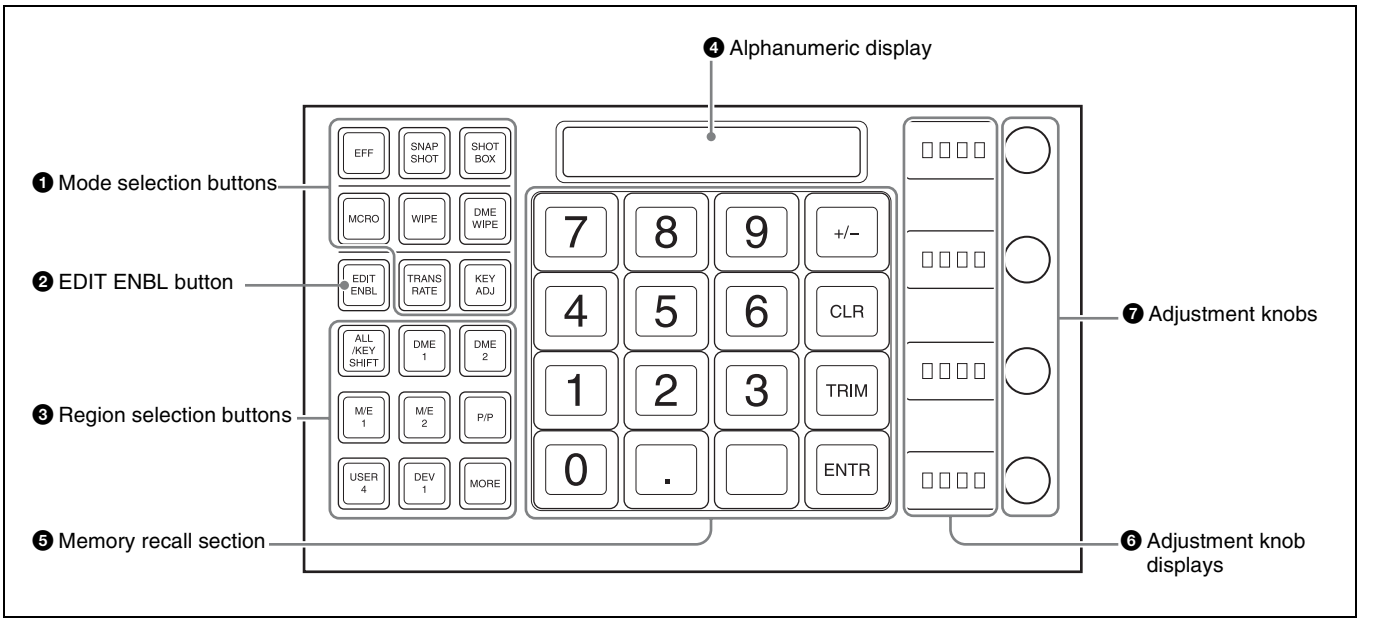

❶ Mode selection buttons

Pressing the following buttons selects the mode.



Name	Description
EFF (effect)	Press this to carry out effect creation/recall/editing/execution/deletion.
SNAPSHOT	Press this to carry out snapshot creation/recall/editing/deletion.
SHOTBOX	Press this to carry out shotbox creation/recall/editing/execution/deletion.
MCRO (macro)	Press this to carry out macro creation/editing/execution/deletion.
WIPE (wipe snapshot)	Press this to carry out wipe snapshot creation/recall/deletion and wipe adjustments.
DME WIPE (DME wipe snapshot)	Press this to carry out DME wipe snapshot creation/recall/deletion and DME wipe adjustments.
TRANS RATE (transition rate)	Press this to set the transition rate.
KEY ADJ (key adjust)	Press this to carry out key adjustments and set modifiers.
KEY SS (key snapshot)	• Press this to carry out key snapshot creation/recall/deletion. • By default, this is not assigned to a mode selection button, so before use it is necessary to assign to a mode selection button in the Setup menu.


❷ EDIT ENBL (edit enable) button

By pressing this, turning it on, you can carry out the following operations.

- Effect creation/editing
- Snapshot attribute setting
- Shotbox creation/editing
- Macro creation/editing
- Wipe adjustments
- DME wipe adjustments

❸ Region selection buttons

These select the function block to which operations apply. When the mode selection button selection is EFF/SNAPSHOT/SHOTBOX/MCRO, you can select multiple region selection buttons simultaneously. In this case, the first button pressed lights green as the reference region, and the other buttons pressed light amber (the buttons for the regions shown in the memory recall section are yellow).



Name	Description
ALL/KEY SHIFT	• Selects all regions. • When any region is selected, press this button to unset the selection of all regions. • When KEY ADJ (key adjust) or KEY SS (key snapshot) is selected as the function mode, these buttons are for KEY5 to KEY8 selection.
DME 1 to DME 2	Select DME channels.

Name	Description
M/E 1, M/E 2, P/P	Select the M/E-1, M/E-2, and PGM/PST regions respectively.
USER4	Selects the USER4 region.
DEV1	Selects the device 1 region.
MORE	• Displays buttons in the memory recall section for regions not assigned to a region selection button, so that they can be selected. • By default the following regions are shown on the memory recall section buttons. MSTR (master snapshot, master timeline registers), USER1 to 3, USER5 to 8, MCRO (macro), DEV2 (device 2), PBUS, GPI, RTR (router) • If there is a region selected in the memory recall section, this is indicated by the [MORE] button lighting green. • To revert the button displays in the memory recall section, press the [MORE] button once more, or press the [EXIT] button that appears in the memory recall section. • Note that except for the [ALL], [EXIT], and [MORE] buttons, you can freely change the assignment to regions in the Setup menu.

❹ Alphanumeric display
This shows the selected region name or register number, and entered numeric values.

❺ Memory recall section
This comprises 16 LCD buttons, each with a display that changes according to the operating mode.

❻ Adjustment knob displays
Each of these shows the initial letter of the parameter that can be adjusted with the knob to the right, and the setting value (three digit places, including the minus sign).

❼ Adjustment knobs
Use these to adjust the parameters selected with the memory recall section buttons.

Basic Menu Operations

Overview

In the MVS system, all detailed settings for basic operations such as transitions, keys, wipes, and DME are made in menus.
You can also display menus on an external monitor, and use a mouse. The menu operations using a mouse are basically the same as the menu control block operations described here, with mouse clicks in place of button presses. However, since the monitor has no knobs for adjusting the parameters in the menu control block.

For details of operations corresponding to these knob operations, see "Operation With a Mouse" (page 85).

Notes

On the MVS-8000X, M/E-5 cannot be used. M/E-5 operation and settings are disabled, even if they appear in the menu.

For details, see "Disabled Operation and Settings Menus" (page 393).

About the Top Menu List

When the control panel is powered on, the top menu list appears as shown below.



You can also display this by selecting VF1 'Top Menu List' after pressing the [HOME] button at the upper left in the top menu selection button area of the menu control block.

To display the top menu from the top menu list

In the same way as for the top menu selection buttons in the menu control block, press each button to display the particular top menu in the menu display.

Notes

- The arrangement of buttons in the top menu list and the default arrangement of the top menu selection buttons may be different.
- Changing the top menu selection button assignment in setup has no effect on the top menu list.

To shut down the menus

Press [Shutdown] at the lower right.
This operation is the same as the shut down operation in the top menu window *(see page 80)*.

Accessing Menus

You can use any of the following methods to access a menu, and the initially displayed menu page depends on the method used.

Pressing a top menu selection button in the menu control block

This displays the page you last accessed in the particular menu. After initially powering on the system, however, the page of VF1 - HF1 of the particular menu is always selected.

For details of the menus which can be recalled, see "Menus accessed from a top menu selection button" (page 76).

For details of the VF buttons and HF buttons, see "Interpreting the Menu Screen" (page 77).

Pressing a button other than a top menu button twice in rapid succession

Depending on the button, this may display a fixed page or the page selected last time you accessed the menu.

For details of the menus which can be recalled, see "Menus Accessed by Pressing a Button Twice" (page 399).

Press the menu page selection button at the top left of the menu display

The top menu window appears; press the top menu selection button for the particular menu, or enter the menu number with the numeric keypad, and press [Enter].

Menus accessed from a top menu selection button

Buttons	Menus	Function	See
HOME	Home	Recalling menus using the top menu list or shortcut menu	Top menu list: *page 75* Shortcut menu: *page 86*
M/E 1	M/E-1	Transition, keys, and wipe settings for the M/E-1 bank	*page 102* (transitions), *page 126* (keys), *page 163* (wipes)
M/E 2	M/E-2	Transition, keys, and wipe settings for the M/E-2 bank	
M/E 3	M/E-3	Transition, keys, and wipe settings for the M/E-3 bank	
M/E 4	M/E 4	Transition, keys, and wipe settings for the M/E-4 bank	
M/E 5	M/E-5	Transition, keys, and wipe settings for the M/E-5 bank	
P/P	PGM/PST	Transition, downstream key, and wipe settings for the PGM/PST bank	
FRAME MEM	Frame Memory	Frame memory settings	*page 204*
COLOR BKGD	Color Bkgd	Color background settings	*page 228*
AUX	Aux	AUX bus settings	*page 236*
CCR	CCR	Color corrector settings	*page 240*
COPY SWAP	Copy/Swap	Copy and swap settings	*page 230*

Buttons	Menus	Function	See
MISC	Misc	Settings for side flag, safe title, transition settings, and connection to external devices	*page 233*
STATS	Status	Status display	*page 236*
DME	DME	DME special effect settings	*page 288*
GLB EFF	Global Effect	Global effect settings	*page 349*
RTR	Router	Router settings	*page 237*
DEV	Device	Settings for external device operation	Chapter 12 (Volume 2)
MCRO	Macro	Macro register and macro timeline settings	Chapter 16 (Volume 2)
KEY FRAME	Key Frame	Keyframe settings	Chapter 13 (Volume 2)
EFF	Effect	Keyframe effect register settings	Chapter 13 (Volume 2)
SNAPSHOT	Snapshot	Snapshot register settings	Chapter 14 (Volume 2)
SHOTBOX	Shotbox	Shotbox register settings	Chapter 15 (Volume 2)
FILE	File	File settings	Chapter 17 (Volume 2)
USER SETUP	User setup	User setup settings	Chapter 24 (Volume 2)
ENG SETUP	Engineering Setup	Setup functions	Chapter 18 to Chapter 23 (Volume 2)
DIAG	Diagnosis	Status information display	Chapter 25 (Volume 2)

Example of Displaying a Menu

To display, for example, the M/E-1 >Key1 >Type menu, use either of the following operations.


- Press the top menu selection button [M/E 1], then press the VF1 ‘Key1’ button and the HF1 ‘Type’ button in that order.
- Press the menu page number button in the upper left corner of the menu screen to display the top menu window, then enter the page number of the M/E-1 >Key1 >Type menu, which is 1111, and press [Enter]. *For details of the menu page numbers, see “Menu Tree” (page 371).*



The M/E-1 >Key1 >Type menu appears in the menu display as follows.

Interpreting the Menu Screen

The menu screen consists of the following principal parts. When buttons on the screen are lit or represented in a depressed state, this indicates that the corresponding item or function is selected (set on).
The following describes the M/E-1 >Key1 >Type menu screen as an example.

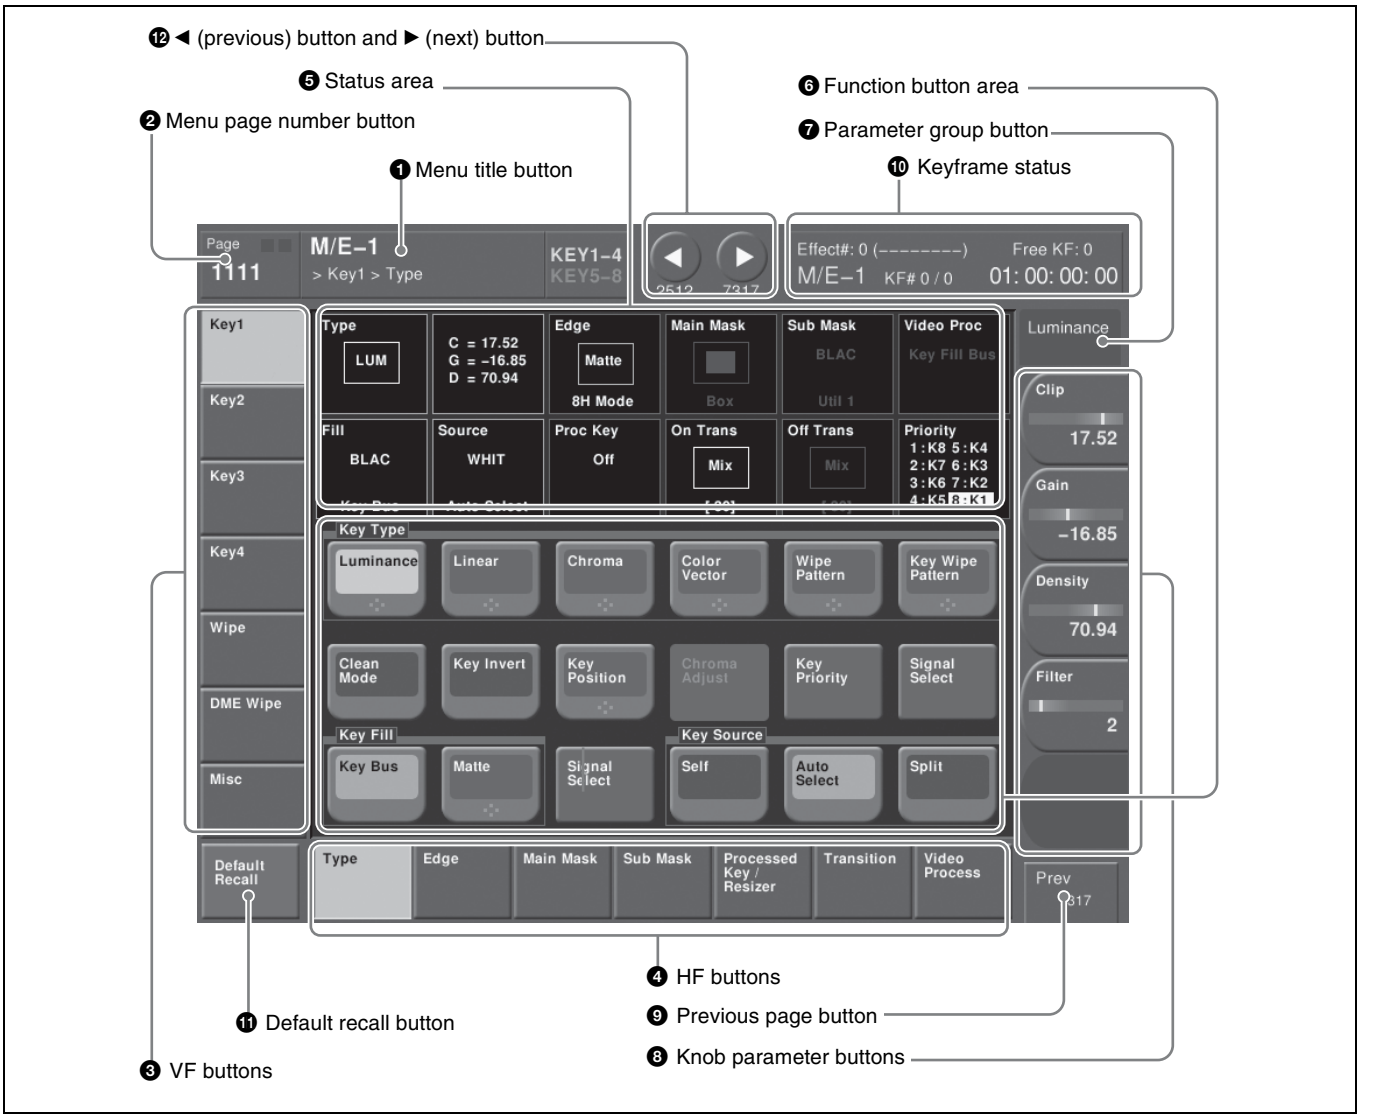

M/E-1 >Key1 >Type menu

❶ Menu title button

This shows the title of the menu screen.
You can set different colors for the main menu site and subsidiary menu site *(see page 84)*.

Switching the VF buttons between the Key1 to Key4 and Key5 to Key8 button displays


Switch the displays using the [KEY1-4] and [KEY5-8] menu title buttons.



When [KEY1-4] is lit, Key1 to Key4 buttons appear in VF1 to VF4.
When [KEY5-8] is lit, Key5 to Key8 buttons appear in VF1 to VF4.

❷ Menu page number button

This shows the menu screen page number.
When you press this button, the top menu window *(see page 80)* appears. You can enter the page number for the desired menu, or press one of the top menu selection buttons in the window, to display that menu.
While the system is accessing the hard disk, the indicator lights red.

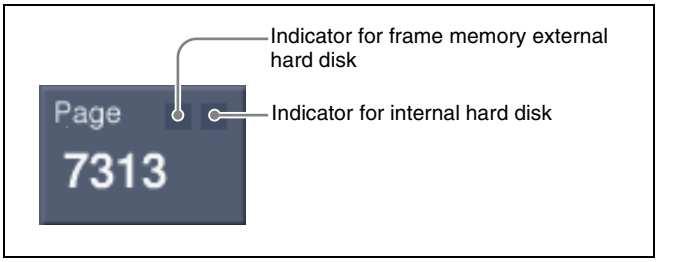


Notes

When the indicator is lit, do not power off the switcher, or disconnect the USB cable [1)].

1) When an external hard disk drive is connected

❸ VF buttons
These indicate the larger subdivisions of this menu. Depending on the selected item, the menu screen contents including the HF button indications change.

❹ HF buttons
These indicate the items within the menu.
Depending on the selected item, the menu indications change.
Depending on the function, if any one is on, the status is shown by an orange bar, as in the following figure.



❺ Status area
This shows the status of the settings items controlled by the selected menu.
An orange frame appears around the parameter area relating to the displayed menu. For each of the twelve areas, pressing the display jumps to the related menu.

❻ Function button area
This shows the functions which can be operated in the currently selected menu by means of buttons.
Each function button corresponds to a function which can be set in the currently selected menu. Press it to enable the function, to display a parameter group and adjust the parameters with the knobs, or to execute the function.
These buttons are in groups by function. In the screen example shown on the previous page, the [Key Bus] and [Matte] function buttons constitute the <Key Fill> group.

❼ Parameter group button
This displays parameter group names for which the knobs can make adjustments, the current parameter setting page number, and the total number of the parameter setting pages (Example: Color Vector 1/2).
When there are more than five parameters within the same parameter group, press this button to display the sixth and subsequent parameters, which can then be controlled by the knobs.

❽ Knob parameter buttons
These show the parameters currently controlled by the knobs and their values. Pressing one of these buttons displays the numeric keypad window *(see page 81),* and you can then enter a new value for the corresponding parameter with the numeric keypad.

❾ Previous page button
This shows the page number of the previously displayed menu screen. Press it to go back to that page. When the indication [Parent] appears, this displays the parent directory.

❿ Keyframe status
This shows the keyframe status of the reference region. Pressing this button switches the menu screen as follows.
When a menu other than the Key Frame menu is currently shown: The menu screen switches to the Key Frame menu.
When the Key Frame menu is currently shown: The menu screen switches to the menu that was on the screen immediately before the Key Frame menu.
In some parts of menus such as the File menu, this functions as a “Region selection area,” for selecting the region to which operations apply.


⓫ Default recall button
This only appears in those menus for which the default recall function is available.

For details of the menus which can be initialized, see “Menus Allowing a Return to Default Settings” (page 405) in Appendix.

Press this button, turning it on, then press a VF button or knob parameter button to return the settings to their default values, in the following groupings.
- Function grouping: the functions within an HF menu under the VF button
- Knob parameters (parameters currently controlled by the knobs)

⓬ ◄ (previous) button and ► (next) button
The ◄ button returns to the previous menu. Press the ► button to continue to the next menu.

Names and Functions of Parts of the Top Menu Window

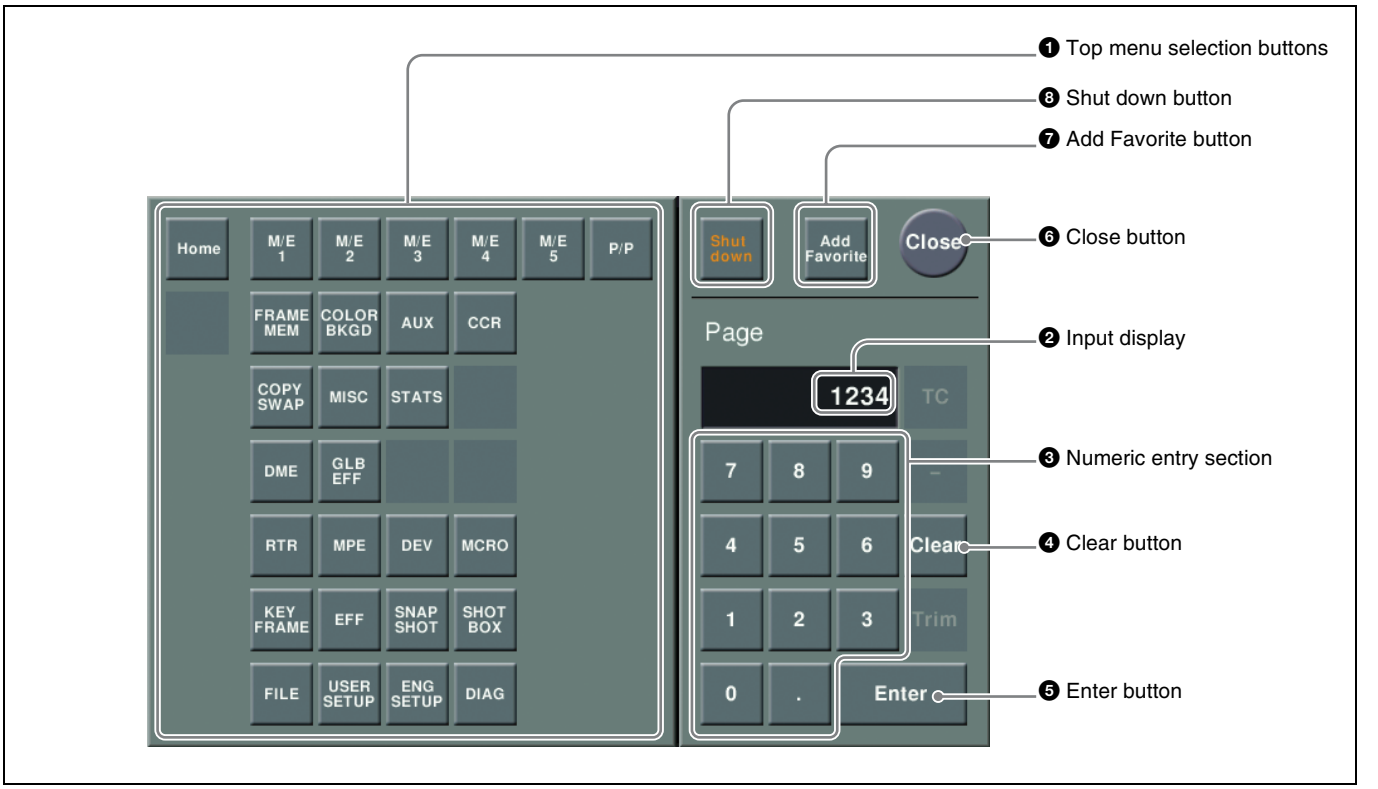

❶ Top menu selection buttons
These are the same as the top menu selection buttons in the menu control block. Pressing one of these buttons closes the top menu window and displays the selected menu in the menu display.

❷ Input display
This shows the page number entered with the numeric entry section.

❸ Numeric entry section
Enter a page number.

❹ Clear button
Press this to clear the input display.

❺ Enter button
Pressing this button without entering a page number closes the top menu window with the current menu remaining in the menu display.
If you enter a page number then press this button, this confirms the value in the input display. If it is a correct page number, the top menu window closes, and the menu display shows the new menu. If it is not correctly set, the input display changes color.

❻ Close button
Press this to close the top menu window.

❼ Add Favorite button
Pressing this button allows the currently displayed menu to be registered to the Shortcut menu *(see page 86)*.

❽ Shut down button
Shuts down the menus.

Notes

Be sure to shut down the menus before powering off the control panel.

Shutting down the menus

1 In the menu screen, press the menu page number button to open the top menu window.

2 Press [Shut down].


A confirmation message appears.

3 Press [Yes].

This shuts down the menu system after a while, and the menu display changes to black. Then, power off the system.

To restart menu operations
Power on the control panel once more.

Names and Functions of Parts of the Numeric Keypad Window

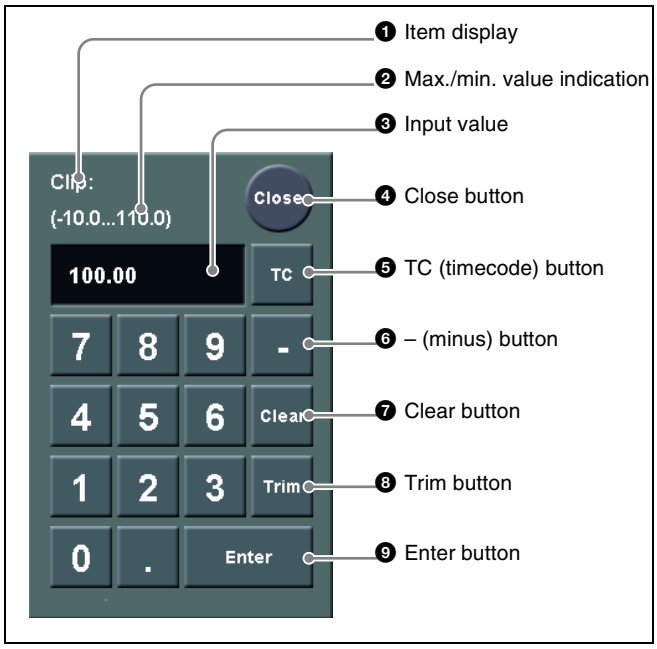

❶ Item display
This is the name of the parameter being set in the numeric keypad window.

❷ Max./min. (maximum/minimum) value indication
This shows the maximum and minimum settings of the parameter.

❸ Input value
This is the value being input into the numeric keypad window.

❹ Close button
This closes the numeric keypad window.

❺ TC (timecode) button
When the numeric keypad window is opened for a setting requiring a timecode value to be entered, this button appears in a depressed state.
You can enter a timecode value in the range that depends on the signal format.
00:00:00:00 to 23:59:59:nn,
where nn = (number of frames per second) – 1.

❻ – (minus) button
This toggles the sign of the entered value. When it is pressed, the value is negative.

❼ Clear button
This clears the input. It does not change the parameter setting.


❽ Trim button
After entering the difference from the current value, press this button to confirm the numeric input.

❾ Enter button
This confirms the entered value.
If correctly set, the numeric keypad window closes.
If not correctly set, the input display changes color.

Names and Functions of Parts of the Keyboard Window

Notes

Except when changing source names, the following characters cannot be used.
space, \, /, :, ;, , (comma), . (period), <, >, *, ?, ", |

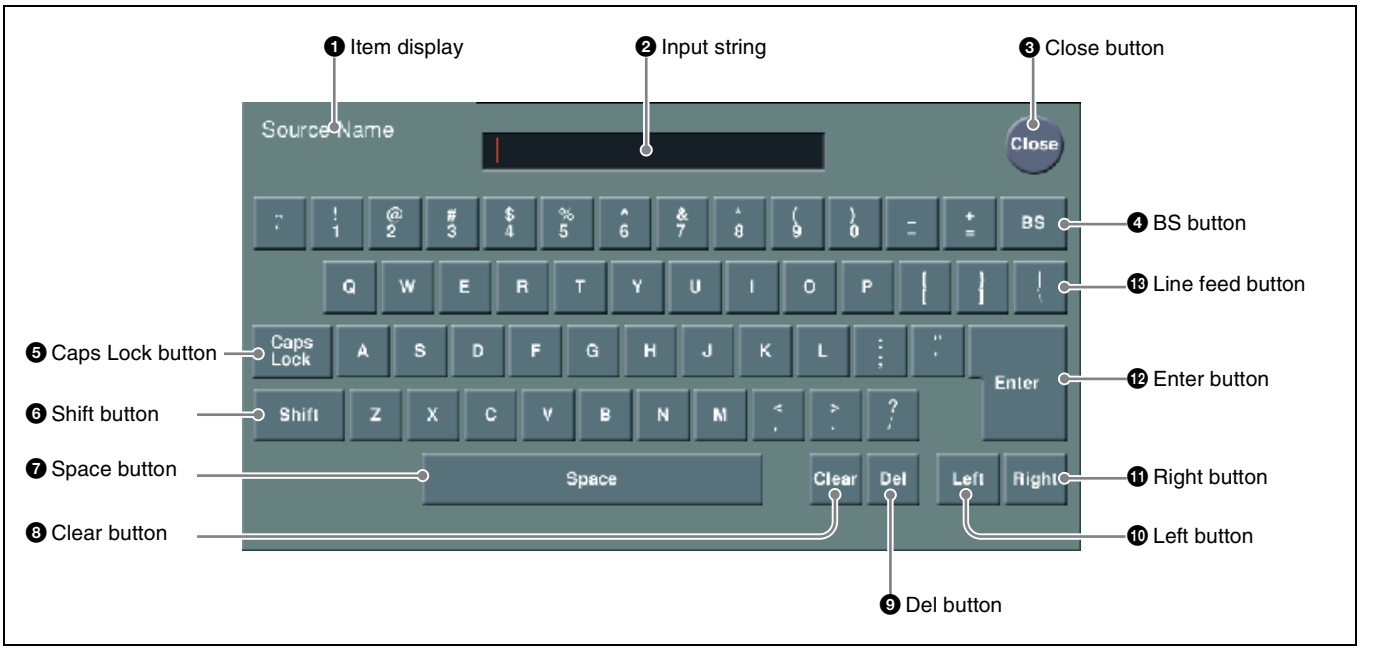

❶ Item display
This is the name of the parameter being set in the keyboard window.

❷ Input string
This is the character string being input in the keyboard window.

❸ Close button
This closes the keyboard window.

❹ BS button
This clears the character immediately before the cursor in the input string.

❺ Caps Lock button
This enables input of capital letters only.

Notes

You can enter items to be displayed on the control panel LCD using lowercase letters, but these will be converted to capitals for display.
MS-DOS does not distinguish case in filenames, and therefore you are recommended to enter filenames in capital letters.

❻ Shift button
This selects the characters on the shift side of the keys. The shift is released when you enter a character.

❼ Space button
This enters a space character.

❽ Clear button
This clears all of the characters in the input string.

❾ Del button
This clears the character immediately after the cursor in the input string.

❿ Left button
This moves the cursor one character to the left in the input string.


⓫ Right button
This moves the cursor one character to the right in the input string.

⓬ Enter button
This sets the input string as a parameter value, and closes the keyboard window if the value has been entered correctly. If the value has not been entered correctly, the display color changes.

⓭ Line feed button
After pressing the Shift button, press this button to feed a line. The input string shows “|”.

Names and Functions of Parts of the Color Pallet Window

When a parameter is assigned to the knobs as a combination of luminance, saturation, and hue, pressing a knob parameter button displays a color palette window.

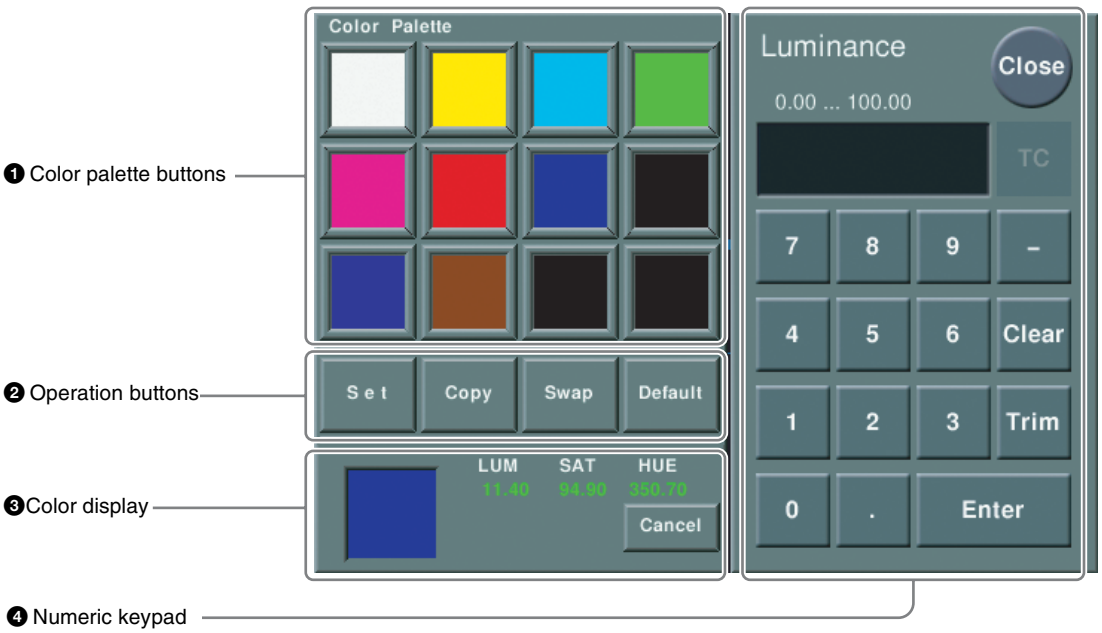

❶ Color palette buttons

Press one of these to enter the corresponding color in the display.

By default the following settings are available.

First row: white, yellow, cyan, green

Second row: magenta, red, blue, black

Third row: all black

❷ Operation buttons

Set: If you press any color palette button with this button held down, the color shown in the color display is assigned to the color palette button.

Copy: If you press a color palette button with this button held down, the color is used as the source for copying. Next press a different color palette button to copy to that button.

Swap: If you press two color palette buttons in sequence with this button held down, the two colors are swapped.

Default: If you press any color palette button with this button held down, the color palette button is set to the default color.

❸ Color display

This shows the setting color, and the parameters (LUM, SAT, and HUE).

By adjusting the parameters with the knobs, you can create any color.

If a parameter value is outside the permitted range for RGB (0 to 255), the indication “Illegal Color” appears, and this is adjusted to a value in range.

Cancel: Pressing this button returns to the state when the color palette window was opened.

❹ Numeric keypad

Use this to enter numeric values for parameters.

For details of use, see page 81.

Menu Operations

The method of menu operation is basically the same when using a mouse with an external monitor, but with mouse clicks in place of button presses. There is no difference in the menu control block operation described here. However, the monitor has no knobs for adjusting the parameters in the menu control block.

For details of operations corresponding to these knob operations, see the section below, "Operation With a Mouse" (page 85).

Selecting an Item

1 Press the VF button (1 to 7) for the desired group of items.

The HF button (1 to 7) indications change to show the items within the selected group.

2 Press the HF button for the desired item.

The indications in the status area and function button area change, and you can now make various changes to the selected item.

Selecting a Function

Press the appropriate function button within the function button area.

Shape and color of the button

Pressing the button turns it on, and it lights, showing the state.




Lit pale blue: The function is enabled, and the parameters can currently be adjusted with the knobs.
Lit orange: The function is enabled.
Lit purple: Execution button. Pressing the button immediately executes the function (Example: [Auto Start] in the Chroma Adjust menu).



Pressing a button of this type displays a further menu, allowing more detailed settings (Example: [Chroma Adjust] in the Type menu).

Setting Parameters

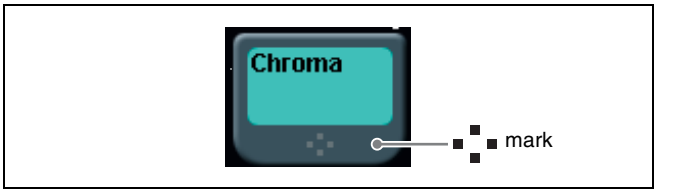

The mark above on a function button indicates that there are parameters which can be adjusted with the knobs. Pressing this function button assigns parameters to the knobs.
You can set the parameter values by either of the following methods.

- Turn the knob (1 to 5) corresponding to the parameter, to adjust the value.
- Press the knob parameter buttons (1 to 5) corresponding to the parameter. This displays the numeric keypad window allowing you to enter the desired value.

In the description of specific setting procedures, the knob adjustment is described, as follows.
Example: When wipe pattern key is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00
3	Density	Key density	0.00 to 100.00

When the [MENU] button in the device control block is lit, you can use the trackball and Z-ring to control the parameters.

- Move the trackball on the X-axis to control the parameter for knob 1 or on the Y-axis to control the parameter for knob 2. Moving up or to the right increases the parameter value, and moving down or to the left decreases the parameter value.
- Use the Z-ring to adjust the parameter for knob 3. Turning clockwise increases the parameter value, and turning counterclockwise decreases the parameter value.

Switching Between the Main Menu Site and Subsidiary Menu Site

For menu transitions, you can store two separate versions in the main and subsidiary menu sites.
By switching sites, and pressing the ◀ button and the ▶ button you can trace the history in each menu.

To switch the subsidiary menu site on and off

Assign [SUB MENU SITE] to a menu control block top menu selection button or user preference button.
To switch to the subsidiary menu site, press this button, turning it on.

For details, see "Assigning Functions to the Menu Control Block Top Menu and User Preference buttons" in Chapter 19 (Volume 2).

Going Back to the Previous Menu

To return to the last displayed menu, press the previous page button.

Returning to Default State in Function Groupings

1 Press [Default Recall], turning it on.

This enters the menu default recall mode.

2 Press the VF button you want to return to the default state.

This returns the settings within the function grouping to the default state, and [Default Recall] goes off.

Notes

The default state of the settings depends on the setting of the initial status mode, set in the Setup menu of system setup, as follows.
User: The state when [Initial Status Define] is executed.
Factory: Factory default settings

Returning Knob Parameters to Default State

1 Press [Default Recall], turning it on.

This enters the menu default recall mode.

2 Press the knob parameter button you want to return to the default state.

This returns the knob parameter value to the default state, and [Default Recall] goes off.

For details, see the table, "Knob parameters subject to restriction on default recall" on page 407.

Notes

The default recall function does not return the horizontal (H) and vertical (V) position settings to their default state individually. Returning the horizontal (H) position to its default state also returns the vertical (V) position to its default state automatically, and vice versa.

Operation With a Mouse

If you display the menus in an external monitor, operated with a mouse, then you click the mouse instead of pressing a button as described in the previous section, "Menu Operations."
However, in the following cases there are special operations with a mouse.

To set a parameter with the mouse

To adjust the value of a knob setting parameter button with the mouse, you can use any of the following three methods.
- Position the cursor over the knob setting parameter button for which you want to adjust the value, and turn the mouse wheel.
- Position the cursor over the knob setting parameter button for which you want to adjust the value, then hold down the right mouse button, and drag the bar showing the setting to the desired value.
- Position the cursor over the knob setting parameter button for which you want to adjust the value, then click the left mouse button to open the numeric keypad window by which you can input the desired value.

To scroll a list with the mouse

Position the cursor over the list you want to scroll, and turn the mouse wheel.
In the setup menus you can select the direction of mouse wheel rotation that increases the setting value. And you can also switch the functions of the right and left mouse buttons.

For details, see Chapter 19 "Setting the Mouse Wheel Scrolling Direction for Parameter Setting" (Volume 2).

Shortcut Menu

Registering a Menu To the Shortcut Menu

1 In the Home >Favorites >Shortcut menu, select the desired group.


2 Display the menu you want to register, and then press [Add Favorite].

The currently displayed menu is automatically registered to a blank button.

Recalling a Menu Using the Shortcut Menu

1 In the Home menu, select VF2 ‘Favorites’ and HF1 ‘Shortcut.’

The following menu appears.

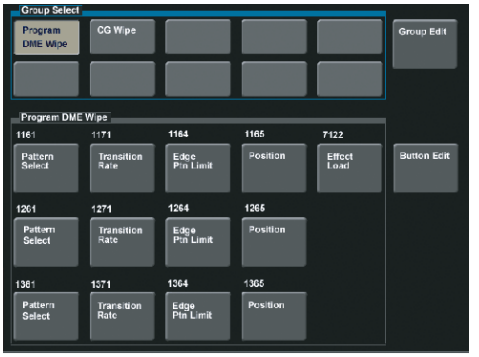

2 In the [Group Select] box, select the group.

The group buttons appear.

3 Press the button for the desired menu.


Customizing the Shortcut Menu

Assign frequently used menus to buttons, to create a “Favorites” menu.

To create a menu group


1 In the Home menu, select VF2 ‘Favorites’ and HF1 ‘Shortcut.’

The following menu appears.

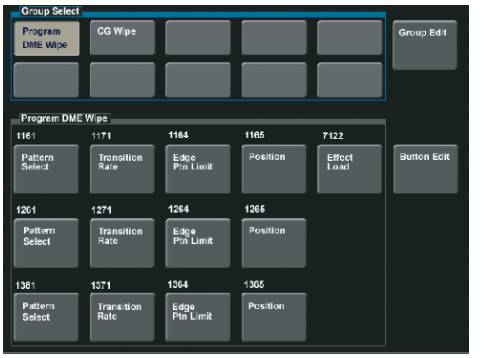

2 Press [Group Edit].

The following menu appears.

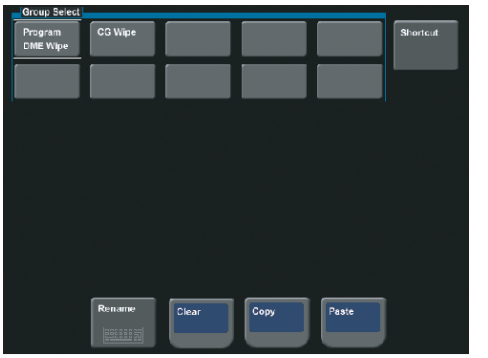

3 With the cursor, select the group name (in this case a blank button) for the operation.

4 Press [Rename].

A keyboard window appears.

5 Enter a group name (maximum 24 characters), and press [Enter].

This confirms the group name.

To copy a menu group

1 In the Home >Favorites >Group Edit menu, press the button for the copy source group.

2 Press [Copy].

3 Press the button for the copy destination group.

4 Press [Paste].

This copies the menu group settings.

To delete menu group settings

1 In the Home >Favorites >Group Edit menu, select the group to be deleted.

2 Press [Clear].

A confirmation message appears.


3 Press [Yes].

This deletes the settings.

To register a menu on a button

You can register 15 buttons in one group.

1 In the Home >Favorites >Shortcut menu, press [Button Edit].

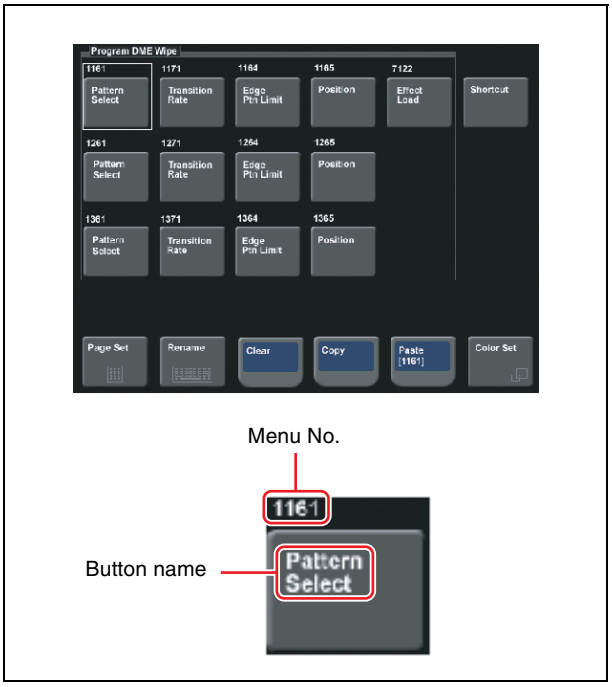

2 Move the cursor to the position where you want to display the button. To change the content of an already displayed button, press the button to select it.

3 Press [Page Set].

A page number input window appears.

4 Enter the page number for the menu you want to register.

5 Press [Rename].

A keyboard window appears.

6 Enter the button name (maximum 24 characters).

7 To change the button color, press [Color Set].

Button color samples appear.

8 Press the desired color.

This completes the assignment of the menu to the button.

9 Repeat steps **2** to **8** to complete the “Favorites” menu.

To copy button settings

1 In the Home >Favorites >Button Edit menu, press the copy source button to select it.

2 Press [Copy].

3 Press the copy destination button to select it.

4 Press [Paste].

This copies the button settings.

To delete button settings

In the Home >Favorites >Button Edit menu, press [Clear]. This deletes the button settings.

Notes

The shortcut menu settings are handled as part of the control panel setup. You can recall and save them in the same way as setup data.

To register a menu macro on a button

See “Recalling a Menu Macro Register and Executing a Menu Macro” in Chapter 16 (Volume 2).

To execute a menu macro with a button

See “Recalling a Menu Macro Register and Executing a Menu Macro” in Chapter 16 (Volume 2).


Signal Selection and Transitions

Chapter 3

Video Processing Flow

The switch from the current video stream (appearing on the corresponding program monitor) to a new video stream is referred to as a transition.


The following illustration shows the flow of operations for carrying out a transition on an M/E bank or the PGM/PST bank.

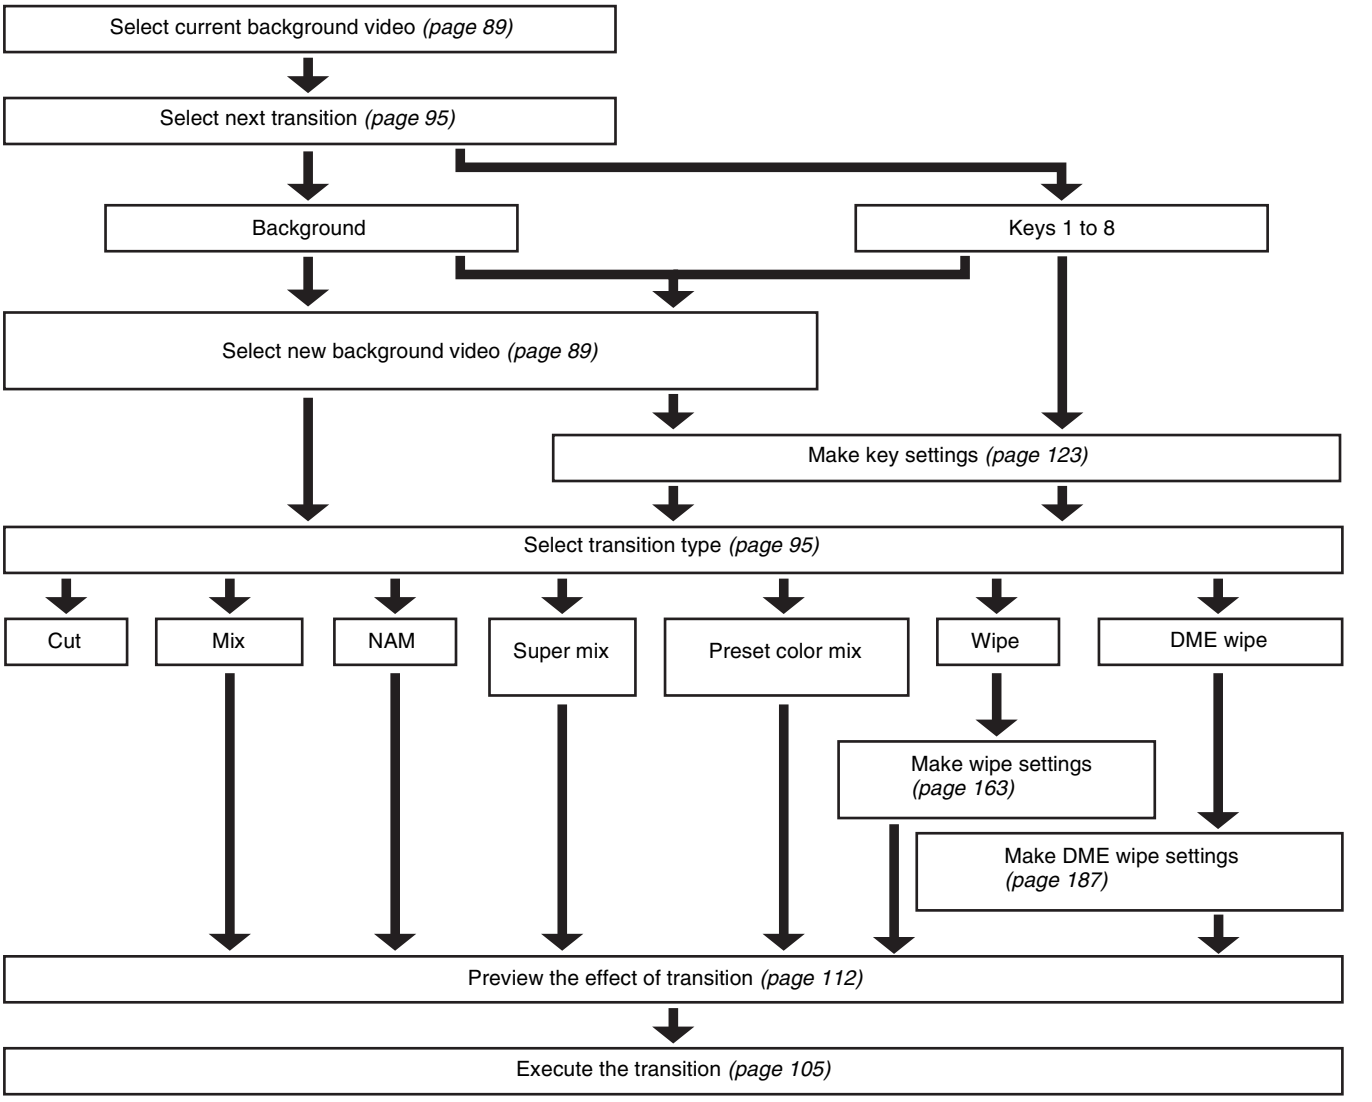

Signal Selection

You carry out signal selection with the cross-point buttons in the cross-point control block of each M/E bank or the PGM/PST bank, and the buttons in the auxiliary bus control block.

The number of buttons in each cross-point row may be 16, 24, or 32, but here the description is of the 32-button case as an example.

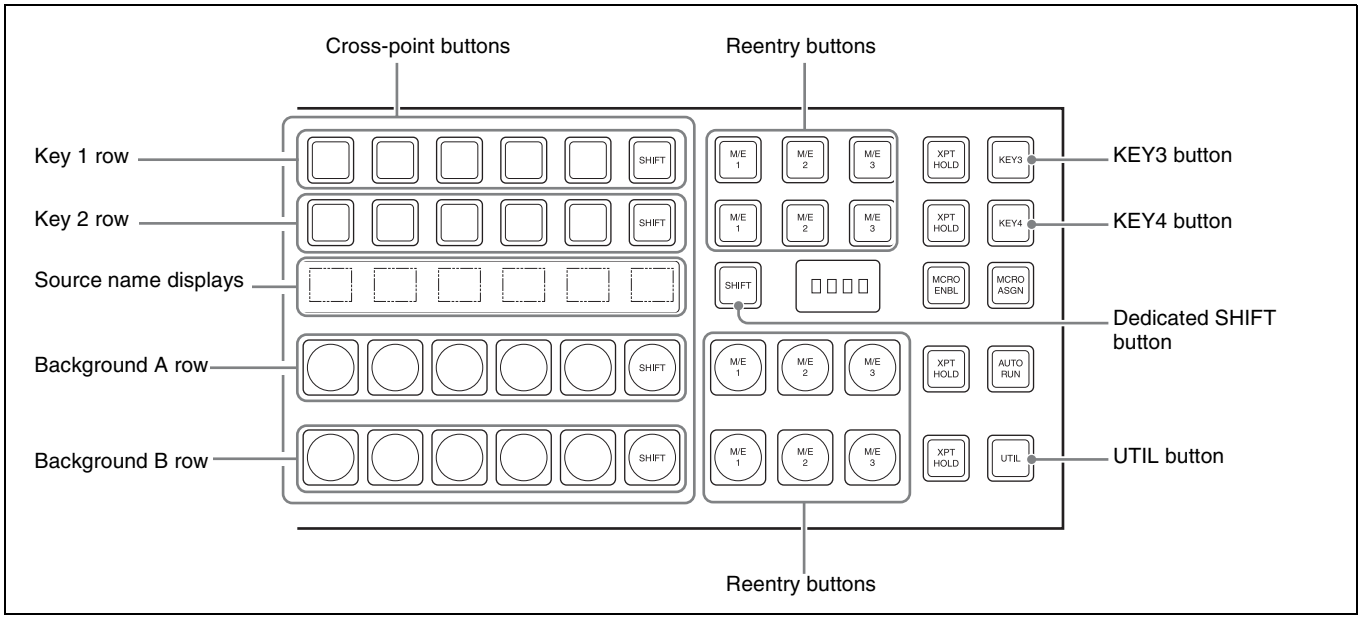

Cross-point control block

Basics of Signal Selection

The M/E banks, PGM/PST bank, and auxiliary bus control block each have 32 cross-point buttons and three reentry buttons (four in the case of the auxiliary bus control block). These buttons are identified by numbers common to all of the banks and the control block, and a signal is assigned to each number.

The basis of signal selection is to select, in a cross-point button row, the cross-point button to which is assigned the desired signal.

Reentry buttons

To use the output of one M/E bank as the input signal to another bank, use the reentry buttons [M/E 1], [M/E 2], and [M/E 3] (on the auxiliary bus control block, [M/E 1], [M/E 2], [M/E 3], and [PGM]) in the cross-point control block of the destination bank.

For example, to feed the output from the M/E-1 bank as the background B input to M/E-2, in the M/E-2 cross-point control block, press the [M/E 1] button in the background B row.

Notes

- To select [M/E 4] or [M/E 5], it is necessary to assign M/E 4 or M/E 5 to a button *(see page 396)*.
- For a 5M/E or 6M/E system, a maximum of four reentry stages are possible. For other restrictions on reentry, *see page 240*.

Bus Selection

Each row of 32 cross-point buttons is shared by multiple buses.

To assign a bus to the cross-point buttons in the auxiliary bus control block, press one of the AUX delegation buttons to select the bus.

Notes

- When using the CCP-6224/6324, buses may be assigned with the cross-point button rows for keys 1 and 2 as the auxiliary bus control block.

- You can assign a key and AUX bus to the key 1 row of cross-point buttons, and select the signal in the key 2 row.

For details, see "Assigning a Key or AUX Bus to a Button in the Key 1 or Key 2 Row" in Chapter 19 (Volume 2).

The following table illustrates the correspondence between buses and cross-point button rows, and the delegation operations.

Bank	Bus name	Cross-point button row	Delegation operation
M/E-1, M/E-2, M/E-3, M/E-4 [a], M/E-5 [a]	Background A bus [b]	Background A row	–
	Background B bus [b]	Background B row	–
	Key 1 bus	Key 1 row	Turn off the dedicated [SHIFT] button, then turn off the [KEY3] button. [c]
	Key 2 bus	Key 2 row	Turn off the dedicated [SHIFT] button, then turn off the [KEY4] button. [c]
	Key 3 bus	Key 1 row	Turn off the dedicated [SHIFT] button, then turn on the [KEY3] button. [c]
	Key 4 bus	Key 2 row	Turn off the dedicated [SHIFT] button, then turn on the [KEY4] button. [c]
	Key 5 bus [d]	Key 1 row	Turn on the dedicated [SHIFT] button, then turn off the [KEY3] button.
	Key 6 bus [d]	Key 2 row	Turn on the dedicated [SHIFT] button, then turn off the [KEY4] button.
	Key 7 bus [d]	Key 1 row	Turn on the dedicated [SHIFT] button, then turn on the [KEY3] button.
	Key 8 bus [d]	Key 2 row	Turn on the dedicated [SHIFT] button, then turn on the [KEY4] button.
PGM/PST	Program bus [b]	Program row	–
	Preset bus [b]	Preset row	–
	DSK 1 bus	DSK 1 row	Turn off the dedicated [SHIFT] button, then turn off the [DSK3] button. [c]
	DSK 2 bus	DSK 2 row	Turn off the dedicated [SHIFT] button, then turn off the [DSK4] button. [c]
	DSK 3 bus	DSK 1 row	Turn off the dedicated [SHIFT] button, then turn on the [DSK3] button. [c]
	DSK 4 bus	DSK 2 row	Turn off the dedicated [SHIFT] button, then turn on the [DSK4] button. [c]
	DSK 5 bus [d]	DSK 1 row	Turn on the dedicated [SHIFT] button, then turn off the [DSK3] button.
	DSK 6 bus [d]	DSK 2 row	Turn on the dedicated [SHIFT] button, then turn off the [DSK4] button.
	DSK 7 bus [d]	DSK 1 row	Turn on the dedicated [SHIFT] button, then turn on the [DSK3] button.
	DSK 8 bus [d]	DSK 2 row	Turn on the dedicated [SHIFT] button, then turn on the [DSK4] button.
M/E-1, M/E-2, M/E-3, M/E-4 [a], M/E-5 [a], PGM/PST	Utility 1 bus	Background A row	When [UTIL] button mode is Hold, hold down the [UTIL] button.
	Utility 2 bus	Background B row	
	DME external video bus	Key 1 row	Hold down the [UTIL] button.
	DME utility 1 bus	Key 2 row	Hold down the [UTIL] button, and press the [KEY4] button, turning it off.
	DME utility 2 bus		Hold down the [UTIL] button, and press the [KEY4] button, turning it on.

Bank	Bus name	Cross-point button row	Delegation operation
Auxiliary bus control block [e]	AUX1 to AUX48 buses	1st row, 2nd row	Turn on the appropriate buttons in accordance with the signal assignment made in the Setup menu.
	Frame memory source 1 and frame memory source 2 buses		
	DME 1 to DME 8 video buses		
	DME 1 to DME 8 key buses		
	Edit preview bus		
	M/E-1 UTILITY 1 and M/E-1 UTILITY 2 buses		
	M/E-2 UTILITY 1 and M/E-2 UTILITY 2 buses		
	M/E-3 UTILITY 1 and M/E-3 UTILITY 2 buses		
	M/E-4 UTILITY 1 and M/E-4 UTILITY 2 buses		
	M/E-5 UTILITY 1 and M/E-5 UTILITY 2 buses		
	P/P UTILITY 1 and P/P UTILITY 2 buses		
	M/E-1 Key 1 fill to M/E-1 Key 8 fill buses		
	M/E-1 Key 1 source to M/E-1 Key 8 source buses		
	M/E-2 Key 1 fill to M/E-2 Key 8 fill buses		
	M/E-2 Key 1 source to M/E-2 Key 8 source buses		
	M/E-3 Key 1 fill to M/E-3 Key 8 fill buses		
	M/E-3 Key 1 source to M/E-3 Key 8 source buses		
	M/E-4 Key 1 fill to M/E-4 Key 8 fill buses		
	M/E-4 Key 1 source to M/E-4 Key 8 source buses		
	M/E-5 Key 1 fill to Key 8 fill buses		
	M/E-5 Key 1 source to Key 8 source buses		
	DSK 1 source to DSK 8 source buses		
	DSK 1 fill to DSK 8 fill buses		
	M/E-1 external DME bus		
	M/E-2 external DME bus		
	M/E-3 external DME bus		
	M/E-4 external DME bus		
	M/E-5 external DME bus		
	P/P external DME bus		
	DME UTILITY 1 and DME UTILITY 2 buses		

a) M/E-4 or M/E-5 requires assignment.
b) Dual background bus mode (see below) can be selected.
c) A dedicated [SHIFT] button operation is required when the dedicated [SHIFT] button operation mode is set in setup to “Key5-8 Select.” For other settings, a dedicated [SHIFT] button operation is not required.

d) Only valid when the dedicated [SHIFT] button operation mode is set in setup to "Key5-8 Select." For other settings, assignment is not possible.
e) An assignment to the delegation buttons is required in setup, to assign the bus for operations.

Dual background bus mode

In this mode, the shifted signal on the background A row can be selected on the key 1 row, and the shifted signal on the background B row can be selected on the key 2 row. To switch this mode on and off, it is necessary to assign this function to the [PRE MCRO] button in the cross-point control block.

For details of the assignment operation, see "Assigning the Dual Background Bus Mode Switching Function" in Chapter 19 (Volume 2).

Notes

For the following switcher banks, dual background bus mode is not available.
- When set to "Dual M/E Assign"
- When M/E Config is set to "DSK"

AUX Panel-less Function

When using 24-column cross-point control blocks for the CCP-6224/CCP-6324 Control Panel, you can use the key 1 and key 2 rows as the auxiliary bus control block. This is called the panel-less function.

Selecting the AUX bus

1. Switch the operation mode with the [AUX CTRL] button.
2. In the key 1 row, select the AUX bus for the operation.
3. In the key 2 row, select the desired signal.

Signal Assignment and Selection


Assigning signals to buttons

Each of the 32 cross-point buttons and reentry buttons has a corresponding button number, to which you assign a signal.
In addition to the signals input to the following connectors, you can also select signals generated within the switcher.
- The input connectors on the rear panel of the switcher (1 to 144 in MVS-8000X, 1 to 80 in MVS-7000X)
- The premium input 1 to 20 connectors (only in MVS-8000X)
- The FC input 1 to 16 connectors (only in MVS-8000X)

Each button has assigned to it a video signal and a key signal, forming a pair. You can set these video and key combinations in the Setup menu.

For details of Setup menu operations, see "Creating Cross-Point Assign Tables" in Chapter 19 (Volume 2).

Cross-point button control block button numbers

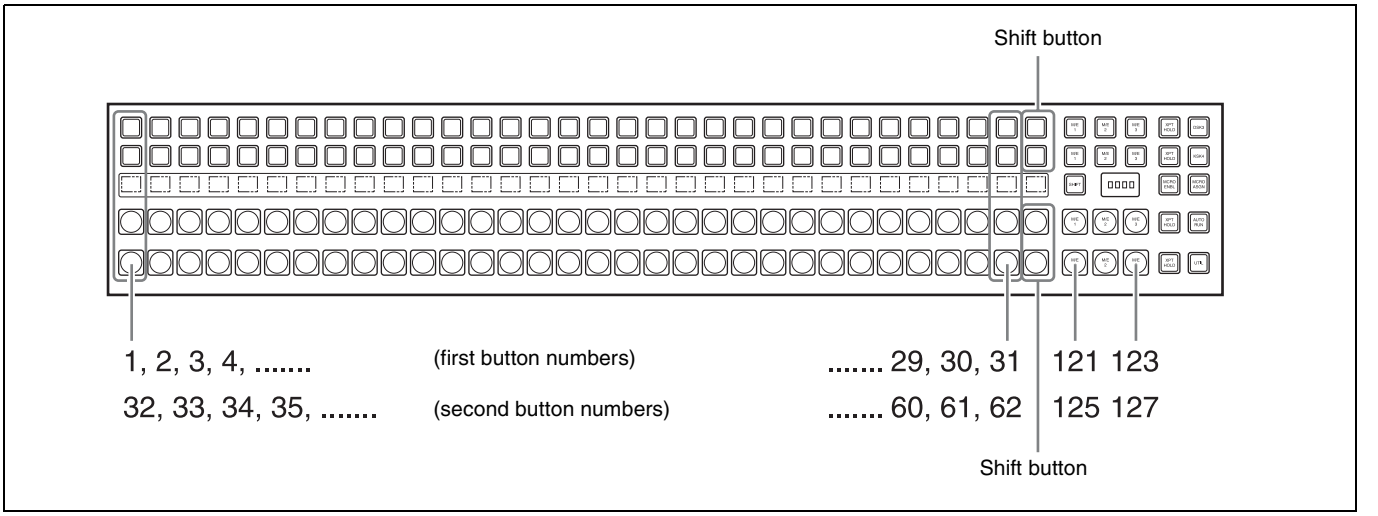

On each M/E bank and the PGM/PST bank, each cross-point button and reentry button has two button numbers, and you use the shift button to switch between these numbers.
In the case of a 32-button layout, the button numbers are as follows.

Cross-point control block button numbers

Button	Number when the shift button is not pressed	Number when the shift button is pressed
From the left end to the 31st button	1 to 31	32 to 62

Cross-point control block button numbers

Button	Number when the shift button is not pressed	Number when the shift button is pressed
Reentry buttons	121 to 123	125 to 127

Notes

You can use the rightmost button (number 32) as a [SIDE FLAG] button. In this case, the shift button moves one to the left, to number 31, and the button numbers are offset by one.

For details of the [SIDE FLAG] button, see "Assigning a Cross-Point Button to Enable/Disable Side Flags" in Chapter 19 (Volume 2).


Switching button numbers

The rightmost (32nd) button functions as a shift button (the shift button function can be disabled in the Setup menu).

When selecting the signals of button numbers 1 to 31, press the cross-point button for the desired signal.

To select button numbers 32 to 62, hold down the shift button, and press the cross-point button for the desired signal.

Button numbers in the auxiliary bus control block

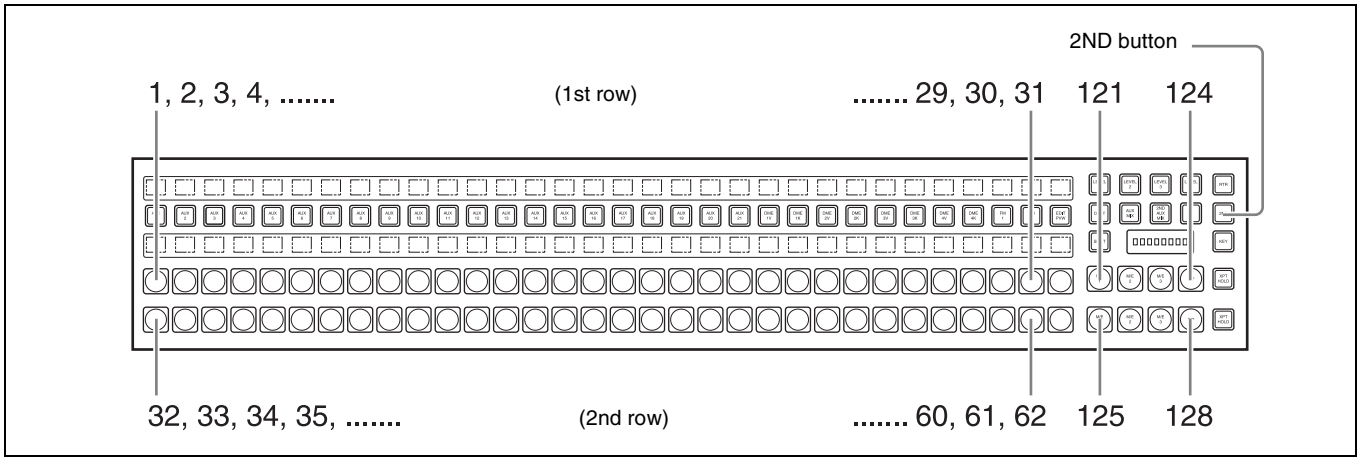

When the [2ND] button is unlit

The cross-point buttons and reentry buttons in the auxiliary bus control block have separate upper (1st row) and lower (2nd row) numbers.

In the case of a 32-button layout, the button numbers are as follows.

Auxiliary bus control block button numbers ([2ND] button unlit)

Button	Button	Button numbers
1st row	From the left end to the 31st button	1 to 31
	Reentry buttons	121 to 124
2nd row	From the left end to the 31st button	32 to 62
	Reentry buttons	125 to 128

When the [2ND] button is lit

Different buses can be assigned to the 1st-row buttons and 2nd-row buttons. When the 32nd button is set as a shift button, the 1st-row buttons and 2nd-row buttons both have the following button numbers.

Auxiliary bus control block button numbers ([2ND] button lit)

Button	Number when the shift button is not pressed	Number when the shift button is pressed
From the left end to the 31st button	1 to 31	32 to 62
Reentry buttons	121 to 124	125 to 128

Inhibiting cross-point button operations

For each cross-point button, you can temporarily inhibit operations.

Notes

This setting is cleared when you reset the control panel.

Assigning a button to the function of disabling cross-point button operation

You can assign the button to be used for the operation to the [PRE MCRO] button, in setup.

For details, see "Overall Control Panel Settings (Config Menu)" in Chapter 19 (Volume 2).

You can also use the [Inhibit Set] and [Inhibit All Clear] functions, assigned to user preference buttons.

For details, see "Assigning Functions to User Preference Buttons" in Chapter 19 (Volume 2).

Buses for which operations can be inhibited

This setting applies to the auxiliary bus control block (when using the CCP-8000) and the cross-point buttons in each switcher bank. However, when using the CCP-6224/6324, buses may be assigned with the cross-point button rows for keys 1 and 2 as the auxiliary bus control block.
For example, if you make the setting for one cross-point button in a switcher bank, this inhibits operation of all cross-point buttons with the same number in the following buses.
The corresponding name also disappears from the source name display.

- Background A, background B
- Keys 1 to 8
- Utility 1, Utility 2
- DME utility 1, DME utility 2
- External DME

To inhibit operation of a cross-point button

Hold down the button to which "Inhibit Set" is assigned, and press the cross-point button whose operation you want to inhibit.
The button you pressed flashes amber, and this makes the operation inhibited.

Notes

Even when you inhibit operation of a cross-point button, macro attachment settings are still possible.

For details, see "Setting and Canceling a Macro Attachment" in Chapter 16 (Volume 2).

To clear a cross-point button operation inhibit setting

Hold down the button to which "Inhibit Set" is assigned, and press the button whose operation is inhibited (flashing amber).
This clears the operation inhibit setting for the button you pressed.

To clear all operation inhibit settings

Press the button to which "Inhibit Set" is assigned and the button to which "Inhibit All Clear" is assigned simultaneously.

Selection of signals linked with the audio mixer

When you select a signal in a switcher bank background A, key 1 or key 2 row (of the CCP-6224/6324 control panel in AUX control mode) or AUX bus control block (of the CCP-8000), and the bank and signal are set to be linked to the audio mixer, then the program output of the audio mixer follows the signal selection.

For details of the setting, see "Making Settings for Audio Mixer" in Chapter 19 (Volume 2).

Notes

- For details of audio mixers that can be connected, contact your Sony service or sales representative.
- When the signal is switched with a snapshot, keyframe, and so on, the audio mixer is not linked.
- When bus fixed mode is selected in setup *(see page 110)*, the audio mixer program output is linked to the bus output as the background.

Signal Name Display

You can attach a name (source name) to each signal assigned to a cross-point button, with a maximum of 16 characters.

- The source name displays in the cross-point control block and auxiliary bus control block show the source names of the video signals assigned to numbers 1 to 31.
- To display the source names for numbers 32 to 62, press the [SHIFT] button to the right of the source name displays.
- To display the source names of the key signals assigned to buttons, hold down the [SPLIT] button in the key control block or the [KEY] button in the auxiliary bus control block.

When using the AUX panel-less function *(see page 92)* with the CCP-6224/6324 Control Panel, you can use the cross-point control block as an AUX bus control block with the [AUX CTRL] button.
In this case, use the key 1 row as AUX delegation buttons, and the key 2 row as AUX bus cross-point selection buttons; the source name displays show the bus names and source names.

Colors of lit cross-point buttons

In a particular row of cross-point buttons, only the last pressed button is effective, and lights amber or red. The amber indicates the "low tally" state, and the red indicates the "high tally" state, to indicate whether or not the selected signal appears in the final output video.

Significance of colors of lit cross-point buttons

Color	State	Significance
Amber	Low tally	Does not appear in final output video
Red	High tally	Appears in final output video

Transitions

Selecting the Next Transition

To execute a transition, it is first necessary to decide how the image will be changed as a result of the transition. This selection is carried out using the next transition selection buttons *(see page 37)* in the transition control block of each M/E or PGM/PST bank.

For details of operations, see "Procedure for Basic Transition Operation" (page 96).

Transition Types

Selecting the transition type determines the way in which the transition occurs.
Carry out the type selection with the transition type selection buttons in the transition control block of each M/E or PGM/PST bank.

For details of this operation, see "Procedure for Basic Transition Operation" (page 96).

The following are the transition types.

Mix

This is a dissolve, in which the new video progressively fades in over the current video, with the sum of the two video outputs maintained constant. At the mid-point of the transition (when the fader lever is in the center position), the output of each is 50%.
This transition type can also be selected for an independent key transition. In this case, the key either dissolves in or dissolves out similarly, with the progress of the transition.

NAM (non-additive mix)

In this dissolve, the current video and new video signals are compared, and the signal with the higher luminance level is given priority in the output. The current video is maintained at 100% output for the first half of the transition as the new video increases progressively to 100%, then the current video is progressively reduced from 100% to zero in the second half with the new video maintained at 100% output.

Notes

This transition type is not available for an independent key transition.

Super mix

In this dissolve, the current video is maintained at 100% output for the first half of the transition as the new video is mixed while increasing progressively to 100%, then the current video is progressively reduced from 100% to zero in the second half with the new video maintained at 100% output.

Notes

This transition type is not available for an independent key transition.

For details on super mix settings, see page 102.

Preset color mix

This is a two-stage dissolve, comprising two transitions, the first a dissolve to a color matte, and the second from the color matte to the new video.
In the first transition, the current video is replaced by the color matte in a mix (dissolve), then in the second transition the color matte is replaced by the new video also in a mix (dissolve).

Notes

This transition type is not available for an independent key transition.

For details on color matte settings, see page 103.

Wipe

A wipe replaces the current video by the new video according to a predetermined pattern. This transition type can also be selected for an independent key transition.

For details, see Chapter 5 "Wipes" (page 163).

DME wipe

Using a DME effect, it is possible to obtain a transition to a new image from the current image, as in a wipe. You can also use this transition type as an independent key transition.

For details, see Chapter 6 "DME Wipes" (page 183).

Clip transitions


Linked to a mix (dissolve) or wipe transition, a frame memory clip (movie) is played back.

Cut

A cut switches instantaneously from the current video to the new video. When the next transition is a key transition, the key cuts in or out instantaneously.

Procedure for Basic Transition Operation

The positions of the principal buttons used for basic transition operation are as follows.

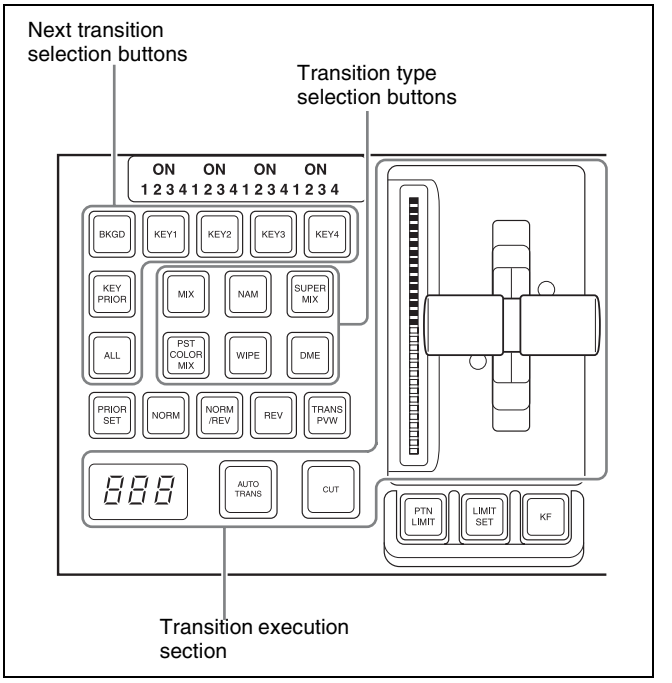

Transition control block (for standard transitions)

1 In the cross-point control block, select the background video with the background A row of cross-point buttons.

2 Select the way in which the transition will affect the image, using the next transition selection buttons in the transition control block.

For an overview, see "Selecting the Next Transition" (page 95).

To change the background: Press the [BKGD] button, turning it on.

To insert or delete a key: Press one of the [KEY1] to [KEY4] buttons (or [DSK1] to [DSK4] buttons in the PGM/PST bank), turning it on.

For details of the operation to select [Key5] to [Key8], see "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" (page 397) in Appendix.

To enable the key priority setting, which determines the key overlay order after the transition: Press the [KEY PRIOR] button, turning it on.
You can press more than one button at the same time.

To change the keys and background presets in Setup menus simultaneously: Press the [ALL] button.

To allocate a particular next transition button to the [ALL] button function, see "Setting the Operation Mode of the [ALL] Button in the Transition Control Block" in Chapter 19 (Volume 2).

3 For the transition to change the key priority, set the priority for after the transition.

When using keys 1 to 8, see "Priority Setting for Keys 1 to 8" (page 101). For details of the key priority setting operation, see "Key Priority Setting" (page 98).

4 Select the new video used for the transition.

- In the background B row of cross-point buttons, select the new background video.
- When inserting a key, select the key signal, and make any required settings.

For details of key settings, see Chapter 4 "Keys" (page 123).

To carry out a cut transition, skip to step **7**; otherwise continue to step **5**.

5 Select one of the transition type selection buttons in the transition control block.

To carry out a dissolve to the new video: Press one of the [MIX], [NAM], [SUPER MIX], and [PST COLOR MIX] buttons, turning it on.
To carry out a wipe: Press the [WIPE] or [DME] button, turning it on.
To carry out a transition while playing back a frame memory clip: Press one of the buttons corresponding to the clip to be used (FM1&2CLIP, FM3&4CLIP, FM5&6CLIP, and FM7&8CLIP).

You can also use the Misc >Transition menu to select a desired transition type for the M/E or PGM/PST bank. *See "Selecting the Transition Type by a Menu Operation" (page 102).*

For an overview, see "Transition Types" (page 95).

Notes

The transition type selection buttons in the transition control block can be interchanged in the setup menu.

For details, see "Overall Control Panel Settings (Config Menu)" in Chapter 19 (Volume 2).

6 Make the required settings, according to the selected transition type.

For details of the settings, see the relevant section.

Super mix: *"Super Mix Settings" (page 102)*
Preset color mix: *"Color Matte Settings" (page 103)*
Wipe: *"Basic Procedure for Wipe Settings" (page 163)*
DME wipe: *"Basic Procedure for DME Wipe Settings" (page 187)*
Clip transition: *"Clip Transition Operations" (page 219)*

Using the transition preview function *(see page 112)*, you can check the transition on the preview monitor.

7 Carry out the transition in the transition execution section.

For a gradual transition such as a mix (dissolve) or wipe: Press the [AUTO TRANS] button, or operate the fader lever.
To execute a transition by pressing the [AUTO TRANS] button, first set the transition rate (specified as the duration of the transition). *See "Setting the Transition Rate" (page 105).*
When you have selected a wipe or DME wipe as the transition type, you can also set the transition range. *See "Pattern Limit" (page 107).*
For an instantaneous transition: Press the [CUT] button.

For details, see "Executing a Transition" (page 105).

Transition linked to the audio mixer

If the video signal selected in the background B row is linked to the audio mixer in setup, then the audio mixer sound changes with the transition. That is, pressing the [AUTO TRANS] button gives a cross fade, and pressing the [CUT] button gives an instantaneous sound switch.

For details of setup, see "Making Settings for Audio Mixer" in Chapter 19 (Volume 2).

Notes


- The audio mixer is not linked to a snapshot or key frame transition.
- The audio mixer is not linked to a transition using the fader lever.
- If the bus-fixed mode *(see page 110)* is selected in the setup menu, and the fader lever is in the lowest position, there is a cross fade from the audio selected on the B row to the audio selected on the A row.
- The audio mixer is not linked to a key transition.
- In the following cases, the audio and video may be out of sync.
  - When carrying out a cross fade in some DME wipes (for example, "picture in picture")
  - When executing a preset color mix in two-stroke mode

- For details of audio mixers that can be used, contact your Sony service or sales representative.

Key Priority Setting

If a number of keys are already inserted in the current video, you can check or change the key priority, that is to say, the order in which the keys are overlaid.
When a key priority ([KEY PRIOR]) is selected as the next transition, you can also change the key priority in the new video.

The key priority values go from 1 to 4, with a higher priority key being “in front” as seen on the screen.



Priority sequence on the screen


There are two ways of setting the priority: either using the [PRIOR SET] button in the transition control block, or using the Misc menu to access the Key Priority menu for the M/E or PGM/PST bank.

Notes

When the operating mode is set to multi program, the key priority setting cannot be made.

Setting the Key Priority in the Transition Control Block

The positions of the buttons used for the operation are as follows.

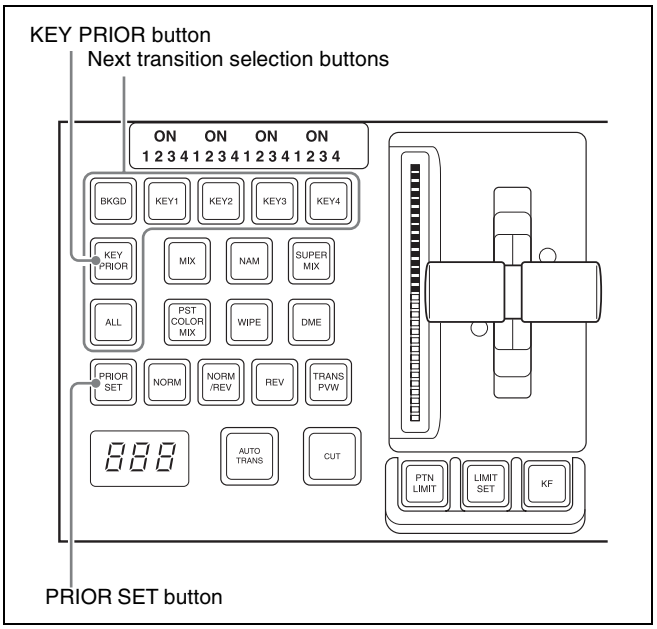

Transition control block (standard type)

Changing the currently inserted key priority

1 If the next transition selection button [KEY PRIOR] is on, press another next transition selection button to turn the [KEY PRIOR] button off.


When the [KEY PRIOR] button is on, the transition control block switches to the mode for changing the key priority for after the transition.

2 Holding down the [PRIOR SET] button, press the one of the next transition selection buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] buttons in the PGM/PST bank) for the key to appear on top.

Notes

- To select [Key5] to [Key8], or [DSK5] to [DSK8] requires an assignment *(see page 397)*.
- The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups.
  For example, it is not possible to set a priority sequence of keys 1, 5, and 2.

The selected key now appears on top, on the program monitor.
The priority of keys other than the selected one does not change.

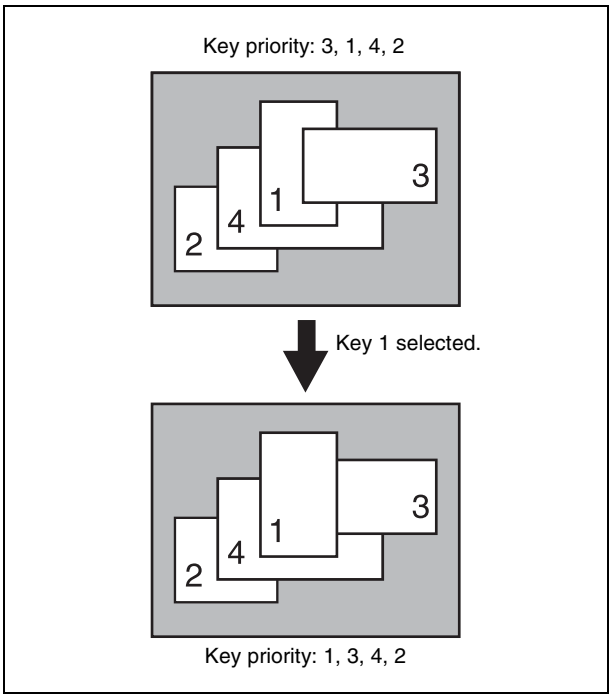

To change the priority of more than one key, repeat this operation as required.

Changing the key priority for after the transition

When executing a transition, turning on the next transition selection button [KEY PRIOR] causes the keys to be rearranged based on the set priority.
To set the key priority for after the transition, use the following procedure.

1 In the transition control block, hold down the [PRIOR SET] button and press the [KEY PRIOR] button to turn it on. Do not release the [PRIOR SET] button before advancing to step **2**.

The [KEY PRIOR] button lights green, and it becomes possible to change the key priority setting for after the transition.

2 Hold down the [PRIOR SET] button, and press the one of the next transition selection buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] buttons in the PGM/PST bank) for the key you want to bring to the front after the transition.

To set the priority to be the same as before the transition, press the [BKGD] button.

Notes

- The [BKGD] button is only effective when in the mode for changing the key priority for after the transition.

- To select [Key5] to [Key8], or [DSK5] to [DSK8] requires an assignment *(see page 397)*.
- The key priority establishes a separate priority order within each of the groups of keys 1 to 4 and keys 5 to 8. You can make any setting within the groups of keys 1 to 4 or keys 5 to 8, but not for combinations of keys from different groups. For example, it is not possible to set a priority sequence of keys 1, 5, and 2.

When the next transition selection button [KEY PRIOR] is on, the selected key appears on top on the preview monitor. The priority of keys other than the selected one does not change.

3 To change the priority of more than one key, repeat the previous operation as required.

4 Execute the transition.

Setting the Key Priority by a Menu Operation

When using keys 1 to 8, set the priority separately for the two groups *(see page 101)*.


Changing the priority of the currently inserted keys

1 In the M/E or PGM/PST menu, select first VF7 'Misc,' then HF3 'Key Priority.'

The Key Priority menu appears.

2 For each of <Priority1>, <Priority2>, <Priority3>, and <Priority4>, select a key, to determine the key priority sequence.

The keys are inserted in the key priority sequence with priority 1 at the front.

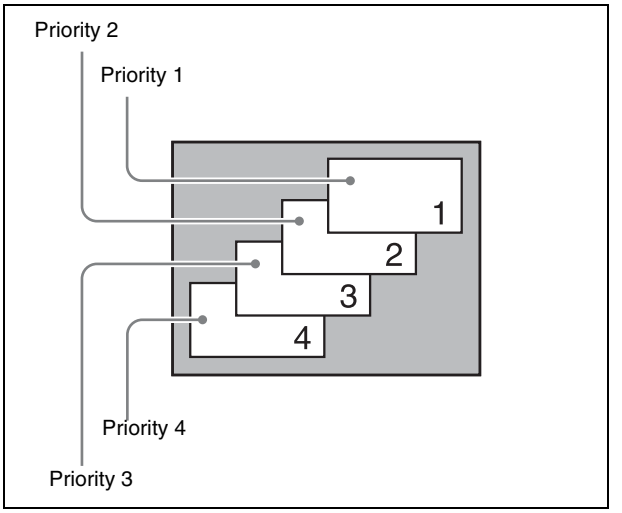

Notes

It is not possible to select the same key for two or more priority numbers.

The keys appear in the set order on the program monitor.

Changing the key priority for after the transition

1 In the M/E or PGM/PST menu, select first VF7 'Misc,' then HF4 'Next Key Priority.'

The Next Key Priority menu appears.

2 For each of <Priority1>, <Priority2>, <Priority3>, and <Priority4>, select a key, to determine the key priority sequence.

*For details of the key priority sequence, see the figure shown for step **2** in the previous item (see page 100).*

The keys appear in the set order on the preview monitor.

3 Execute the transition.

The keys are rearranged in the set order on the program monitor.

Display of the Key Output Status and Key Priority

You can check whether keys are currently output, and the key priority setting, using the key status display in the transition control block of the M/E or PGM/PST bank. The display is above the next transition selection buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] buttons in the PGM/PST bank).

Notes

You can change the assignment of the next transition selection buttons [KEY1] to [KEY4]. If this is changed, the output status and priority is shown for the assigned key.


Display of the key output status

When a key is included in the output from the M/E or PGM/PST bank, the corresponding ON indicator lights.

Key priority display

The key priority is indicated by numerals 1 to 4 lighting.

The topmost key as seen on the program monitor is priority 1, and the keys underneath are numbered 2, 3, 4 away from the viewer *(see page 100)*.
To display the key priority for after the transition, press the [KEY PRIOR] button in the transition control block, turning it on. For keys for which the priority after the transition is different from the current priority, the corresponding numerals 1 to 4 flash. For a key with the same priority, the indication remains on.
Example key status display given when the [KEY PRIOR] button is pressed:
Current key priority: 1, 2, 3, 4
Key priority after the transition: 3, 2, 1, 4
Indicators: 1, 3 (flashing), 2, 1 (flashing), 3, 4

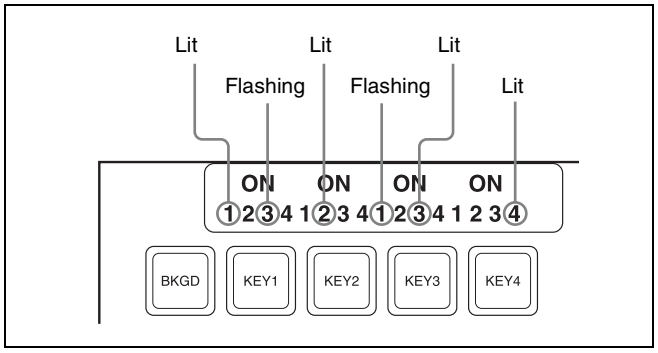

Example key status display
(showing the key priority after the transition)

Priority Setting for Keys 1 to 8



Set the priority for each of the groups consisting of keys 1 to 4 and keys 5 to 8.

1 In the VF7 ‘Misc’ menu, select HF3 ‘Key Priority,’ to display the Key Priority menu.

2 In <Higher Group>, press the button for the group you want to be higher.

The button you pressed lights green, and this becomes the reference group.

3 Set the reference group priority.

4 In <Lower Group>, select the other group.

5 Set the priority for the other group.

Selecting the Transition Type by a Menu Operation

You can also select the required transition type by a menu operation.

1 In the M/E or PGM/PST menu, select first VF7 'Misc,' then HF1 'Transition.'

The Transition menu appears.

2 Select the required transition type in the <Transition Type> group.

The parameter settings can now be adjusted with the knobs according to the selected transition type.

For details, see the following.
- *"Super Mix Settings" (page 102)*
- *"Color Matte Settings" (page 103)*
- *"Setting the Transition Rate" (page 105)*

Notes

When multi-program mode is selected in the Setup menu, there may be cases in which two or more transition types have been selected.

For details, see "Setting the Operation Mode" in Chapter 20 (Volume 2).

Super Mix Settings

You can set the output levels of the current and new video signals at the mid-point of the transition, in the range 0 to 100%.

Notes

This transition type is not available for an independent key transition.

1 In the M/E or PGM/PST menu, select first VF7 'Misc,' then HF1 'Transition.'

The Transition menu appears.

2 Select [Super Mix] in the <Transition Type> group.

3 Turn the knobs to adjust the output levels.

Knob	Parameter	Adjustment	Setting values
2	A Gain	Background A output level	0.00 to 100.00%
3	B Gain	Background B output level	0.00 to 100.00%

Color Matte Settings

You can specify the color matte by luminance, saturation, and hue values.
Also, in place of a color matte you can use an image selected on the utility 2 bus.


Notes

- This transition type is not available for an independent key transition.
- In the multi-program mode, you can use a preset color mix only when selecting the background for the next transition.

One-stroke mode and one-time mode


- You can make a setting such that a preset color mix is carried out in a single transition. This is called “one-stroke mode.”
  When the bus fixed mode is selected with a Setup menu setting, a preset color mix is always carried out in the one-stroke mode.
- You can also make a setting such that when a preset color mix is completed, the next transition switches to the previous transition type automatically. This is called “one-time mode.”

When only the background is changed

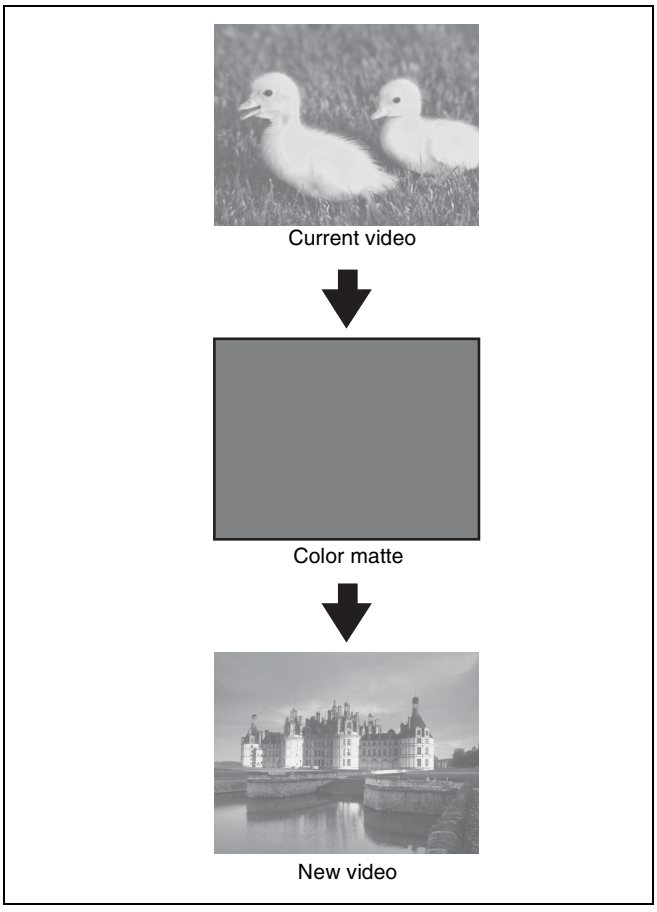

Preset color mix (changing background only)


When a key is inserted

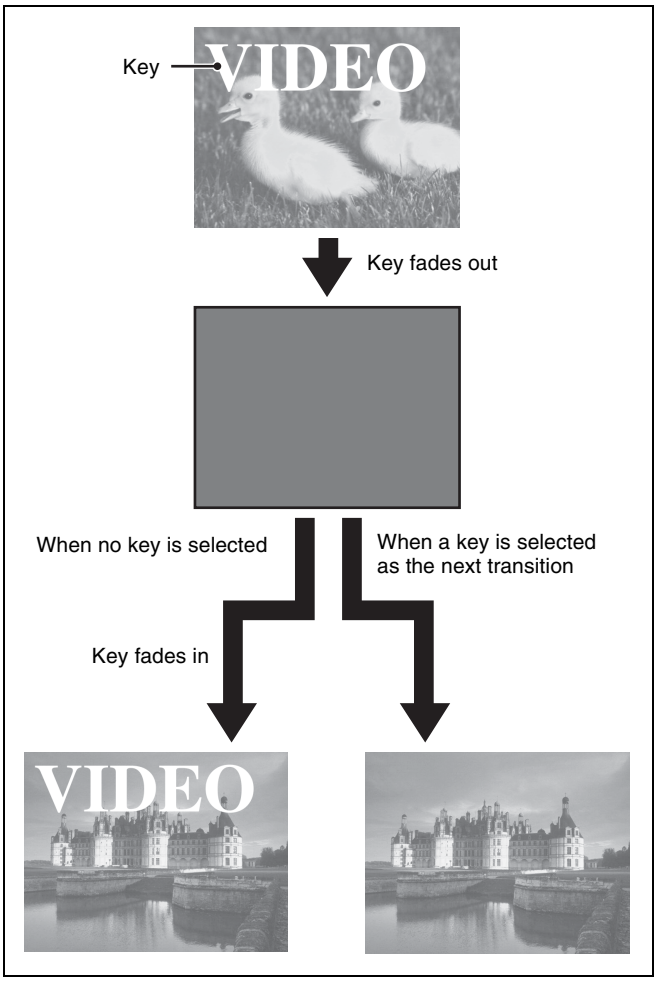

Preset color mix (transition including key)

By means of a Setup menu setting, it is possible to preserve the key state while carrying out the color matte mix.

When, with a key inserted, a key is selected in the next transition

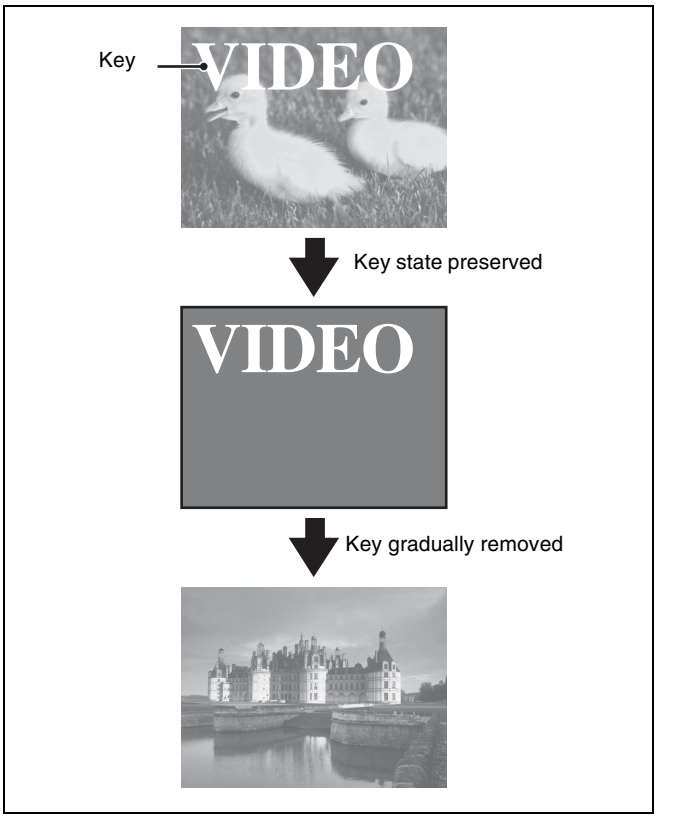

Preset color mix (when set to preserve key state)

Setting the color matte

1 In the M/E or PGM/PST menu, select first VF7 'Misc,' then HF1 'Transition.'

The Transition menu appears.

2 Select [Preset Color Mix] in the <Transition Type> group.

3 In the <Preset Color Mix Fill> group, select one of the following.

Flat Color: monochrome color matte
Utility 2 Bus: signal selected on the utility 2 bus

4 When "Flat Color" is selected, turn the knobs to adjust the color matte.


Knob	Parameter	Adjustment	Setting values
2	Luminance	Luminance	0.00 to 100.00
3	Saturation	Saturation	0.00 to 100.00
4	Hue	Hue	359.99 to 0.00

Executing a Transition

There are two modes of executing a transition: an auto transition by button operation or a manual transition using the fader lever.
It is also possible to combine both methods, taking control with the fader lever of an auto transition which has partly completed, or complete a transition started with the fader lever as an auto transition.
By combining common transitions with independent key transitions, different transition types can be applied to the background and keys, for example allowing a key wipe combined with a background dissolve.
When the audio mixer is linked in setup, you can carry out an auto transition, and also switch the sound with the audio mixer *(see page 97)*.

Transition Indicator Function

In each of the M/E banks and PGM/PST bank, to the left of the fader lever is a transition indicator composed of multiple LEDs. This indicator shows the state of the transition, whether auto or manual, by which LEDs are lit.

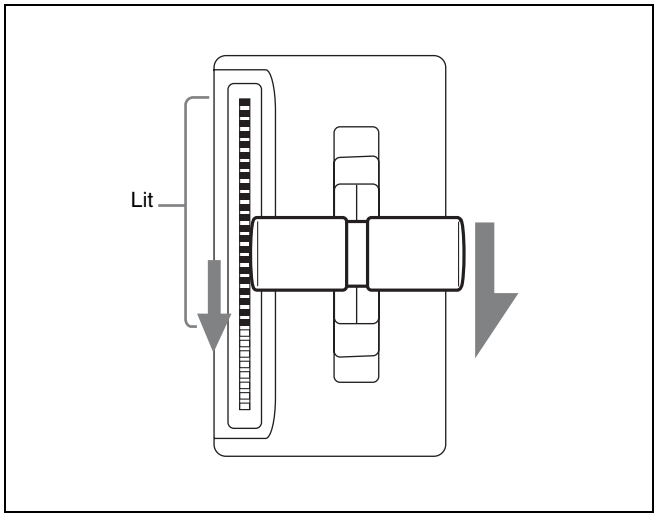

Transition indicator

For example, in the previous illustration, it can be seen that the transition is more than half completed.
When the transition is completed, all of the LEDs go off.

Setting the Transition Rate

There are two ways of setting the transition rate: using the Flexi Pad control block, Multifunction Flexi Pad control block or numeric keypad control block to enter a numeric value, or using the Misc menu to access the Transition menu for the M/E or PGM/PST bank.

You can also display the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and change the settings *(see page 234)*.

Notes

When a clip transition is selected as the transition type, it is not possible to set the transition rate.

Frame input mode and timecode input mode

For numeric input of the transition rate value, there are two modes: frame input mode and timecode input mode. You select one of these modes using either the Flexi Pad control block *(page 106)*, Multifunction Flexi Pad control block or the numeric keypad control block *(page 106)*.

Frame input mode: The entered value is a number of frames.
Example: Entering 123 constitutes an entry of 123 frames

Timecode input mode: The entered value is a timecode value.
Example: Entering 123 constitutes an entry of 1 second 23 frames.

Notes

Whereas you can enter a value of up to 999 in frame input mode, a value not smaller than 10 seconds cannot be entered in timecode input mode.

Frame display mode and timecode display mode

For the transition rate display in the transition control block, there are two modes: frame display mode and timecode display mode. You can select one of these modes in setup.

For details, see "Setting the Transition Rate Display Mode" in Chapter 19 (Volume 2).

Notes

The setting is common to all banks of the switcher.

Frame display mode: Values are shown as from 0 to 999 frames. In this display mode, a value entered in timecode input mode is converted for display as a number of frames.

Timecode display mode: Values are shown as timecode values, consisting of seconds and frames. In this display mode, a value entered in frame input mode is converted for display as a timecode value. If the value consists of four or more digits, the last digit is not shown.

Example: A value of 9 seconds 23 frames appears as “9.23” and a value of 10 seconds 1 frame appears as “10.0.”


Setting the transition rate in the Flexi Pad control block

Notes

When using a simple-type transition control block, you cannot use the Flexi Pad control block to set the transition rate.

1 In the M/E bank Flexi Pad control block, press the [TRANS RATE] button.

The memory recall section display is now ready to accept the entered transition rate.

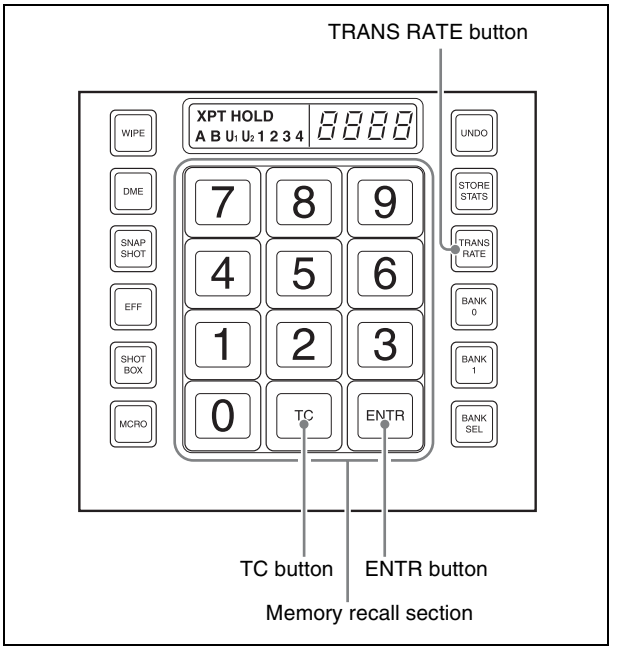

Flexi Pad control block (standard type)


2 Enter the desired transition rate with the numeric keypad.
If required, press the [TC] button to toggle the input mode (frame input or timecode input).

- Enter a value of up to three digits.
- To cancel the entry, press any of the six buttons in the leftmost column ([WIPE], [DME], …) or the [TRANS RATE] button.

3 Press the [ENTR] button.

This confirms the entry, and the new setting appears in the transition control block display.

Setting the transition rate in the numeric keypad control block

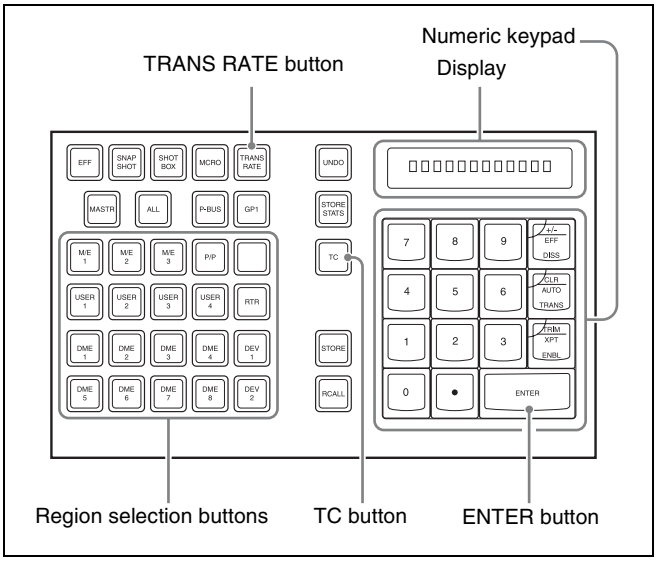

Numeric keypad control block

1 In the numeric keypad control block, press the [TRANS RATE] button.

2 Press the region selection button for the M/E or PGM/PST bank for which you want to set the transition rate, turning it on.

The numeric keypad control block display now shows the selected region name and the current transition rate setting for the region.

3 With the numeric keypad, enter the transition rate.

If required, press the [TC] button to toggle the input mode (frame input or timecode input).

- Enter a value of up to three digits.
- To clear the entry, press the [CLR] button.

4 Press the [ENTER] button.

This confirms the entry, and the selected region name and the set transition rate appear in the numeric keypad control block display.
The transition control block display of the same bank (M/E or PGM/PST) also shows the setting.


To enter a difference from the current value

After pressing the [+/–] button, enter the difference and press the [TRIM] button.
To change the sign (+ or –), press the [+/–] button.

Setting the transition rate in the Multifunction Flexi Pad control block

1 In the Multifunction Flexi Pad control block, press the [TRANS RATE] button.


The button displays in the memory recall section change as shown in the following illustration, and the Multifunction Flexi Pad control block switches to the transition rate setting mode.

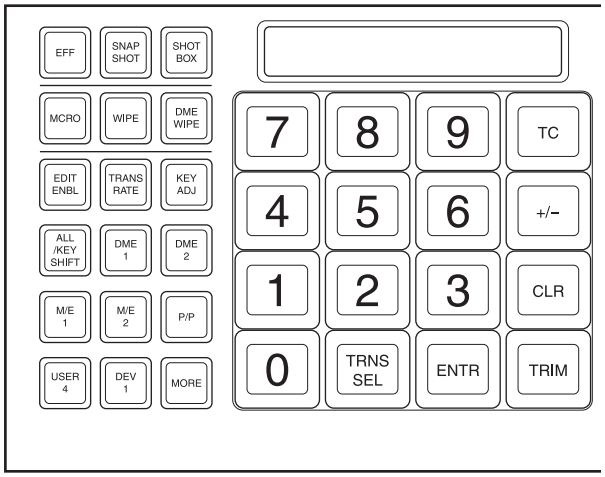

2 In the region selection buttons, select the switcher bank.

3 Press the [TRNS SEL] button in the memory recall section.

The button displays in the memory recall section change as shown in the following illustration, and you can select the type of transition for which to set the rate.

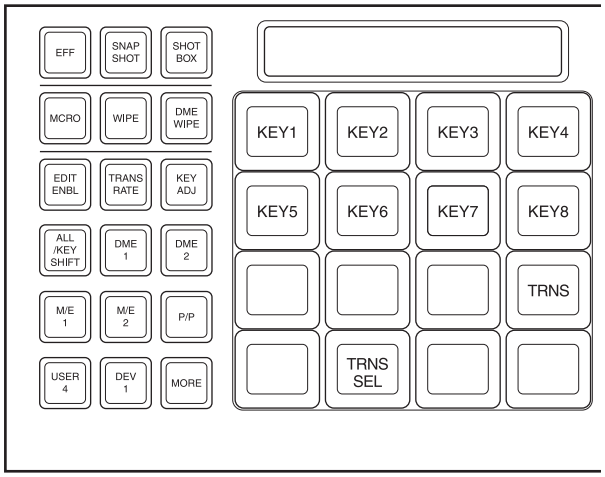

4 Press the [TRNS] button.

You can now set the M/E-1 block background transition rate.

5 Watching the alphanumeric display, enter the transition rate you want to set with the memory recall section button.

If required, press the [TC] button to switch the input mode (frame count input or timecode input).

- Enter a value of up to three digits.
- To cancel the input, press any of the mode selection buttons.

6 Press the [ENTR] button.

Setting the transition rate by a menu operation

1 In the switcher bank, select first VF7 ‘Misc,’ then HF1 ‘Transition.’

The Transition menu appears.

2 Select any transition type in the <Transition Type> group.

3 Turn the knob to set the transition rate.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition Rate	0 to 999 (frame count)

Displaying the transition rates in a menu and changing the settings

For each of the M/E and PGM/PST banks, you can display the transition rate, independent key transition rate and fade-to-black transition rate, and change the settings *(see page 234)*.

Pattern Limit

When a wipe or DME wipe pattern is selected for the transition, you can specify the range of movement of the wipe pattern through the course of the transition, for each bank independently.
When the pattern limit function is enabled, carrying out a transition results in the following effect for example settings.


- When the limit value is set to 50%, the effect at the end of the transition is the same as when the fader lever is at the center position in the normal case (with the pattern limit function disabled); the wipe pattern does not complete.
- When the limit value is set to 0%, the wipe effect is completely disabled, and carrying out the transition produces no change in the image.
- When the limit value is set to the maximum 100%, the image changes in exactly the same way as when the pattern limit function is off, but when the transition is completed, the cross-point selections on the background A and B buses do not interchange.

There are two ways of setting a pattern limit: either by operating the fader lever to save the fader position, or by

using the Wipe menu or DME Wipe menu to access the Edge/Direction menu for the M/E or PGM/PST bank.

Notes

- A pattern limit only applies when a wipe or DME wipe is selected as the transition type.
- A pattern limit cannot be applied to an independent key transition *(see page 113)*.
- In multi-program mode, pattern limits can be used only when the background transition type is a wipe or DME wipe. If a key is selected for the next transition, the pattern limit settings are reflected in the wipe or DME wipe selected for the background transition type.

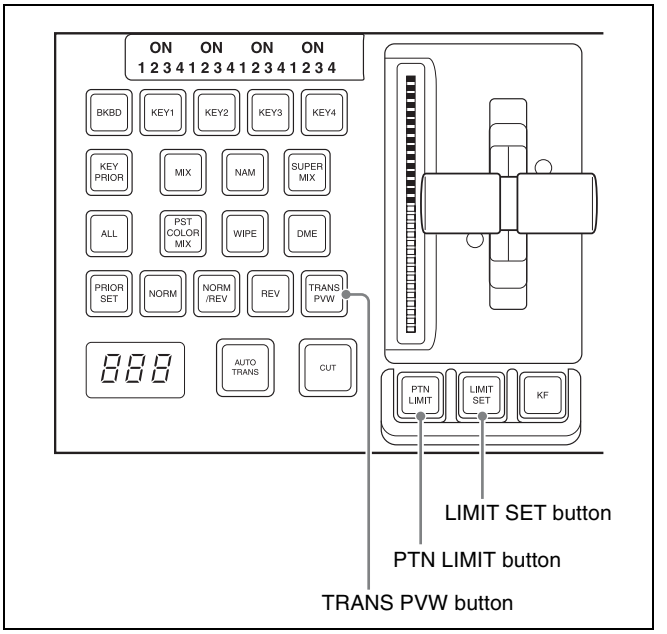

Transition control block (standard type)

Setting the pattern limit with the fader lever

1 Move the fader lever to the position corresponding to a particular pattern size.

- First make sure that the [PTN LIMIT] button is off.
- To check the pattern size on the preview monitor, first press the [TRANS PVW] button, to select the transition preview mode *(see page 112)*.

2 Press the [LIMIT SET] button.

This sets the current fader lever position as the pattern limit.

Setting the pattern limit by a menu operation

1 When a wipe is selected as the transition type, in the M/E or PGM/PST menu, select first VF5 ‘Wipe,’ then HF4 ‘Edge/Direction.’

When a DME wipe is selected as the transition type, in the M/E or PGM/PST menu, select first VF6 ‘DME Wipe,’ then HF4 ‘Edge/Direction.’

The Edge/Direction menu appears.

2 Press the [Pattern Limit] button, turning it on.

3 Turn the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Pattern Limit	Pattern limit	0.00 [a] to 100.00 [b] %

a) 0.00%: Executing the transition does not change the video output at all.

b) 100.00%: The transition is the same as when no pattern limit is set, but the cross-point button selections of the background A and B buses do not interchange when the transition completes.

Executing a pattern limit transition

1 Press the [PTN LIMIT] button, turning it on.

The button you pressed lights amber.

2 Carry out the transition.

The transition progresses as far as the set pattern limit. Even if the transition completes, the cross-point button assignments of the background A and B buses do not interchange.

3 Carry out the transition once again.

The status before the previous transition is restored.

To cancel the pattern limit

To cancel the pattern limit after completion of step **3** in the previous procedure, press the [PTN LIMIT] button, turning it off.

If after carrying out step **2** in the previous procedure, the pattern limit has been reached, carry out the following procedure.

1 Press the [PTN LIMIT] button.

The button you pressed lights green.

2 Carry out the transition.

The [PTN LIMIT] button goes off, and the pattern limit state is released.

Depending on the way in which the transition was executed, the action will be as follows.

- When you press the [CUT] button, the pattern limit is immediately released, and the image switches instantaneously.
- When you press the [AUTO TRANS] button, until the state of the next transition, the transition is carried out over the duration given by the transition rate.
- When you move the fader lever, the transition is carried out from the pattern limit state to the state before the pattern limit transition was carried out. Moving the fader lever even a little synchronizes the fader lever position with the transition state, and you can move the fader lever either in the forward direction or in the reverse direction.

Depending on the Setup settings, the transition may be executed at the instant you press the [PTN LIMIT] button, and the button goes off. In this case, execution continues for the time specified by the dedicated transition rate in the menu setting, as far as the state of the next transition.

For details of the setting, see "Selecting the Bank to Make the Settings" in Chapter 20 (Volume 2).

To set the transition rate when the pattern limit is released

1 In the <Pattern Limit Release> group of the Edge/ Direction menu, select one of the following.

Auto Trans Rate: Use the transition rate set in the transition rate control block
Independ Trans Rate: Independent transition rate

2 If you selected "Independ Trans Rate" in step **1**, adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Independent transition rate	0 to 999 (frames)

Executing an Auto Transition


The following two modes can be used for auto transition.

Cut

A cut switches instantaneously from the current video to the new video. When the next transition is a key transition, the key cuts in or out instantaneously.

Auto transition

The transition from the current video to the new video is carried out automatically at a constant rate, using the transition effect selected as the transition type.
You can set the transition rate in advance *(see page 105)*.

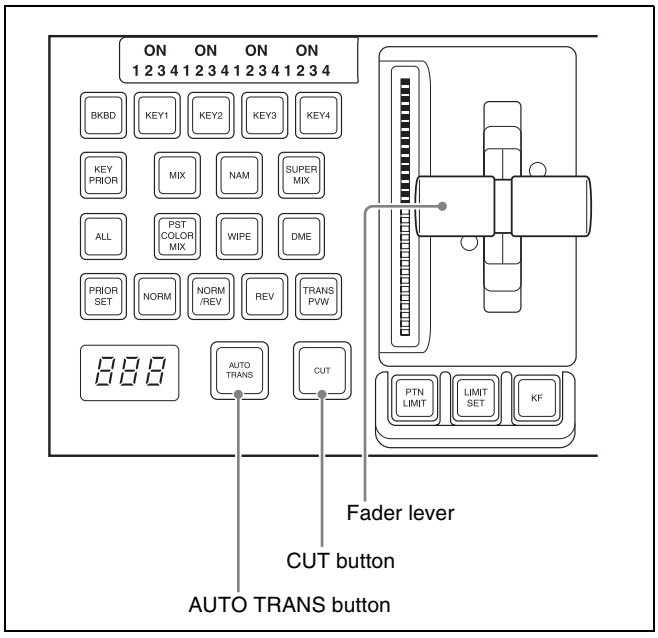

Transition control block (standard type)

To execute a transition on the M/E or PGM/PST bank by a button operation, use the following procedure in the transition control block.

To carry out an instantaneous cut transition: Press the [CUT] button.

To carry out a gradual transition: Press the [AUTO TRANS] button.
This executes the transition at the preset transition rate *(see page 105)*.
While the transition is executing, the [AUTO TRANS] button lights amber. When it completes the button goes off.

To complete a partially executed transition instantaneously: Press the [CUT] button.
The [AUTO TRANS] button goes off.

Executing a Transition With the Fader Lever (Manual Transition)

Using the fader lever, you can manually control the progress of the transition. Moving the fader lever from one end of its travel to the other completes the transition.
To execute a manual transition with the transition control block fader lever, use the following procedure.

To carry out the transition completely: Move the lever over the full range of its travel.

To pause a partly executed transition: Stop moving the fader lever.

To resume a paused transition: Resume moving the fader lever.

Combinations of Auto and Manual Transitions

Using the [AUTO TRANS] button, the [CUT] button, and the fader lever, use the following procedures.

Moving the fader lever during an auto transition


During an auto transition started by pressing the [AUTO TRANS] button, operating the fader lever immediately enables the fader lever, and the [AUTO TRANS] button goes off. Thereafter, the fader lever controls the progress of the transition.

Executing an auto transition after partly moving the fader lever

- Press the [CUT] button to instantaneously complete the transition.
- Press the [AUTO TRANS] button to complete the rest of the transition at the preset transition rate.
  If the transition rate is set to 100 frames, and the fader lever has moved through $^1/_4$ of the transition, then the remaining $^3/_4$ of the transition is carried out in 100 frames.

Non-Sync State

If the fader lever is in an intermediate position when a transition is completed as an auto transition, then the lever position no longer agrees with the transition state. This is termed a non-sync state.
In a non-sync state, two lit LEDs indicate the position from which a normal transition can be carried out. This is either at one end position or both end positions of the fader lever travel.
Moving the fader lever toward the position of the lit LEDs does not carry out a transition, but when the fader lever reaches the end position the non-sync state is released, and it is now possible to carry out the next transition.

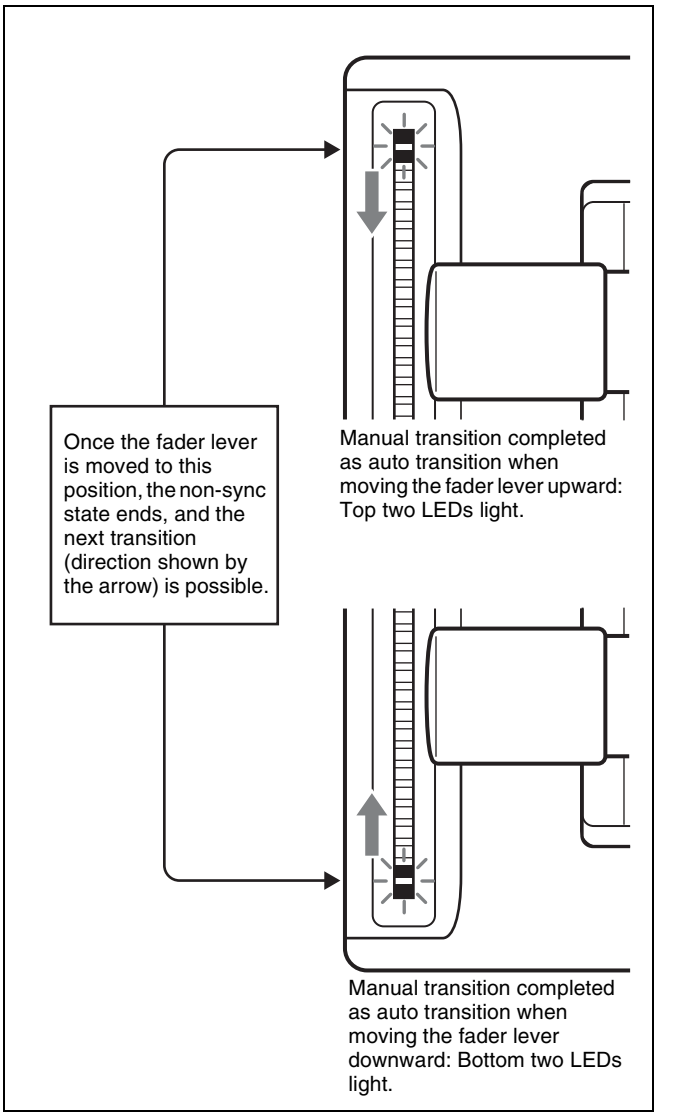


- If the fader lever is moved in the direction away from the lit LEDs, this carries out the next transition, over the remaining part of the fader lever travel.
- Even in a non-sync state, you can carry out an auto transition by pressing the [AUTO TRANS] button. During the auto transition, the indicators show the transition progress in the usual way, but when the transition completes, they once again indicate the non-sync state.

Fader Lever Operation in Bus Fixed Mode

Flip-flop mode and bus fixed mode

The following describes the difference between flip-flop mode and bus fixed mode, taking an M/E bank as an example; the functionality is the same, however, on the PGM/PST bank.

Normally, when a background transition is carried out on an M/E bank, the signals selected on the A and B rows of cross-point buttons are interchanged at the end of the transition. That is to say, except during a transition, the background output is always from the background A bus. This is called “flip-flop mode.”
The alternative is known as “bus fixed mode,” in which there is no bus interchange. In this mode, when the fader lever is at the top of its travel the output from the A bus is always 100%, and when the fader lever is at the bottom of its travel the output from the B bus is 100%.

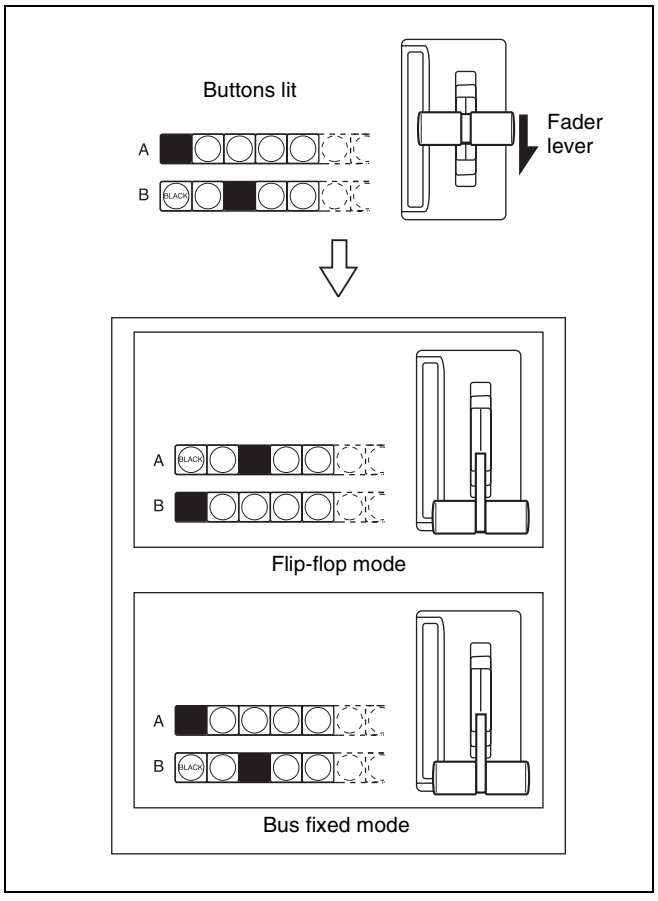

Flip-flop mode and bus fixed mode

In the bus fixed mode there is a fixed relationship between the position of the fader lever and the signal output on each bus. Depending on the direction of the transition, the fader lever must therefore always be moved in a particular direction, as shown in the following table. This does not affect an auto transition, which is executed regardless of the fader lever direction.

Next transition	Transition direction	Fader lever movement
Background	A → B	Downward
	B → A	Upward
Keys 1, 2, 3, 4, 5, 6, 7, and 8	On → Off (deletion)	Downward
	Off → On (insertion)	Upward

- When a transition applies to a combination of more than one of the background and keys 1, 2, 3, 4, 5, 6, 7, and 8, then the transition for all of these must be in the same direction complying with the above table.
- If as a result of an auto transition, for example, the fader lever position does not agree with the signal output, this is a non-sync state *(see page 110)* and LEDs light at both end positions of the fader lever travel. Moving the fader lever does not carry out a transition, but when the fader lever reaches the end position the non-sync state is released, and it is now possible to carry out the next transition. If the fader lever is moved in the direction away from the lit LEDs, this carries out the next transition, over the remaining part of the fader lever travel.

Transition Preview

With the preview output of the M/E banks and PGM/PST bank, you can check the effect of a transition in advance. To carry out a transition preview, press the [TRANS PVW] button in the transition control block.

Notes

In multi-program mode, DSK mode or bus fixed mode *(page 110)*, it is not possible to carry out a transition preview.

Carrying out a transition preview

1 In the M/E or PGM/PST bank transition control block, press the [TRANS PVW] button.

The [TRANS PVW] button lights green, and the switcher is now in the transition preview mode. At this point, the preview output is the same as the program output before the [TRANS PVW] button was pressed.

2 Operate the fader lever, or press the [AUTO TRANS] button or [CUT] button.

On the preview monitor, you can check the effect of the transition.

To terminate a transition preview

There are three modes for a transition preview. To terminate a transition preview, carry out the operation according to the mode, and press the [TRANS PVW] button, turning it off.

Lock: Toggling the [TRANS PVW] button on and off switches between the transition preview mode and the normal mode.

Hold: The preview mode obtains only while the [TRANS PVW] button is held down.

One Time: Each time a transition ends, it reverts to the normal mode.

Set the transition preview mode in the following combinations.

For details, see "Setting the Button Operation Mode" in Chapter 19 (Volume 2) and "Settings Relating to Video Switching (Transition Menu)" in Chapter 20 (Volume 2).

Transition Preview mode	Switcher setup (Transition menu) <Transition Preview> group	Panel setup (Operation >Custom Button menu) <Trans Pvw> group
Lock	Normal	Lock
Hold	Normal	Hold
One Time	One Time	–

Notes

- During a transition, whether executed with the [AUTO TRANS] button or the fader lever, it is not possible to press the [TRANS PVW] button.
- In bus fixed mode *(see page 110),* transition previews are not available.
- When using the simple-type transition control block *(see page 120),* transition previews are not available.

Independent Key Transitions

What is an independent key transition?

In addition to common transitions, it is possible to carry out independent transitions on the keyers of the M/E banks and PGM/PST bank. These are called “independent key transitions.”

By carrying out an independent key transition in combination with a common transition, different transition types can be used for the background and keys. It is also possible to use different transition types for key insertion and key deletion by means of a Setup menu setting *(see page 115)*.

Combining other transitions with independent key transitions

When you set a common transition and a key independent transition for the same key, you can apply two different effects such as a wipe and mix (dissolve) *(see page 95)* to the key simultaneously.

When carrying out such a combination of transitions simultaneously on a key as auto transitions *(see page 109)*, the result depends on the timing of pressing the respective [AUTO TRANS] buttons.


Simultaneous execution

If the [AUTO TRANS] buttons for the two transitions are pressed simultaneously, the following is the result.

Note that in both cases the common transition is a wipe and the independent key transition is a mix (dissolve).


Deleting a key with simultaneous transitions: With the key inserted, it is deleted simultaneously with the two transitions.

When the common transition completes, even if the independent key transition is still not completed, the two end simultaneously.

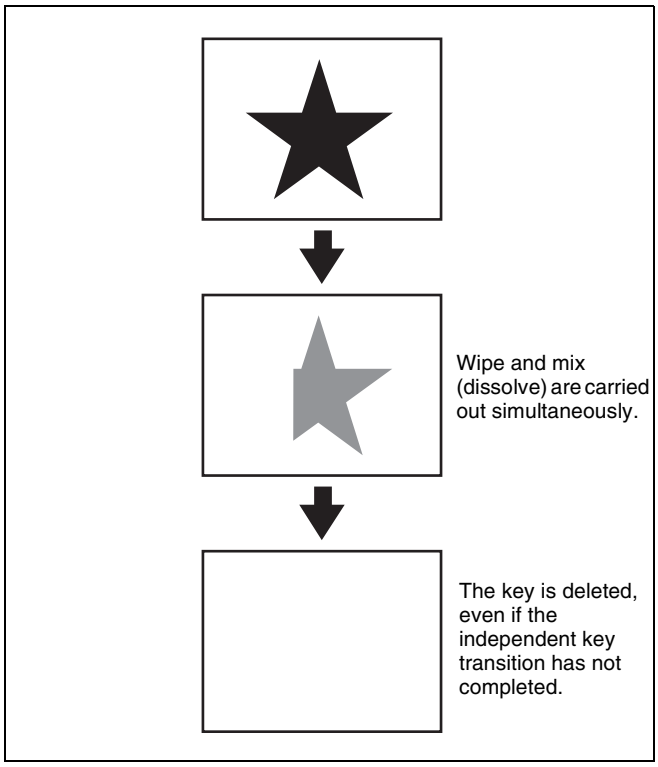

Deleting a key with simultaneous transitions

Inserting a key with simultaneous transitions: With the key not inserted, it is inserted simultaneously with the two transitions. If the common transition or independent key transition ends first, the other continues to completion.

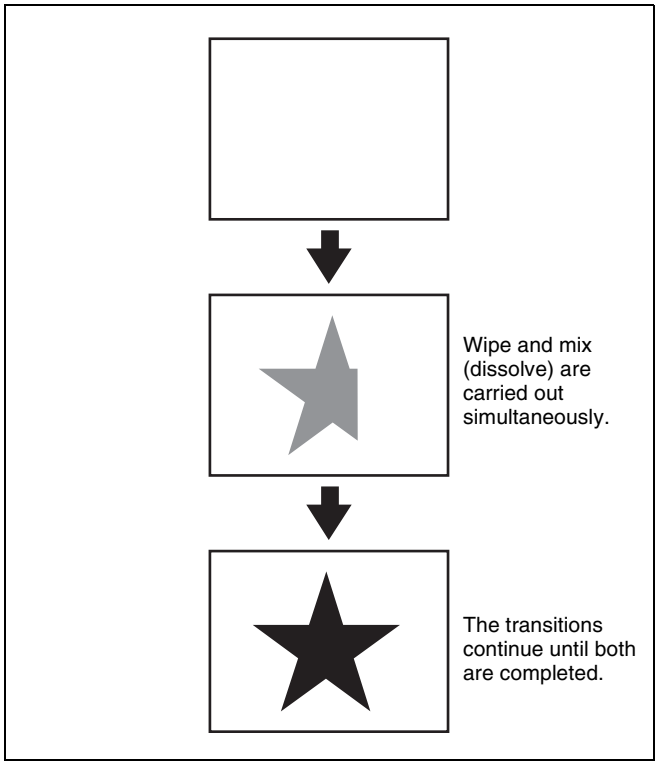


Inserting a key with simultaneous transitions

Time offset execution

If the [AUTO TRANS] buttons for the two transitions are pressed with a time offset, the following is the result. Note that in both cases the common transition is a wipe and the independent key transition is a mix (dissolve).


Time offset execution with the key inserted: With the key inserted, it is deleted with the two transitions acting with a time offset.

Whichever button is pressed first, when the common transition completes, even if the independent key transition is still not completed, the two end simultaneously.

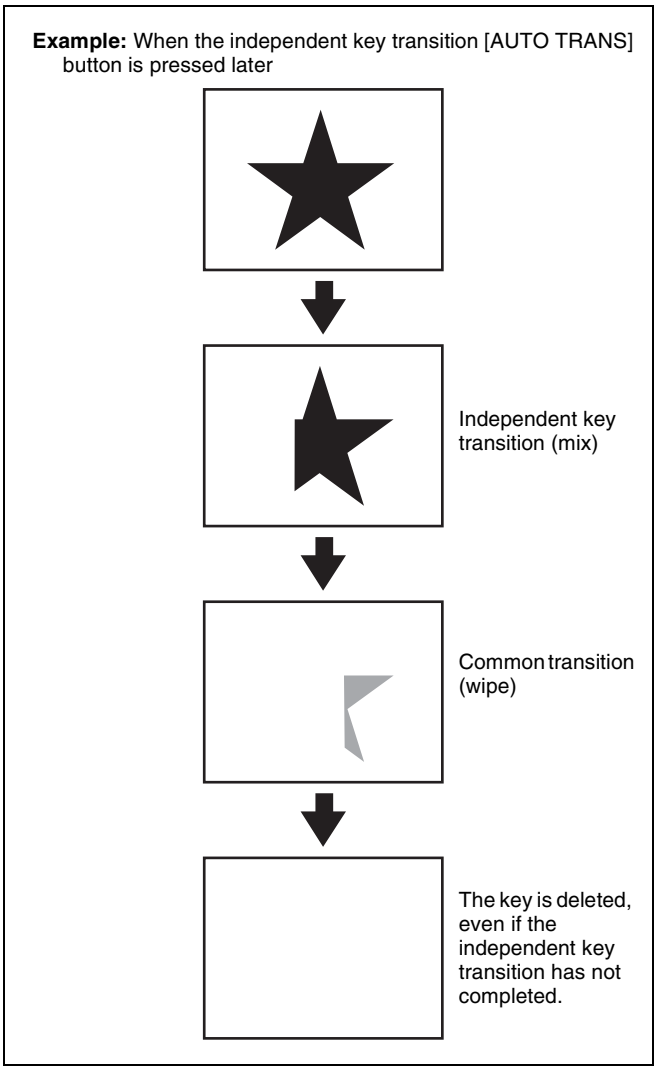


Time offset execution with the key inserted

Time offset execution with the key not inserted: With the key not inserted, it is inserted with the transition whose [AUTO TRANS] button is pressed first. Since the key is then in the inserted state, with the transition whose [AUTO TRANS] button is pressed later, the key is deleted. When the key is completely deleted, both transitions complete.

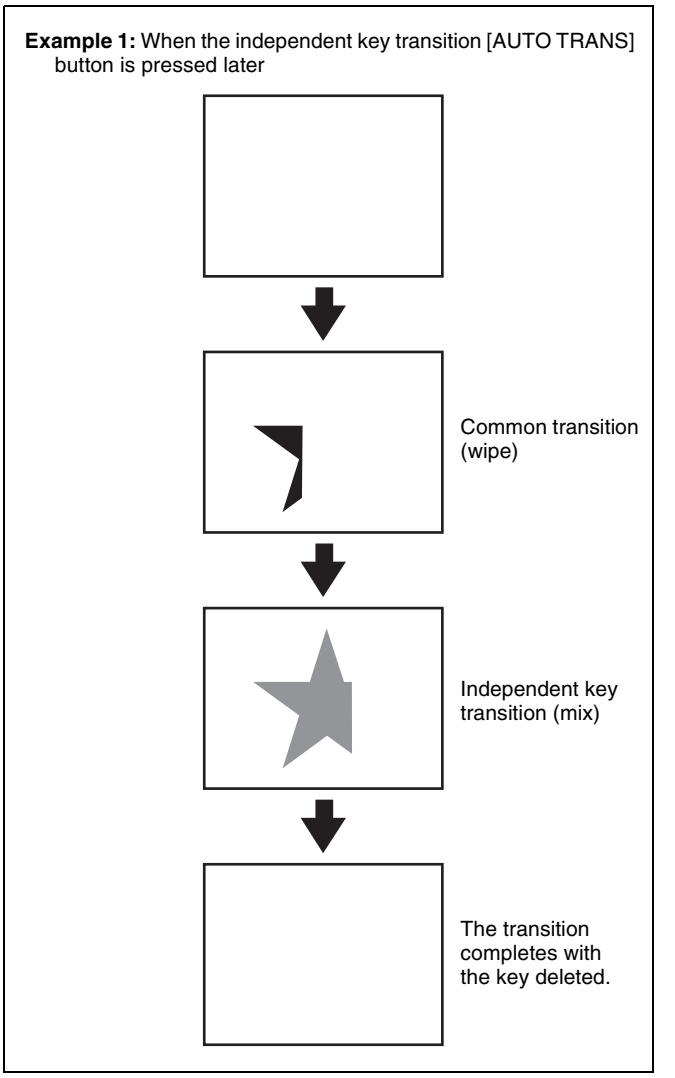


Time offset execution with the key not inserted

Example 2: When the common transition [AUTO TRANS] button is pressed later

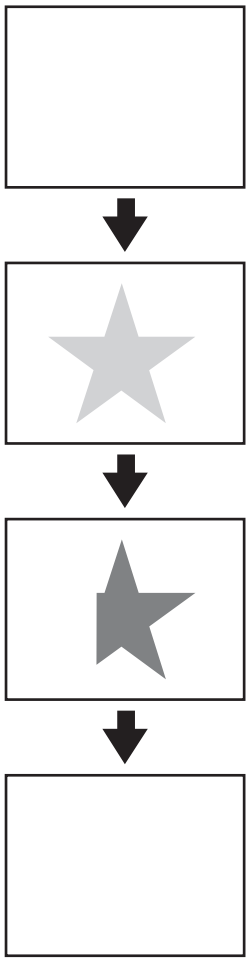

Time offset execution with the key not inserted

Basic Independent Key Transition Operations

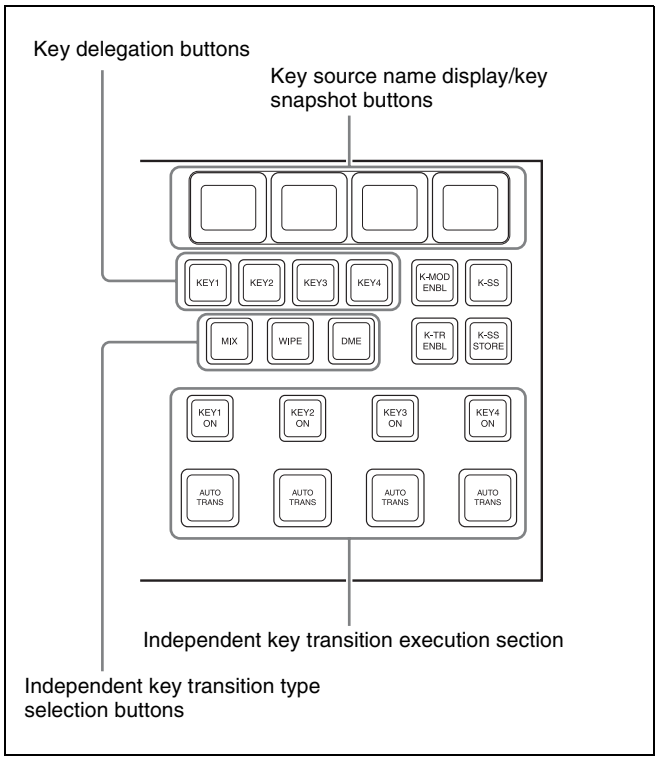

Independent key transition control block (standard type)

To set independent transitions for the keyers on the M/E or PGM/PST bank, use the independent key transition control block.

1 Select one or more of the delegation buttons [KEY1] to [KEY4] ([DSK1] to [DSK4] in the PGM/PST bank), turning them on.

You can press more than one button at the same time.

Notes

The buttons for [Key5] to [Key8] and [DSK5] to [DSK8] require previous assignment in the Setup menu *(see page 397)*.

2 Select the transition type.

To fade a key in or out: Press the [MIX] button, turning it on.

To insert or delete a key using a dedicated wipe pattern: Press the [WIPE] button, turning it on.

To insert or delete a key using a dedicated DME wipe pattern: Press the [DME] button, turning it on.

To instantaneously insert or remove the key: press the [CUT] button, turning it on.

If, in the Setup menus, you set insertion and deletion as independent modes, make the settings for the next transition in the independent key transition control block.
Separate settings are required both when inserting a key and when deleting it. For example, with the key not inserted, if you select the transition type and carry out a transition, this will be the setting when inserting a key.
You can also use the Transition menu to select a desired independent key transition type for each key *(see the next section).*

For details of the wipe settings, see "Wipe Settings for Independent Key Transitions" (page 175). For details of DME wipe settings, see "DME Wipe Settings for Independent Key Transitions" (page 193).

3 Execute the transition.

To insert or delete the key gradually with a mix or wipe transition: Press the [AUTO TRANS] button.

For details of the transition rate, see "Setting the Independent Key Transition Rate" (page 117).
For details of operation together with a common transition, see "Combining other transitions with independent key transitions" (page 113).


To cut the key in or out instantaneously: Press the [KEY ON] button on the keyer.

Notes

- In an independent key transition, the pattern limit function is not available.
- When the following DME effects are set, the effects may be applied during wipe transitions. If the effects are not necessary, cancel the settings.
  - Trail
  - Motion Decay
  - Wind

  When the Keyframe Strobe effect is set, operating keyframes do the same effect. Cancel the unnecessary settings.

Independent key transition operations when using the CCP-6224/6324 Control Panel

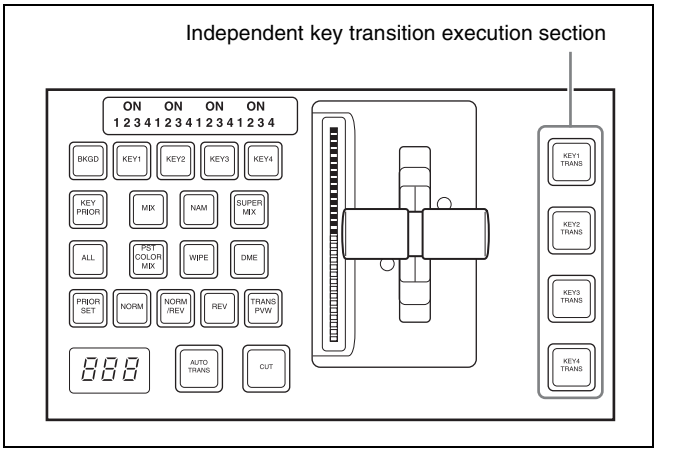

Transition control block (compact type)

To carry out an independent key transition, press the corresponding button in the independent key transition execution section of the transition control block.
The color of the button shows the status as follows.
Lit green: transition in progress.
Lit amber: key inserted.
Lit red: key inserted into final program output.
Off: no key inserted.

For details of setting the transition rate, see "Setting the transition rate in the Flexi Pad control block" (page 106).

Notes

The buttons for [Key5] to [Key8] and [DSK5] to [DSK8] require previous assignment in the Setup menu *(see page 397).*

Setting the Independent Key Transition Type by a Menu Operation

You can also select the required independent key transition type by a menu operation.

1 In the M/E or PGM/PST menu, select first the desired one from VF1 'Key1' to VF4 'Key4,' then HF6 'Transition.'

The Transition menu for the selected appears.

2 Select the required transition type in the <Transition Type> group.

If, in the Setup menus, you set insertion/deletion as independent modes, make the settings for insertion in the <On Transition Type> group, and the settings for deletion in the <Off Transition Type> group.

Setting the Independent Key Transition Rate

There are two ways of setting the transition rate: using the Flexi Pad control block, Multifunction Flexi Pad control block or numeric keypad control block to enter a numeric value, or using the Key menu to access the Transition menu for the M/E or PGM/PST bank.
You can also display the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and change the settings *(see page 234)*.
When the setup selection is for separate transition rates for inserting or deleting a key, you can set both rates independently. For example, with the system in the state with the key not inserted, the transition rate setting applies to key insertion.

Setting the independent key transition rate in the Flexi Pad control block

Notes

In the PGM/PST bank or when using a simple-type transition control block, you cannot use the Flexi Pad control block to set the transition rate.

1 In the Flexi Pad control block of the M/E bank, hold down the [TRANS RATE] button, and in the independent key transition control block, press the delegation button [KEY1] to [KEY8] for the key for which you want to set the transition rate.

The memory recall section display is now ready to accept the entered independent key transition rate.

2 Enter the desired transition rate with the numeric keypad.

- Enter a value of up to three digits.
- To cancel the entry, press any of the six buttons in the leftmost column ([WIPE], [DME], …) or the [TRANS RATE] button.

For details of frame input mode and timecode input mode, see page 105.

3 Press the [ENTR] button.

Setting the independent key transition rate in the numeric keypad control block

Notes

You cannot use the numeric keypad control block to set the transition rate for a simple transition.

1 In the numeric keypad control block, hold down the [TRANS RATE] button, and in the independent key transition control block, press the delegation button [KEY1] to [KEY8] ([DSK1] to [DSK8] in the PGM/PST bank) for the key for which you want to set the transition rate.

The numeric keypad control block changes to the mode for inputting the independent key transition rate, and its display now shows the corresponding region name and the current transition rate set for the region.

2 With the numeric keypad, enter the transition rate.

- Enter a value of up to three digits.
- To clear the entry value, press the [CLR] button.

For details of frame input mode and timecode input mode, see page 105.

3 Press the [ENTER] button.

This confirms the entry, and the selected region name and the set transition rate appear in the numeric keypad control block display.

To enter a difference from the current value

After pressing the [+/–] button, enter the difference and press the [TRIM] button.
To change the sign (+ or –), press the [+/–] button.

Setting the independent key transition rate in the Multifunction Flexi Pad control block

For example, to set the independent key transition rate for M/E-1 key1, carry out the following procedures.

1 In the Multifunction Flexi Pad control block, press the [TRANS RATE] button.

The Multifunction Flexi Pad control block switches to the transition rate setting mode.

2 In the region selection buttons, select the switcher bank.

3 Press the [TRNS SEL] button in the memory recall section.

You can select the type of transition for which to set the rate.

4 Press the [KEY1] button.

This enables setting of the independent key transition rate for M/E-1 key1.

5 Watching the alphanumeric display, enter the transition rate you want to set with the memory recall section button.

If required, press the [TC] button to switch the input mode (frame count input or timecode input).
- Enter a value of up to three digits.
- To cancel the input, press any of the mode selection buttons.

6 Press the [ENTR] button.

Setting the independent key transition rate by a menu operation

1 In the M/E or PGM/PST menu, select first the desired one from VF1 'Key1' to VF4 'Key4,' then HF6 'Transition.'

The Transition menu for the selected key appears.

2 Select any transition type in the <Transition Type> group.

If, in the Setup menus, you set insertion/deletion as independent modes, make the settings for insertion in the <On Transition Type> group, and the settings for deletion in the <Off Transition Type> group.

3 Turn the knob to set the transition rate.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frame count)

Independent key transition rate display

To check the set independent key transition rate, press the key source name display/key snapshot button above the corresponding delegation button when the [K-SS] button is off.

Displaying the independent key transition rates in a menu and changing the settings

For each of the M/E and PGM/PST banks, you can also display the transition rate, independent key transition rate and fade-to-black transition rate, and change the settings *(see page 234)*.

Fade to Black

The PGM/PST block provides a fade-to-black function for the program output image.

Notes


In multi-program mode or DSK mode, it is possible to carry out a fade-to-black on a number of programs simultaneously.

You can also make a Setup menu setting such that a fade-to-black does not apply to particular programs.

For details of the setting, see "Settings Relating to Video Switching (Transition Menu)" in Chapter 20 (Volume 2).

Fade to Black Operation

Fade-to-black transitions can be executed using the [FTB] button in the fade to black control block.

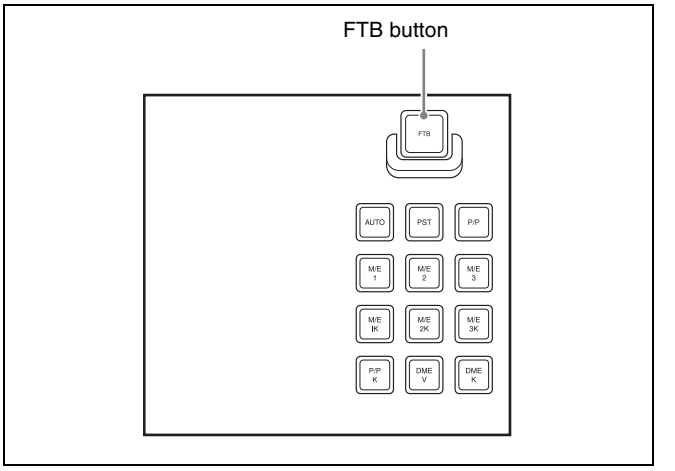

Fade to black control block

Carrying out a fade to black

Press the [FTB] button.
The fade to black is carried out with the transition rate set for the program output of the PGM/PST bank.
During the transition, the [FTB] button lights amber. When the transition completes (the video is completely black), the button lit color changes to red.

Setting the Fade to Black Transition Rate

Setting the fade to black transition rate

1 In the PGM/PST menu, select first VF7 ‘Misc,’ then HF1 ‘Transition.’

The Transition menu appears.

2 Select [FTB].

3 Turn the knob to set the fade to black transition rate.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frame count)

Displaying the transition rates in a menu and changing the settings

You can also display the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and change the settings *(see page 234)*.

AUX Mix Transitions

In addition to M/E and PGM/PST, you can make transitions between two AUX buses.

Notes

AUX mix transitions cannot be executed in 3D mode.


Preparations for AUX mix transitions

The following preparations are required.

Preparations	Refer to
Assign the two AUX buses used for the AUX mix to consecutive odd-numbered and even-numbered output connectors (for example, Output 1 and Output 2).	*“Enabling AUX Mix Transitions” in Chapter 20 (Volume 2)*
Set the AUX mix transition rate.	*page 235*

Executing an AUX mix transition

You execute an AUX mix transition using the [AUX MIX] button on the cross-point control block (Key/AUX bus delegation mode or the CCP-6224/6324 in AUX operating mode) or the auxiliary bus control block.
The following describes the use of AUX1 and AUX2 buses on the auxiliary bus control block as an example. The operation can be performed in the same manner on the cross-point control block.

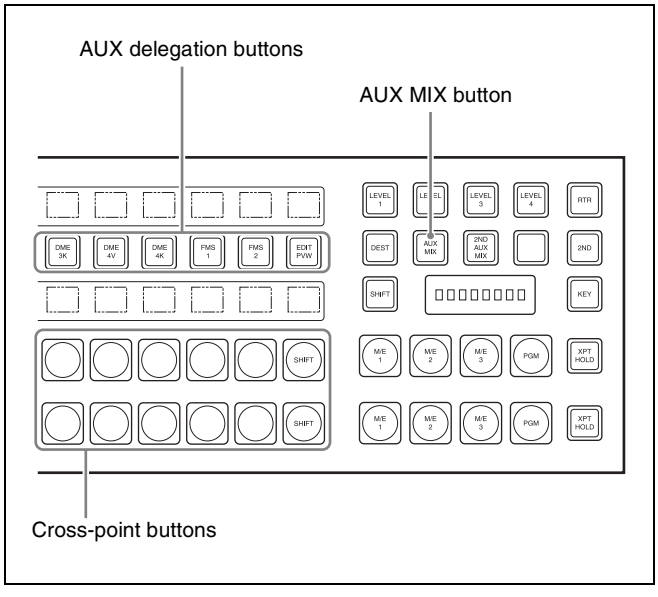

Auxiliary bus control block

1 In the auxiliary bus control block, press the AUX delegation button assigned to the AUX1 bus, turning it on.

Notes

When executing an AUX mix translation bus, always select an odd-numbered bus. Selecting an even-numbered bus will not execute a transition, even if AUX mix transitions are enabled.

2 In the row of cross-point buttons, select the image for before the transition.

3 Press the [AUX MIX] button, turning it on.

Notes

If the bus assigned to the 2nd row cross-point buttons is different from the bus assigned to the 1st row, press the [2ND AUX MIX] button, and not [AUX MIX], to execute an AUX mix transition on the 2nd row.


4 In the row of cross-point buttons, select the image for after the transition.

This executes the transition at the preset transition rate. The image during the transition is output from the AUX1 bus. The image selected in step **4** is output from the AUX2 bus.

Simple Transition

Basic Operations for Simple Transitions

A simple-type transition control block is used to carry out a transition.

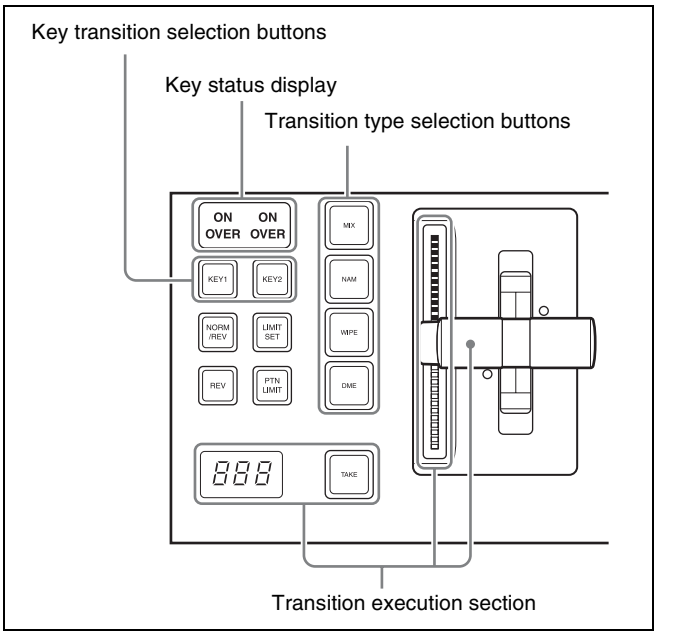

Transition control block (simple right-hand type)

Notes

The simple transition control block cannot be installed in the CCP-6224/6324 Control Panel.

Carrying out a transition using a simple-type transition control block

1 With the background A row of cross-point buttons in the cross-point control block, select the background video.

2 Using one of the following methods, select the way in which the transition will affect the image.

Use a combination of the transition type selection buttons ([MIX], [NAM], [WIPE] and [DME]) and the next transition selection buttons ([KEY1] and [KEY2]).

For an overview of the mix, NAM, wipe, and DME wipe transition types, see "Transition Types" (page 95).

To change the background only: Press one of the [MIX], [NAM], [WIPE], and [DME] buttons. The [KEY1] and [KEY2] buttons go off, and the system changes to the background transition mode.

To insert or delete key 1: Hold down the [KEY1] button and press one of the [MIX], [NAM], [WIPE], and [DME] buttons.

To insert or delete key 2: Hold down the [KEY2] button and press one of the [MIX], [NAM], [WIPE], and [DME] buttons.

To insert or delete key 1 and key 2 simultaneously: Hold down the [KEY1] and [KEY2] buttons, and press one of the [MIX], [NAM], [WIPE], and [DME] buttons.

To use a super mix or preset color mix: Select [Super Mix] or [Preset Color Mix] in the Misc >Transition menu for the M/E or PGM/PST bank.

To set the key priority, use the Misc >Key Priority menu for the M/E or PGM/PST bank *(see page 100)*.

Notes

The transition type selection buttons ([MIX], [NAM], [WIPE], and [DME]) can be assigned to other transition types in setup.

For details, see "Setting Transition Control Block Button Assignments" in Chapter 19 (Volume 2).

3 Select the new background for after the transition.

- Select the background video with the background B row of cross-point buttons.
- To insert a key, select the key signal, and make various settings as required.

For details of key settings, see Chapter 4 "Keys" (page 123).

4 Depending on the transition type selected in step **2**, make the required settings.

For details of the settings, see the following sections:

Super mix: *"Super Mix Settings" (page 102)*
Preset color mix: *"Color Matte Settings" (page 103)*
Wipe: *"Basic Procedure for Wipe Settings" (page 163)*
DME Wipe: *"Basic Procedure for DME Wipe Settings" (page 187)*
Clip transition: *"Clip Transition Operations" (page 219)*

5 Carry out the transition in the transition execution section.

For a gradual transition such as a mix or wipe: Press the [TAKE] button, or operate the fader lever.

See "Setting the Transition Rate" (page 105) and "Pattern Limit" (page 107) as required.

Display of the Key Output Status and Key Priority

You can check the output status of keys 1 and 2 and the key priority setting, in the key status display in the transition control block.
The key status display includes two ON indicators corresponding to keys 1 and 2.

Display of the key output status

When the key is inserted in the output from the M/E or PGM/PST bank, the indication "ON" lights, and when it is not inserted, the indication goes off.

Key priority display

The key lying in front on the program monitor has an indication "OVER" lit.
To set the key priority, use the Misc >Key Priority menu for the M/E or PGM/PST bank *(see page 100)*.

Split Fader

What does "split fader" mean?

The term "split fader" refers to the function of carrying out a transition with the fader lever split into left and right halves, so that the background A and background B buses can be manipulated separately.
To use the split fader, the following conditions must be met.

- The fader lever is in bus fixed mode.
  For details, see "Selecting the Bank to Make the Settings" in Chapter 20 (Volume 2).
- The necessary settings have been made in a Setup menu to enable the split fader.
  For details, see "Selecting the Bank to Make the Settings" in Chapter 20 (Volume 2).
- A background is selected for the next transition.
- For the transition type, [MIX] or [NAM] is selected.

Split fader operation

The two halves of the split fader lever correspond to the buses as follows.
Right fader lever: Background A bus
Left fader lever: Background B bus
The relationship between the positions of the two fader levers and the image output in a mix is as follows.

Left lever position	Right lever position	A bus output	B bus output
Top	Top	100%	0%
Bottom	Top	100%	100%
Top	Bottom	0%	0%


Left lever position	Right lever position	A bus output	B bus output
Bottom	Bottom	0%	100%
Center	Center	50%	50%

- When the transition type is NAM, the outputs of the A bus and B bus in the above table are the outputs subjected to NAM.
- The transition indicators always show the progress of the background A bus.
- The operation of the left lever and that of the right lever can be swapped.
  For details, see "Specifying Main Split Fader" in Chapter 19 (Volume 2).

Independent Key Transitions With a Simple Transition Module

You carry out independent key transition operations using the independent key transition control block (simple type). This controls only keys 3 and 4. However, each key button can be assigned to any key in setup.

For details, see "Assigning a Function to the Independent Key Transition Control Block (Simple Type)" in Chapter 19 (Volume 2).

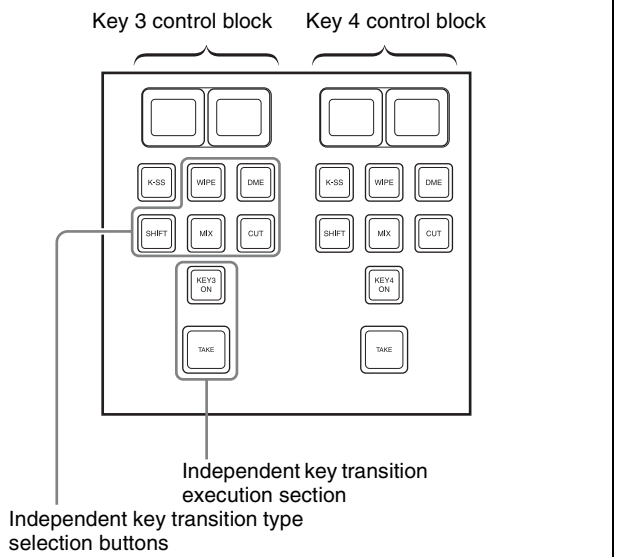

Independent key transition control block (simple type)

Carrying out a transition using a simple-type independent key transition control block

1 Select the transition type for key 3 or key 4 using the independent key transition type selection buttons.

To fade a key in or out: Press the [MIX] button, turning it on.
To insert or delete a key using a dedicated wipe pattern: Press the [WIPE] button, turning it on.
To insert or delete a key using a dedicated DME wipe pattern: Press the [DME] button, turning it on.

For details of wipe settings, see "Wipe Settings for Independent Key Transitions" (page 175). For details of DME wipe settings, see "DME Wipe Settings for Independent Key Transitions" (page 193).

To cut the key instantaneously in or out: Press the [CUT] button, turning it on.
If, in the Setup menus, you set insertion and deletion as independent modes, make the settings for the next transition in the independent key transition control block.
Separate settings are required both when inserting a key and when deleting it. For example, with the key not inserted, if you select the transition type and carry out a transition, this will be the setting when inserting a key.

2 Carry out the transition in the independent key transition execution section.

To insert or delete the key gradually with a mix or wipe transition: Press the [TAKE] button.
To set the independent key transition rate using a simple-type transition control block, use the key 3 and key 4 Transition menus *(see page 117)*.
To cut the key in or out instantaneously: Press the [KEY 3 ON] button or [KEY 4 ON] button.

Notes

In an independent key transition, the pattern limit function is not available.

Keys

Chapter 4

Overview

A key is an effect in which a part of the background image is replaced by an image or superimposed text. The signal determining how the background is cut out is termed the "key source," and the signal that replaces the cut-out part is termed the "key fill."
The system component responsible for processing a key is referred to as a keyer.
Each M/E bank and the PGM/PST bank has eight keyers, and all of these keyers provide the same functions.

Notes

- When the signal format is 1080P, four keyers can be used (keys 1 to 4).
- On the MVS-7000X, the number of available keys depends on the M/E bank.
  For details, see "M/E Configuration Switching" (page 266).

Key Types

The key type indicates the manner in which the key source signal is used to cut out the background. In each bank, you can use the following key types. You can select the key type using the key type selection buttons in the key control block or Multi function Flexi Pad control block, or by a setting in the Type menu for the keyer *(see page 127)*.

Luminance key

The background is cut out according to the luminance (Y) of the key source signal, and at the same time the key fill signal is cut out and then added to the background signal.

Linear key

This is a type of luminance key, but there is a reduced variability in gain, allowing more precise adjustment.

Color vector key

The key signal is created from a combination of the luminance and chrominance components of the key source signal. When perfect keying is not possible with a luminance key, this allows a key signal to be created even if the luminance level is low, provided that the colors have high saturation.

Clean mode

In a luminance key, linear key or color vector key, you can enable the clean mode. When the clean mode is on, the key source does not affect the key fill, which is added unchanged to the background. This improves the keyed image quality, but means that the part of the key fill signal which is not to be inserted must be completely black, or it will color the background. You set the clean mode with the Type menu of the respective keyer.


For details, see "Setting the key type in a menu" (page 127).

Note that in the following situations, the clean mode goes off, and cannot be turned on.

- When the key type is a pattern key
- When key inversion is on
- When the key fill is a matte
- When the key edge is an outline
- When the key edge is normal with soft edge being on
- When fine key is on
- When the key positioner is on

Chroma key

A key signal based on a particular color is used to cut out the background, and the key fill is then inserted. The inserted signal is also referred to as the foreground, and the composite image is called a chroma key image.

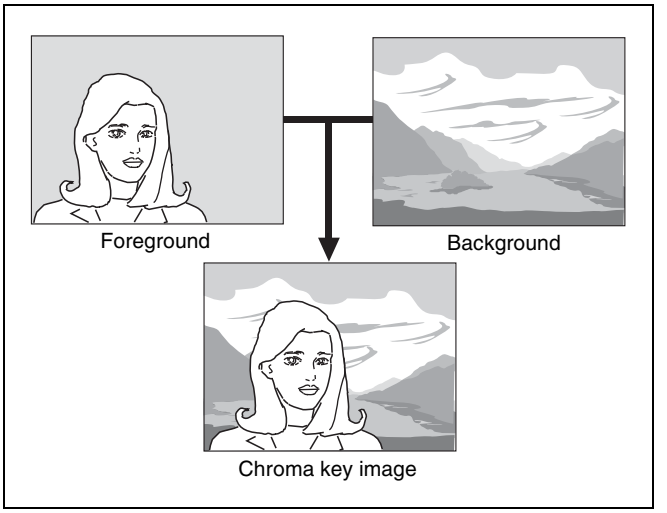

For details of chroma key, see (page 130) and (page 131).

Wipe pattern key

This uses the wipe pattern selected for a transition as the key source.

Key wipe pattern key

This uses the wipe pattern selected for an independent key transition as the key source.




Note on wipe pattern modifiers

In a wipe pattern key or key wipe pattern key, you can apply various modifications, depending on the pattern used, and the modifiers in common with a wipe. However, modifiers which relate to the wipe direction and edge are not reflected.

Key Modifiers

Edge modifiers

You can apply borders and other effects to the edge of the key *(see pages 134 and 144)*.

Name	Effect	Image
Normal	This is the state with no key edge modifiers applied.	
Border	This applies a uniform width border to the edge of the key. You can adjust the border width and density. You can also enable the separate edge function, and adjust the top, bottom, left, and right border widths separately.	
Drop border	This applies a border below and to the right for example, of the key. You can adjust the border width, position, and density.	
Shadow	This applies a shadow below and to the right for example, of the key. You can adjust the shadow width, position, and density.	
Outline	This uses the outline of the original key as the key. You can adjust the width and density of the outline. You can also enable the separate edge function, and adjust the top, bottom, left, and right outline widths separately.	
Emboss	This applies an embossing effect to the outline of the key. You can adjust the width and position of the embossing and the density. You can adjust the density separately for key fill and key edge. When embossing is on, the Fine Key and zabton functions go off.	–
Soft edge	This softens the edge of the key.	–
Zabton	This inserts a translucent pattern behind a key. You can adjust the pattern size, softness, density and color.	–

Edge type and key fill/key source position

The key edge modification function has two modes: a mode (“key drop ON mode”) in which the key fill/key source position moves downward, and a mode (“key drop OFF mode”) in which it does not move downward.

Key drop ON mode: The key fill/key source position moves downward by eight scan lines or four scan lines. When a drop border or shadow is selected, it is possible to apply a border to the top edge of the key.

Key drop OFF mode: The key fill/key source position does not move. When a drop border or shadow is selected, it is not possible to apply a border to the top edge of the key.

In the key drop ON mode, a menu setting selects between the mode (“4H mode”) in which the key fill/key source position is lowered by four scan lines, and the mode (“8H mode”) in which the key fill/key source position is lowered by eight scan lines.

When Fine Key is on, the edge width is forced to the range 0.00 to 4.00.

Note that in the following situations, the key drop mode is forcibly turned on.

- When the edge type is border, outline, or emboss
- When the edge type is normal with soft edge being on
- When Fine Key is on

To fix key fill / key source in key drop off mode

Switch frame delay mode on.

Regardless of the fine key and edge type settings, key fill and key source are fixed in key drop off mode. In this mode key image has a one-frame delay.

Notes

This function uses the resizer, and therefore the normal effect of the setting is not obtained while using DME wipe or other effect that uses the resizer.

Edge fill

When a border, drop border, or shadow modifier is selected, you can select a signal to fill these edge effects. The edge fill may be either the signal from the dedicated color matte generator, or the signal currently selected on the utility 1 bus.

In the case of an outline, there is no edge fill signal selection, because the key fill signal fills the outline, and the rest of the image remains as the background.

For the emboss effect, in place of the edge fill signal, the emboss fill matte 1 and emboss fill matte 2 signals are used.

Masks

A mask is used to inhibit the effect of a key over a part of the image. This allows parts of the background which would otherwise be keyed to be protected, or to correct the key if it is not of the desired shape.


For details of masking operations, see “Masks” (pages 137 and 146).

Key mask and background mask

There are two types of mask: a key mask and a background mask.

Key mask: This masks out a part of the key, which will result in the background appearing.

Background mask: This masks out a part of the background, which will result in the key fill appearing.

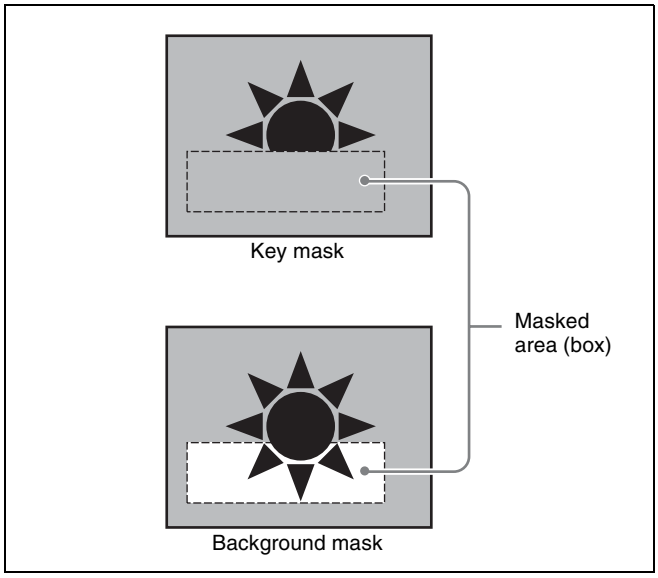

Main mask and subsidiary (“sub”) mask

Each keyer allows two masks to be used simultaneously, and these are referred to as the main mask and the sub mask. The signal that determines the mask shape and size is termed the mask source, and different sources are used for the main mask and sub mask.

Main mask: This uses the signal from the dedicated box generator provided on each keyer, or the signal from the dedicated pattern generator as the mask source.

When the box generator is selected, a rectangular mask is formed. You can adjust the positions of the four sides of the box separately.

When the pattern generator is selected, you can select the pattern and apply modifiers.

Sub mask: This uses the wipe generator signal or the signal selected on the utility 1 bus, as the mask source.

When the wipe generator is selected, the patterns and the pattern modifiers are the same as in a wipe transition.

Key Memory

The key memory function allows the keyer settings on each cross-point button to be automatically stored, so that

the next time the same cross-point button is selected these settings are recalled automatically.
There are two modes for key memory: simple mode and full mode.
The parameters stored in each mode are as follows.

Simple mode: key type, clean mode (including the plane setting for chroma keying), key position, key inversion, and adjustment values for the particular key type (Clip, Gain, Density, Filter, etc. This includes color vector key, wipe pattern key, key wipe pattern key, and chroma key. However, in the case of a chroma key, it excludes color cancel, Y balance, foreground CCR, window, and shadow.)

Full mode: All settings except transition (the same parameters as simple mode, Fine Key, key modifiers, main and sub mask settings, chroma key detailed settings, and so on)

For the settings for these modes, see "Selecting the Bank to Make the Settings" in Chapter 20 (Volume 2).

Key Default

With a simple operation you can return the key adjustment values to their defaults.
The adjustment values which can be returned to their default values are as follows.

- Adjustment values for the particular key type (Clip, Gain, Density, Filter, etc.)
  In the case of chroma keying, all adjustment values return to their default values.
- Key position
- Key inversion
- Clean mode

For details, see "Returning the key adjustment values to their defaults" (page 149).

For the menu operation to return the key adjustment values to their defaults, see "Returning to Default State in Function Groupings" (page 85).

Key Setting Operations Using Menus

There are two ways of making key settings: either using menus, or using the key control block or the Multifunction Flexi Pad control block.
This section describes basic procedures for making key settings using the menus, taking the M/E-1 >Key1 menu as an example.
Operations in the Key menus are the same for all banks (M/E and PGM/PST).

For details of the method of using the key control block, see "Key Setting Operations with the Key Control Block" (page 142).

Key Setting Menus

The key setting menus for each bank (M/E and PGM/PST) are as follows.

Bank	Keys set	Menus
M/E-1	Keys 1 to 8	M/E-1 >Key1 to 8
M/E-2	Keys 1 to 8	M/E-2 >Key1 to 8
M/E-3	Keys 1 to 8	M/E-3 >Key1 to 8
M/E-4	Keys 1 to 8	M/E-4 >Key1 to 8
M/E-5	Keys 1 to 8	M/E-5 >Key1 to 8
PGM/PST	Downstream keys 1 to 8	PGM/PST >DSK1 to 8


Notes

- When the signal format is 1080P, only keys 1 to 4 can be used.
- On the MVS-7000X, the number of available keys depends on the M/E bank.
  For details, see "M/E Configuration Switching" (page 266).

Accessing a key setting menu

For example, to access the M/E-1 >Key1 menu, carry out any of the following procedures.

- In the menu control block, select the top menu selection button [M/E 1], then press VF1 'Key1.'
  If VF1 'Key5' is shown, press the [KEY1-4] switching button at the top of the menu, turning it on, then press VF1 'Key1.'

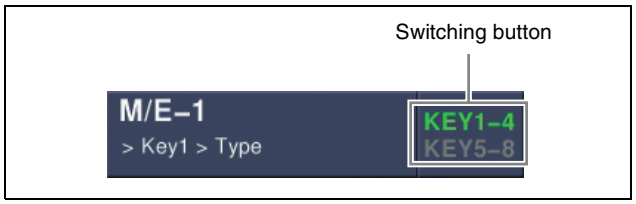

- In the M/E-1 bank transition control block, press the KEY1 next transition selection button twice in rapid succession.
- In the M/E-1 bank independent key transition control block, press the key delegation button [KEY1] twice in rapid succession.
- In the key control block, press the M/E delegation button [M/E 1], then press the key delegation button [KEY1] twice in rapid succession.

Note that you can access the DSK menus by pressing the button for the corresponding key in the downstream key control block twice in rapid succession.

Notes

- To select [M/E 4] or [M/E 5] with the top menu selection buttons, it is first necessary to assign a button in the Setup menu *(see page 396)*.
- To select [Key5] to [Key8], and [DSK5] to [DSK8] in the key control block, a previous assignment in the Setup menu is required *(see page 397)*.

Key Type Setting

Setting the key type in a menu

1 In the M/E-1 >Key1 menu, select HF1 'Type.'

The Type menu appears.

2 In the <Key Type> group, select the key type.

Luminance: luminance key
Linear: linear key
Chroma: chroma key
Color Vector: color vector key
Wipe Pattern: wipe pattern key
Key Wipe Pattern: key wipe pattern key

3 Carry out the following settings as required, depending on the key type selected in step **2**.

To enable clean mode *(see page 123)* for a luminance key, linear key or color vector key: Select [Clean Mode] so that it is set on.
When clean mode is enabled, key fill is added to the background without cutting out with key source.

When chroma key is selected: Select [Chroma Adjust] to access the Chroma Adjust menu *(see page 132)*, and make the required settings.

When a wipe pattern key is selected: In the M/E-1 >Wipe menu *(see page 163)*, select the pattern and set any modifiers, then return to the M/E-1 >Key1 menu.

When a key wipe pattern key is selected: In the M/E-1 >Key1 > Transition >Wipe Adjust menu *(see page 175)*, carry out pattern selection and modifier setting, then return to the M/E-1 >Key1 >Type menu.

Notes

For a wipe pattern selected for a wipe pattern key or key wipe pattern key, the [Edge] and [Direction] modifier settings are not available.

4 Set the parameters.

When a luminance key or linear key is selected

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for generating the key signal	+109.59 to –7.31
2	Gain	Key sensitivity	–100.00 to +100.00
3	Density	Key density	0.00 to 100.00
4	Filter	Filter coefficient	1 to 9 a)

a) Setting this value to 1 activates "through" state in which no filter is applied. The larger the value, the more strongly the filter applies.

When a chroma key is selected

Knob	Parameter	Adjustment	Setting values
3	Density	Key density	0.00 to 100.00

When a color vector key is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Y Clip	Reference level for creating luminance signal	+109.59 to –7.31
2	Y Gain	Luminance signal sensitivity	–100.00 to +100.00
3	C Clip	Reference level for creating chrominance signal	100.00 to 0.00
4	C Gain	Chrominance signal sensitivity	–100.00 to +100.00
5	Density	Key density	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Y Filter	Luminance signal filter coefficient	1 to 9
2	C Filter	Chrominance signal filter coefficient	1 to 9

When a wipe pattern key or key wipe pattern key is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of edge softness	0.00 to 100.00
3	Density	Key density	0.00 to 100.00

5 Make the following settings as required.

To invert the black and white sense of the key source: Press [Key Invert], turning it on.

To adjust the horizontal position or key source width for a luminance key, linear key, or chroma key: Press [Key Position], turning it on, and set the parameters.

Knob	Parameter	Adjustment	Setting values
1	H Phase	Key horizontal position	–4.00 to +4.00
2	Left	Key left edge position	–4.00 to +4.00
3	Right	Key right edge position	–4.00 to +4.00

To set the key priority: Press [Key Priority] or select VF7 'Misc' and HF3 'Key Priority' to access the Key Priority menu.

For details, see "Setting the Key Priority by a Menu Operation" (page 100).

Selecting Key Fill and Key Source

Notes

In the case of the MVS-8000X, only the premium inputs (inputs to the switcher premium input connectors 1 to 20) can be selected as key signals on the M/E-4 bank.

Selecting key fill and key source

To select key fill and key source for key 1 on the M/E-1 bank, use the following procedure.

1 In the M/E-1 >Key1 menu, select HF1 'Type.'

The Type menu appears.

2 In the <Key Fill> group, select either of the following for use as key fill.

Key Bus: signal selected on the key 1 fill bus
Matte: signal from the dedicated color matte generator

3 If you selected [Key Bus] in step **2**, select the key fill signal on the key 1 row in the cross-point control block.

For the CCP-6224/6324 Control Panel, it is necessary to set the [AUX CTRL] button to Off in order to exit the AUX panel-less function *(see page 92)*.

4 If you selected [Matte] in step **2**, in the same Type menu, press [Matte Adjust] to display the Matte Adjust menu, then adjust the single-color or two-color combination color matte. Select whether to use a single-color matte or a two-color combination in the <Fill Matte> group.

Flat Color: Adjust color 1 with the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Mix Color: Carry out a color mix. Adjust color 1 and color 2, and select a mix pattern *(see the next section)*.

5 In the <Key Source> group, specify the key source selection mode.

Self: The key fill bus signal is automatically selected as the key source.
When the key type is selected as chroma key, select [Self].

Auto Select: The signal allocated, being paired with the key fill bus signal, to a cross-point button is automatically selected as the key source. The setting of key fill and key source pairs is carried out in the Setup menu.

For details, see "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume 2).

Split: You can select a key source signal independently of the key source automatically selected in Auto Select mode.

6 If [Split] was selected in step **5**, hold down the [SPLIT] button in the key control block or the Multifunction Flexi Pad Control block, then in the cross-point control block key 1 row, select the key

source signal. Alternatively, hold down the key delegation button in the transition control block and press a cross-point button in the key 1 row to select the key source signal.

Notes

- In the above-stated key 1 row operation, you can only select a key signal assigned to a cross-point button. *For the method of selecting a video signal, see the following item, "To select a video signal assigned to a cross-point button."*
- When [Split] is selected, the key memory function *(see page 125)* is disabled.

To select a video signal assigned to a cross-point button

By selecting the key source bus with an auxiliary bus control block AUX delegation button, and pressing the cross-point button, it is possible to select the video signal assigned to the cross-point button.
If you press the cross-point button with holding down [KEY], the key signal is selected.

Notes

In the above operation, the following settings must have been made.

- Assigning the key source bus to an AUX delegation button
  For details, see "Auxiliary Bus Control Block Settings (Aux Assign Menu)" in Chapter 19 (Volume 2).
- Setting the [KEY] button operating mode
  For details, see "Setting the Button Operation Mode" in Chapter 19 (Volume 2).

Selecting key source and key fill in the menu


Selecting key source

For example, to select the key source for M/E-1 key 1, use the following procedure.

1 In the <Key Fill> group of the M/E-1 >Key1 >Type menu, hold down [Key Bus].

2 Press [Signal Select].

The Signal Select menu appears.

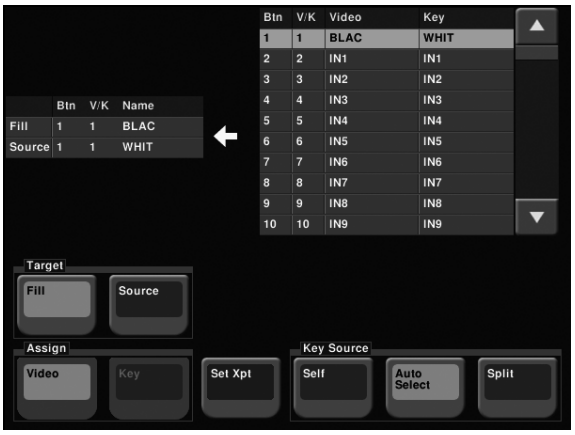

3 In the <Target> group, press [Source].

4 In the <Key Source> group, select the key source selection mode (Self, Auto Select, or Split).

*See step **5** in "Selecting Key Fill and Key Source" (page 128).*

5 If you selected [Split], using any of the following methods, select the key source signal.

- Press directly on the list on the right.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Setting	Values
1	No	Button number	1 to 300

6 In the <Assign> group, select the video signal or key signal from the V/K pair to assign to the key source.

7 Press [Set Xpt].

This selects the key source signal.

Selecting key fill

For example, to select the key fill for M/E-1 key 1, use the following procedure.

1 In the M/E-1 >Key1 >Type menu status area, press "Fill."

The Signal Select menu appears.

2 In the <Target> group, press [Fill].

3 Select the fill signal from the list on the right.

4 Press [Set Xpt].

This selects the key fill signal.

Carrying out a color mix for key fill

When [Matte] is selected for key fill, you can combine color 1 and color 2. For the combination, you can use not only a key wipe generator pattern, but also the dedicated pattern for key edge color mix.

1 In the <Key Fill> group of the Type menu, select [Matte] and press [Matte Adjust].

The Matte Adjust menu appears.

2 Select [Mix Color] in the <Fill Matte> group.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Softness of the edge of the pattern	0.00 to 100.00

4 Select the combining pattern in the <Mix Pattern> group.

Key Wipe: The wipe pattern selected for an independent key transition is used for combination. You can change this pattern by pressing [Pattern Select] to open the menu for key wipe pattern selection (Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Wipe Adjust menu).

Key Edge Pattern: Combine using the dedicated pattern selected for the color mix in the key edge fill. You can change this pattern by pressing [Pattern Select] to open the menu for edge color mix dedicated wipe pattern selection (Mix Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Matte Adjust menu).

For details, see "Carrying out a color mix for the key edge fill matte" (page 136).

5 In the Type menu, adjust color 1 and color 2.

To adjust color 1, select [Color1], and to adjust color 2, select [Color2], then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

6 To interchange color 1 and color 2, press [Color Invert], turning it on.

Chroma Key Composition and Basic Settings

In creating a chroma key image, either a normal mix or an additive mix can be used. To select which, use the Type >Chroma Adjust menu for the keyer.

Normal mix: The foreground is cut out with the key signal, and then combined with the background, which has also been cut out with the key signal.

Additive mix: The background, which has been cut out with the key signal, is combined with the unshaped foreground. This is effective for a natural-looking composite when the scene includes glass or other translucent objects.

Plane function

In an additive mix, the foreground is not shaped by the key signal, and variations in the (blue) background appear in the composite image. To prevent this, it is possible to set a particular luminance level for the background, and any parts below this level are cut forcibly.

Composing an image by chroma keying

1 In the M/E-1 >Key1 menu, select HF1 'Type.'

2 Select [Chroma] in the <Key Type> group.

It becomes possible to adjust the key density *(see page 127)*.

3 Select [Chroma Adjust].

The Chroma Adjust menu appears.

4 Carry out auto chroma key adjustments.
Also carry out manual adjustments if necessary to obtain an optimum chroma key image.

5 In the <Mix Mode> group, select [Normal Mix] or [Additive Mix] depending on the desired type of chroma key composition.

When using an additive mix for chroma keying, the (typically blue) background parts of the foreground video must be converted to black. For this, use the color cancel function *(see page 133)*.

Using the plane function

In an additive mix, since no key is applied to the foreground, any variations in the (typically blue) background may appear in the composite image. To avoid this, a particular luminance level can be set for the (blue) background, and regions of lower luminance forcibly cut.

1 In the Chroma Adjust menu, set [Plane] on.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance level	0.00 to 100.00

Key Adjustments (Menus)

This section describes key adjustments made by a menu operation.
You can adjust the following functions by a menu operation.

- Chroma Key Adjustment *(page 131)*
- Key Edge Modifications *(page 134)*
- Masks *(page 137)*
- Applying a DME effect to a key *(page 139)*
- Specifying the Key Output Destination *(page 141)*
- Key Modify Clear *(page 141)*
- Blink Function *(page 141)*
- Video Processing *(page 142)*

Chroma Key Adjustments

Methods of adjusting the composite obtained from chroma keying include automatic adjustment with the auto chroma key function, and manual adjustment carrying out the necessary processing separately. The optimum results will be obtained by first carrying out adjustments with the auto chroma key function, then making any fine adjustments as required.
The following manual adjustments are possible.

Key active


When this function is off, only the foreground is output and you can make adjustments of color cancel *(see the next paragraph).*

Color cancel

If the foreground image includes shades of the background color, turn this function on to remove the color from the foreground image.

Chroma key window

You can adjust the range over which the key signal is determined as matching the specified hue. When this adjustment is off the default ranges are used.
Chroma keying generates a key signal based on a particular color (reference color) in the foreground (typically a plain blue background), and the “window” refers to the range of colors which are regarded as matching this specified reference color to create the key signal.
As seen on a vectorscope (that is, in the hue-saturation color space), the range for this matching corresponds to a truncated sector. This range is specified by two parameters: the “Angle” parameter, which determines the range of the hue parameter, and the “Crop” parameter, which determines the degree of truncation *(see the following figure).*

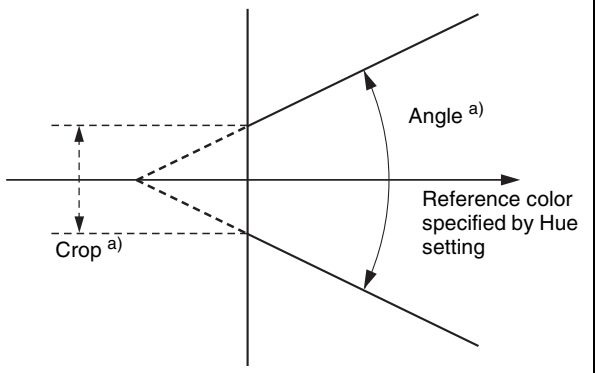

a) The Crop and Angle values do not change even if you use the auto chroma key function.

Window adjustment

Y balance

In normal chroma keying, the key signal is based on the chrominance component only, and all elements of the foreground with the same hue are replaced by the background. Using the Y balance function, you can specify a luminance level range within which the key is active, and replace the specified part by the background.
You can use the Y balance function independently on the key signal for the composition and the key signal for the color cancel function. When applied to the key signal for the composition, this produces the foreground with the color cancel effect applied. This can therefore be used to provide an impression of smoke, for example.
When the Y balance function is applied to the color cancel key, the relevant part is output in its original color without canceling, and therefore it is possible to combine colors which are the same color as the background (i.e. typically blue) in the foreground.

Chroma key shadow

This function provides a more realistic treatment when the shadow of an object in the field of view falls on the blue background. Since parts of the blue background darker than a specified intensity are treated as shadows, there is no effect on cutting out of the foreground.

Video signal adjustment

You can vary the foreground signal gain, or change the hue. There are separate adjustments for the gain of the overall video signal, and Y and C components.

Making auto chroma key adjustments

Auto chroma key is an automatic adjustment function which allows you to specify a part of the foreground video (for example, the blue background color) and use it as a reference for creating the chroma key image.

1 In the M/E-1 >Key1 menu, select HF1 ‘Type,’ then select [Chroma] in the <Key Type> group.

2 Select [Chroma Adjust].

The Chroma Adjust menu appears.

3 Select [Sample Mark] in the <Auto> group.

The foreground video only appears on the monitor, with a white box-shaped sample selector.

4 Adjust the position and size of the sample selector, to specify the color to be used as the basis of chroma keying (typically a blue background).

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–100.00 to +100.00 a)
2	Position V	Vertical position	–100.00 to +100.00 a)
3	Size	Size	1.00 to 100.00

a) The setting ranges depend on the signal format, screen aspect ratio, and size settings.

5 Select [Auto Start] in the <Auto> group.

This executes an auto chroma key based on the color specified by the sample selector, and displays the composite image on the monitor.

Making key active adjustments

When the key active function is on, the composite image is output to the monitor, and you can watch the monitor while manually adjusting the keying.
When the key active function is off, only the foreground image appears. Set this off when manually adjusting color cancel *(see the next section)*.

1 In the Chroma Adjust menu, set [Key Active] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Clip	Chroma key reference level	0.00 to 100.00
2	Gain	Key gain	–100.00 to +100.00
3	Hue	Hue	359.99 to 0.00
4	Density	Density	0.00 to 100.00
5	Filter	Filter coefficient	1 to 9

Making color cancel adjustments

If the background color is leaking into the foreground video, turning the color cancel function on allows you to eliminate this leakage.

1 In the Chroma Adjust menu, turn [Key Active] off.

Only the foreground image appears on the monitor.

2 In the <Color Cancel> group, set [Color Cancel] on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00
5	Filter	Filter coefficient	1 to 9

4 Set [Key Active] on.

The chroma key composite image now appears in the monitor.

Making key signal adjustments for color cancel

When the color cancel function is set on, you can adjust the key signal for color cancel.

1 In the <Color Cancel> group of the Chroma Adjust menu, set [Color Cancel] on.

2 In the <Color Cancel> group, set [Cancel Key] on.

The cancel key is now on, and you can now adjust the key signal for color cancel.

Knob	Parameter	Adjustment	Setting values
1	Clip	Color cancel key reference level	0.00 to 100.00
2	Gain	Color cancel key gain	–100.00 to +100.00

3 Make the following settings, as required, in the <Color Cancel> group.

When setting [Key Position] on and adjusting the color cancel key edge position

Knob	Parameter	Adjustment	Setting values
1	H Phase	Move left and right edges of the color cancel key simultaneously	Left edge position value shown
2	Left	Move left edge of the color cancel key	–3.00 to +3.00
3	Right	Move right edge of the color cancel key	–3.00 to +3.00

When setting [Window] on and adjusting the detection range of the color cancel key

Knob	Parameter	Adjustment	Setting values
1	Crop	Crop value	100.00 to 0.00
2	Angle	Angle value	180.00 to 0.00

For details of the crop and angle parameters, see "Chroma key window" (page 131).

When setting [Y Balance] on and adjusting the ratio in which Y balance is added to the color cancel key

Knob	Parameter	Adjustment	Setting values
1	Mixture	Ratio of Y balance key	0.00 to 100.00

Adjusting the window

Setting the window *(see page 131)* function on allows you to adjust the detection range used to determine the key signal. When this function is off, the default range is used for the key.
After making sure that the values of Clip, Gain, and Hue are adjusted appropriately, use the following procedure to make the window adjustment.

1 In the Chroma Adjust menu, set [Window] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Crop	Crop value	100.00 to 0.00
2	Angle	Angle value	180.00 to 0.00

Adjusting the Y balance

Setting the Y balance *(see page 132)* on allows you to specify that, even if the hue is the same, only portions of a particular luminance will be replaced by the background.

1 In the Chroma Adjust menu, set [Y Balance] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Clip	Luminance range	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
2	Gain	Key gain	–100.00 to +100.00
3	Luminance	Luminance	0.00 to 100.00

Adjusting the chroma key shadow

This function allows a shadow falling on the (typically blue) background color to be rendered more realistically. Since portions of the (blue) background of less than a certain luminance are treated as shadows, there is no effect on cutting out of the foreground.

1 In the Chroma Adjust menu, set [Shadow] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Reference luminance for shadows	0.00 to 100.00
2	Gain	Shadow key gain	–100.00 to +100.00
3	Density	Shadow opacity	0.00 to 100.00
4	Soft	Shadow softness	0.00 to 100.00

Notes

When chroma key shadow is on, key edge is changed to normal, and soft edge is switched off.

Adjusting the video signal

You can change the gain of the foreground signal, or vary the Hue. There are separate adjustments for the gain of the whole video signal, or Y and C individually.

1 In the Chroma Adjust menu, set [FRGD CCR] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Overall gain of video signal	–100.00 to +100.00
2	Y Gain	Y signal gain	–100.00 to +100.00
3	C Gain	C signal gain	–100.00 to +100.00
4	Hue	Hue offset amount	–180.00 to +180.00

Key Edge Modifications

To modify the key edge of key 1 on the M/E-1 bank, use the following procedure.

1 In the M/E-1 >Key1 menu, select HF2 'Edge.'

The Edge menu appears.

2 Select the edge type *(see page 124)* in the <Edge> group.

Normal: unadorned edge
Border: edge with border applied
Drop Border: edge with drop border applied
Shadow: edge with shadow applied
Outline: edge used as outline
Emboss: embossing effect applied to edge

If you select [Normal], skip to step **7**.

3 Set the border width and other parameters.

When border or outline is selected: The setting parameters depend on the key type and whether the separate edge function is enabled or not. To enable the separate edge function, press [Separate Edge], setting it on.

- **Separate edge off**

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 8.00 a) (0.00 to 100.00) b)
3	Density	Density	0.00 to 100.00

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0.00 to 4.00.
b) When a wipe pattern key or key wipe pattern key is selected as the key type

- **Separate edge on**
  The left, right, top, and bottom border or outline widths can be adjusted independently. The separate edge function is only valid when a luminance key, linear key, or chroma key is selected as the key type.

Knob	Parameter	Adjustment	Setting values
1	Top	Top edge width	0.00 to 8.00 a)
2	Left	Left edge width	0.00 to 8.00 a)
3	Right	Right edge width	0.00 to 8.00 a)
4	Bottom	Bottom edge width	0.00 to 8.00 a)
5	Density	Density	0.00 to 100.00

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0.00 to 4.00.

When drop border or shadow is selected: The setting parameter values depend on the on/off setting of key drop and the selection of 4H mode/ 8H mode *(see page 125)*.

• "Key drop off" mode

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 8.00 a)
2	Position	Position	359.99 to 180.00
3	Density	Density	0.00 to 100.00

• "Key drop on" mode

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 8.00 a)
2	Position	Position	359.99 to 0.00
3	Density	Density	0.00 to 100.00

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0.00 to 4.00.

When emboss is selected:

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0.00 to 4.00
2	Position	Position	359.99 to 0.00
3	Density a)	Density	0.00 to 100.00

a) The Density adjustment only affects the key edge. This can be adjusted separately from Key Density, and if Key Density is set to 0.00, the embossed edge effect only can be applied.

To make edge fill adjustments, carry out the settings in step **6**.

4 Select the edge fill signal in the <Edge Fill> group.

Utility 1 Bus: signal selected on the utility 1 bus
Matte: signal from dedicated color matte generator. It becomes possible to adjust color 1.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

When the edge type is outline, in place of the edge fill signal, the selected key fill signal fills the outline, and elsewhere remains as the background.

5 Carry out the following operation, depending on the selection in step **4**.

When [Utility 1 Bus] is selected: Hold down the [UTIL] button in the cross-point control block, and select the signal in the background A bus row. While the [UTIL] button is held down, the background A bus changes to the utility 1 bus.

Notes

To enable the [UTIL] button, its operation mode must be set to [Hold] beforehand.

For details, see "Setting the Button Operation Mode" in Chapter 19 (Volume 2).

When [Matte] is selected: Press [Matte Adjust] in the same EDGE menu, to display the Matte Adjust menu, and adjust a single color or two-color combination color matte.
You can select whether to use a single color matte or a two-color combination color matte in the <Edge Matte> group.

For the color mix operation, see "Carrying out a color mix for the key edge fill matte" (page 136).

6 When emboss is selected for the edge type, adjust the color in the <Emboss Fill> group.

To adjust matte 1 press [Matte1], and to adjust matte 2 press [Matte2], then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

7 To make the edge soft, press [Soft Edge] to set it on, and adjust the softness.

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0.00 to 100.00

For a normal edge, when [Soft Edge] is enabled, [Key Drop] is kept on.

8 To make separate fine adjustments to the positions of the left, right, top, and bottom of the source edge, press [Fine Key], to set it on, and adjust the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Key top edge position	–2.00 to +2.00
2	Left	Key left edge position	–2.00 to +2.00
3	Right	Key right edge position	–2.00 to +2.00
4	Bottom	Key bottom edge position	–2.00 to +2.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	H Phase	Key horizontal position	Left edge position value shown
2	V Phase	Key vertical position	Top edge position value shown

Notes

In the emboss function it is not possible to set [Fine Key] on.

- When the edge type is normal, drop border or shadow, enabling the [Fine Key] function keeps [Key Drop] on.
- When applying a border to the key edge, enabling the [Fine Key] function halves the border width setting range.

Setting Key Drop Mode

1 In the Edge menu, press [Key Delay Mode].

The Key Delay Mode menu appears.

2 In the <Key Delay Mode> group, press [Key Drop] to set key drop mode.

On: Key drop mode on
Off: Key drop mode off

To set the key fill/key source position

Press [8H Mode] is switch between 8H mode and 4H mode.
On: 8H mode
Off: 4H mode

To fix key fill/key source to key drop off mode

In the <Key Delay Mode> group, press [Frame Delay], turning it on.

Notes

This function uses the resizer, and therefore the expected result of the setting may not be obtained if conditions do not allow the resizer to be used.

Carrying out a color mix for the key edge fill matte

When you select 'Matte' for the edge fill of a border, drop border, or shadow, you can create a combination of color 1 and color 2 using a wipe pattern generated by the dedicated pattern generator.

1 In the <Edge Fill> group of the Edge menu, select [Matte], then press [Matte Adjust].

The edge fill Matte Adjust menu appears.

2 In the <Edge Matte> group, select [Mix Color], turning it on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Softness of pattern edge	0.00 to 100.00
3	Pattern	Pattern number	1 to 24 a)

a) The patterns are the same as standard wipes. *For details, see "Wipe Pattern List" in Appendix (page 357).*

To select the pattern, display the Mix Pattern Select menu by pressing [Mix Pattern] in the edge fill Matte Adjust menu.
After selecting one of the patterns (standard wipe patterns 1 to 24) displayed in the Mix Pattern Select menu, you can adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Softness of pattern edge	0.00 to 100.00

4 Adjust color 1 and color 2.

To adjust color 1 press [Color 1], and to adjust color 2 press [Color 2], turning it on respectively, and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

5 If required, set the pattern modifiers.

When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00 a)
2	Position V	Vertical position	–200.00 to +200.00 a)

a) See *page 169*.

When turning [Multi] on and replicating the pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 a)

a) See *page 171*.

When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a) See *page 171*.

When turning [Angle] on in the <Rotation> group and inclining the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–100.00 to +100.00 a)

a) See *page 170*.

When turning [Speed] on in the <Rotation> group and rotating the pattern at a constant speed

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00 a)

a) See *page 170*.

6 To interchange color 1 and color 2, press [Color Invert], turning it on.

Applying the zabton effects

1 In the Edge menu, press [Zabton], turning it on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Pattern edge softness	0.00 to 100.00
3	Density	Density	0.00 to 100.00

Notes

If in the pattern selection described below you select "Mask Pattern," and "Box" for the main mask, the "Size" parameter here cannot be adjusted. Set "Size" in the Main Mask menu.

3 To adjust the pattern and color, press [Zabton Adjust].

The Zabton Adjust menu appears.

4 In the <Zabton Pattern> group, select the pattern.

Key Wipe: Use a key wipe.
You can change this pattern by pressing [Pattern Select] to open the menu for key wipe pattern selection (Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Wipe Adjust menu).

Key Edge Pattern: Use a color mixing pattern for key edge.
You can change this pattern by pressing [Pattern Select] to open the menu for edge color mix dedicated wipe pattern selection (Mix Pattern Select menu), and make adjustments by pressing [Pattern Adjust] to open the menu for pattern adjustment (Matte Adjust menu).

Mask Pattern: Use the main mask Box or Pattern.

You can also press [Pattern Select], and in the corresponding pattern adjustment menu, change the pattern.

5 To adjust the color, press [Zabton Color] and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00
4	Density	Density	0.00 to 100.00

Masks

There are two masks, which can be used to mask off unneeded parts of a key or background, or to remove defects, and these are known as the main mask and subsidiary mask.
You can either use the main mask and subsidiary mask independently, or at the same time.

Using the main mask

For example, to use the main mask for key 1 on the M/E-1 bank, use the following procedure.

1 In the M/E-1 >Key1 menu, select HF3 'Main Mask.'

The Main Mask menu appears.

2 In the <Mask Type> group, select the mask type.

Key Mask: Masks a part of a key.
Bkgd Mask: Masks a part of a background.

3 In the <Mask Source> group, select the mask source.

Box: signal from the dedicated box generator
Pattern: signal from the dedicated pattern generator

4 Set the mask source parameters.

When a box is selected

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	–100.00 to +100.00
2	Left	Left position	–100.00 to +100.00
3	Right	Right position	–100.00 to +100.00
4	Bottom	Bottom position	–100.00 to +100.00
5	Soft	Box softness	0.00 to 100.00

When a pattern is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00
5	Pattern	Pattern number	1 to 24 a)

a) The pattern is the same as a standard wipe. *See "Wipe Pattern List" in Appendix (page 357).*

To select the pattern, display the Mask Ptn Select menu by pressing [Mask Ptn Select] in the Main Mask menu.
After selecting one of the patterns (standard wipe patterns 1 to 24) displayed in the Mask Ptn Select menu, you can adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

5 To invert the black and white sense of the mask source, press [Mask Invert], turning it on.

6 When a pattern is selected as the mask source, set the pattern modifiers as required.

When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00 a)
2	Position V	Vertical position	–200.00 to +200.00 a)

a) See *page 169*.

When turning [Multi] on and replicating the pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 a)

a) See *page 171*.

When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a) See *page 171*.

When turning [Angle] on in the <Rotation> group and setting the angle of the pattern rotation

Knob	Parameter	Adjustment	Setting values
1	Angle	Pattern angle	–100.00 to +100.00 a)

a) See *page 170*.

When turning [Speed] on in the <Rotation> group and setting the rate of pattern rotation

Knob	Parameter	Adjustment	Setting values
1	Speed	Rate of pattern rotation	–100.00 to +100.00 a)

a) See *page 170*.

Using the subsidiary mask

For example, to use the subsidiary mask for key 1 on the M/E-1 bank, use the following procedure.

1 In the M/E-1 >Key1 menu, select HF4 'Sub Mask.'

The Sub Mask menu appears.

2 In the <Mask Type> group, select the mask type.

Key Mask: Masks a part of a key.
Bkgd Mask: Masks a part of a background.

3 In the <Mask Source> group, select the mask source.

Wipe: wipe pattern selected for a transition
If you select [Wipe], select the pattern and make modifier settings in the M/E-1 >Wipe menu *(see page 163),* then return to this M/E-1 >Key1 menu. In the case of a wipe pattern selected for a mask, the modifier [Edge] and [Direction] settings are not available.

Utility 1 Bus: signal selected on the utility 1 bus
When you selected [Utility 1 Bus], hold down the [UTIL] button in the M/E-1 bank cross-point control block, and select the signal with the background A bus buttons. While the [UTIL] button is pressed, the background A bus switches to the utility 1 bus.

Notes

To enable the [UTIL] button, its operation mode must be set to [Hold] beforehand.

For details, see "Assigning a Bus to an AUX Delegation Button" in Chapter 19 (Volume 2).

4 Set the mask source parameters.

When wipe is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

When utility 1 bus is selected

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for creating mask signal	+109.59 to –7.31
2	Gain	Gain	–100.00 to +100.00

5 To invert the black and white sense of the mask source, press [Mask Invert], turning it on.

Applying a DME Effect to a Key

Notes

- When the SDI interface is used to connect the DME, DME effects (including DME wipes) can be used in only one place for one M/E bank.
- When the dedicated interface is used to connect the DME, the number of keys to which DME effects (including DME wipes) can be applied simultaneously for one M/E bank varies as follows depending on the execution mode of the DME wipe pattern selected for the background.
  - MVS-8000X

Applicable block	Key to which DME effects are applied	DME wipe pattern for background	Number of keys to which DME effects can be applied simultaneously
Other than M/E-4	Keys 1 to 4	No DME wipe used	2
		One-channel mode	1
		Two- or three-channel mode	0
	Keys 5 to 8	-	2 a)
M/E-4	Keys 1 to 4	No DME wipe used	2 b)
		One-channel mode	1 c)
		Two- or three-channel mode	0
	Keys 5 to 8	-	0

  - MVS-7000X

Key to which DME effects are applied	DME wipe pattern for background	Number of keys to which DME effects can be applied simultaneously
Keys 1 to 4	No DME wipe used	2
	One-channel mode	1
	Two- or three-channel mode	0
Keys 5 to 8	-	2 a)

a) 0 when the system signal format is 1080P.
b) 1 when the system signal format is 1080P and the DME input/output signal format is set to dual link mode.
c) 0 when the system signal format is 1080P and the DME input/output signal format is set to dual link mode.

- When combining DMEs connected via the dedicated interface and the SDI interface, you can increase the number of keys to which DME effects are applied simultaneously (requires a setting in setup).
For details, see "Setting DME and Switcher Interfaces" in Chapter 20 (Volume 2).

Assigning a DME to a key

1 In the M/E-1 >Key1 menu, select HF5 'Processed Key/Resizer.'

The Processed Key/Resizer menu appears.

2 In the <DME Select> group, select the DME channel (DME1 to DME8) to be used.

The lit colors of [DME1] to [DME8] indicate the DME assignment.

Lit green: Shows the DME assigned to the currently selected key.

Lit amber: Shows the DME assigned to a key other than the currently selected key.

Off: DME is not assigned.

To select a DME being used by another keyer

Press [Override], turning it on, then select the DME channel.

The later selection is valid, and the button lights green.

Using two or three DME channels on one keyer

When using the DME dedicated interface, proceed as follows.

Notes

- On the MVS-8000X, when the signal format is 1080P, the combination of two consecutively numbered DME channels that can be selected is DME1 and DME2, DME3 and DME4, DME5 and DME6, or DME7 and DME8. It is not possible to combine three or more DME channels.
- On the MVS-7000X, when the signal format is 1080P, the above restriction also applies if using the MVE-8000A. There is no such restriction for the MKS-7470X/7471X.

1 Select the DME for the first channel *(see the previous item, "Assigning a DME to a key"),* then select the successive channel for the second channel. For the third channel select the channel after that.

2 To select the video signal for the second channel, hold down the [UTIL] button in the cross-point control block, and select the signal in the Key1 row (DME external video bus).

3 To select the video signal for the third channel, hold down the [UTIL] button in the cross-point control block, and carry out the following operation.

- If the selected DME is channel 3 or channel 4, turn off the [KEY4] button in the key 2 row, then select the signal in the key 2 row (DME utility 1 bus).
- If the selected DME is channel 7 or channel 8, turn on the [KEY4] button in the key 2 row, then select the signal in the key 4 row (DME utility 2 bus).

Using four DME channels on one keyer

When using the DME dedicated interface, proceed as follows.

Notes

- On the MVS-8000X, when the signal format is 1080P, this operation cannot be carried out.
- On the MVS-7000X, when the signal format is 1080P, the above restriction also applies if using the MVE-8000A. There is no such restriction for the MKS-7470X/7471X.

1 Select the DME channel 1 (or channel 5) for the first channel *(see "Assigning a DME to a key" (page 140))*. In the same way, select the DME channel 2 (channel 6) for the second channel, the DME channel 3 (channel 7) for the third channel, and the DME channel 4 (channel 8) for the fourth channel.

2 To select the video signal for the second channel, hold down the [UTIL] button in the cross-point control block, and select the signal in the Key1 row (DME external video bus).

3 To select the video signal for the third channel, hold down the [UTIL] button in the cross-point control block, and carry out the following operation.

- If the selected DME is channel 3, turn off the [KEY4] button in the key 2 row, then select the signal in the key 2 row (DME utility 1 bus).
- If the selected DME is channel 7, turn on the [KEY4] button in the key 2 row, then select the signal in the key 4 row (DME utility 2 bus).

4 To select the video signal for the fourth channel, hold down the [UTIL] button in the cross-point control block, and carry out the following operation.

- If the selected DME is channel 4, turn on the [KEY4] button in the key 2 row, then select the signal in the key 4 row (DME utility 2 bus).
- If the selected DME is channel 8, turn off the [KEY4] button in the key 2 row, then select the signal in the key 2 row (DME utility 1 bus).

When using the SDI interface

The operations to select the video signals for the third and fourth channels differ from those in the previous procedure: select the video signals on the AUX bus allocated in a Setup menu (Engineering Setup >Switcher >Device Interface >DME Type Setting >DME SDI Interface menu).

Notes

In setup (Engineering Setup >Switcher >Device Interface menu), if "Dual DME units" is selected, the second channel video signal is also selected on the AUX bus.

For details, see "Setting the Interface Between the DME and the Switcher" in Chapter 19 (Volume 2).

You can check the DME operating status in the Status menu *(see page 236)*.

Assigning a DME output signal as a monitor signal

1 In the Processed Key/Resizer menu, press [Monitor].

The Monitor menu appears.

2 Press [Monitor Set], turning it on.

3 In the <DME Select> group, select the DME channel (DME1 to DME8) to be used.

This assigns the selected DME output to DME MON V and DME MON K.
The colors with which [DME1] to [DME8] are lit show the key assignment status.
Lit green: DME currently being monitored
Lit amber: DME that can be monitored
Off: Unassigned DME

Specifying the Key Output Destination

Using the key processed keyer signals (external processed key)

To select the key processed keyer key fill and key source signals on the AUX bus or edit preview bus, press [Ext Proc Key] turning it on, in the Processed Key/Resizer menu.
This assigns the key fill and key source signals for M/E-1 key 1 to reentry signals PROC V and PROC K.
When a DME is selected on the keyer, the key fill and key source signals to which a DME effect is applied are assigned.

Notes

You cannot select the PROC V and PROC K signals using the cross-point selection buttons of the M/E or PGM/PST bank.

Using the key processed keyer signals or signals to which a DME effect is applied in frame memory (frame memory feed)

To use the key processed keyer key fill and key source signals on the frame memory source buses, in the Processed Key/Resizer menu, press [FM Feed]. [Ext Proc Key] turns on, and the key fill and key source signals processed on the currently selected keyer are automatically assigned to frame memory source buses 1 and 2. When a DME is selected on the keyer, the key fill and key source signals to which a DME effect is applied are assigned.

Key Modify Clear

A simple button operation or a menu operation returns the key settings to the initial status settings.
Press [Default Recall] at the lower left of the menu display, turning it on, then press the corresponding VF button (VF1 to VF4) to return the key settings to their initial status.

For details of the initial status, see "Saving User-Defined Settings" in Chapter 18 (Volume 2).
For the menu operation to return the key state to that set in initial status, see "Returning to Default State in Function Groupings" (page 85).

Blink Function

With the blink function, you can obtain the following effects.
Key blink: The key is alternately inserted and deleted at regular intervals. You can set the period of blinking, and the proportion of each cycle for which the key is inserted.
Edge blink: The key fill and key edge fill signals are interchanged at regular intervals. You can set the period of blinking, and the proportion of each cycle for which the original state holds.

The blink settings are in the Transition menu for each key.

Using the blink function

For example, to make the required settings for key 1 on the M/E-1 bank, use the following procedure.

1 In the M/E-1 >Key1 menu, select HF6 'Transition.'

The Transition menu appears.

2 In the <Blink> group, select [Key Blink] or [Edge Blink] to set it on.

3 Set the blink parameters.

When key blink is selected

Knob	Parameter	Adjustment	Setting values
1	Blink Rate	Length of blink cycle	1 to 100
2	Duty	Proportion of cycle for which key inserted	0.00 to 100.00

When edge blink is selected

Knob	Parameter	Adjustment	Setting values
1	Blink Rate	Length of blink cycle	1 to 100
2	Duty	Proportion of cycle for which original state holds	0.00 to 100.00

Video Processing

You can adjust the luminance and hue of the selected key fill signal.
For example, to apply video processing to the signal selected on the M/E-1 bank key 1 fill bus, use the following procedure.

1 In the M/E-1 >Key1 menu, select HF7 ‘Video Process.’

The Video Process menu appears.

2 Press [Video Process], turning it on.


3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video gain	–200.00 to +200.00
2	Y Gain	Luminance gain	–200.00 to +200.00
3	C Gain	Chrominance gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Luminance black level	–7.31 to +109.59

To return adjustment values to their defaults
Press [Unity].

Key Setting Operations with the Key Control Block

This section describes the basic procedures for key settings using the key control block.

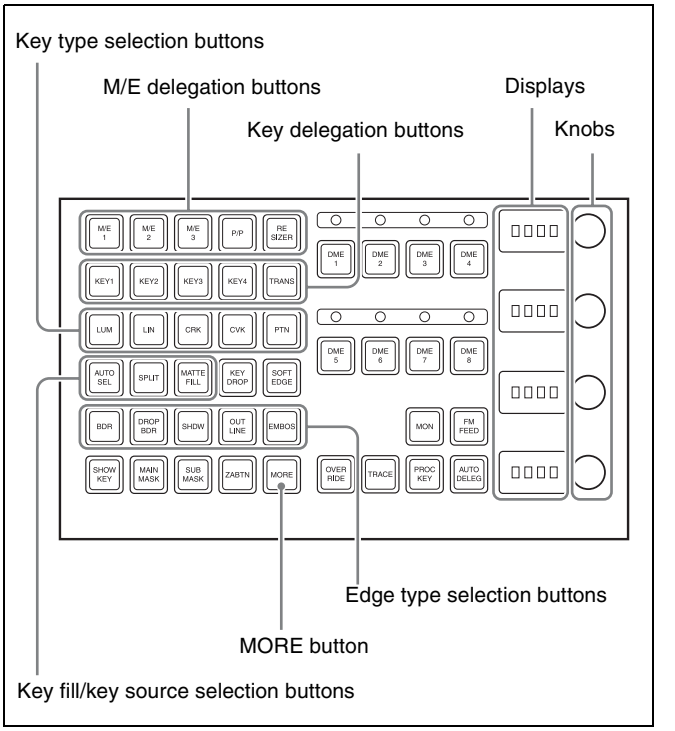

Notes

To select [M/E 4] or [M/E 5], [Key5] to [Key8], and [DSK5] to [DSK8] in the key control block, a previous assignment in the Setup menu is required *(see page 397)*.

Selecting the Bank and Keyer

To make key settings, first select the bank (from M/E-1 to M/E-3 and PGM/PST) and keyer, then assign them to the key control block.
For example, to set key 1 on M/E-1 with the key control block, use the following procedure.

1 Using the M/E delegation buttons in the key control block, press the [M/E 1] button, setting it on.

2 Using the key delegation buttons in the key control block, press the [KEY1] button, setting it on.

This assigns the key control block to M/E-1 key 1.

Selecting the Key Type

To select the key type, press one of the key type *(see page 123)* selection buttons in the key control block.
[LUM] button: luminance key
[LIN] button: linear key
[CRK] button: chroma key
[CVK] button: color vector key
[PTN] button: key wipe pattern key

When using a wipe pattern key as the key type, in the <Key Type> group of the Type menu for the keyer, select [Wipe Pattern] and make the settings.

The button you pressed lights green, and you can now adjust the parameters with the knobs. The display beside each knob shows the first letter of the parameter name and the three-digit setting value.

Parameter Adjustment with the Knobs

When the button for a function requiring parameter settings is pressed (that is, on), you can set the parameters with the four knobs. If there are more than four values to be assigned to the knobs, the [MORE] button lights amber. At this point, press the [MORE] button, which turns green, to assign the fifth and subsequent parameters to the knobs, so that the parameter settings can be made.

When the [LUM] or [LIN] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for generating the key signal	+109 to –7
2	Gain	Key sensitivity	–100 (shown as –00) to +100
3	Density	Key density	0 to 100
4	Filter	Filter coefficient	1 to 9

When the [CRK] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Clip	Chroma key reference level	0 to 100
2	Gain	Key sensitivity	–100 (shown as –00) to +100
3	Hue	Hue	0 to 359
4	Density	Key density	0 to 100

- When [Key Active] is off, only the parameters Hue and Density are displayed.
- When both [Key Active] and [Color Cancel] are off, only the parameter Density is displayed.

When the [CVK] button is lit green

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Y Clip	Reference level for Y signal	+109 to –7
2	Y Gain	Y signal sensitivity	–100 (shown as –00) to +100
3	C Clip	Reference level for chrominance signal	100 to 0
4	C Gain	Chrominance signal sensitivity	–100 (shown as –00) to +100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Y Filter	Y signal filter coefficient	1 to 9
2	C Filter	Chrominance signal filter coefficient	1 to 9
4	Density	Key density	0 to 100

When the [PTN] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Edge softness	0 to 100
3	Density	Key density	0 to 100

Selecting Key Fill

Select whether to use a color matte as key fill, or the signal on the key fill bus.
When using a color matte: Press the [MATTE FILL] button, setting it on. The button lights green, and you can now set the parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Color 1 luminance	0 to 100
2	Saturation	Color 1 saturation	0 to 100
3	Hue	Color 1 hue	359 to 0

When [Mix Color] is selected in the key fill Matte Adjust menu, you can further adjust color 2.

When [Mix Color] is on, and the [MORE] button is lit amber

Knob	Parameter	Adjustment	Setting values
1	Luminance	Color 1 luminance	0 to 100
2	Saturation	Color 1 saturation	0 to 100
3	Hue	Color 1 hue	359 to 0
4	Size	Pattern size	0 to 100

When [Mix Color] is on, and
the [MORE] button is lit green

Knob	Parameter	Adjustment	Setting values
1	Luminance	Color 2 luminance	0 to 100
2	Saturation	Color 2 saturation	0 to 100
3	Hue	Color 2 hue	359 to 0
4	Soft	Edge softness	0 to 100

When using the key fill bus signal: Press the [MATTE FILL] button, turning it off.
To select the key fill signal, use the key 1 or key 2 row buttons in the cross-point control block.
For the CCP-6224/6324 Control Panel, it is necessary to set the [AUX CTRL] button to Off in order to exit the AUX panel-less function *(see page 92)*.

Selecting Key Source

- To use the key source paired with the key fill signal selected on the key fill bus, press the [AUTO SEL] button, turning it on. The pairing of the cross-point buttons for key fill and key source is carried out in the Setup menu.
  For details, see "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume 2).
- To select the key source independently of the key fill signal selected on the key fill bus and paired with the key source, hold down the [SPLIT] button, turning it on, then press the desired key 1 or key 2 row button in the cross-point control block.
- To use as key source the same signal as the key fill signal selected on the key fill bus, select the SELF mode by pressing the [AUTO SEL] button and [SPLIT] button simultaneously so that both are off. When chroma key is selected as the key type, select the SELF mode.

Key Adjustments (Key Control Block)

This section describes the various key adjustments provided by the control panel key control block.

Key Edge Modifications

To apply a modification to the key edge *(see page 124)*, press one of the edge type selection buttons in the key control block.

[BDR] button: border
[DROP BDR] button: drop border
[SHDW] button: shadow
[OUTLINE] button: outline
[EMBOS] button: emboss

The pressed button lights green, and you can now adjust the parameters with the knobs. The display beside each knob shows the first letter of the parameter name and the three-digit setting value.

Setting the border parameters

When the [BDR] button is lit green, the parameter settings depend on the key type and whether the separate edge function is active. To activate the separate edge function, press [Separate Edge], setting it on, in the Edge menu for the key.

Separate edge off

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0 to 8 [a] (0 to 100) [b]
4	Density	Border density	0 to 100

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0 to 4.
b) When a wipe pattern key or key wipe pattern key is selected as the key type

Separate edge on
The border width settings can be made independently for left, right, top, and bottom sides. The separate edge function is only available when luminance key, linear key, or chroma key is selected as the key type.

Knob	Parameter	Adjustment	Setting values
1	Top	Top edge width	0 to 8 [a]
2	Left	Left edge width	0 to 8 [a]
3	Right	Right edge width	0 to 8 [a]
4	Bottom	Bottom edge width	0 to 8 [a]

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0 to 4.

To adjust the edge fill color

When [BDR] is selected, the [MORE] button lights amber. Pressing the [MORE] button to turn it green then allows you to adjust the edge fill color parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0 to 100
2	Saturation	Saturation	0 to 100
3	Hue	Hue	359 to 0
4	Density	Density	0 to 100

Setting the drop border or shadow parameters

When the [DROP BDR] or [SHDW] button is lit green, the parameter settings differ between the "key drop OFF" and "key drop ON" modes *(see page 125)* as shown below. You switch between these two modes by turning the [KEY DROP] button on or off.

"Key drop OFF" mode

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0 to 8 a)
2	Position	Position	359 to 180
4	Density	Density	0 to 100

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0 to 4.

"Key drop ON" mode

Knob	Parameter	Adjustment	Setting values
1	Width	Width	0 to 8 a)
2	Position	Position	359 to 0
4	Density	Density	0 to 100

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0 to 4.

To adjust the edge fill color

When [DROP BDR] or [SHDW] is selected, the [MORE] button lights amber. Pressing the [MORE] button to turn it green then allows you to adjust the edge fill color parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0 to 100
2	Saturation	Saturation	0 to 100
3	Hue	Hue	359 to 0
4	Density	Density	0 to 100

Setting the outline parameters

When the [OUTLINE] button is lit green, the parameter settings depend on the key type and whether the separate edge function is active. To activate the separate edge function, press [Separate Edge], setting it on, in the Edge menu for the key.

Separate edge off

Knob	Parameter	Adjustment	Setting values
1	Width	Outline width	0 to 8 a) (0 to 100) b)
4	Density	Outline density	0 to 100

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0 to 4.
b) When a wipe pattern key or key wipe pattern key is selected as the key type

Separate edge on

The outline width settings can be made independently for left, right, top, and bottom sides. The separate edge function is only available when luminance key, linear key, or chroma key is selected as the key type.

Knob	Parameter	Adjustment	Setting values
1	Top	Top edge width	0 to 8 a)
2	Left	Left edge width	0 to 8 a)
3	Right	Right edge width	0 to 8 a)
4	Bottom	Bottom edge width	0 to 8 a)

a) In the "4H mode" and when [Fine Key] *(page 135)* is on, the setting value range is 0 to 4.

When [Outline] is selected with separate edge on, the [MORE] button lights amber. Pressing the [MORE] button to turn it green then allows you to adjust the key fill density parameter with a knob.

Knob	Parameter	Adjustment	Setting values
4	Density	Outline density	0 to 100

Setting the embossing parameters

When the [EMBOS] button is lit green, adjust the following parameters.

Knob	Parameter	Setting values
1	Width	0 to 4
2	Position	359 to 0
4	Density	0 to 100

Selecting a normal edge

When all five edge type selection buttons are off, a normal edge is selected. If one of the buttons is lit, press it, turning it off.

Softening the edge

Press the [SOFT EDGE] button, turning it on. The button lights green, and you can now adjust the softness with the knob.

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0 to 100

- For a normal edge, when [SOFT EDGE] is enabled, “Key Drop” mode turns on.
- When a luminance key or linear key is selected as the key type, and clean mode is enabled, enabling [SOFT EDGE] ends the clean mode.

Applying the zabton effects

When the [ZABTN] button is lit green, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Pattern edge softness	0 to 100

Press the [MORE] button lit amber, changing it to green, then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0 to 100
2	Saturation	Saturation	0 to 100
3	Hue	Hue	359 to 0
4	Density	Density	0 to 100

Masks

Using the main mask

In the key control block, press the [MAIN MASK] button, turning it on.
The parameter settings depend on the mask source selected as [Box] or [Pattern] in the <Mask Source> group of the Main Mask menu for the key.

When box is selected

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	–100 (shown as –00) to +100
2	Left	Left position	–100 (shown as –00) to +100
3	Right	Right position	–100 (shown as –00) to +100
4	Bottom	Bottom position	–100 (shown as –00) to +100

When box is selected and the [MORE] button is lit amber, there are more settings. Press the [MORE] button, so that it changes from amber to green to make the extra setting.

Knob	Parameter	Adjustment	Setting values
1	Soft	Box softness	0 to 100

When pattern is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Edge softness	0 to 100
3	Pattern	Pattern number	1 to 24 a)

a) The pattern is the same as a standard wipe. *See “Wipe Pattern List” (page 357).*

Using the subsidiary mask

In the key control block, press the [SUB MASK] button, turning it on. The parameter settings depend on the mask source selected as [Wipe] or [Utility 1 Bus] in the <Mask Source> group of the Sub Mask menu for the key.

When wipe is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0 to 100
2	Soft	Edge softness	0 to 100

When utility 1 bus is selected

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for creating mask signal	+109 to –7
2	Gain	Gain	–100 (shown as –00) to +100

Applying a DME Effect to a Key

Notes

- When the SDI interface is used to connect the DME, DME effects (including DME wipes) can be used in only one place for one M/E bank.
- When the dedicated interface is used to connect the DME, the number of keys to which DME effects (including DME wipes) can be applied simultaneously for one M/E bank varies as follows depending on the execution mode of the DME wipe pattern selected for the background.

- MVS-8000X

Applicable block	Key to which DME effects are applied	DME wipe pattern for background	Number of keys to which DME effects can be applied simultaneously
Other than M/E-4	Keys 1 to 4	No DME wipe used	2
		One-channel mode	1
		Two- or three-channel mode	0
	Keys 5 to 8	-	2 a)
M/E-4	Keys 1 to 4	No DME wipe used	2 b)
		One-channel mode	1 c)
		Two- or three-channel mode	0
	Keys 5 to 8	-	0

- MVS-7000X

Key to which DME effects are applied	DME wipe pattern for background	Number of keys to which DME effects can be applied simultaneously
Keys 1 to 4	No DME wipe used	2
	One-channel mode	1
	Two- or three-channel mode	0
Keys 5 to 8	-	2 a)

a) 0 when the system signal format is 1080P.
b) 1 when the system signal format is 1080P and the DME input/output signal format is set to dual link mode.
c) 0 when the system signal format is 1080P and the DME input/output signal format is set to dual link mode.

- When combining DMEs connected via the dedicated interface and the SDI interface, you can increase the number of keys to which DME effects are applied simultaneously (requires a setting in setup).
For details, see "Setting DME and Switcher Interfaces" in Chapter 20 (Volume 2).

Assigning a DME to a key

1 In the key control block, press the delegation buttons [M/E 1] and [KEY1].

2 Using the DME channel selection buttons, select the DME channel (DME1 to DME8) for applying the effect.

The lit colors of the [DME1] to [DME8] buttons indicate the DME assignment.
Lit green: Shows the DME assigned to the currently selected key.
Lit amber: Shows the DME assigned to a key other than the currently selected key.
Off: DME is not assigned.

To select a DME being used by another keyer
Press [Override], turning it on, then select the DME channel.
The later selection is valid, and the button lights green.

Using two or three DME channels on one keyer

When using the DME dedicated interface, proceed as follows.

Notes

On the MVS-8000X, when the signal format is 1080P, the combination of two consecutively numbered DME channels that can be selected is DME1 and DME2, DME3 and DME4, DME5 and DME6, or DME7 and DME8. It is not possible to combine three or more DME channels.
On the MVS-7000X, when the signal format is 1080P, the above restriction also applies if using the MVE-8000A. There is no such restriction for the MKS-7470X.

1 Select the DME for the first channel *(see the previous item, "Assigning a DME to a key"),* then select the successive channel for the second channel. For the third channel select the channel after that.

2 To select the second channel video signal, hold down the [UTIL] button in the cross-point control block, and select the signal in the Key1 row (DME external video bus).

3 To select the third channel video signal, when the selected DME is Ch3 or Ch4, select the signal on the DME utility 1 bus. When the selected DME is Ch7 or Ch8, select the signal on the DME utility 2 bus.

For details of the method of signal selection, see "Bus Selection" (page 89).

Using four DME channels on one keyer

When using the DME dedicated interface, proceed as follows.

Notes

- On the MVS-8000X, when the signal format is 1080P, this operation cannot be carried out.
- On the MVS-7000X, when the signal format is 1080P, the above restriction also applies if using the MVE-8000A. There is no such restriction for the MKS-7470X/7471X.

1 Select the DME channel 1 (or channel 5) for the first channel *(see "Assigning a DME to a key" (page 147))*. In the same way, select the DME channel 2 (channel 6) for the second channel, the DME channel 3 (channel 7) for the third channel, and the DME channel 4 (channel 8) for the fourth channel.

2 For the second channel video signal, select the signal on the DME external video bus.

3 To select the third channel video signal, when the selected DME is Ch3, select the signal on the DME utility 1 bus. When the selected DME is Ch7, select the signal on the DME utility 2 bus.

4 To select the fourth channel video signal, when the selected DME is Ch4, select the signal on the DME utility 2 bus. When the selected DME is Ch8, select the signal on the DME utility 1 bus.

For details of the method of signal selection, see "Bus Selection" (page 89).

When using the SDI interface

The operations to select the video signals for the third and fourth channels differ from those in the previous procedure: select the video signals on the AUX bus allocated in a Setup menu (Engineering Setup >Switcher >Device Interface >DME Setting >DME SDI Interface menu).

Notes

When using a second key in combination with a dedicated interface, select the signal to be used on the AUX bus.

You can check the DME operating status in the Status menu *(see page 236)*.

Assigning the DME output signal to a monitor signal

1 Holding down the output destination specification button [MON] in the key control block, use the DME channel selection buttons to select the DME channel (DME1 to DME8) you want to use.

The selected DME output is assigned to DME MON V and DME MON K.

2 To check the DME assignment status, hold down just the [MON] button.

While it is held down, the lit color of the [DME1] to [DME8] buttons shows the key assignment status.
Lit green: Shows the DME currently being monitored.
Lit amber: Shows a DME which can be monitored.
Off: DME is not assigned.

Other Key Setting Operations

Using an external processed key

You can select and use the key processed keyer key fill and key source signals on the AUX buses.

1 Select the keyer to be allocated.

2 In the key control block, press [PROC KEY], turning it on.

The button lights amber, and on the currently selected keyer, the key fill and key source are assigned to reentry signals PROC V and PROC K.

When a DME is selected on the currently selected keyer, the key fill and key source signals to which the DME effect is applied are assigned to PROC V and PROC K.

Notes

You cannot select the PROC V and PROC K signals using the cross-point selection buttons of the M/E or PGM/PST bank.

Using a frame memory feed

When you press the [FM FEED] button in the key control block, it lights momentarily amber, then the key fill and key source signals processed in the currently selected keyer are assigned to frame memory sources 1 and 2.
If a DME is selected on the currently selected keyer, then the key fill and key source signals to which a DME effect is applied are assigned to frame memory sources 1 and 2.
Carrying out a frame memory feed causes the [PROC KEY] button to light amber.

Using the show key function

While the [SHOW KEY] button is held down, the key-processed key source signal appears on the specified output (Show key mode).
Even when the [SHOW KEY] button is released, for a preset time the show key mode is maintained. You can specify the output to which the show key function is

applied and set the time for which the show key mode is maintained after releasing the button in the Setup menu.

For details see "Settings for the Show Key Function" in Chapter 20 (Volume 2).

Using the auto delegation function

To couple the selection in the key delegation buttons of the independent key transition control block so that the key control block delegation selection is automatically switched, in the key control block press the [AUTO DELEG] button, turning it on.

Returning the key adjustment values to their defaults

Holding down a key type button ([LUM], [LIN], [CRK], [CVK], or [PTN]) recalls the key default values *(page 126)*.


Key modify clear

When an M/E delegation button is held down, holding down a key delegation button together returns the key settings to the initial status settings.

For details of the initial status, see "Saving User-Defined Settings" in Chapter 18 (Volume 2).

Key Adjustments (Multifunction Flexi Pad Control Block)

This section describes basic key adjustment operations when using the Multifunction Flexi Pad control block.

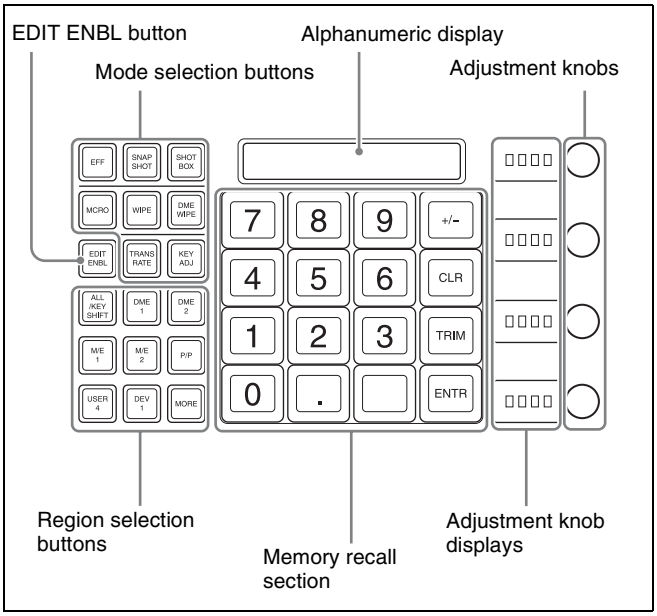

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 396)*.

Selecting the switcher bank and keyer

Before carrying out key adjustment, first select the key adjust mode, then select the switcher bank and keyer. For example, to adjust key 1 on M/E-1, proceed as follows.

1 In the Multifunction Flexi Pad control block mode selection buttons, press [KEYADJ].

2 Press the [M/E 1] region selection button.

3 Press the [KEY SHIFT] button, turning it off.

4 In the memory recall section, press the [KEY1] button.


Notes

To select keys 5 to 8, in step **3** press [KEY SHIFT], turning it on, then press one of buttons [KEY5] to [KEY8] in the memory recall section to select the key.


The button displays in the memory recall section now appear as shown in the following illustration.

Pressing the [PAGE 1/4] > [PAGE 2/4] > [PAGE 3/4] buttons further changes the display as follows, then pressing [PAGE 4/4] returns to the original display shown in the illustration.


[PAGE 1/4]

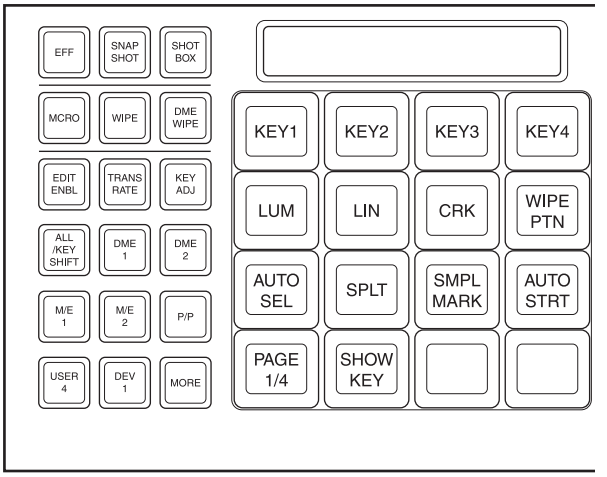


[PAGE 2/4]

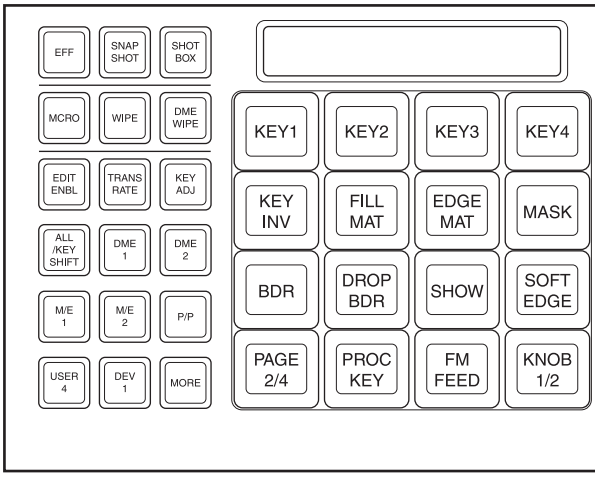

[PAGE 3/4]

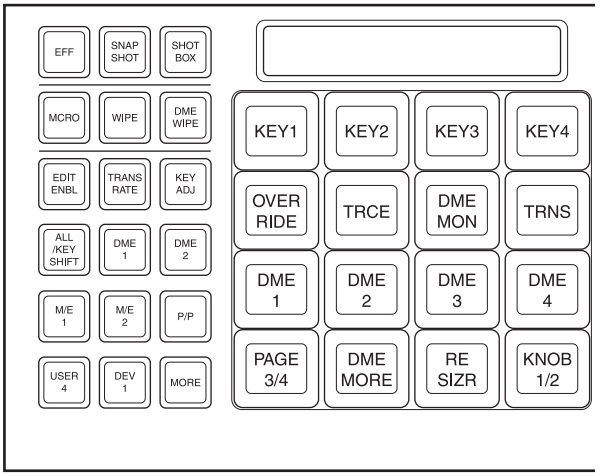

[PAGE 4/4]

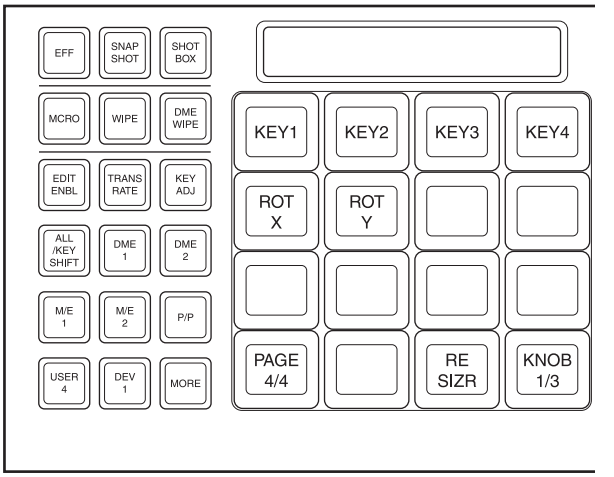

With these buttons in the memory recall section, you can carry out the following key adjustment.

Selecting the key type

[LUM] button: Selects a luminance key.
[LIN] button: Selects a linear key.
[CRK] button: Selects a chroma key.
[WIPE PTN] button: Selects a key wipe pattern key.

Adjust the parameters for each type with the adjustment knobs. For details of the parameters, see the following sections.

Luminance key: "When the [LUM] or [LIN] button is lit green" *(page 143)*
Linear key: "When the [LUM] or [LIN] button is lit green" *(page 143)*
Chroma key: "When the [CRK] button is lit green" *(page 143)*
Key wipe pattern key: "When the [PTN] button is lit green" *(page 143)*

Selecting the key source

[AUTO SEL] button: The signal assigned as a pair with the key fill bus signal for the key row button in the cross-point control block is automatically selected.
[SPLT] button: Select a different signal manually. To make the selection, hold down this button, and press the button assigned to the signal you want as key source in the cross-point control block.

You can also use the same signal as the key fill selected on the key fill bus as key source (SELF). Press the [AUTO SEL] button and [SPLT] button simultaneously so that both are off, to select the SELF mode.

Setting auto chroma key

[SMPL MARK] button: Toggles the sample mark display on and off. When on, the monitor screen shows the foreground video and a white box sample mark.

[AUTO STRT] button: Automatically adjusts the chroma key. When the [SMPL MARK] button is off, pressing this does not carry out automatic chroma key adjustment.

You can adjust the display position and size of the sample mark with the adjustment knobs.

For details of these parameters, see "Making auto chroma key adjustments" (page 132).

Setting the show key function

[SHOW KEY] button: When this is pressed, the key source signal to which key processing has been applied is output from the specified output port (show key mode).

For details, see "Using the show key function" (page 148).

Setting the resizer function

[RESIZR] button: Enables and disables the resizer function.

The parameters that can be adjusted with the adjustment knobs are on three pages; to access the second page or third page, press the [KNOB 1/3] or [KNOB 2/3] button.

For details of the parameters, see "Menu operations for key shrinking, magnification, rotation and movement" (page 152).

If you press this button at the same time as any of the [KEY1] to [KEY4] buttons, you can switch the trackball and joystick to the resizer setting mode.

[ROT X] button: When this is set to On, you can rotate the key around on the X-axis.

[ROT Y] button: When this is set to On, you can rotate the key around on the Y-axis.

For the parameters adjustable with the adjustment knobs, see step 4 in "Setting rotation of the resizer" (page 159).

Inverting the sense of the key source

[KEY INV] button: When this is set to On, the sense of the key source is inverted.

Selecting the key fill signal

[FILL MAT] button: When this is On, the signal generated by the dedicated color matte generator is selected, and when it is Off, the signal selected on the key 1 fill bus is selected.

For parameters that can be adjusted with the adjustment knobs, see "Selecting key fill and key source" (page 128).

Selecting the key edge signal

[EDGE MAT] button: When this is On, the signal generated by the dedicated color matte generator is selected, and when it is Off, the signal selected on the utility bus is selected.

*For parameters that can be adjusted with the adjustment knobs, see step **4** in "Key Edge Modifications" (page 135).*

Selecting the mask source

[MASK] button: Selects the mask source (box or pattern generated by dedicated generator) to be selected in the Main Mask menu for each M/E bank.

The parameters that can be adjusted with the adjustment knobs are different for a box or a pattern.

The box parameters are on two pages; to access the second page, press the [KNOB 1/2] button.

*For details, see step **4** in "Using the main mask" (page 138).*

Applying modifiers to the key edge

[BDR] button: Applies a border to the edge.

[DROP BDR] button: Applies a drop border to the edge.

[SHDW] button: Applies a shadow to the edge.

For parameters that can be adjusted with the adjustment knobs, see "Key Edge Modifications" (page 134).

Setting the degree of edge softening

[SOFT EDGE] button: Softens the key edge.

*For parameters that can be adjusted with the adjustment knobs, see step **7** in "Key Edge Modifications" (page 135).*

Enabling the set key to be used on the AUX bus

[PROC KEY] button: This enables the keyer key fill/key source signal to be subjected to key processing, then used as a reentry signal by selection on the AUX bus.

For details, see "Using an external processed key" (page 148).

Sending a signal subjected to key processing to frame memory

[FM FEED] button: Press this to assign the key fill/key source signal processed on the currently selected keyer to frame memory source 1 or 2.

For details, see "Using a frame memory feed" (page 148).

Using a DME currently used on another keyer

[OVERRIDE] button: When one DME channel is in use, holding down this button and pressing a DME channel button ([DME1] to [DME8]) allows you to forcibly select this channel. The button for the selected DME channel lights green.

Recalling the keyer using the DME channel

[TRCE] button: Holding down this button, press the selection button for the DME channel already assigned to another keyer or transition, to switch the keyer or transition to which the DME channel is assigned to the currently selected state.

Monitoring DME output

[DME MON] button: Holding down this button and pressing the selection button for a DME channel ([DME1] to [DME8]) allows you to monitor the signal for this channel as a reentry signal to DME MON V/K. However, it is first necessary to assign this channel on the DME to the delegation (keyer or transition) to be monitored.

Selecting the DME channel

[DME1] to [DME8] buttons: Press one of these to select the corresponding DME channel. The number of valid buttons depends on the number of DME channels in use.

[DME MORE] button: If there are more than four DME channels in use, use this to change the DME channel selection buttons displayed.

Returning the key adjustment values to their defaults

Holding down a key type button ([LUM], [LIN], [CRK], or [WIPE PTN]) recalls the key default values.

Key modify clear

When the [KEY ADJ] button is held down, holding down the region selection button for the selected region together returns all the key settings of the region to the initial status settings.
When the [KEY ADJ] button is held down, holding down the button for the selected key together returns the key settings to the initial status settings.

For details of the initial status, see "Saving User-Defined Settings" in Chapter 18 (Volume 2).

Resizer

Resizer allows you to apply DME-like effects such as image shrinking, magnification and movement, rotation as well as change of the aspect ratio, to the processed key. The following functions are available.

- Two-dimensional transformations of keys *(page 152)*
- Key rotation around the X- or Y-axis
- Resizer interpolation settings *(page 155)*
- Resizer crop/border settings *(page 155)*
- Resizer effect settings *(page 156)*
  (wide key border, drop shadow, edge enhance, mosaic, defocus, mask)

Notes

- The image of the key manipulated by resizer has a one-frame delay.
- Some effects of resizer are different from what you would expect of DME effects.

Restrictions on the use of effects

There are restrictions on combined use of resizer effects themselves and that with DME wipes.

For details, see "Impossibility of simultaneous use within the same keyer" (page 159).

Relation between resizer and other effects

You cannot apply DME effects to a key for which the resizer function is enabled. When one of the three functions – resizer, DME wipe and DME effects – is enabled, the other two are disabled.

Two-Dimensional Transformations and Rotation of Keys

Notes

When the screen aspect ratio is 4:3 in HD format, when the resizer is used to shrink a video image, this is applied to the 16:9 screen including the added video on the left and right sides. Use the crop function as required to extract the 4:3 image.

Menu operations for key shrinking, magnification, rotation and movement

For example, to shrink, magnify, rotate or move key 1 of the M/E-1 bank, use the following procedure.

1 In the M/E-1 >Key1 >Processed Key/Resizer menu, press [Resizer], turning it on.

2 Adjust the following parameters with the knobs.

Parameter group [1/2]


Knob	Parameter	Adjustment	Setting values	
1	Location X	Move key horizontally	HD	–99.9999 to +99.9999
			SD 4:3	–33.3333 to +33.3333
			SD 16:9	–24.9999 to +24.9999
2	Location Y	Move key vertically	HD	–99.9999 to +99.9999
			SD 4:3	–33.3333 to +33.3333
			SD 16:9	–24.9999 to +24.9999
3	Size	Magnify or shrink key	0.0000 to 99.9999	
4 a)	Rotation X	Rotate key horizontally	–99.9999 to +99.9999	
4 b)	Rotation Y	Rotate key vertically	–99.9999 + 99.9999	
5	Perspective	Change perspective	0.0000 to 1.0000	

a) [X] is turned on in the <Rotation> group of the Rotation menu.
b) [Y] is turned on in the <Rotation> group of the Rotation menu.

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Aspect X	Change aspect ratio horizontally	0.0000 to 99.9999
2	Aspect Y	Change aspect ratio vertically	0.0000 to 99.9999
3	Aspect Ratio	Change aspect ratio horizontally and vertically at a time	0.0000 to 2.0000

Key control block operations for key shrinking, magnification, rotation and movement

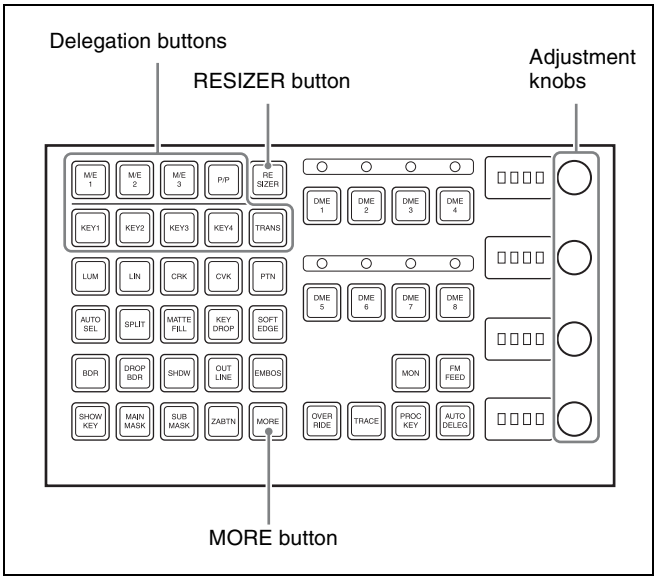

1 Use the delegation buttons to select the key to which you want to apply a resizer function.

2 Press the [RESIZER] button, turning it on.

3 Adjust the following parameters with the knobs.
To switch between displaying parameter group 1/2 and 2/2, press the [MORE] button.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values	
1	X	Move key horizontally	HD	–99 to +99
			SD 4:3	–33 to +33
			SD 16:9	–24 to +24
2	Y	Move key vertically	HD	–99 to +99
			SD 4:3	–33 to +33
			SD 16:9	–24 to +24
3	S	Magnify or shrink key	0.0 to 99	

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	X	Change aspect ratio horizontally	0.0 to 99

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
2	Y	Change aspect ratio vertically	0.0 to 99
3	R	Change aspect ratio horizontally and vertically at a time	0.0 to 2.0

4 To specify the direction of rotation, press the [ROT X] or [ROT Y] button, turning it on.

Notes

To enable the [ROT X] and [ROT Y] buttons, it is necessary to assign functions in advance.

For details, see "Assigning Functions to Key Control Block Buttons" in Chapter 19 (Volume 2).

5 Turn the knobs to adjust the following parameters.


• When [ROT X] is lit

Knob	Parameter	Adjustment	Setting values
1	Rotation X	Rotate key horizontally	–99 to +99
4	Perspective	Change perspective	0 to 99

• When [ROT Y] is lit

Knob	Parameter	Adjustment	Setting values
2	Rotation Y	Rotate key vertically	–99 to +99
4	Perspective	Change perspective	0 to 99

Device control block operations for key shrinking, magnification, rotation and movement

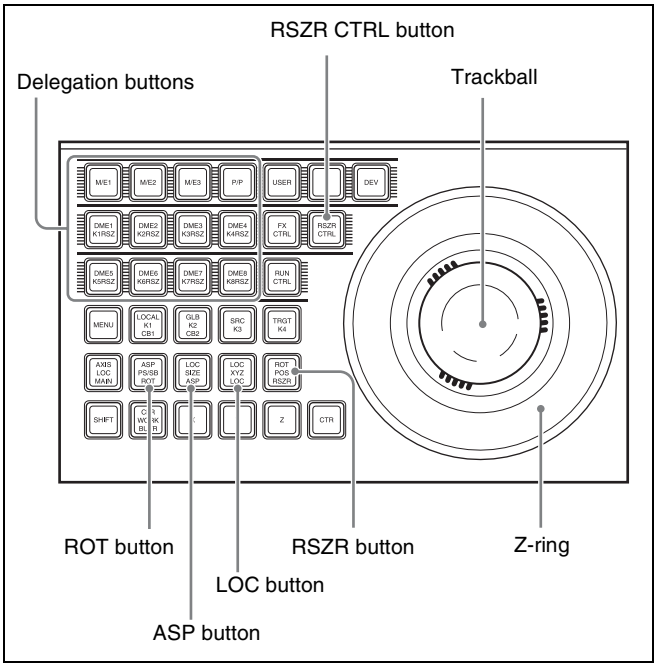

1 Press the [RSZR CTRL] button, turning it on.

2 Press the delegation button to select the key.

3 Press the [RSZR] button, turning it on.

4
- To change the aspect ratio, turn on the [ASP] button.
- To shrink, magnify, or move the key, turn on the [LOC] button.
- To rotate the key, turn on the [ROT] button. To specify the direction of rotation, press [X] or [Y]. To adjust perspective, press [Z].

Hold these buttons down while carrying out the operation of step **5** to enable fine adjustment (fine mode).

5 Use the trackball and joystick for the operation.

*For details of parameters, see steps **3** and **5** of "Key control block operations for key shrinking, magnification, rotation and movement" (page 153).*

Entering parameters

This operation is the same as DME three-dimensional parameter input.

For details, see "Entering Three-Dimensional Parameter Values" (page 286).

Resetting parameters

This operation is the same as DME three-dimensional parameter resetting.

For details, see "Entering Three-Dimensional Parameter Values" (page 286).

Clearing resizer effects

To clear two-dimensional transform and rotation parameters only and set the initial state

In the device control block, press the [CLR WORK BUFR] button in the operation buttons.

To clear all resizer parameters, and set the initial state

In the device control block, press the [CLR WORK BUFR] button in the operation buttons, twice in rapid succession.

For the initial state, you can select either the factory default settings or user settings.

For details of how to make this selection, see "Selecting the State After Powering On (Start Up Menu)" in Chapter 18 (Volume 2).

Resizer Interpolation Settings

For example, to make the interpolation settings for key 1 of the M/E-1 bank, use the following procedure.

1. In the M/E-1 >Key1 >Processed Key/Resizer menu, press [Resizer], turning it on.
2. Press [Resizer Process].

   The Resizer Process menu appears.
3. In the <Video Field/Frame Mode> and other groups, make the interpolation settings.

   This operation is the same as when making the DME interpolation settings for MVS-8000A.

   For details, see "Interpolation Settings" (page 346).

   However, the following points are different from the operation for MVE-8000A.
   - [Interpolation Mode] can be set for any type of signal formats.
   - The anti-moiré filter cannot be set.

Resizer Crop/Border Settings

Making a crop setting for a key for which resizer is on

For example, to make the crop settings for key 1 of the M/E-1 bank, use the following procedure.

1. In the M/E-1 >Key1 >Processed Key/Resizer menu, press [Resizer], turning it on.
2. Press [Border/Crop].

   The Border/Crop menu appears.
3. Press [Crop], turning it on.
4. Set the parameters.

   These settings are the same as those for crop of DME. For details, see "Crop Settings" (page 290).

Notes

If mosaic or defocus is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the crop is disabled.

Applying a border to a key for which resizer is on

For example, to add the border for key 1 of the M/E-1 bank, use the following procedure.

1. In the M/E-1 >Key1 >Processed Key/Resizer menu, press [Resizer], turning it on.
2. Press [Border/Crop].

   The Border/Crop menu appears.
3. Press [Border], turning it on.
4. Set the parameters.

   The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

   SD format

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust width of left and right borders	0.00 to 4.00

Knob	Parameter	Adjustment	Setting values
2	V	Simultaneously adjust width of top and bottom borders	0.00 to 3.00 (4:3) 0.00 to 2.25 (16:9)
3	All	Simultaneously adjust width of all four borders	Value of H shown
4	Density	Density of the borders	0.00 to 100.00

HD format

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust width of left and right borders	0.00 to 12.00 (4:3) 0.00 to 16.00 (16:9)
2	V	Simultaneously adjust width of top and bottom borders	0.00 to 9.00
3	All	Simultaneously adjust width of all four borders	Value of H shown
4	Density	Density of the borders	0.00 to 100.00

To apply color to a border

1 In the <Border Mode> group of the Border/Crop menu, press [Flat Color].

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

To soften the inner edge of a border

1 In the Border/Crop menu, press [Border Soft].

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Inner Soft	Border inner softness	0.00 to 100.00

To apply a beveled light edge

1 In the <Border Mode> group of the Border/Crop menu, press [Beveled Light Edge].

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Top	Top edge	–100.00 to +100.00
2	Left	Left edge	–100.00 to +100.00
3	Right	Right edge	–100.00 to +100.00
4	Bottom	Bottom edge	–100.00 to +100.00
5	All	Four edges	Value of Left shown

3 Press [Border Soft].

4 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Inner Soft	Border inner softness	0.00 to 100.00
2	Bound Soft	Border boundary softness	0.00 to 100.00

To apply a beveled color edge

1 In the <Border Mode> group of the Border/Crop menu, press [Beveled Color Edge].

2 In the <Color Adjust> group, select the edges for adjustment among the [Top], [Left], [Right], and [Bottom] edges. To select all the four edges, press [All].

3 Set the color parameters.

For details, see "To apply color to a border" (page 156)

4 Press [Border Soft].

5 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Inner Soft	Border inner softness	0.00 to 100.00
2	Bound Soft	Border boundary softness	0.00 to 100.00


Applying Resizer Effects

For example, to apply effects to key 1 of the M/E-1 bank, use the following procedure.

1 In the M/E-1 >Key1 >Processed Key/Resizer menu, press [Resizer], turning it on.

2 Press [Enhanced Effect].

The Enhanced Effect menu appears.

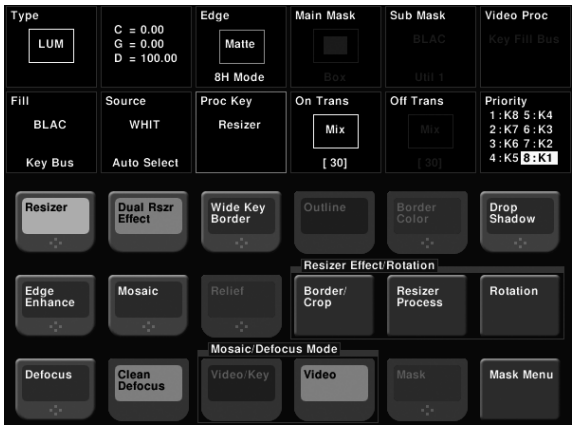

Applying a wide key border

1 In the M/E-1 >Key1 >Processed Key/Resizer >Enhanced Effect menu, press [Dual Rszr Effect], turning it on.

2 Press [Wide Key Border], turning it on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust border width of left and right edges	0.00 to 100.00
2	V	Simultaneously adjust border width of upper and lower edges	0.00 to 100.00
3	All	Simultaneously adjust border width of all four edges	Value of H shown
4	Soft [a)]	Softness of border	0.00 to 100.00
5	Density	Density of border	0.00 to 100.00

a) Shared with the drop shadow “Soft” value.

4 To add an outline, press [Outline], turning it on.

5 To adjust the border color, press [Border Color].

6 Set the color parameters.

For details, see “To apply color to a border” (page 156).

Applying a drop shadow

1 In the M/E-1 >Key1 >Processed Key/Resizer >Enhanced Effect menu, press [Dual Rszr Effect], turning it on.

2 Press [Drop Shadow], turning it on.

3 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

SD format

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position of shadow	–8.00 to +8.00
2	V	Vertical position of shadow	–6.00 to +6.00 (4:3) –4.50 to +4.50 (16:9)
3	Size	Shadow size	0.00 to 2.00
4	Soft [a)]	Softness of shadow	0.00 to 100.00
5	Density	Density of shadow	0.00 to 100.00

a) Shared with the wide key border “Soft” value.

HD format

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position of shadow	–24.00 to +24.00 (4:3) –32.00 to +32.00 (16:9)
2	V	Vertical position of shadow	–18.00 to +18.00
3	Size	Shadow size	0.00 to 2.00
4	Soft [a)]	Softness of shadow	0.00 to 100.00
5	Density	Density of shadow	0.00 to 100.00

a) Shared with the wide key border “Soft” value.

Edge enhancement

Adjusting the gain sharpens the image.

1 In the M/E-1 >Key1 >Processed Key/Resizer >Enhanced Effect menu, press [Edge Enhance], turning it on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal gain adjustment	0.00 to 100.00
2	V	Vertical gain adjustment	0.00 to 100.00
3	All	Both horizontal and vertical adjustment	H value is displayed

Applying a mosaic

1 In the M/E-1 >Key1 >Processed Key/Resizer >Enhanced Effect menu, press [Mosaic], turning it on.

2 Set the parameters.

This operation is the same as the DME mosaic setting. For more details, see "Mosaic Settings" (page 307).

3 In the < Mosaic/Defocus Mode > group, select the signal to which to apply the mosaic effect.

Video/Key: Video signal and key signal
Video: Video signal only

Notes

If mosaic is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the crop and mask are disabled.

To make the mosaic like a relief pattern

1 With [Mosaic] on, press [Relief], turning it on.

2 In addition to the mosaic parameters, set the following parameters.

Knob	Parameter	Adjustment	Setting values
3	Gain	Relief depth of mosaic cells	0.00 to 100.00
4	Angle	Light source direction	–8.00 to +8.00

Defocusing

1 In the M/E-1 >Key1 >Processed Key/Resizer >Enhanced Effect menu, press [Defocus], turning it on.

2 Set the parameters.

This operation is the same as the defocusing setting when using the DME with the DME dedicated interface (see page 303).

However, <Mosaic/Defocus Mode> appears in place of <Defocus Mode>.

Notes

If defocus is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the crop and mask are disabled.

Applying a mask to mosaic or defocus

1 In the M/E-1 >Key1 >Processed Key/Resizer >Enhanced Effect menu, press [Dual Rszr Effect], turning it on.

2 Press [Mask], turning it on.

This enables the mask function.
To make the mask settings, continue with steps **3** and following.

3 Press [Mask Menu].

The Mask menu appears.

4 In the <Mask Source> group, select either of [Box] and [Circle].

Box: Use a box pattern as the mask signal.
Circle: Use a circle pattern as the mask signal.

5 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows. The parameters are the same as for drop shadow.

For more details, see "Applying a drop shadow" (page 157), except that knobs 3 and 5 are as follows.

Knob	Parameter	Adjustment	Setting values
3	Size	Size	0.00 to 100.00
5	Aspect	Aspect ratio	–100.00 to +100.00

The rotation and inversion operations are the same as for a DME mask setting.

For more details, see "Mask Settings" (page 310).

Notes

- When a mask effect is applied to a border, the boundary becomes discontinuous, giving an unnatural effect. Avoid applying a mask to a border.
- If mosaic or defocus is enabled, and in the <Mosaic/Defocus Mode> group you select Video/Key, then the mask is disabled.

Restrictions on resizer effects

Restrictions on the use of effects

Of the resizer effects, using mask, drop shadow, or wide key border requires two units of hardware for the resizer function.
These are called “dual resizer effects”.
In a dual resizer effect, predetermined combinations, key 1 and key 2, key 3 and key 4, key 5 and key 6, key 7 and key 8 are used.
For example, if either of key 1 and key 2 has resizer set to On, the other key cannot be used for a dual resizer effect. The same restriction applies when using a resizer DME wipe in place of resizer.

Impossibility of simultaneous use within the same keyer

The following combinations of resizer effects cannot be simultaneously on.

- Mosaic and edge enhance
- Defocus and wide key border
- Mask and drop shadow
- Mask and wide key border

Setting rotation of the resizer

Notes

Either X or Y direction must be specified for rotation. You cannot make rotation by combining both directions.
When rotating key 1 of the M/E-1 bank, for example, use the following procedure.

1 Select M/E-1 >Key1 >Processed Key/Resizer menu, press [Resizer], turning it on.

2 Press [Rotation], turning it on.

The Rotation menu appears.

3 Press [X] or [Y] in the <Rotation> group to select the direction of rotation.

4 Turn the knobs to adjust the following parameters.

- When [X] is on

Knob	Parameter	Adjustment	Setting values
1	Rotation X	Rotate key horizontally	–99.0000 to +99.0000
4	Perspective	Change perspective	0.0000 to 99.9999

- When [Y] is on

Knob	Parameter	Adjustment	Setting values
2	Rotation Y	Rotate key vertically	–99.0000 to +99.0000
4	Perspective	Change perspective	0.0000 to 99.9999

Canceling Virtual Images


If an extreme degree of perspective is set for an image, the part of the image exceeding the virtual view point is displayed wrapped around on the monitor screen. You can press [Wrap Around], turning it on, to make a setting not to show the virtual images.

Key Snapshots

Key settings other than the key on/off status and the key priority can all be instantaneously saved in a dedicated register, for recall when required. A key snapshot comprises three values: a cross-point button number, key memory full mode, and independent key transition, and can be called in any combination.
There are four key snapshot registers for each keyer.

Key Snapshot Operations

Key snapshot operations are carried out in the independent key transition control block, downstream key control block or Multifunction Flexi Pad control block. Each keyer is provided with four dedicated key snapshot registers.

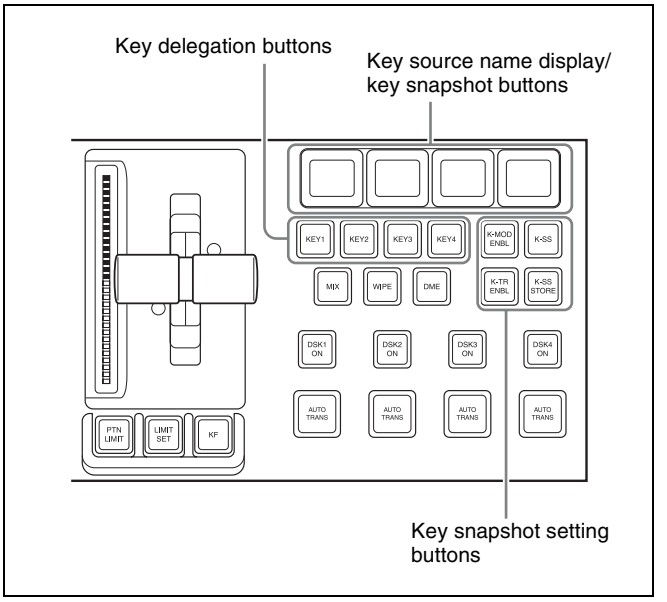

Independent key transition control block (standard type)

Notes

To select [Key5] to [Key8] or [DSK5] to [DSK8] in the independent key transition control block or downstream key control block, a previous assignment in the Setup menu is required *(see page 397)*.

Saving a key snapshot

For example, the following procedure saves the state of the M/E-1 key 1 settings.

1 In the M/E-1 independent key transition control block, press the key delegation button [KEY1], turning it on.

2 Press the [K-SS] button, turning it on.

The system switches to key snapshot mode, and the key source name display/key snapshot buttons show the status of registers 1 to 4 for key 1.
Off: Nothing is saved in the register.
Lit orange: Settings are saved in the register.
For a register holding a snapshot, the register name is shown as up to eight characters.

3 Hold down the [K-SS STORE] button, and press the key source name display/key snapshot button corresponding to the register in which you want to save the snapshot.

The key source name display/key snapshot button which you pressed lights yellow.

Notes

If you save a key snapshot in a register for which the button is lit orange or yellow, the existing contents of the register are overwritten.

Recalling a key snapshot

For example, the following procedure recalls the state of the M/E-1 key 1 settings.

1 In the M/E-1 independent key transition control block, press the key delegation button [KEY1], turning it on.

2 Press the [K-SS] button, turning it on.

3 Set the following buttons on or off, depending on the information you want to recall.
These buttons are not provided in the downstream key control block.

[K-MOD ENBL] button: When this is on, the key settings and key modifiers are recalled. When this is off, they are not recalled.
[K-TR ENBL] button: When this is on, the independent key transition settings are recalled. When this is off, they are not recalled.
If both buttons are off, the key memory function is enabled and only the saved selection of key fill and key source signals is recalled.

4 Press the key source name display/key snapshot button corresponding to the register you want to recall.

The button you pressed lights yellow, and this recalls the key snapshot.
To cancel a recall carried out in the downstream key control block, press the [UNDO] button in the downstream key control block.

Key snapshot operation on the Multifunction Flexi Pad control block


By default, the [KEY SS] key snapshot mode selection button does not appear in the Multifunction Flexi Pad control block. To carry out key snapshot saving and recall in this control block, it is first necessary in the Engineering Setup >Panel >Config >Link/Program Button >Multi Function >Mode Sel Assign menu to assign the Key Snapshot mode to a mode selection button.

To save a key snapshot

For example, to save a key snapshot for key 1 of M/E-1, select M/E-1 and key1, then use the following procedure.

1 Press the [K SS] button.

The button displays in the memory recall section change as shown in the following illustration.

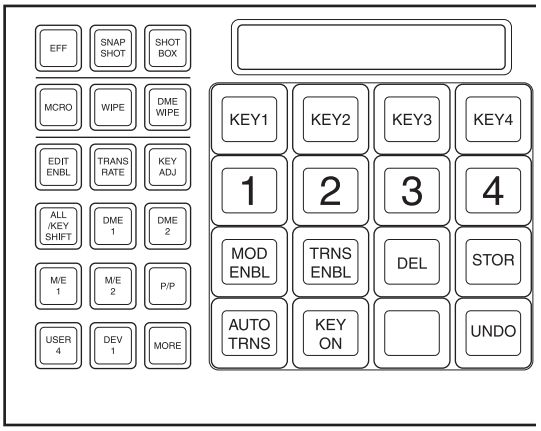

2 In the memory recall section, hold down the [STOR] button, and press the button (any of [1] to [4]) for the register in which you want to save the key snapshot.

To recall a key snapshot

For example, to recall a key snapshot for M/E-1 key 1 saved in register 1, with the M/E-1 region and key 1 selected, proceed as follows.

1 Press the [KEY SS] button.

2 According to the information you want to recall, set the following buttons On/Off.

[MOD ENBL] button: Recall the key adjustment values and key modifier settings.
[TRNS ENBL] button: Recall independent key transition settings.
If both are Off, then key memory is enabled, and just the saved key fill and key source signal selections are recalled.

3 Press button [1] for the register you want to recall.

The [1] button lights yellow, and the key snapshot is recalled.
To cancel the recall operation, press the [UNDO] button.

To delete a key snapshot

For example, to delete a key snapshot for M/E-1 key 1 saved in register 1, with the M/E-1 and key 1 region selected, proceed as follows.

1 Press the [KEY SS] button.

2 Holding down the [DEL] button, press the button [1] for the register in which is saved the key snapshot you want to delete.

To carry out an auto transition execution during key snapshot operation

Press the [AUTO TRNS] button.

Instant key insertion/removal


Press the [KEY ON] button.
To remove the key, while the key is inserted press the [KEY ON] button.

Key Snapshot Operations Using a Simple Transition Module

When using a simple transition module, the key snapshots hold the settings for key 3 and key 4. However, each key control block can be assigned to any key in setup.

For details, see "Assigning a Function to the Independent Key Transition Control Block (Simple Type)" in Chapter 19 (Volume 2).

You can carry out key snapshot operations in the independent key transition control block (simple type) and Flexi Pad control block (simple type).
There are four dedicated key snapshot registers for each of keys 3 and 4.

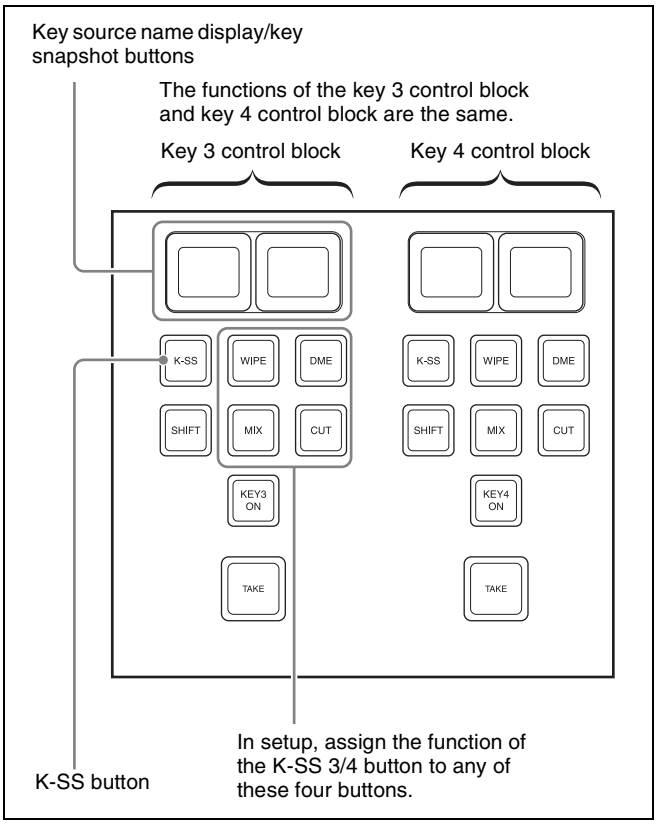

Independent key transition control block (simple type)

Saving a key snapshot

For example, to save the settings of M/E-1 key 3, use the following procedure.

1 In the M/E-1 independent key transition control block, press the [K-SS] button in the key 3 control block, turning it on.

This switches to key snapshot mode, and the key source name display/key snapshot button shows the state of registers 1 and 2 for key 3.
Pressing the [K-SS 3/4] button shows the state of registers 3 and 4 for key 3.
Off: Nothing is saved in the register.
Lit orange: Settings are saved in the register.
For a register holding a snapshot, the register name is shown as up to eight characters.

2 In the Flexi Pad control block, hold down the [SNAPSHOT] button and press the key source name display/key snapshot button corresponding to the register in which you want to save the snapshot.

The key source name display/key snapshot button which you pressed lights yellow.

Notes

If you save a key snapshot in a register for which the button is lit orange or yellow, the existing contents of the register are overwritten.

Recalling a key snapshot

For example, the following procedure recalls the state of the M/E-1 key 3 settings.

1 In the M/E-1 independent key transition control block, press the [K-SS] button in the key 3 control block, turning it on.

2 Press the key source name display/key snapshot button corresponding to the register you want to recall.

Press the [K-SS 3/4] button as required, to switch between displaying the key 3 registers 1 and 2 or registers 3 and 4.
The button you pressed lights yellow, and this recalls the key settings (excluding the key insertion state (on/off) and key priority).

Chapter 5 Wipes

Overview

A wipe is a transition from the current video stream to a new video stream, using a wipe pattern.
Changing the background by means of a wipe is referred to as a "background wipe," and inserting or deleting a key with a wipe is termed a "key wipe."
There are two types of wipe: those that can be selected in a common transition, and those that can be selected in an independent key transition *(see page 175)*.

Types of Wipe Pattern

The patterns that can be used for a wipe are divided into a number of groups, as follows. Note that only the standard wipe patterns can be used for an independent key transition.

For wipe patterns, see "Wipe Pattern List" in Appendix (page 357).

Standard wipe patterns
Patterns consisting of straight lines vertically, horizontally, or diagonally, and circular patterns.

Enhanced wipes
More complex shapes such as hearts, stars, and round corners.

Rotary wipes
These patterns involve rotation of the image about a point.

Mosaic wipe pattern
This divides the image into small tiles.

Random and diamond dust wipe patterns
These patterns consist of small random tiles, or fine particles.

Basic Procedure for Wipe Settings

You carry out wipe setting operations principally using the Wipe menu for each of the M/E-1 to M/E-3 and PGM/PST banks.
This section describes the basic procedures for wipe settings, taking the M/E-1 >Wipe menu as an example.

Wipe Settings Menu

Accessing the wipe settings menu

To access the M/E-1 >Wipe menu, use either of the following operations.

- In the menu control block, select the top menu selection button [M/E 1], and press VF5 'Wipe.'

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 396)*.

- In the transition control block of the M/E-1 bank, press the transition type selection button [WIPE] twice in rapid succession.

Wipe Pattern Selection

Selecting a wipe pattern by a menu operation

1 In the M/E-1 >Wipe menu, select HF1 'Main Pattern.'

The Main Pattern menu appears.

2 Select the wipe pattern group with the pattern group selection button.

Standard: standard wipes
Enhanced: enhanced wipes
Rotary: rotary wipes
Mosaic1 to Mosaic3: mosaic wipes
Random/Dust: random/diamond dust wipes
The patterns from the selected pattern group appear on the screen.

For details of wipe patterns, see "Types of Wipe Pattern" (page 163) and "Wipe Pattern List" (page 357) in Appendix.

3 Press the button to select the desired pattern.

4 The parameters change according to the selected pattern, and you can adjust the pattern.

When a polygon wipe is selected (pattern number 49)

Knob	Parameter	Adjustment	Setting values
1	No	Number of points	3 to 64
2	Star Rate	Angularity of star	–100.00 to +100.00 a)

a) A value of –100.00 completely removes the star "rays," leaving a circle; at +100.00 the "rays" are at their sharpest.

When a mosaic wipe is selected (pattern numbers 200 to 203, 206 to 213, 224 to 247, 250 to 257, 260 to 269)

Knob	Parameter	Adjustment	Setting values
1	H Tile No	Number of tiles horizontally	2 to 36
2	V Tile No	Number of tiles vertically	2 to 18

When a karaoke wipe is selected (pattern numbers 220 to 223)

Knob	Parameter	Adjustment	Setting values
1	Start	Position of start tile	–100.00 to +100.00 a)
2	Row No	Number of rows of tiles	1 to 36
3	Phase	Delay for next row	–100.00 to +100.00 b)

a) At –100.00 tiles appear from the top (or left edge) of the screen; at +100.00 from the bottom (or right edge) of the screen.
b) At –100.00 all rows appear simultaneously; at +100.00 until one row of tiles is completely displayed, the next row does not start to appear.

When a random wipe is selected (pattern number 273)

Knob	Parameter	Adjustment	Setting values
1	H Size	Tile width	0.00 to 100.00
2	V Size	Tile height	0.00 to 100.00
3	Volatility	Rate of tile generation	0.00 to 100.00

When a diamond dust wipe is selected (pattern number 274)

Knob	Parameter	Adjustment	Setting values
1	H Size	Particle width	0.00 to 100.00
2	V Size	Particle height	0.00 to 100.00
3	Flash Rate	Rate of generation of particles	0.00 to 100.00

Notes

When Flash Rate is set to 0.00, you cannot change the pattern. In this state, adjusting H Size or V Size has no effect on the pattern.

For details of a pattern mix, see the next section.

For details of applying pattern modifiers, see "Setting Wipe Modifiers" (page 166).

Pattern Mix

You can create a new pattern by combining two selected patterns (main and "sub").

Notes

It is not possible to apply a pattern mix to an independent key transition.


Types of pattern mix

There are four ways in which patterns can be combined in a pattern mix, as follows.


Mix: The effect of the sub pattern is applied to the main pattern, modifying the outline or nature of the main pattern.

Positive NAM (+Nam): Creates a pattern with an outline which contains all points within the outlines of either of the main pattern and the sub pattern.

Negative NAM (–Nam): Creates a pattern with an outline which contains all points within the outlines of both of the main pattern and the sub pattern.

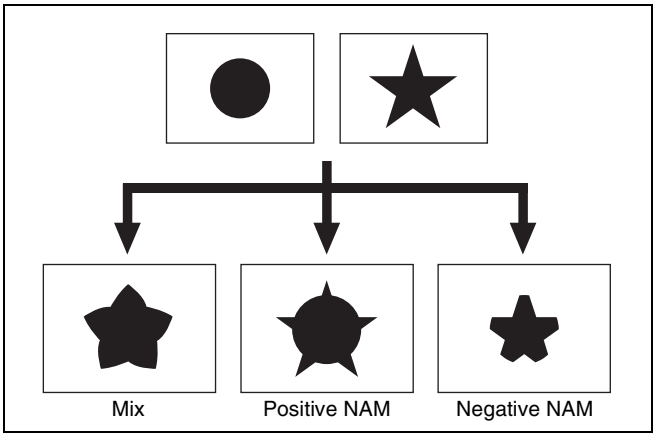

Morphing: As the transition progresses, the pattern morphs from the main pattern, through the "mix" combination, to the sub pattern.

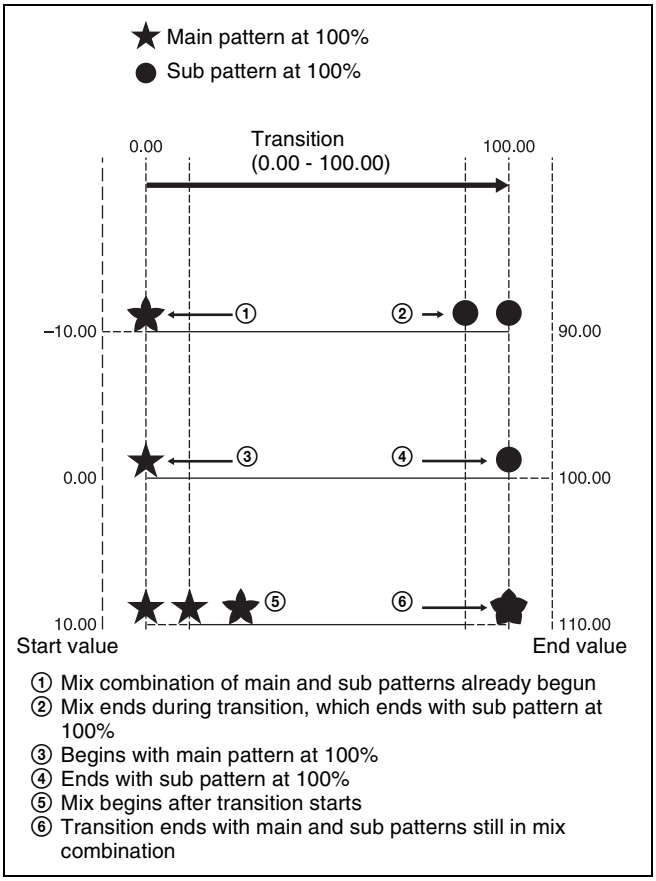

- Parameter settings
  Start: Point in the course of the transition at which the main pattern is at 100%
  End: Point in the course of the transition at which the sub pattern is at 100%
- A value of 0.00 corresponds to the beginning of the transition, and a value of 100.00 to the end of the transition.
- A negative Start value signifies that the main and sub patterns are already combined when the transition starts.
- An End value of 100.00 or more signifies that the main and sub patterns are still combined when the transition complete.
- If the Start and End values are the same, the main and sub patterns are interchanged instantaneously at the corresponding point in the transition.
- If End is less than Start, as the transition proceeds, it changes from the sub pattern to the main pattern.

Dust mix

You can apply the effect of a diamond dust wipe to a selected pattern. You can also apply the diamond dust wipe effect to the pattern resulting from a pattern mix *(see page 166)*.
When the pattern mix function is off, turning dust mix on results in the main pattern and the diamond dust pattern being mixed. This state is the same as a pattern mix when the diamond dust pattern is selected for the sub pattern.

Main and sub modifier link function

When carrying out a pattern mix, it is possible to link the modifier settings for the main pattern and sub pattern. There are two modes for this function.

FULL LINK (fully linked) mode

In this mode, all modifier settings are the same for the main pattern and sub pattern.
Changing the modifier settings for one pattern automatically changes the settings for the other.

SEMI LINK (semi-linked) mode

Only the parameter settings of the modifiers are linked. The modifier on/off settings are not linked. When the parameter values for the modifiers of the main pattern and sub pattern are different, then after this link mode is selected, changing the value of a parameter for one pattern changes the value of the parameter for the other pattern to maintain the same difference between the two.

Notes

When carrying out a wipe transition using a pattern mix, it is recommended that you set the modifier link function to FULL LINK mode.
If the link function is off, or SEMI LINK mode is selected, the desired effect may not be obtained at the start or end of the transition.

Combining two patterns

Select a main pattern in the Main Pattern menu, then use the following procedure.

1 In the M/E-1 >Wipe menu, select HF3 'Sub Pattern.'

The Sub Pattern menu appears.

2 In the same way as for the main pattern, select the sub pattern.

The patterns that can be selected for the sub pattern depend on the pattern selected for the main pattern *(see the following table)*.

Yes: Combination possible **No:** Combination not possible

Main pattern	Sub pattern				
	Standard	Enhanced	Rotary	Mosaic	Random/ diamond dust
Standard	Yes	Yes	No	Yes	Yes
Enhanced	Yes	Yes	No	Yes	Yes
Rotary	No	No	No	No	No
Mosaic	Yes	Yes	No	No	Yes
Random/ diamond dust	Yes	Yes	No	Yes	No

3 Select HF2 'Pattern Mix.'

The Pattern Mix menu appears.

4 In the <Pattern Mix> group, select the type of pattern mix *(see page 164)*.

Mix: mix
+Nam: positive Nam
–Nam: negative Nam
Morphing: morphing

5 Depending on the selection in step **4**, set the following parameters.

When mix, positive Nam, or negative Nam is selected

Knob	Parameter	Adjustment	Setting values
1	Mix Ratio	Proportion of sub pattern to the main pattern	0.00 to 100.00

When morphing *(see page 165)* is selected

Knob	Parameter	Adjustment	Setting values
2	Start	Point in transition at which main pattern is at 100%	–50.00 to +150.00
3	End	Point in transition at which sub pattern is at 100%	–50.00 to +150.00

6 In the <Main/Sub Link> group, make the main/sub modifier link function settings *(see page 165)*.

Full: fully linked mode
Semi: semi-linked mode

Applying the effect of a diamond dust wipe to the selected pattern (Dust mix)

1 In the Pattern Mix menu, press [Dust Mix], turning it on.

2 Set the following parameters as required.

Knob	Parameter	Adjustment	Setting values
1	Mix Ratio	Proportion of diamond dust pattern in mix	0.00 to 100.00
2	H Size	Particle width	0.00 to 100.00
3	V Size	Particle height	0.00 to 100.00
4	Flash Rate	Rate of generation of particles	0.00 to 100.00

You can also apply the dust mix function to the pattern generated by a pattern mix.

Notes

When a random/diamond dust wipe (pattern numbers 270-274) is selected, the dust mix function is not available.

Setting Wipe Modifiers

You can apply various modifiers to the wipe pattern: setting the wipe direction, pattern position, and so on. Note that the available modifiers may depend on the pattern you are using *(see page 174)*.

Main pattern and sub pattern modifiers

You can make independent settings of the modifiers for the main pattern and sub pattern.

- To set the modifiers for the main pattern, in the M/E-1 >Wipe menu, select HF5 'Main Modify,' and make the settings in the Main Modify menu.
- To set the modifiers for the sub pattern, select HF6 'Sub Modify,' and make the settings in the Sub Modify menu.

Operations in the Main Modify menu and Sub Modify menu are the same.

Independently set modifiers for the main pattern and sub pattern


- Positioner
- Rotation
- Aspect ratio
- Pattern replication (MULTI)
- Pairing

• Modulation
• Spring
• Spiral

The following sections show examples of modifying the main pattern.

Specifying the wipe direction (Direction)

You can specify the direction of the wipe: the regular direction is referred to as “normal,” and the other direction as “reverse.” You can also select alternating directions each time the transition is completed (normal/reverse mode).

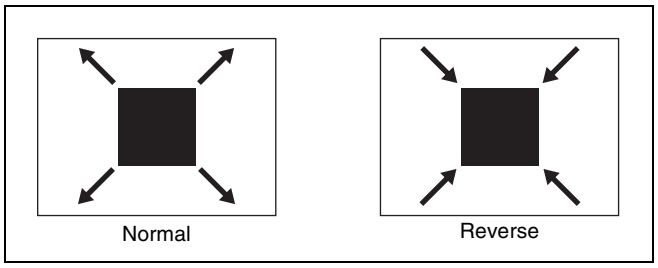

To specify the wipe direction in a menu

1 In the M/E-1 >Wipe menu, select HF4 ‘Edge/Direction.’

The Edge/Direction menu appears.

2 In the <Direction> group, specify the wipe direction.


Normal: regular direction
Normal/Reverse: alternate between regular and reverse for each transition
Reverse: reverse direction to normal

To specify the wipe direction with a button in the transition control block

In the transition control block of each of the M/E-1 to M/E-3 and PGM/PST banks, press the following direction selection buttons.
NORM: Normal
NORM/REV: Normal/reverse
REV: Reverse

Splitting the wipe pattern (Split)

This splits the pattern, making the parts of the wipe move in opposite directions.

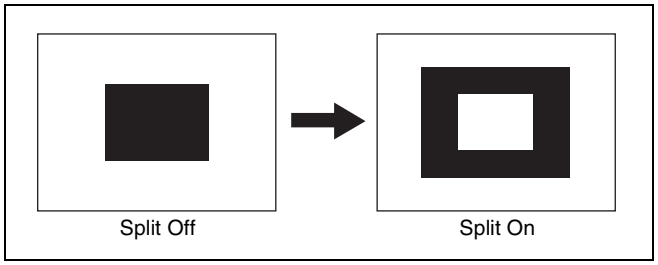

The parameter Split No specifies the number of splits. The parameter Spacing specifies the spacing between adjacent patterns.

1 In the M/E-1 >Wipe menu, select HF4 ‘Edge/Direction.’

The Edge/Direction menu appears.


2 Press [Split], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Split No	Number of splits	1 to 4 (integer)
2	Spacing	Spacing between adjacent patterns	0.00 to 100.00

Modifying the wipe pattern edge (Edge)

You can apply a border to the pattern, soften the edges, or soften the applied border.

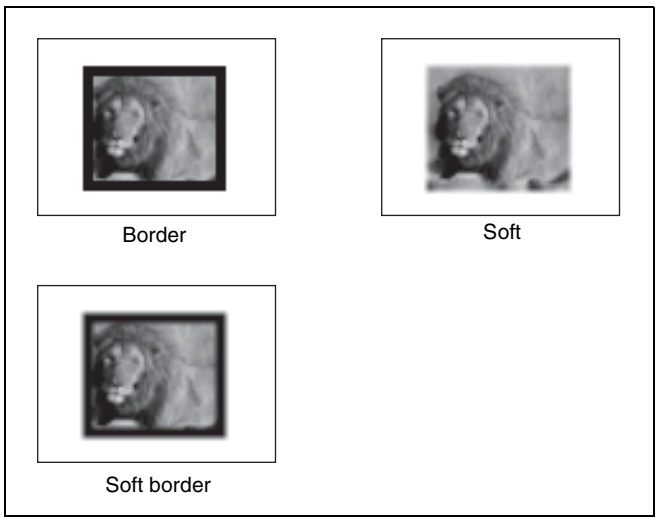

Border: You can adjust the border width.
Soft: You can adjust the edge softness.
Soft border: You can adjust the border width, and the softness of the inner and outer edges of the border.

When a border or soft border is selected, the signal filling the border is called edge fill. For the edge fill, you can use a matte generated by the dedicated color matte generator, or the signal selected on the utility 2 bus. A matte can include color 1 and color 2, and a combination of the two colors (a “color mix”).

1 In the M/E-1 >Wipe menu, select HF4 ‘Edge/Direction.’

The Edge/Direction menu appears.

2 In the <Edge> group, select the edge type.

Border: border
Soft: soft edge
Soft Border: soft border

3 Set the parameters according to the selection in step **2**.

When border is selected

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00

When soft edge is selected

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0.00 to 100.00

When soft border is selected

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00
2	Inner Soft	Border inner softness	0.00 to 100.00
3	Outer Soft	Border outer softness	0.00 to 100.00

4 When you selected border or soft border, select the edge fill signal in the <Edge Fill> group.

Utility 2 Bus: signal selected on the utility 2 bus
Matte: signal from the dedicated color matte generator

5 Depending on the operation in step **4**, carry out the following operation.

When 'Utility 2 Bus' is selected: Hold down the [UTIL] button in the cross-point control block, and select the signal on the background B bus. While the [UTIL] button is held down, the background B bus changes to the utility 2 bus.

Notes

To enable the [UTIL] button, its operation mode must be set to [Hold] beforehand.

For details, see "Setting the Button Operation Mode" in Chapter 19 (Volume 2).

When 'Matte' is selected: In the same Edge/Direction menu, press [Matte Adjust] to display the Matte Adjust menu, then adjust the single-color or two-color combination color matte. Select whether to use a single-color matte or a two-color combination in the <Edge Matte> group.
Flat Color: Adjust color 1 with the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

When you select [Mix Color] for a two-color combination, see the next paragraph.

Carrying out a color mix for the edge fill matte

When you selected [Matte] for the border or soft border edge fill, you can combine color 1 and color 2.
For the combination, you can use not only a normal wipe generator pattern, but also the dedicated color mix pattern.

1 In the <Edge Fill> group of the Edge/Direction menu, select [Matte], and press [Matte Adjust].

The Matte Adjust menu appears.

2 In the <Edge Matte> group, select [Mix Color], turning it on.

3 In the <Mix Pattern> group, make one of the following selections.

Wipe: Use the wipe pattern selected for the transition.
Pattern: Use the dedicated pattern.

4 Depending on the selection in step **3**, set the following parameters.

When Wipe is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

When Pattern is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00
3	Pattern	Pattern number	1 to 24 a)

a) The patterns are the same as for a standard wipe. *See "Wipe Pattern List" (page 357) in Appendix.*

If you selected Pattern, you can also carry out the pattern selection by pressing [Mix Pattern Select] in the Matte Adjust menu, to display the Mix Ptn Select menu. Select any pattern appearing in the Mix Ptn Select menu (wipe patterns 1 to 24) by pressing the appropriate button, and you can then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
2	Soft	Edge softness	0.00 to 100.00

5 If you selected Pattern in step **4**, if required, the following modifiers can be added. After selecting a wipe mix, skip to step **6**.

When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00 a)
2	Position V	Vertical position	–200.00 to +200.00 a)

a) See *page 169*.

When turning [Multi] on and using replications of the same pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 a)

a) See *page 171*.

When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a) See *page 171*.

When turning [Angle] on in the <Rotation> group and slanting the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–100.00 to +100.00 a)

a) See *page 170*.

When turning [Speed] on in the <Rotation> group and rotating the pattern at a constant rate

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00 a)

a) See *page 170*.


6 To adjust color 1, set [Color 1] on, and to adjust color 2 set [Color 2] on, then adjust the parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

7 To interchange color 1 and color 2, press [Color Invert], turning it on.

Setting the wipe position (Positioner)

When you turn on this function, you can move the wipe pattern to any position.

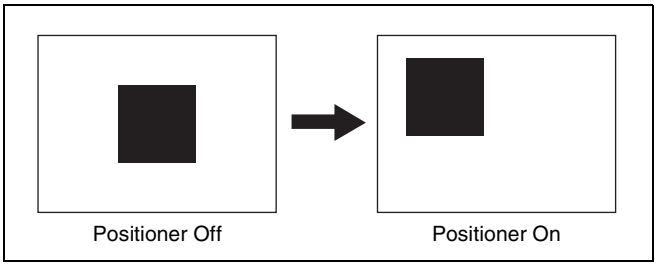

- The parameter H Position controls the horizontal position of the pattern.
  A negative value moves the pattern to the left, and a positive value moves the pattern to the right.
- The parameter V Position controls the vertical position of the pattern.
  A negative value moves the pattern down, and a positive value moves the pattern up.

You can set the position independently for the main pattern and sub pattern.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.

2 In the <Position> group, press [Position], turning it on, and set the pattern position.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00
2	Position V	Vertical position	–200.00 to +200.00

To return the pattern position to the center of the screen

In the <Position> group, press [Center].

To move the pattern from its current position to the center through the course of a transition

In the <Position> group, press [Auto Center], turning it on.

To set the wipe position using the trackball or joystick

You can also set the wipe position using the trackball or joystick in the device control block.

1 In the device control block, press the [M/E1], [M/E2], [M/E3], [M/E4], [M/E5], or [P/P] button, turning it on.

Notes

To select [M/E4] or [M/E5], a previous button assignment in the Setup menu is required *(see page 396)*.

The buttons in the device control block are assigned to the wipe position setting as follows.

Table 1: Buttons and assigned settings

Button name	Setting
MAIN	Wipe position for common transition (main pattern)
SUB	Wipe position for common transition (sub pattern)

Table 2: Buttons assigned to functions

Button name	Function
POS	Toggle Position on or off.
X, Y	Fix the operating direction.
CTR	Return the pattern position to the center of the screen.

2 Press the [MAIN] button or [SUB] button, turning it on.

3 Press the [POS] button, turning Position on.


4 Move the trackball or joystick, to set the wipe position. By pressing the [X] button, turning it on, you can restrict movement to the horizontal direction, and by pressing the [Y] button, turning it on, you can restrict movement to the vertical direction.

Rotating the wipe pattern (Rotation)

You can rotate the pattern. There are three rotation modes, as follows.

Angle

This carries out a wipe with the pattern in a fixed angle.

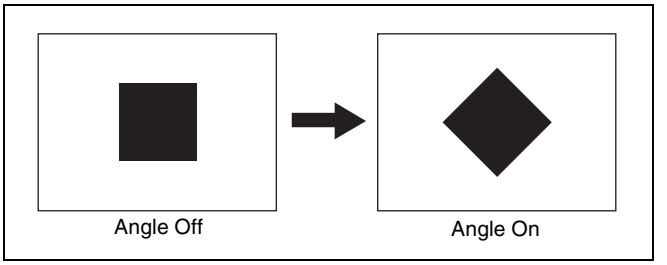


The parameter Angle determines the angle of pattern rotation.

- A value of –100.00 of the parameter Angle corresponds to one whole turn counterclockwise.
- A value of +100.00 corresponds to one whole turn clockwise.
- With a value of 0.00 there is no rotation.

Speed

Through the course of the transition the wipe pattern rotates at a fixed specified speed.




The parameter Speed determines the speed of pattern rotation.

- A value of –100.00 of the parameter Speed corresponds to one turn per second counterclockwise.
- A value of +100.00 corresponds to one turn per second clockwise.
- With a value of 0.00 the pattern is stationary.

Magnitude

Through the course of the transition the wipe pattern rotates through the specified angle.



The parameter Angle determines an angle of pattern inclination at the beginning of the transition.

- A value of –100.00 corresponds to the angle rotated one whole turn counterclockwise.
- A value of +100.00 corresponds to the angle rotated one whole turn clockwise.
- With a value of 0.00 the pattern is stationary.

The parameter Magnitude determines an angle of pattern rotation through the course of the transition.

- A value of –200.00 corresponds to a rotation of two turns counterclockwise.
- A value of +200.00 corresponds to a rotation of two turns clockwise.
- With a value of 0.00 the pattern is stationary.

You can apply rotation independently to the main pattern and sub pattern.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.

2 In the <Rotation> group, select the rotation type.

Angle: Incline the pattern through a fixed angle.
Speed: Rotate at a fixed rate.
Magnitude: Rotate through a particular angle during the course of the transition.

3 According to the selection in step **2**, set the following parameters.

When Angle is selected

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–100.00 to +100.00

When Speed is selected


Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00

When Magnitude is selected

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation at start of transition	–100.00 to +100.00
2	Magnitude	Angle of rotation through course of transition	–200.00 to +200.00

Setting the wipe pattern aspect ratio (Aspect ratio)

You can freely change the aspect ratio of the pattern.

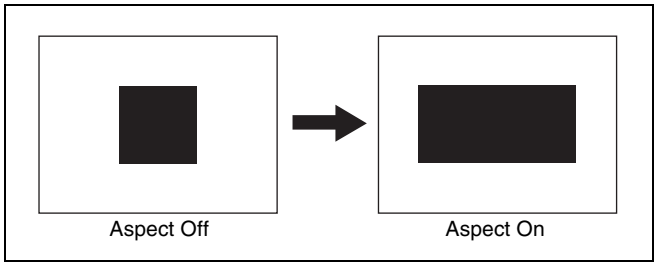

A negative value of the parameter Aspect stretches the pattern vertically; a positive value stretches the pattern horizontally.
You can set the aspect ratio independently for the main pattern and sub pattern.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.


2 Press [Aspect], turning it on.

3 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00


Setting the wipe pattern replication (Multi)

The same pattern can be repeated horizontally and vertically or both, up to 63 times. You can also change the orientation of alternate copies, or change the position.

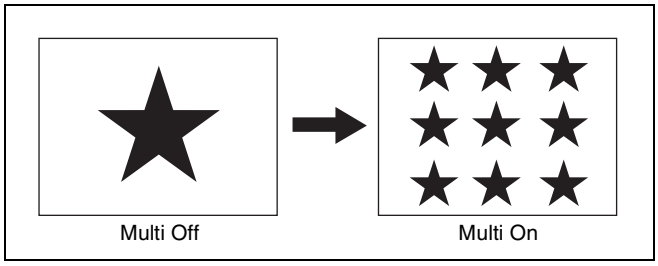

- The parameter H Multi determines the number of pattern replications horizontally, and the parameter V Multi determines the number of pattern replications vertically.
- The parameter Shift determines the manner of replication.
  At a value of –100.00, the pattern of the adjacent odd-numbered column on the left lines up with the central coordinate horizontally.
  At a value of +100.00, the pattern of the adjacent odd-numbered column on the right lines up with the central coordinate horizontally.

For an independent key transition wipe, you can use the “Invert Type” parameter to select from the following four types of replication pattern.

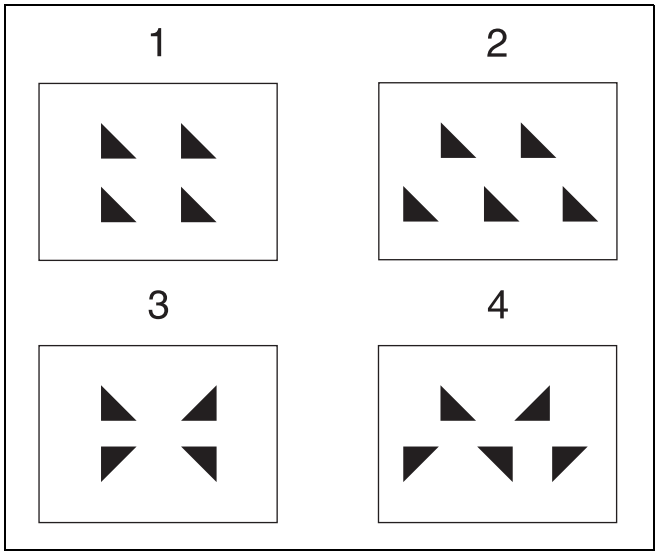

1: All replications in the same orientation
2: Even-numbered rows staggered
3: Even-numbered columns and rows inverted
4: Even-numbered columns and rows inverted, and even-numbered rows staggered

You can set pattern replication independently for the main pattern and sub pattern.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.

2 Press [Multi], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Shift	Replication layout	–100.00 to +100.00

4 To make more adjustments, press [Multi Adjust].

The Multi Adjust menu appears.

5 Make the following settings, as required.

H Invert: When this is on, alternate tiles are inverted left-to-right.

V Invert: When this is on, alternate tiles are inverted top-to-bottom.

Non-Mask: When this is on, even if the positioner function is used to move the pattern position, the pattern is always present on the screen.


Position: By adjusting the following parameters, move the pattern position within the divisions determined in step **3**.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position of pattern	–200.00 to +200.00 a)
2	Position V	Vertical position of pattern	–200.00 to +200.00 a)

a) See *page 169*.

Making a wipe pattern like a Venetian blind (Pairing)

This slits the pattern into multiple strips in the horizontal or vertical direction, making it like a venetian blind.

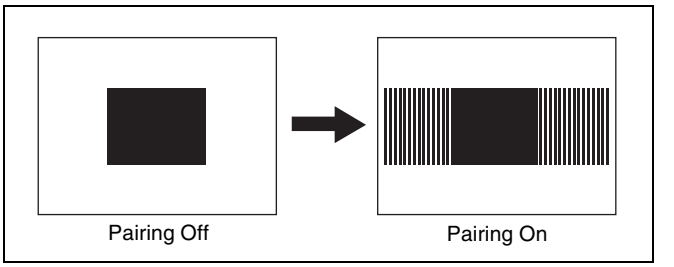

- The parameter Width determines the width of the slits.
- The parameter H Offset determines the spacing in the horizontal direction.
  If a negative value is set, the even-numbered pairs of strip and slit move to the left, and the odd-numbered pairs move to the right. The value –100.00 represents the maximum movement.
  If a positive value is set, the even-numbered pairs of strip and slit move to the right, and the odd-numbered pairs move to the left. The value +100.00 represents the maximum movement.
- The parameter V Offset determines the spacing in the vertical direction.
  If a negative value is set, the even-numbered pairs of strip and slit move upward, and the odd-numbered pairs move downward. The value –100.00 represents the maximum movement.
  If a positive value is set, the even-numbered pairs of strip and slit move downward, and the odd-numbered pairs move upward. The value +100.00 represents the maximum movement.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.

2 In the <Pairing> group, select the slit direction.

H: Create slits in the horizontal direction.
V: Create slits in the vertical direction.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Width	Width of the slits	1 to 128 (integer)
2	H Offset	Spacing in the horizontal direction	–100.00 to +100.00
3	V Offset	Spacing in the vertical direction	–100.00 to +100.00

Applying modulation to the wipe pattern (Modulation)

The pattern signal can be modulated, creating waves in the horizontal, vertical, or radial direction along the edges.


The parameter Shape determines the form of the modulation.
1: sine wave, 2: triangular wave, 3: rectangular wave

Notes

When using 1080PsF mode in an HD system, the modulation function is not available.

Horizontal modulation


This modulates the pattern, applying waviness in the horizontal direction to edges.



The parameter Speed determines the speed of waves. A value of –100.00 generates the maximum downward speed of waves, and a value of +100.00 the maximum upward speed.

Vertical modulation


This modulates the pattern, applying waviness in the vertical direction to edges.



The parameter Speed determines the speed of waves. A value of –100.00 generates the maximum leftward speed of waves, and a value of +100.00 the maximum rightward speed.

Fringe

This modulates the pattern, applying waviness in the radial direction to edges.



The parameter Speed determines the speed of waves. A value of –100.00 generates the maximum counterclockwise speed of waves, and a value of +100.00 the maximum clockwise speed.
You can apply modulation independently to the main pattern and sub pattern.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.

2 Depending on the desired effect, in the <Modulation> group select one of the following.


H (Horizontal modulation): Modulate the pattern, applying waviness in the horizontal direction to edges.
V (Vertical modulation): Modulate the pattern, applying waviness in the vertical direction to edges.
Fringe (Radial modulation): Modulate the pattern, applying waviness in the radial direction to edges.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Amplitude	Amplitude of modulation	0.00 to 100.00
2	Frequency	Frequency of modulation	0.00 to 100.00
3	Speed	Speed of waves	–100.00 to +100.00
4	Shape	Form of the modulation	1 to 3

Applying barrel or pincushion distortion to the edge of the wipe pattern (Spring)

As the transition progresses, the edge of the pattern is subjected to barrel or pincushion distortion.

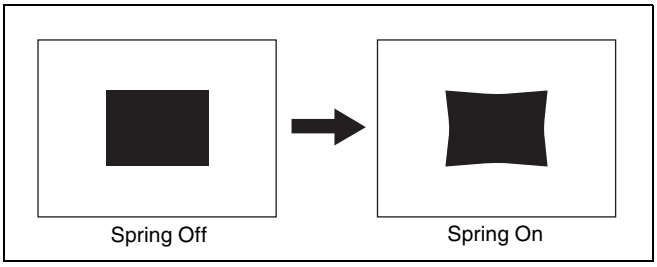

A negative parameter value produces pincushion distortion, and a positive value produces barrel distortion. You can set the spring function independently for the main and sub patterns.

1 In the M/E-1 >Wipe menu, select HF5 ‘Main Modify.’

The Main Modify menu appears.


2 Press [Spring], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Gain	Degree of barrel distortion	–100.00 to +100.00

Applying a spiral effect to the wipe pattern (Spiral)

This deforms the pattern spirally.

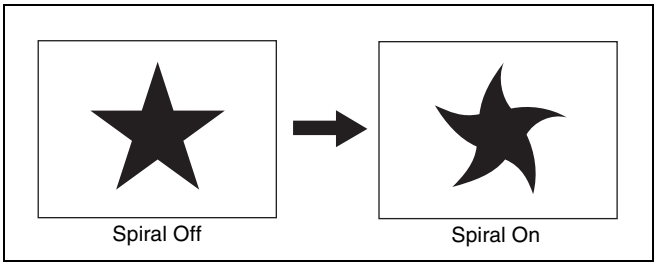

- The parameter Magnitude determines the size and direction of the spiral.
  A value of –100.00 represents the maximum movement in the counterclockwise direction, and a value of +100.00 represents the maximum movement in the clockwise direction.
- The parameter Wave Speed determines the speed of the lateral waves.
  A value of –100.00 represents the maximum speed to the left, and a value of +100.00 represents the maximum speed to the right.

You can set the spiral function independently for the main and sub patterns.

1 In the M/E-1 >Wipe menu, select HF5 'Main Modify.'

The Main Modify menu appears.

2 Press [Spiral], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Magnitude	Size and direction of the spiral	–100.00 to +100.00
2	Wave Speed	Speed of the lateral waves	–100.00 to +100.00

Possible combinations of wipe patterns and modifiers

Yes: Can be used **No:** Cannot be used

Modifiers	Type of wipe				
	Standard	Enhanced	Rotary	Mosaic	Random/ diamond dust
Direction	Yes	Yes	Yes	Yes	Yes
Split	Yes	Yes	No	Yes	No
Edge	Yes	Yes	Yes	Yes	Yes
Positioner	Yes [a)]	Yes [b)]	Yes [c)]	No	No
Rotation	Yes	Yes	Yes [c)]	No	No
Aspect ratio	Yes [d)]	Yes	No	No	No
Pattern replication	Yes	Yes	Yes	Yes [e)]	No
Pairing	Yes [f)]	Yes	No	No	No
Modulation (H/V)	Yes	Yes	Yes	No	No
Modulation (Fringe)	No [g)]	Yes	No	No	No
Spring	No [g)]	Yes	No	No	No
Spiral	No [h)]	Yes	No	No	No

a) Not patterns 1 to 16, 19, and 20
b) Not patterns 300 to 303
c) Not patterns 100 to 103, 150, 151, 516, 518, 604, and 606
d) Not patterns 1 to 8, 17, and 18
e) Not patterns 220 to 223
f) Not patterns 19 and 20
g) But patterns 21, 23 and 24 are possible
h) But patterns 21 and 23 are possible

Wipe Modify Clear

Press [Default Recall] at the lower left of the menu display, turning it on, then press VF5 'Wipe' to return the wipe settings to their initial status.

For details of the menu operation to return the wipe state to that set in initial status, see "Returning to Default State in Function Groupings" (page 85).

Wipe Settings for Independent Key Transitions

You carry out independent key transition wipe setting operations using the Wipe Adjust menu for each keyer. This section describes the independent key transition wipe settings, taking the M/E-1 >Key1 >Transition >Wipe Adjust menu as an example.

For details, see "Independent Key Transitions" (page 113).

Basic Procedure for Independent Key Transition Wipe Settings

Accessing the independent key transition wipe settings menu

As an example, to access the M/E-1 >Key1 >Transition >Wipe Adjust menu, carry out the following operations.

- In the menu control block, select the top menu selection button [M/E 1] and select VF1 'Key1' and HF6 'Transition' to display the Transition menu for key 1, then press [Wipe Adjust].
- If VF1 [Key5] is shown, press the switching button at the top of the menu, so that [Key1-4] appears, and press VF1 [Key1].

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 396)*.

- In the independent key transition control block of the M/E-1 bank, press the key delegation button [KEY1], then press the independent key transition type selection button [WIPE] twice in rapid succession.

Carrying out the above operation displays the M/E-1 >Key1 >Transition >Wipe Adjust menu (referred to below as the Key1 Wipe Adjust menu).

Selecting the independent key transition wipe pattern

You select the independent key wipe pattern from the list of patterns displayed in the menu.

Notes

In an independent key transition, you can only use the standard wipe patterns (pattern numbers 1 to 24).
To select a wipe pattern for independent key1 on the M/E-1 bank, use the following procedure.

1 In the Key1 Wipe Adjust menu, select [Pattern Select].

The Pattern Select menu appears.

2 Press the button for the desired pattern.

Setting Independent Key Transition Wipe Modifiers

Available modifiers

You can use the following modifiers with an independent key transition wipe.
Note that the available modifiers may depend on the pattern you are using.

- Direction
- Soft edge
- Positioner
- Rotation
- Aspect ratio
- Pattern replication

Setting the wipe direction (Direction)

In the <Direction> group of the Key1 Wipe Adjust menu, make any of the following selections.
Normal: regular direction
Normal/Reverse: alternate between regular and reverse for each transition
Reverse: reverse direction to normal

Softening the wipe pattern edge (Soft edge)

1 Press [Soft] in the Key1 Wipe Adjust menu, turning it on.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0.00 to 100.00

Setting the wipe position (Positioner)

There are two methods of setting the wipe position: using the device control block, or in a menu.

To set the wipe position using the trackball or joystick

You can also set the wipe position using the trackball or joystick in the device control block.

1 In the device control block, press the [M/E1], [M/E2], [M/E3], [M/E4], [M/E5], or [P/P] button, turning it on.

Notes

To select [M/E4] or [M/E5], a previous button assignment in the Setup menu is required *(see page 396)*.

The buttons in the device control block are assigned to the wipe position setting as follows.

Table 1: Buttons and assigned settings

Button name	Setting
K1 CB1	Wipe position for independent key 1 transition
K2 CB2	Wipe position for independent key 2 transition
K3	Wipe position for independent key 3 transition
K4	Wipe position for independent key 4 transition

Table 2: Buttons assigned to functions

Button name	Function
POS	Toggle Position on or off.
X, Y	Fix the operating direction.
CTR	Return the pattern position to the center of the screen.

2 Press one of the buttons in Table 1 above, to select the wipe position to which the operation applies. Multiple selections are supported.

Notes

By setting the operation mode in setup, you can also use [K1 CB1], [K2 CB2], [K3], and [K4] to select keys 5 to 8. In this case, press [SHIFT], turning it on, then press [K1 CB1], [K2 CB2], [K3], or [K4] to select one of keys 5 to 8. However, it is not possible to select more than one key.

For details of assignment for keys 5 to 8, see "Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu" in the Appendix (page 397).

3 Press the [POS] button, turning Position on.

4 Move the trackball or joystick, to set the wipe position. By pressing the [X] button, turning it on, you can restrict movement to the horizontal direction, and by pressing the [Y] button, turning it on, you can restrict movement to the vertical direction.

To set the wipe position by a menu operation

1 Press [Position] in the Key1 Wipe Adjust menu, turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00 a)
2	Position V	Vertical position	–200.00 to +200.00 a)

a) See *page 169*.

To move the pattern from its current position to the center through the course of a transition

Press [Auto Center], turning it on.

Rotating the wipe pattern (Rotation)

1 In the <Rotation> group of the Key1 Wipe Adjust menu, select the rotation type.

Angle: Incline the pattern through a fixed angle.
Speed: Rotate at a speed rate.
Magnitude: Rotate the pattern through a fixed angle during the course of the transition.

2 According to the selection in step **1**, set the following parameters.

When Angle is selected

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–100.00 to +100.00 a)

a) See *page 170*.

When Speed is selected

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00 a)

a) See *page 170*.

When Magnitude is selected

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation at start of transition	–100.00 to +100.00 a)

Knob	Parameter	Adjustment	Setting values
2	Magnitude	Angle of rotation through course of transition	–200.00 to +200.00 a)

a)See *page 170*.

Setting the wipe pattern aspect ratio (Aspect ratio)

1 Press [Aspect] in the Key1 Wipe Adjust menu, turning it on.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a)See *page 171*.

Replicating the wipe pattern (Multi)

1 Press [Multi] in the Key1 Wipe Adjust menu, turning it on.

2 Set the following parameters.


Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 a)

a)See *page 171*.


Wipe Snapshots

You can snapshot and save a wipe pattern together with the current settings of its modifiers and pattern limit in a dedicated register for recall when required.
There are 10 wipe snapshot registers on each M/E bank and the PGM/PST bank.
Use the Flexi Pad control block, the Multifunction Flexi Pad block in each switcher bank or the Menu control block to save and recall wipe snapshots.
For simple transitions *(see page 120)*, there are eight wipe snapshot registers on each M/E bank and the PGM/PST bank.

Wipe Snapshot Operations With the Flexi Pad

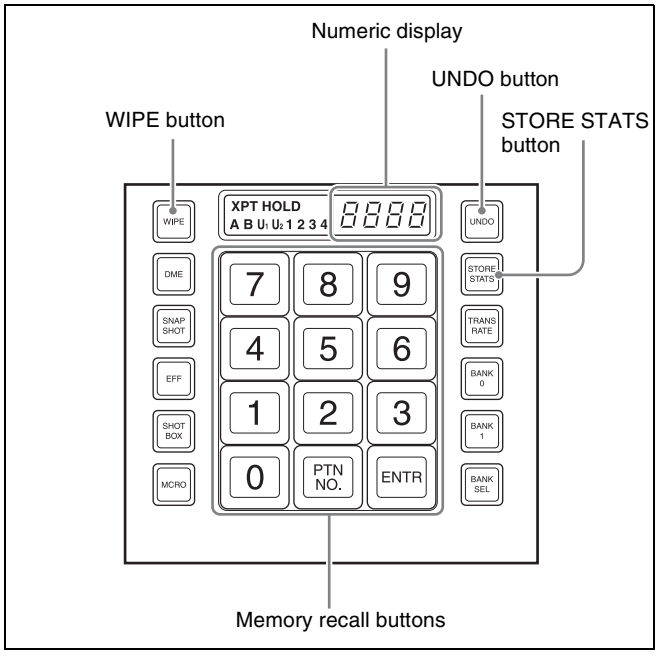

Flexi Pad control block (standard type)

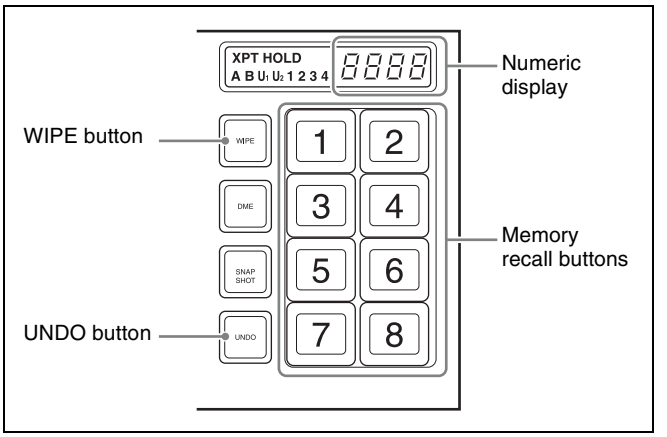

Flexi Pad control block (simple type)

Selecting a wipe pattern in the Flexi Pad control block

To select a pattern with a standard type Flexi Pad control block, use the following procedure. It is not possible to select a wipe pattern with a simple type Flexi Pad control block.

1 In the M/E-1 Flexi Pad control block, press the [WIPE] button.

This switches the Flexi Pad control block to wipe snapshot mode.

2 In the memory recall section, press the [PTN NO.] button.

This switches the Flexi Pad control block to wipe pattern number recall mode.

3 Use the buttons in the memory recall section to enter the pattern number consisting of up to three digits, and press the [ENTR] button.

The entry is confirmed, and now the numeric display shows the pattern number *(see page 357)*.

Saving a wipe snapshot

1 Make the wipe settings that you want to save.

Make any modifier settings required *(see page 166)*.

2 In the Flexi Pad control block, hold down the [WIPE] button, and press the memory recall button corresponding to the register in which you want to save.

Notes

- If you press a button which is lit orange or yellow, the existing contents of the register are overwritten.
- If you carry out a pattern mix, and both the main pattern and sub pattern are selected, then the memory recall button shows the main pattern.

The pattern appears on the button you pressed, which lights yellow.
The numeric display shows the number of the corresponding pattern.
It is also possible to display the register name using a Setup menu.

For details, see "Operation Settings (Operation Menu)" in Chapter 19 (Volume 2).

Meaning of the state of buttons

Off: Nothing is saved in the register.
Lit orange: Settings are saved in the register.
Lit yellow: The most recently recalled register.

Canceling the saving of a wipe snapshot

To cancel the saving of a wipe snapshot immediately after performing it, hold down the [STORE STATS] button, and press the [UNDO] button.
The [STORE STATS] button changes from amber to green.

Notes

On a simple type Flexi Pad control block, it is not possible to cancel the saving of a wipe snapshot.

Recalling a wipe snapshot

1 In the Flexi Pad control block, press the [WIPE] button.

This switches the Flexi Pad control block to the wipe snapshot mode.

2 Press the memory recall button for the register from which you want to recall the wipe snapshot.

The button lights, and the saved wipe snapshot is recalled. At this point, the numeric display shows the pattern number or register name.

Canceling the recall of a wipe snapshot

To cancel the recall of a wipe snapshot, press the [UNDO] button.

Deleting a wipe snapshot

When the [WIPE] button is lit in the Flexi Pad control block, hold down the [STORE STATS] button and press the memory recall button for the register in which you want to delete the wipe snapshot.

The indication of the memory recall button reverts from the wipe pattern or register name to the register number.


Notes

In a simple type Flexi Pad control block, it is not possible to delete a wipe snapshot.

Wipe Snapshot Operations With the Menus

Menus used

As an example, when operating on M/E-1, select M/E-1 >Wipe >Wipe Snapshot.
The Wipe Snapshot menu appears.

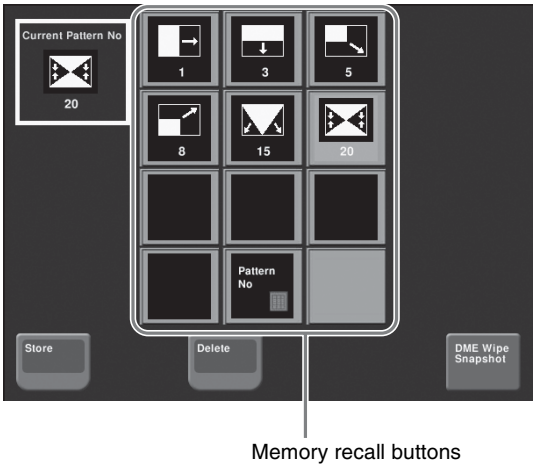

Button displays

In setup you can select whether the memory recall buttons show the pattern number or register name.

For details, see "Operation Settings (Operation Menu)" in Chapter 19 (Volume 2).

Saving a wipe snapshot from the menu

1 Set up the wipe you want to save.

2 In the Wipe Snapshot menu, press [Store], lighting it amber.

3 Press the memory recall button for the register in which you want to save.

Notes

- If you press a button which is already lit, this overwrites the contents of the register.
- When both the main pattern and sub pattern are selected for a pattern mix, the button in the memory recall section shows only the main pattern.

Recalling a wipe snapshot from the menu

In the Wipe Snapshot menu, press the memory recall button for the wipe snapshot you want to recall.
This recalls the wipe snapshot, and the button you pressed lights amber.
In the upper left is shown the currently recalled register name or number.

Notes

The Flexi Pad control block and menu settings are linked. A setting in setup determines whether register names or pattern numbers appear.

Deleting a wipe snapshot from the menu

1 In the Wipe Snapshot menu, press [Delete].

2 Press the memory recall button for the wipe snapshot you want to delete.


Wipe Pattern Operations in the Multifunction Flexi Pad Control Block

Recalling a Wipe Snapshot

You can recall a wipe snapshot in the Multifunction Flexi Pad control block.
To recall a wipe snapshot, use the operations shown in the following illustration.

1 In the Multifunction Flexi Pad control block, press the [WIPE] button.

This sets the Multifunction Flexi Pad control block to wipe snapshot mode, and the button indications appear as follows.

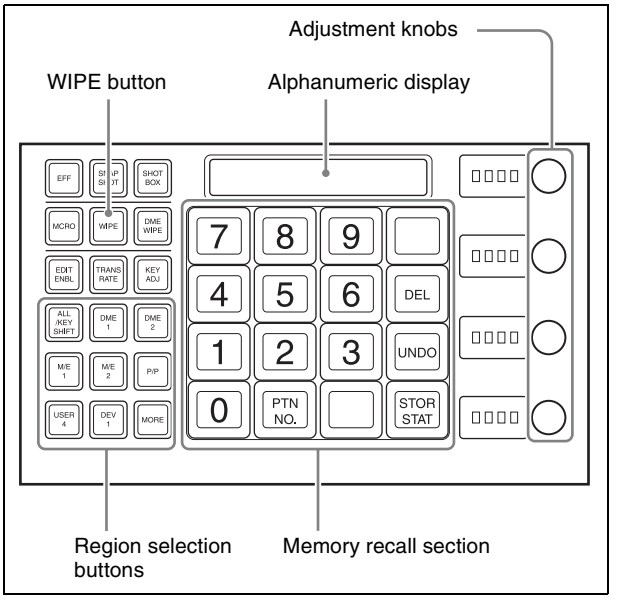

You can change the indications for buttons [0] to [9] in the memory recall section to pattern images, using the Engineering Setup >Panel >Operation >Flexi Pad Mode menu.

2 Select the region for the wipe snapshot to be recalled with the region selection buttons.

3 Press the numeric button (lit orange) in the memory recall section corresponding to the register in which the desired wipe snapshot is stored.

The button you pressed lights yellow, and this recalls the saved wipe snapshot.
At this point the numeric display shows the register name or pattern number for the pattern.

Selecting the Wipe Pattern

1 Press the [WIPE] button, and select the region with the region selection buttons.

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 396)*.

2 Press the [PTN NO.] button in the memory recall section.


The [PTN NO.] button lights green.

3 With the buttons in the memory recall section, enter the pattern number of up to three digits, and press the [ENTR] button.

This confirms the input, and the pattern number *(see page 357)* appears in the alphanumeric display.
The [PTN NO.] button lights orange, and the system returns to wipe snapshot mode.

Editing the Wipe Pattern

By pressing the [EDIT ENBL] button to switch the memory recall section to editing mode as shown in the following illustration, you can edit the selected wipe pattern with the following buttons.
To exit from the editing mode, press the [EDIT ENBL] button once more, or press the [EXIT] button.

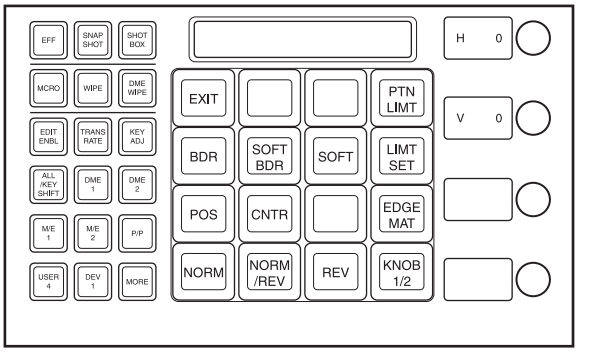

Wipe pattern edge setting buttons

BDR (border): Applies a border to the wipe pattern.
SOFT BDR (soft border): Softens the applied border.
SOFT (soft edge): Softens the edge.
EDGE MAT (edge matte): Selects whether to fill the edge with a color matte, or insert an image from the utility bus. By default a color matte is selected.

You can adjust the parameters selected with these buttons using the control knobs, when the button is lit green.

When border is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	359 to 0

When soft border is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100
2	I	Degree of softening of inside of border	0 to 100
3	O	Degree of softening of outside of border	0 to100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	359 to 0

When soft edge is selected

Knob	Parameter	Adjustment	Setting values
1	S	Degree of softening of edge	0 to 100

When edge matte is selected

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	359 to 0

Buttons for positioning the wipe pattern

POS (position): Adjusts the position of the wipe pattern.

CNTR (center): Returns the wipe pattern position to the center.

When you press the [POS] button, the alphanumeric display first shows the name of the parameter, “H” or “V,” and then the value of the parameter.

When the [POS] button is lit green, you can adjust the position of the wipe pattern with the control knobs.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–200 to +200
2	V	Vertical position	–200 to +200

Buttons for setting the wipe direction

NORM (normal): Sets wipe to normal (forward) direction.

NORM/REV (normal/reverse): Sets the wipe direction to alternate between normal and reverse for each transition.

REV (reverse): Sets wipe to reverse direction to normal.

Buttons for setting the wipe pattern limit

PTN LIMT (pattern limit): Enables the following settings for the pattern limit using the control knobs.

LIMT SET (limit set): If you change the pattern size with the fader lever then press this button, this sets the current size as the pattern limit.

Knob	Parameter	Adjustment	Setting values
1	P	Pattern limit range	0 [a] to +100 [b] (%)

a) At 0%, executing the transition has no effect at all.

b) At 100%, the transition can be executed with the same effect as with no pattern limit set, but when the transition completes, background buses A and B are not interchanged.

Other buttons

EXIT: Exits the editing mode, and returns the memory recall section to wipe snapshot mode.

KNOB 1/2: When the control knob adjustments are on two pages, this switches between parameter group [1/2] and parameter group [2/2].

Wipe modify clear

When the [WIPE] button is held down, holding down the region selection button for the selected region together returns all the wipe settings of the region to the initial status settings.

For details of the initial status, see “Saving User-Defined Settings” in Chapter 18 (Volume 2).

Saving, Canceling, and Deleting Edited Wipe Patterns

Saving the edited wipe pattern as a snapshot

Holding down the [WIPE] button, press the button in the memory recall section for the register in which you want to save.
The button you pressed lights yellow.
Buttons for registers in which wipe snapshots are already saved light orange.

Canceling a saved wipe snapshot

Immediately after saving, hold down the [STOR STAT] button and press the [UNDO] button.
Buttons for registers in which a wipe snapshot is saved are lit orange.

Canceling recall of a wipe snapshot

To cancel the operation of recalling a wipe snapshot, press the [UNDO] button.

Deleting the data of a saved wipe snapshot

Holding down the [DEL] button, press the button for the register in which the wipe snapshot you want to delete is saved.
The register button you pressed goes off.

DME Wipes

Chapter 6

Overview

A DME wipe is a wipe transition that uses a DME effect to change from one video image to the next.
There are two types of DME wipe: those which can be selected for a normal transition, and those which can be selected for an independent key transition *(see page 193)*.

Notes

It is also possible to carry out a DME wipe on a key using the resizer *(see page 195)*.

Types of DME Wipe Pattern

The patterns used for a DME wipe fall into two broad classes.
Preset patterns: predetermined fixed patterns
User programmable DME patterns: patterns which you can create using keyframe effects

DME wipe execution mode and pattern numbers that can be used

There are three DME wipe execution modes, depending on the number of DME channels available: one-channel mode, two-channel mode and three-channel mode. The pattern numbers that can be used in these modes are as follows.

Execution mode	Preset pattern numbers that can be used	User programmable DME pattern numbers that can be used
One-channel mode	1000 series	1901 to 1999
Two-channel mode	2000 series	2901 to 2999
Three-channel mode	3000 series	3901 to 3999

Notes

- On the MVS-8000X, when the signal format is 1080P, the three-channel mode is not available.
- On the MVS-7000X, when the signal format is 1080P, the above restriction also applies if using the MVE-8000A. There is no such restriction for the MKS-7470X/7471X.

DME wipe pattern groups

The patterns used in DME wipes fall into the following groups.

For each group (excluding user programmable DMEs), for schematic patterns and numbers, see "DME Wipe Pattern List" in Appendix (page 361).

Pattern groups	Effects	Pattern numbers		
		One-channel mode	Two-channel mode	Three-channel mode
Slide	The new video slides in over the old video.	1001 to 1008	2601 to 2608	—
Squeeze	The new video appears squeezed over the old video, and progressively expands to cover it.	1021 to 1031	2621 to 2628	—
Split	The old video splits, and the new video appears in the gap.	1011 to 1013	—	—
Door	The new video moves like a door closing, and progressively covers the old video.	10411048	—	—
Flip tumble	The old video rotates about an axis and is replaced by the new video. During the transition, the signal from the utility 2 bus of the M/E bank appears as the background.	1101 to 1104, 1109, 1110, 1121, 1122, 1124, 1131 to 1133, 1135	—	—
Mirror	The new video appears over the old video as a mirror effect slides in all four directions.	1355 to 1358	—	—
Sphere	The new video appears wrapped around a sphere over the old video, then returns to the original video while unwrapping.	1365	—	—
Character trail	The new video appears with a trail over the old video. Next this gradually returns to the original from the periphery.	1371, 1372	—	—
Wave	The new video appears with a wave-like effect over the old video. Next this returns to the original video as the effect reduces.	1378, 1379	—	—
Ripple	The new video appears over the old video like outwardly moving ripples.	1381	—	—
Page turn	The old video moves like a page turning, and the new video appears behind it.	1301 to 1313, 1315 to 1318, 1341 to 1345	2701 to 2713, 2715 to 2718, 2741 to 2745	—
Page roll	The new video unrolls like a scroll over the old video. This is a type of page turn.	1321 to 1333, 1335 to 1338, 1346 to 1350	2721 to 2733, 2735 to 2738, 2746 to 2750	—
Frame in-out	Completed in two transitions. In the first transition, the new video appears, then on the second transition the new video goes out and the old video returns.	1201 to 1208, 1221 to 1224	2851 to 2854, 2861 to 2864	—
Picture-in-picture	• In one-channel mode, this completes in two transitions. - In the first transition, the old video shrinks, and the new video appears behind it. - In the second transition, the old video expands again until it is its original size. • In two-channel mode, in the first half of the transition, the old video shrinks, and the new video appears. - In the second half of the transition, the new video expands, and the old video disappears. - You can move the pattern from the current position by a relative amount. - During the transition, the signal from the utility 2 bus of the M/E bank appears as the background.	1251	2651 to 2652	—
2D trans	The new video appears over the old video, while undergoing expansion, two-dimensional rotation and translation.	1051 to 1058, 1061 to 1064, 1068	—	—
3D trans	• In one-channel mode, the new video appears over the old video, while undergoing expansion, three-dimensional rotation and translation. • In two-channel mode, the old video changes to the new video while both undergo expansion, three-dimensional rotation and translation.	1071, 1072, 1074, 1076, 1077, 1088, 1091 to 1094	2631 to 2634, 2642, 2644	—

Pattern groups	Effects	Pattern numbers		
		One-channel mode	Two-channel mode	Three-channel mode
Sparkle	The new video appears over the old video with a nonlinear effect applied, such as broken glass, explosion, or melt. Next this returns to the original video as the effect gradually reduces.	1391, 1393, 1394, 1396, 1398, 1399	—	—
Split slide	The new video appears in strip form while sliding interleaved in the opposite direction over the old video.	1384 to 1389	—	—
Mosaic	In the first half of the transition, a mosaic is gradually applied to the old video, then at the 50% point the inner image changes to the new video. In the second half, the mosaic effect on the new video is gradually reduced, returning to the original image at 100%.	1701	—	—
Defocus	In the first half of the transition, the old video is gradually defocused, then at the 50% point the inner image changes to the new video. In the second half, the defocusing effect on the new video is gradually reduced, returning to the original image at 100%.	1702	—	—
Brick	• In two-channel mode, a brick such that the side surface is visible slides in over the old video, then rotates so that the new video can be seen. • In three-channel mode, a brick appears over the old video as the image is expanding and rotating, and switches to the new video.	—	2801 to 2804, 2811 to 2814	3601
User programmable DME	Using a DME keyframe effect created with a keyframe operation, this executes a DME wipe. *For details of creating keyframe effects, see "Creating User Programmable DME Patterns" (page 197).*	1901 to 1999	2901 to 2999	3901 to 3999

Notes

In an independent key transition, the following patterns can be used.

Execution mode	DME wipe patterns that can be used
One-channel mode	Slide, split, squeeze, door, 2D trans, 3D trans, frame in-out, page turn, page roll, mirror, sphere, character trail, wave, ripple, split slide, sparkle, user programmable DME
Two-channel mode	Page turn, page roll

DME Wipe Pattern Variation and Modifiers

You can modify the selected DME wipe pattern in the same way as an ordinary wipe pattern, as follows.

For the setting operations, see "Setting DME Wipe Modifiers" (page 189).

Direction: You can set the DME wipe direction to normal, reverse, or alternating normal/reverse *(see page 189),* except for a key transition, which is always in normal/reverse mode. However, a key transition can only be specified when the following patterns are selected, and when other patterns are selected, this is fixed, as normal/reverse.
Patterns: 1204, 1207, 1221 to 1224

Notes

When pattern numbers 1201, 1202, 1203, 1205, 1206, 1208, 1251, 1701, and 1702 are selected, Direction cannot be used.

Edge: You can apply a border or soft border *(see page 189).*
In the case of those user programmable DME patterns for keys in which an edge has already been applied to the effect, the behavior is as follows.
- When the DME wipe edge setting is on, only part of the edge applied in the effect is enabled, and that portion can be adjusted *(see page 189).*
- When the DME wipe edge setting is off, the edge applied in the effect is enabled as is.

Notes

When pattern numbers 1011, 1012, 1013, 1701, and 1702 are selected, Edge cannot be used.

Positioner: You can move the DME wipe pattern or center of the effect to an arbitrary position. Using the position select function, you can also instantaneously move the pattern.

- 1031
  When this pattern number is selected, with the progress of the transition the pattern center automatically moves initially from the set position toward the center of the screen *(see page 189)*. In other words, the effect obtained is the same as in a normal wipe with the positioner set to [Auto Center].
- 1201 to 1208, 1221 to 1224, 1251
  When these pattern numbers are selected, you can set the pattern position when the first transition completes.
- 1381, 1391, 1393, 1394, 1396
  When these pattern numbers are selected, you can set the center of the transition effect.
- 2651, 2652
  When these pattern numbers are selected, you can move the pattern for each channel, or with values relative to the current position the two channels simultaneously.
- 2801 to 2804, 2811 to 2814
  When these pattern numbers are selected, you can set the vertical position as the brick slides in.
- 2851 to 2854, 2861 to 2864
  When these pattern numbers are selected, you can set the pattern position for each channel setting when the first transition completes.

Pattern limit: You can restrict the range of the transition as desired. However, this is not available for a DME wipe in the independent key transition control block.

For more details, see "Pattern Limit" (page 107).

Size: You can set the size of the image. This can only be used when one of the following pattern numbers is selected.
- 1201 to 1208, 1221 to 1224, 1251
- 2651, 2652, 2851 to 2854, 2861 to 2864

Crop: You can crop the image. It is also possible in 16:9 mode to crop both sides to convert the image to a 4:3 aspect ratio. For the execution of a DME wipe crop transition, you can select from the following three possibilities.
- Cut
- Last 5%
- Linear

When [Last 5%] is selected, you can set the [Release Transition] as follows.
- Last 30%
- Last 5%
- Off

Notes

When pattern numbers 1701 and 1702 are selected, crop cannot be used.

Relation Between DME Wipes and Other Effects

The relations between DME wipes and other effects are as follows.

Relation to ordinary wipes

- DME wipes do not use the wipe generator built into the switcher. Therefore, during the execution of a DME wipe, you can still use a pattern produced by the wipe generator as the source for a pattern key or mask.
- A DME wipe pattern cannot be used as the source for a pattern key or mask.

Relation to processed keys

When using the DME for a processed key, if you select a DME wipe, an available DME is automatically allocated to the DME wipe. If all of the DME channels are in use, then it is not possible to select a DME wipe.
If in a Setup menu a setting has been made for DME allocation, that Setup menu setting takes precedence.

For details, see "Setting the assignments of DME channels to use on the individual M/E banks" in Chapter 20 (Volume 2).

Relation to resizer

When resizer is enabled, it is not possible to select a DME wipe.
For the key 1 and key 2, key 3 and key 4, key 5 and key 6, or key 7 and key 8 combinations, if one is used for a dual resizer effect, the other key cannot be used for a DME wipe.

Number of DME wipes that can be used simultaneously on a single M/E bank

DME wipes can be used in nine places, including the eight independent key transitions.

Notes

- When the signal format is 1080P, DME wipes can be used in five places, including the four independent key transitions.
- When the SDI interface is used to connect the DME, DME effects (including DME wipes) can be used in only one place for one M/E bank.
- When the dedicated interface is used to connect the DME, the number of keys to which DME effects (including DME wipes) can be applied simultaneously for one M/E bank varies as follows depending on the execution mode of the DME wipe pattern selected for the background.

- MVS-8000X

Applicable block	Key to which DME effects are applied	DME wipe pattern for background	Number of keys to which DME effects can be applied simultaneously
Other than M/E-4	Keys 1 to 4	No DME wipe used	2
		One-channel mode	1
		Two- or three-channel mode	0
	Keys 5 to 8	-	2 a)
M/E-4	Keys 1 to 4	No DME wipe used	2 b)
		One-channel mode	1 c)
		Two- or three-channel mode	0
	Keys 5 to 8	-	0

- MVS-7000X

Key to which DME effects are applied	DME wipe pattern for background	Number of keys to which DME effects can be applied simultaneously
Keys 1 to 4	No DME wipe used	2
	One-channel mode	1
	Two- or three-channel mode	0
Keys 5 to 8	-	2 a)

a) 0 when the system signal format is 1080P.
b) 1 when the system signal format is 1080P and the DME input/output signal format is set to dual link mode.
c) 0 when the system signal format is 1080P and the DME input/output signal format is set to dual link mode.

Basic Procedure for DME Wipe Settings

You carry out DME wipe setting operations principally using the DME Wipe menu for each bank.
This section describes the basic procedures for DME wipe settings, taking the M/E-1 >DME Wipe menu as an example.

For details of independent key transition DME wipe settings, see "DME Wipe Settings for Independent Key Transitions" (page 193).

For details of resizer DME wipe, see "Resizer DME Wipe Setting" (page 195).

DME Wipe Settings Menu

Accessing the DME Wipe menu

To access the M/E-1 >DME Wipe menu, use either of the following operations.

- In the menu control block, select the top menu selection button [M/E 1], and press VF6 'DME Wipe.'

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 396)*.

- In the transition control block of the M/E-1 bank, press the transition type selection button [DME] twice in rapid succession.

DME Wipe Pattern Selection

Selecting a DME wipe pattern by a menu operation

1 In the M/E-1 >DME Wipe menu, select HF1 '1ch' for one-channel mode, HF2 '2ch' for two-channel mode or HF3 '3ch' for three-channel mode.

2 Select the desired DME wipe pattern group with one of the following buttons.

- **Slide/Squeeze:** slide and squeeze
- **Split/Door:** split and door
- **Flip Tumble:** flip tumble
- **Mirror/Sphere:** mirror and sphere
- **Character Trail:** character trail

- **Wave/Ripple:** wave and ripple
- **Page Turn/Roll:** page turn and page roll
- **Frame I/O/P in P:** frame in/out and picture-in-picture
- **2D Trans/3D Trans:** 2D trans and 3D trans
- **Sparkle/Split Slide:** sparkle and split slide
- **Mosaic/Defocus:** mosaic and defocus
- **Brick:** brick
- **User Program:** user programmable DME

Selectable DME wipe pattern groups in one-channel mode: All of the above groups except for Brick.

Selectable DME wipe pattern groups in two-channel mode: Slide/Squeeze, Page Turn/Roll, Frame I/O, PinP, 3D Trans, Brick and User Program.

Selectable DME wipe pattern groups in three-channel mode: User Program and Brick.

For details of DME wipe patterns, see "Types of DME Wipe Pattern" (page 183) and "DME Wipe Pattern List" (page 361) in Appendix.

The patterns from the selected pattern group appear on the screen.

3 Press the button to select the desired pattern.

Adjusting DME wipe pattern parameters

Of the DME wipe patterns, the following have parameters that can be adjusted.

When Brick (for two channels) is selected (pattern numbers 2801 to 2804, 2811 to 2814)

Knob	Parameter	Adjustment	Setting values
1	Side V Size X	Horizontal magnification	0.01 to 8.00
2	Side V Size Y	Vertical magnification	0.01 to 8.00
3	Height	Height of brick	0.01 to 100.00
4	Center X	Horizontal center position	–100.00 to +100.00 a)
5	Center Y	Vertical center position	–100.00 to +100.00 b)

a) The horizontal center position of the video pasted on Side V. At –100.00 the center is at the left edge of the screen, and at +100.00 the center is at the right edge of the screen.

b) The vertical center position of the video pasted on Side V. At –100.00 the center is at the bottom edge of the screen, and at +100.00 the center is at the top edge of the screen.

When Frame in-out (for two channels) is selected

- **Pattern numbers 2851 to 2854**

Knob	Parameter	Adjustment	Setting values
5	Delay	Timing for video selected on a utility bus to appear on the screen	–100.00 to +100.00

- **Pattern numbers 2861 to 2864**

Knob	Parameter	Adjustment	Setting values
1	Rot X	Rotation about the Y axis (horizontal direction)	–100.00 to +100.00
2	Rot Y	Rotation about the X axis (vertical direction)	–100.00 to +100.00
3	Rot Z	Rotation about the Z axis	–100.00 to +100.00
5	Delay	Timing for video selected on a utility bus to appear on the screen	–100.00 to +100.00

When Brick (for three channels) is selected (pattern number 3601)

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Side V Size X	Side V horizontal magnification	0.01 to 8.00
2	Side V Size Y	Side V vertical magnification	0.01 to 8.00
3	Height	Height of brick	0.01 to 100.00 a)
4	Side V Center X	Side V horizontal center position	–100.00 to +100.00 b)
5	Side V Center Y	Side V vertical center position	–100.00 to +100.00 c)

a) Shared with knob 3 for parameter group 2

b) The horizontal center position of the video pasted on Side V. At –100.00 the center is at the left edge of the screen, and at +100.00 the center is at the right edge of the screen.

c) The vertical center position of the video pasted on Side V. At –100.00 the center is at the bottom edge of the screen, and at +100.00 the center is at the top edge of the screen.

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Side H Size X	Side H horizontal magnification	0.01 to 8.00
2	Side H Size Y	Side H vertical magnification	0.01 to 8.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
3	Height	Height of brick	0.01 to 100.00 a)
4	Side H Center X	Side H horizontal center position	–100.00 to +100.00 b)
5	Side H Center Y	Side H vertical center position	–100.00 to +100.00 c)

a) Shared with knob 3 for parameter group 1
b) The horizontal center position of the video pasted on Side H. At –100.00 the center is at the left edge of the screen, and at +100.00 the center is at the right edge of the screen.
c) The vertical center position of the video pasted on Side H. At –100.00 the center is at the bottom edge of the screen, and at +100.00 the center is at the top edge of the screen.

Setting DME Wipe Modifiers

You can apply various modifiers to the DME wipe pattern, such as setting the DME wipe direction or pattern position.

For an overview of the DME wipe modifiers, see "DME Wipe Pattern Variation and Modifiers" (page 185).

Specifying the DME wipe direction (Direction)

You can specify the DME wipe direction (normal/reverse).

To specify the DME wipe direction in a menu

1 In the M/E-1 >DME Wipe menu, select HF4 'Edge/Direction.'

The Edge/Direction menu appears.

2 In the <Direction> group, specify the DME wipe direction.

Normal: regular direction
Normal/Reverse: alternate between regular and reverse for each transition
Reverse: reverse direction to normal

To specify the DME wipe direction with a button in the transition control block

In the transition control block of each of the M/E-1 to M/E-3 and PGM/PST banks, press the following direction selection buttons.
NORM: Normal
NORM/REV: Normal/Reverse
REV: Reverse

Modifying the DME wipe pattern edge

1 In the M/E-1 >DME Wipe menu, select HF4 'Edge/Direction.'

The Edge/Direction menu appears.

2 Depending on whether the selected pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.
For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.

3 In the <Edge> group, select the edge type.

Border: border
Soft Border: soft border

4 Set the parameters according to the selection in step **3**.

When border is selected

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00
3	Luminance	Luminance	0.00 to 100.00
4	Saturation	Saturation	0.00 to 100.00
5	Hue	Hue	359.99 to 0.00

When soft border is selected

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00
2	Inner Soft	Border inner softness	0.00 to 100.00
3	Luminance	Luminance	0.00 to 100.00
4	Saturation	Saturation	0.00 to 100.00
5	Hue	Hue	359.99 to 0.00

Display indications when multiple channels are selected at the same time
The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

Setting the DME wipe position (Positioner)

1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

2 Depending on whether the DME wipe pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.
For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.

3 In the <Position> group, press [Position], turning it on.

4 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–200.00 to +200.00
2	V	Vertical position	–200.00 to +200.00

Display indications when multiple channels are selected at the same time
The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

To return the DME wipe pattern position to the center of the screen

In the <Position> group, press [Center].

Displaying and moving the position of the DME wipe pattern (position select)

1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.
In the <Position Select> group, the one of the [Top Left], [Top Right], [Bottom Left], and [Bottom Right] buttons that is on indicates the current display position of the DME wipe pattern.

2 In the <Position> group, press [Position], turning it on.

3 Depending on whether the DME wipe pattern is in one-channel mode or two-channel mode, proceed as follows.

In one-channel mode: press [1st Ch], turning it on.
In two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.

4 To move the position of the DME wipe pattern, press the button where you want to move to, turning it on.

The DME wipe pattern displayed on the screen moves to the position of the specified button.

Setting relative positions to move the DME wipe pattern

In two-channel mode, use the following procedure.

1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

2 In the <Ch Select> group, select the target channels.

3 Press [Position] in the <Position> group, turning it on.

4 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
4	Relative H	Relative movement in the horizontal direction	–400.00 to +400.00
5	Relative V	Relative movement in the vertical direction	–400.00 to +400.00

For details of the method of DME wipe pattern selection, see "DME Wipe Pattern Selection" (page 187).

Setting the DME wipe pattern size (Size)

1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

2 Depending on whether the selected pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.
For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time.

3 Press [Size], turning it on.

4 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Set size of effect	0.00 to 200.00 [a]

a) The effect size when [Size] is off is taken as 100.00%.

Display indications when multiple channels are selected at the same time
The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

Adjusting the DME wipe pattern cropping

Notes

When pattern numbers 1701 and 1702 are selected, crop cannot be used.

1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

2 Depending on whether the selected pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: press [1st Ch], turning it on.
For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channel. You can select more than one channel at the same time. For some patterns, the <Ch Select> group selection is fixed and requires no setting.

3 In the <Crop Mode> group, press [Crop], turning it on.

4 Set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Crop the left and right of the image	Left value shown
2	V	Crop the top and bottom of the image	Top value shown
3	All	Crop the top, bottom, left, and right of the image	Left value shown

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Crop the top of the image	–100.00 to +100.00
2	Left	Crop the left of the image	–100.00 to +100.00
3	Right	Crop the right of the image	–100.00 to +100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
4	Bottom	Crop the bottom of the image	–100.00 to +100.00

Display indications when multiple channels are selected at the same time
The indications on the knobs show the settings of the lowest-numbered channel. When you turn the knobs to adjust the settings, this changes the settings on the other channels by the same amount.

To crop to 4:3 aspect ratio in 16:9 mode

In the <Crop Mode> group, press [4:3 Crop], turning it on.

To set the action when a DME wipe crop transition is executed

1 In the M/E-1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

2 Depending on whether the selected pattern is in one-channel mode or two-channel mode, proceed as follows.

For a pattern in one-channel mode: in the <Ch Select> group, press [1st Ch], turning it on.
For a pattern in two-channel mode: from the <Ch Select> group, select the corresponding channels. You can select more than one channel at the same time.


3 In the <Crop Mode> group, press [Crop] or [4:3 Crop] (to crop from 16:9 to 4:3 aspect ratio), turning it on.


4 In the <Crop Mode> group, press [Remove From Begin].

The Remove From Begin menu appears.

5 In the <Crop Transition> group, select the execution mode for the DME wipe crop transition.

Cut: Cut mode. The cropping does not change during the transition, but at the end point of the transition the cropping is removed (enlarges).
Last 5%: The cropping is maintained for the first 95% of the transition, and is progressively removed during the last 5% of the transition (enlarges).
Linear: The cropping is removed linearly through the whole course of the transition (enlarges).

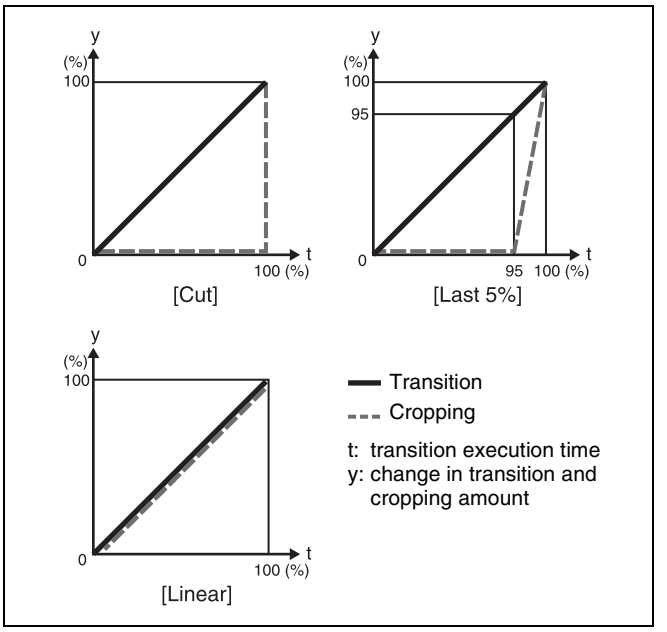

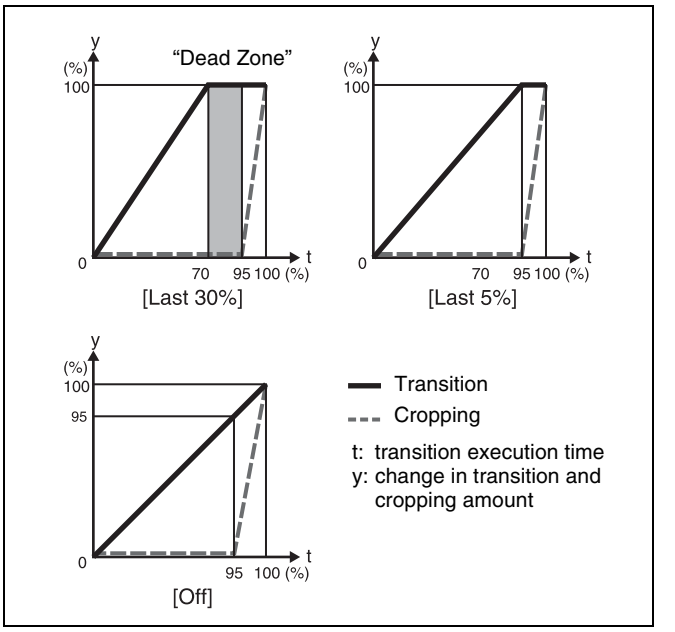

Setting the timing of transition completion

When the execution mode for a DME wipe crop transition is set to [Last 5%], you can select the timing of transition completion from 70% ([Last 30%]), 95% ([Last 5%]), and 100% ([Off]).

1 In the M/E 1 >DME Wipe menu, select HF5 'Modify.'

The Modify menu appears.

2 In the <Crop Mode> group select [Remove From Begin].

The Remove From Begin menu appears.

3 In the <Release Transition> group, select the timing of transition completion.

Last 30%: The transition completes at the end of 70% of the transition execution time. The transition has a dead zone from 70% to 95% of the transition time.

Last 5%: The transition completes at the end of 95% of the transition execution time. When the transition completes, the cropping is removed during the last 5% (enlarges).

Off: The transition completes at the end of the transition execution time. During the last 5% of the transition, the transition and cropping removal proceed together.

DME Wipe Modify Clear

Press [Default Recall] at the lower left of the menu display, turning it on, then press VF6 'DME Wipe' to return the DME wipe settings to their initial status.

For details of the menu operation to return the DME wipe state to that set in initial status, see "Returning to Default State in Function Groupings" (page 85).

DME Wipe Settings for Independent Key Transitions

You carry out independent key transition DME wipe setting operations using the DME Wipe Adjust menu for each keyer.

For an overview of independent key transitions, see page 113.

This section describes the independent key transition DME wipe settings, taking the M/E-1 >Key1 >Transition >DME Wipe Adjust menu as an example.

Basic Procedure for Independent Key Transition DME Wipe Settings

Accessing the independent key transition DME wipe settings menu

As an example, to access the M/E-1 >Key1 >Transition >DME Wipe Adjust menu, carry out the following operation.

- In the menu control block, select the top menu selection button [M/E 1], and select VF1 'Key1' and HF6 'Transition' to display the Transition menu for key 1. Next, press [DME Wipe Adjust].
  If VF1 [Key5] is shown, press the switching button at the top of the menu, so that [Key1-4] appears, and press VF1 [Key1].

  Notes

  To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 396)*.

- Press the key delegation button [Key1] in the independent key transition control block of the M/E-1 bank, then press the independent key transition type [DME] twice in quick succession.

Carrying out the above operation displays the M/E-1 >Key1 >Transition >DME Wipe Adjust menu (referred to below as the Key1 DME Wipe Adjust menu).

Selecting the independent key transition DME wipe pattern

You select the independent key DME wipe pattern from the list of patterns displayed in the menu.
To select a DME wipe pattern for independent key1 on the M/E-1 bank, use the following procedure.

1 In the <Pattern Select> group of the Key1 DME Wipe Adjust menu, press [1ch] for one-channel mode or [2ch] for two-channel mode.

The Pattern Select menu appears.

2 Select the desired DME wipe pattern group with one of the following buttons.

In two-channel mode, only Page Turn and Page Roll are selectable.

- **Slide/Squeeze:** slide and squeeze
- **Split/Door:** split and door
- **Mirror/Sphere:** mirror and sphere
- **Character Trail:** character trail
- **Wave/Ripple:** wave and ripple
- **Page Turn/Roll:** page turn and page roll
- **Frame I/O:** frame in/out
- **2D Trans/3D Trans:** 2D Trans and 3D Trans
- **Sparkle/Split Slide:** sparkle and split slide
- **User Program:** user programmable DME

For details of DME wipe patterns, see "Types of DME Wipe Pattern" (page 183) and "DME Wipe Pattern List" (page 361) in Appendix.

3 Press the button to select the desired pattern.

Setting Independent Key Transition DME Wipe Modifiers

You can add modifiers such as pattern position and size for an independent key transition DME wipe.

For introductory information, see "Setting the DME wipe position (Positioner)" (page 189) and "Setting the DME wipe pattern size (Size)" (page 190).

Setting the DME wipe position (Positioner)

For applicable pattern numbers, see page 185.

1 In the <Position> group of the Key1 DME Wipe Adjust menu, press [Position], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–200.00 to +200.00
2	V	Vertical position	–200.00 to +200.00

To return the DME wipe pattern position to the center of the screen

In the <Position> group, press [Center].

Setting the DME wipe pattern size (Size)

For applicable pattern numbers, see page 186.

1 In the Key 1 DME Wipe Adjust menu, press [Size], turning it on.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Size	Set size of effect	0.00 to 200.00 a)

a) The effect size when [Size] is off is taken as 100.00%.

Cropping a key DME wipe

1 In the <Crop Mode> group of the Key1 DME Wipe Adjust menu, press [Crop], turning it on.

2 Set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Crop the left and right of the image	Left value shown
2	V	Crop the top and bottom of the image	Top value shown
3	All	Crop the top, bottom, left, and right of the image	Left value shown

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Cropping of the top of the image	–100.00 to +100.00
2	Left	Cropping of the left of the image	–100.00 to +100.00
3	Right	Cropping of the right of the image	–100.00 to +100.00
4	Bottom	Cropping of the bottom of the image	–100.00 to +100.00

To crop to 4:3 in 16:9 mode

In the <Crop Mode> group, press [4:3 Crop], turning it on.

To set the operation for DME wipe crop transition execution

1 In the <Crop Mode> group of the Key1 DME Wipe Adjust menu, press [Crop], turning it on.

2 In the <Crop Mode> group, press [Crop] or [4:3 Crop] (to crop to 4:3 in 16:9 mode), turning it on.

3 In the <Crop Mode> group, press [Remove From Begin].

The Remove From Begin menu appears.

*For subsequent operations, see step **5** of "To set the action when a DME wipe crop transition is executed" (page 191).*

To set the timing of transition completion

1 In the <Crop Mode> group of the Key1 DME Wipe Adjust menu, press [Crop], turning it on.

2 In the <Crop Mode> group, press [Remove From Begin].

For subsequent operations, see "Setting the timing of transition completion" (page 192).

Applying a border to a key DME wipe

In the <Edge> group of the Key1 DME Wipe Adjust menu, press [Border], turning it on.

*For subsequent operations, use the same process as in step **4** of "Modifying the DME wipe pattern edge" (page 189).*

Resizer DME Wipe Setting

You can carry out a DME wipe on a key using the resizer.

Notes

When the screen aspect ratio is 4:3 in HD format, when the resizer DME wipe is used to shrink a video image, this is applied to the 16:9 screen including the added video on the left and right sides. Use the crop function as required to extract the 4:3 image.

DME wipe patterns available for resizer DME wipe

You can use the following patterns of the DME wipe pattern one-channel mode that can be used in a resizer DME wipe (7000-series numbers).

- Slide (pattern numbers: 7001 to 7008)
- Squeeze (pattern numbers: 7021 to 7031)
- Frame in-out (pattern numbers: 7201 to 7208, 7221 to 7224)

Relation between resizer DME wipes and other effects

The following relations hold between a resizer DME wipe and other effects.

Relation to processed keys

It is not possible to select a resizer DME wipe for a key with processed key enabled.

Relation to resizer

It is not possible to use a resizer DME wipe for a key with resizer enabled.

It is not possible to use a resizer DME wipe for a key forming a pair with a key with the dual resizer effect enabled. The key combinations forming pairs are keys 1 and 2, keys 3 and 4, key 5 and key 6, and key 7 and key 8. For example, when a dual resizer effect is enabled for key 1, it is not possible to use a resizer DME wipe on key 2.

Making resizer DME wipe settings

1 In the <Pattern Select> group of the Key1 DME Wipe Adjust menu, press [1ch].

The 1ch Pattern Select menu appears.

2 Select [Resizer Slide/Squeeze] or [Resizer Frame I/O].

The patterns of the selected group appear.
The wipe patterns that can be used for a resizer DME wipe are as follows.

- **Slide** (pattern numbers: 7001 to 7008)
- **Squeeze** (pattern numbers: 7021 to 7031)
- **Frame in-out** (pattern numbers: 7201 to 7208, 7221 to 7224)

3 Press the desired pattern to select it.

For more about resizer DME wipe modifiers, see "Setting Independent Key Transition DME Wipe Modifiers" (page 193).

DME Wipe Snapshots

You can snapshot and save a DME wipe pattern together with the current settings of its modifiers and pattern limit in a dedicated register for recall when required.
There are 10 DME wipe snapshot registers for each of the M/E and P/P banks.
To save and recall these registers, use the Flexi Pad control block, the Multifunction Flexi Pad block in each switcher bank or the Menu control block.
In the case of a simple transition system, there are eight DME wipe snapshot registers for each switcher bank.

DME Wipe Snapshot Operations With the Flexi Pad

You can save, recall and delete DME wipe snapshots using the procedures similar to the procedures for wipe snapshot operations. In DME wipe snapshot operations, use the [DME] button instead of the [WIPE] button used in wipe snapshot operations.

Selecting a DME wipe pattern in the Flexi Pad control block

In the standard type Flexi Pad control block, enter a four-digit pattern number, using the [DME] button *(see page 178)*.

Notes

- You cannot select a DME wipe pattern in the simple type Flexi Pad control block.
- A button in the memory recall section in which a DME wipe snapshot is saved shows the pattern, and lights yellow.
  For a user-programmable DME, the register number *(see page 197)* appears.
  Depending on the setting of the Setup menu, you can also display a register name.
  For details, see "Operation Settings (Operation Menu)" in Chapter 19 (Volume 2).
- In a simple type Flexi Pad control block, it is not possible to delete a DME wipe snapshot.
  For details of the operating procedures, see "Wipe Snapshots" (page 177).

DME Wipe Snapshot Operations With the Menus

In the same way as for wipe snapshots, you can save, recall, and delete DME snapshots.

For details of the operating procedures, see "Wipe Snapshot Operations With the Menus" (page 179).

Creating User Programmable DME Patterns

With a user programmable DME, you can use DME effects created through the use of keyframes for a transition on the switcher system.
Note the following points when creating a keyframe effect for use as a user programmable DME pattern.

Register numbers and pattern numbers

When saving a keyframe effect as a user programmable DME pattern, specify the register number that corresponds to the pattern number as shown in the following table.

Execution mode	Register number	Pattern number
One-channel mode	101 to 199	1901 to 1999
Two-channel mode	201 to 299	2901 to 2999
Three-channel mode	301 to 399	3901 to 3999

For details of registers and keyframe effects, see Chapter 13 "Keyframe Effects" (Volume 2), respectively.

Notes

When the signal format is 1080P, three-channel mode cannot be used.

Keyframe effects in the global channel

When the effect with the same number as the reference channel is present on the DME global (GLBL) channel, executing the user programmable DME will also execute the effect on the global channel simultaneously.
When executing a user programmable DME, take note of whether the effect is present on the global channel.

User Programmable DME Transition Mode

To create a user programmable DME, it is necessary to set the transition mode (the way in which the effect moves). To set the transition mode, use the Key Frame >DME User PGM menu.

For details of the operating procedures, see "Transition Mode Settings for User Programmable DME" in Chapter 13 (Volume 2).

The following transition modes are available.

Channels	Transition mode	Effect group
One-channel mode	Single transition mode	Slide, Split, Door, Page turn, Page roll, Squeeze, Mirror, Sphere, Character Trail, Wave, Ripple, 2D Trans, 3D Trans, Sparkle, Split Slide
	Flip Tumble	Flip Tumble, Mosaic, Defocus
	Frame in-out	Frame in-out
	Frame in-out H [a)]	Frame in-out
	Frame in-out V	Frame in-out
	Picture-in-picture [b)]	Picture-in-picture
	Compress [c)]	Picture-in-picture
Two-channel mode	Dual transition mode	Slide, Squeeze, 3D Trans
	Two-channel frame in-out	Frame in-out
	Two-channel picture-in-picture	Picture-in-picture

a) Transition according to DME wipe patterns 1202, 1203, or 1204
b) Transition according to DME wipe pattern 1201
c) Transition according to DME wipe pattern 1251

For details, see "Overview" (page 183).

Notes

For the following group of effects available in two-channel mode, no user programmable DME wipe patterns can be created.

Page turn, Page roll, Brick

Notes on creating keyframe effects

When creating a keyframe effect to be used as a user programmable DME pattern, note the following, depending on the transition mode used.

Notes on single transition mode (one-channel mode)

- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the last keyframe to be a full-size image.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Single].

Notes on flip tumble (one-channel mode)

- Create the first keyframe image at full size. In the <Back> group of the DME >Input/Output >Video/Key menu, depending on the direction of the rotation you

want during the transition, press [H Invert] or [V Invert], turning it on.
- Create the last keyframe with the image inverted so the back side is visible, and with the size at full size.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Flip Tumble].

Notes on frame in-out (one-channel mode)

Create a minimum of three keyframes.
- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the first transition to end such that the image can be seen within the screen. At this point, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- Either create the last keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [FRAME I/O].

Notes on Frame in-out H (one-channel mode)

Create a minimum of three keyframe points.
- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- As the state after completion of the first transition, move the image horizontally to make it visible within the screen. At this time, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- For the last keyframe move the image horizontally to place it outside the screen area or set the image size to zero, so that the image is not visible within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [FRAME I/O H].

Notes on frame in-out V (one-channel mode)

Create a minimum of three keyframe points.
- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- As the state after completion of the first transition, move the image vertically to make it visible within the screen. At this time, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- For the last keyframe move the image vertically to place it outside the screen area or set the image size to zero, so that the image is not visible within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [FRAME I/O V].

Notes on picture-in-picture (one-channel mode)

Create a minimum of three keyframes.
- Either create the first keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the first transition to end such that the image can be seen within the screen. At this point, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- Either create the last keyframe image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [P In P].

Notes on compress (one-channel mode)

Create a minimum of three keyframe points.
- Create the first keyframe with the image at full size.
- In the state at completion of the first transition, create the image to be visible within the screen. At this time, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- For the last keyframe, once again set the image size to full size.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Compress].

Notes on dual transition mode (two-channel mode)

- Create the first keyframe for each channel as follows.
  - **Channel 1:** create the image full-size.
  - **Channel 2:** either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the last keyframe for each channel as follows.
  - **Channel 1:** either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
  - **Channel 2:** create the image full-size.
- In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Dual].

Notes on frame in-out (two-channel mode)

Create a minimum of three keyframe points.
- Create the first keyframe for each channel as follows.
  - **Channel 1:** either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
  - **Channel 2:** either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
- Create the first transition to end such that the image can be seen within the screen. At this point, press the [PAUSE] button in the keyframe control block, turning it on, to set a pause for the keyframe.
- Create the last keyframe for each channel as follows.
  - **Channel 1:** either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.
  - **Channel 2:** either create the image outside the screen area, or set the image size to zero so that it cannot be seen within the screen.

• In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [Frame I/O].


Notes on picture-in-picture (two-channel mode)

Create a minimum of three keyframes.

• Create the first keyframe for each channel as follows.
  - **Channel 1:** create the image full-size.
  - **Channel 2:** since the priority is low, it will not be visible on the screen, so no particular restrictions apply.

  In the Global Effect >Ch1 to Ch4 >Combiner menu, when setting the priority of channel 1 and channel 2, set the channel 1 priority higher.
• In the intermediate part of the transition, create the two images so that both are visible within the screen. In the Global Effect >Ch1 to Ch4 >Combiner menu, when setting the priority of channel 1 and channel 2, set the channel 2 priority higher.

  It is recommended to make the priority settings at a keyframe point at which the two images are not overlapping.
• During the course of a transition, there is a “dead zone” corresponding to the intermediate point of the whole effect *(see following figure),* during which the image does not change. Therefore, it is necessary to create the effect so that the image in the intermediate part of the transition is the keyframe for the mid-point of the whole effect. The range of this “dead zone” corresponds to the central one-third of the range of the transition indicator. This also applies to an auto transition.

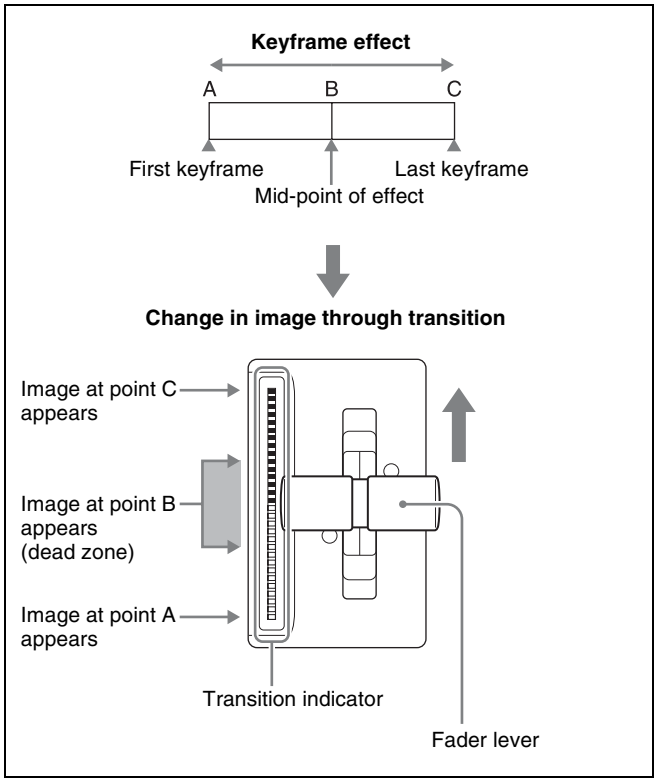


• Create the last keyframe for each channel as follows.
  - **Channel 1:** since the priority is low, it will not be visible on the screen, so no particular restrictions apply.
  - **Channel 2:** create the image full-size.
• In the <Transition Mode> group of the Key Frame >DME User PGM menu, select [P In P].

DME Wipe Pattern Operations in the Multifunction Flexi Pad Control Block

Recalling a DME Wipe Snapshot

The operation of recalling a DME wipe snapshot in the Multifunction Flexi Pad control block is the same as the operation of recalling a wipe snapshot, except for pressing the [DME WIPE] button to select DME wipe snapshot mode *(see page 180)*.

You can change the indications for buttons [0] to [9] in the memory recall section to pattern images, using the Engineering Setup >Panel >Operation >Flexi Pad Mode menu.

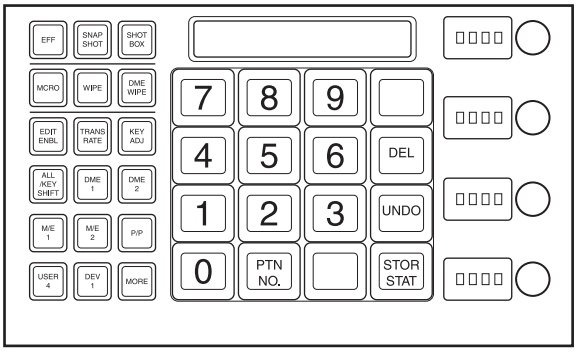


Selecting the DME Wipe Pattern

The operation of selecting the DME wipe pattern in the Multifunction Flexi Pad control block is the same as the operation of selecting a wipe pattern, except for pressing the [DME WIPE] button to select DME wipe snapshot mode *(see page 180)*.

Note, however, that the pattern numbers for DME wipe patterns have four digits *(see page 361)*.

Editing the DME Wipe Pattern

By pressing the [EDIT ENBL] button to switch the memory recall section to editing mode as shown in the following illustration, you can edit the selected DME wipe pattern with the following buttons.
To exit from the editing mode, press the [EDIT ENBL] button once more, or press the [EXIT] button.

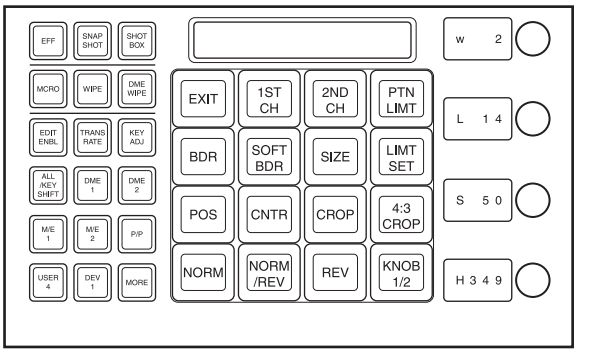

Note that the operation of the following buttons is the same as when editing a wipe pattern.
- [EXIT] button
- [PTN LIMT], [LIMT SET] buttons
- [NORM], [NORM/REV], [REV] buttons
- [KNOB 1/2] button

For the method of operation of these buttons, see "Editing the Wipe Pattern" (page 180).

Channel selection buttons

1ST CH (channel 1): Selects channel 1.
2ND CH (channel 2): Selects channel 2.
You can also select two channels by pressing the buttons simultaneously.

DME wipe pattern edge setting buttons

BDR (border): Applies a border to the DME wipe pattern.
SOFT BDR (soft border): Softens the applied border.
You can adjust the parameters selected with these buttons using the control knobs, when the button is lit green.

- **When border is selected**

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100
2	L	Luminance	0 to 100
3	S	Saturation	0 to 100
4	H	Hue	0 to 359

- **When soft border is selected**

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	W	Border width	0 to 100
2	I	Degree of softening of inside of border	0 to 100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	L	Luminance	0 to 100
2	S	Saturation	0 to 100
3	H	Hue	0 to 359

Buttons for positioning the DME wipe pattern

POS (position): Adjusts the position of the DME wipe pattern.

CNTR (center): Returns the DME wipe pattern position to the center.

When you press the [POS] button, the alphanumeric display first shows the name of the parameter, "H" or "V," and then the value of the parameter.

When the [POS] button is lit green, you can adjust the position of the pattern with the control knobs.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–200 to +200
2	V	Vertical position	–200 to +200
3	H (R)	Relative horizontal movement	–400 to +400
4	V (R)	Relative vertical movement	–400 to +400

Buttons for setting DME wipe pattern cropping

CROP: Adjusts the DME wipe pattern cropping.

4:3 CROP: Crops a 16:9 image to 4:3.

When the [CROP] button is lit green, you can set the cropping ratio of the DME wipe pattern, with the control knobs.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Cropping ratio of the image from left and right sides	–100 to +100
2	V	Cropping ratio of the image from top and bottom sides	–100 to +100
3	A	Cropping ratio of the image from all four sides	–100 to +100

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	T	Cropping ratio of the image from the top	–100 to +100
2	L	Cropping ratio of the image from the left	–100 to +100
3	R	Cropping ratio of the image from the right	–100 to +100
4	B	Cropping ratio of the image from the bottom	–100 to +100

Button for specifying effect size

SIZE: Specifies the effect size. When the [SIZE] button is lit green, you can specify the effect size, with the control knobs.

Knob	Parameter	Adjustment	Setting values
1	S	Effect sizes	0 to 200 a)

a) The effect size when [Size] is off is taken as 100.00.

DME wipe modify clear

With the [DME WIPE] button held down, pressing and holding down the region selection button for the selected region returns the DME wipe settings to their initial status.

For details of the initial status, see "Saving User-Defined Settings" in Chapter 18 (Volume 2).

Saving, Canceling, and Deleting DME Wipe Snapshots

The operations of saving, canceling, and deleting a DME wipe pattern snapshot you have created are the same as the operations of saving, canceling, and deleting a wipe snapshot *(see page 182)*.

Frame Memory

Chapter 7

Overview

Frame memory is a function whereby a frame of input video can be frozen and written to memory, for further use as material for editing.
You can also play recorded frame memory clips (movies).

Frame capacity

The frame memory board has two blocks of memory, and the following table shows the maximum number of images that can be written to each block. Of the two, one is reserved for storing frame memory clips.

HD system:
(Without ancillary data)

Video format	Memory capacity
1080i/50	Approx. 1000 frames
1080i/59.94	
1080PsF/23.976	
1080PsF/24	
1080PsF/25	
1080PsF/29.97	
1080PsF/50	Approx. 2000 frames
1080P/59.94	
720P/50	Approx. 2300 frames
720P/59.94	

(With ancillary data)

Video format	Memory capacity
1080i/50	Approx. 700 frames
1080i/59.94	Approx. 800 frames
1080PsF/23.976	Approx. 600 frames
1080PsF/24	
1080PsF/25	Approx. 700 frames
1080PsF/29.97	Approx. 800 frames
720P/50	Approx. 1400 frames
720P/59.94	Approx. 1700 frames

SD system:
(Without ancillary data)

Video format	Memory capacity
480i/59.94	Approx. 5600 frames
576i/50	Approx. 4800 frames

(With ancillary data)

Video format	Memory capacity
480i/59.94	Approx. 4700 frames
576i/50	Approx. 3900 frames

For details of operating procedures, see "Still Image Operations" (page 204).

Types of image and terminology used

The following types of image are handled in frame memory.

Freeze image: An input image that has been frozen, but not saved to memory.

Still image: A freeze frame that has been saved to memory as a file. Each file (still file) holds just one still image.

Frame memory clip: A clip consists of a sequence of still images, which appears as a movie on playback. In this manual this is also referred to simply as a "clip." The files (still files) constituting clips are referred to as a "clip file."

When the above distinctions are not being made, an image is simply referred to as an "image."

About extended clips

Of the two memory blocks for saving a clip, the clip saved in the memory block which is not combined with a still image is called an "extended clip."
However, when the signal format is 1080P, since both a still image and a clip are saved in both memory blocks, there is no extended clip.

Use of frame memory

There are eight frame memory channels, FM1 to FM8, and each channel independently allows a freeze image to be saved or recalled.
By allocating FM1 to FM8 to cross-point buttons you can use the still image output or clip output from each channel as input material.

Notes

However, when the signal format is 1080P, only the four options of FM1 to FM4 can be used.

Correspondence between input and output

There are two buses for capturing frame memory material: the frame memory source bus 1 and the frame memory source bus 2.
These input buses are used by allocation to one of the pairs of output, FM1&2, FM3&4, FM5&6, and FM7&8. You can freeze a frame in each channel separately, or freeze in the two channels simultaneously.
The source buses allocated to FM1 to FM8 are as follows.

Input	Frame memory source bus 1	Frame memory source bus 2
Output	FM1	FM2
	FM3	FM4
	FM5	FM6
	FM7	FM8

Pair mode

By enabling the pair mode, you can link FM1 and FM2, FM3 and FM4, FM5 and FM6, and FM7 and FM8. For example, when a freeze or image processing is carried out on FM1, the same operation is carried out on FM2. The same applies to the other pairs. When a pair of images are captured in pair mode, the image frozen in FM1 (3, 5, or 7) is referred to as the main file and the other frozen in FM2 (4, 6, or 8) is referred to as the sub file.

Pair files and single files

A file that can be recalled in pair mode is termed a “pair file.” A pair file can be created by setting pair mode and capturing an image, or by using the coupling function *(see page 221)* to combine two single files.
A file other than a pair file is termed a “single file.” A single file can be created by switching off pair mode and capturing an image, or by using the separation function *(see page 221)* to split a pair file.

Operation modes

The frame memory has the following operation mode.

V/K mode: When the pair mode is active, the key signal is automatically selected on frame memory source bus 2. This is convenient for handling the video and key signals together in frame memory. For example, when you select a video signal on frame memory source bus 1, the key signal assigned to it is automatically selected on frame memory source bus 2. You can also use the signal automatically selected on frame memory source bus 2 as a key signal when processing keyframe memory 1.

To change the pair mode or operation mode, use the Frame Memory menu.

Frame memory folders

Still images and clips can be managed in a maximum of twelve groups.
Such a group is called a “frame memory folder.” Folders can be added or deleted, and can be given a name of up to 8 characters.

Notes

- When the system is powered off, the folder names are deleted. The folder names need to be saved on media.
- The following names cannot be used for folders.
  Flash1, Flash2
  CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9
  LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9
  A folder named “Default” is provided, and this folder cannot be renamed or deleted.
- Still images and clips in different frame memory folders cannot have the same name.

Still Image Operations

The frame memory functions provides the following still image file functions.

- Capturing and Saving an Input Image *(page 207)*
- Recalling Still Images *(page 209)*
- Image Output *(page 210)*
- Continuously Capturing Still Images (Record) *(page 211)*
- Recalling a Continuous Sequence of Still Images (Animation) *(page 211)*

Notes

During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons *(see page 215)*, frame memory operations may not be performed properly. Carry out frame memory operations after stopping clip playback.

Preparations

Allocating the frame memory outputs (FM1 to FM8) to cross-point buttons

To output a frame memory image to a monitor, for example, the output signal from the frame memory (FM1 to FM8) must be allocated to a cross-point button. Carry out this allocation in the Setup menu.

Notes

When the signal format is 1080P, only the four options of FM1 to FM4 can be used.


Accessing the Frame Memory menu

Most frame memory operations are carried out using the Frame Memory menu.
To access the Frame Memory menu, use either of the following procedures.

- In the menu control block, select the top menu selection button [FRAME MEM].
- Press the cross-point button to which the frame memory output is allocated twice in rapid succession.

Interpreting the Frame Memory Menu

The menu screen consists of the following principal parts. The frame memory selection area display is the same for all menus, excluding the File (excluding Pair Recombination menu), Folder, and External Device menus.

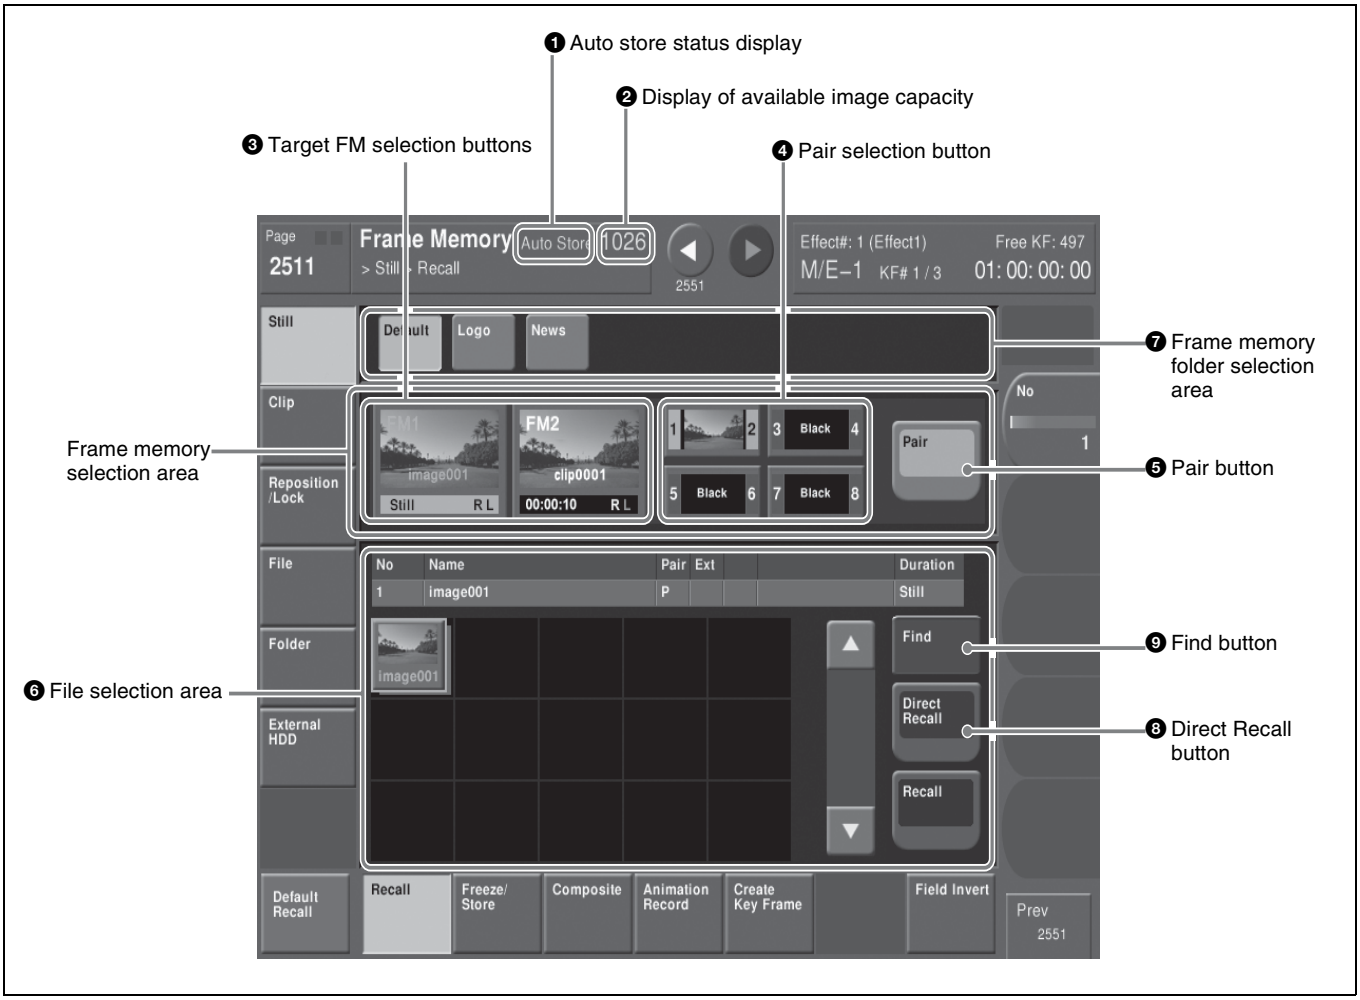

Frame Memory menu

❶ Auto store status display

Depending on the setup settings, this appears when the auto store function is enabled.


❷ Display of available image capacity

This shows the remaining number of frames. When no more frames can be stored, in pair mode "1" or "0" appears in red, and in single mode "0" appears in red.
The lower figure shows the remaining number of frames that can be used as extended clips.

Notes

When the signal format is 1080P, each time a still image is saved the remaining space is reduced by two frames.

❸ Target FM selection buttons

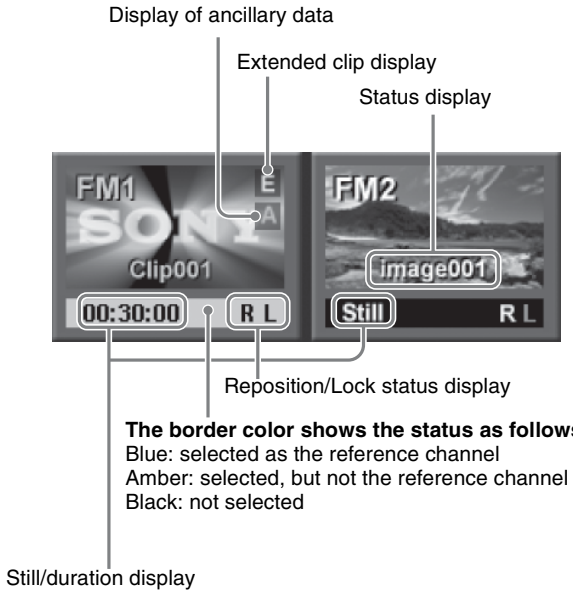

Press one of these to select which of the selected outputs (FM1 and FM2 in the example shown) the operation applies to.
The following information appears on the button.

Status display
File name (e.g. image001) and thumbnail: when a file is output
Black: when a black signal is output
Through: when the input image is output
Freeze: when a freeze is output
Record: when continuously capturing images (record)


Still/duration display
When a still image is selected, "Still" is shown. When a clip is selected, a duration indication such as "00:00:10" is shown.

Reposition/Lock status display
This shows "R" when the reposition function *(see page 210)* is on, and shows "L" when the lock function *(see page 210)* is on.

Extended clip display
For an extended clip, an "E" appears.

Ancillary data-attached clip display
For an ancillary data attached clip, an "A" appears.

❹ Pair selection button
Select the pair to be displayed in the target FM selection buttons (in the following figure, the pair of FM1 and FM2 is selected).

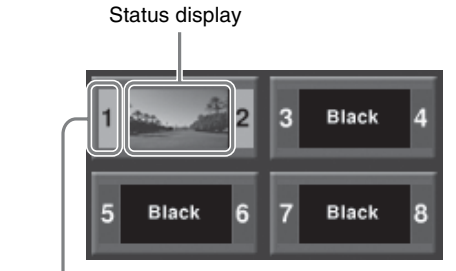


The following information appears on the button.

Status display
For a pair, shows the status for the reference.
Thumbnail: when a file is output
Black: when a black signal is output
Through: when the input image is output
Freeze: when a freeze is output
Record: when continuously capturing images (record)

❺ Pair button
Press this button, turning it on, to enable pair mode.

❻ File selection area
You can select from the displayed still image files or clip files.

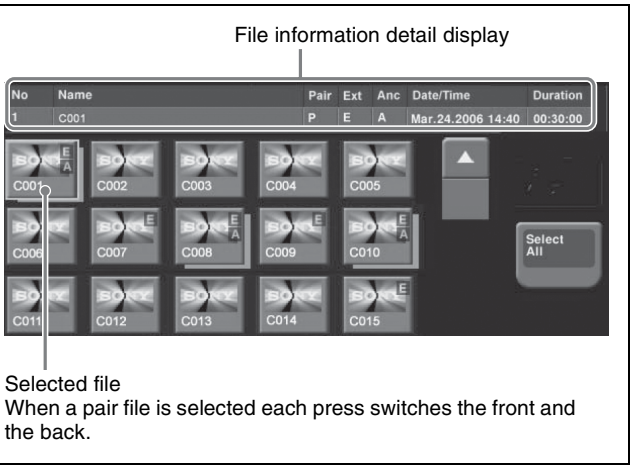

Thumbnail indications
Still image files and clip files: Still image files are displayed as gray buttons and clip files are displayed as yellow buttons.
Single files and pair files: Single files are displayed with shadow and pair files are displayed with no shadow.
Selected file: Pale blue border. When more than one file is selected, only the first is pale blue, and the remainders are amber. If the pair file was selected, each press switches the front and the back.

File information detail display
For the selected file, this shows the file name, "P" if a pair file, "E" if an extended clip, "A" if an ancillary data attached clip, and the duration.

❼ Frame memory folder selection area
Select the frame memory folder to be displayed.

❽ Direct Recall button
Toggle on and off the direct recall mode in which pressing a thumbnail immediately recalls the file.

❾ Find button
Pressing this button displays a popup window, in which you can enter a file name to carry out a search.

Selecting an Input Image

For the input image to frame memory, you can use either the signal selected on one of the two frame memory source buses or a dedicated color matte signal.
When using the signal on frame memory source bus 1 or 2 for the input image, select the signal as described below.

Selecting the signal on a frame memory source bus

As an example, to select a signal on frame memory source bus 1, use the following procedure.

1 In the auxiliary bus control block, press the AUX delegation button to which frame memory source bus 1 is allocated, turning it on.

For allocation of buses to the AUX delegation buttons, see "Assigning a Bus to an AUX Delegation Button" in Chapter 19 (Volume 2).

On a CCP-6224/6324 control panel, you switch the cross-point control block for use as an AUX bus control block.

2 In the auxiliary bus control block cross-point buttons, select the signal to be used for the input image.

To select a signal with a key or DME effect applied on the frame memory source bus

In the key control block, press the [FM FEED] button, turning it on.
This automatically assigns the key fill and key source signals being keyed by the currently selected keyer to frame memory source buses 1 and 2.
When DME is selected on the keyer, the key fill and key source signals to which a DME effect is applied are assigned.

Selecting Outputs and Target Frame Memory

Selecting outputs (FM) and target frame memory

The following description applies to the case of settings for FM1&2, but the procedures are similar for the other cases.

1 In the Frame Memory menu, press one of VF1 to VF4, and select the required HF menu.

The current status of frame memory appears *(see page 204)*.

2 From the pair selection buttons, press the buttons corresponding to FM1 and FM2.

This assigns the signals to FM1 and FM2.
To the right of the target FM selection buttons, the FM1 and FM2 output status appears *(see page 205)*.

3 If required, press [Pair] to select the FM operation mode (pair mode).

On: Operate on FM1 (3, 5, 7) and FM2 (4, 6, 8) as a pair.
Off: Operate on FM1 (3, 5, 7) and FM2 (4, 6, 8) individually.

For more details, see "Pair mode" (page 203).

Notes

In the Pair Recombination menu, the [Pair] operation is not possible.

4 Press the target FM selection button [FM1] or [FM2] *(see page 205)* to select the FM operations apply to.

When [Pair] is On: Whichever of FM1 and FM2 you press, the pair is selected.
When [Pair] is Off: One of the targets must be selected. However, in the Clip >Play menu you can also select both FM1 and FM2.

Selecting a frame memory folder

Press a button in the frame memory folder selection area *(see page 206)*.
By pressing [More] to switch the display, you can select from a maximum of 12 folders.
Thumbnails of the files within the selected folder appear.

Capturing and Saving an Input Image

As the input material for the frame memory, you can use the signal selected on the frame memory source bus. For this signal you can use video processing (video levels or hue value adjustment) or masking.
Allocating a frame memory source bus signal to one of FM1 to FM8, then carrying out a freeze captures a still image in the corresponding frame memory output image, and saves it in temporary memory.
For a freeze, an image can be captured either as video frame (a "frame freeze") or a video field ("field freeze").

Notes

When the system is powered off, any freeze images written to temporary memory are lost.

Freezing an image and writing it to memory

To freeze the signal selected as input material, and write it to memory, use the following procedure.

1 In the Frame Memory menu, select VF1 'Still' and HF2 'Freeze/Store.'

The Freeze/Store menu appears.

2 Select the target frame memory.

For the procedure, see "Selecting outputs (FM) and target frame memory" (page 207).

3 To enable V/K mode, press [V/K Mode] turning it on.

4 Press a button in the frame memory folder selection area, to select the folder to hold the freeze image *(see page 207)*.

Notes

The folder selected here is the destination folder for writing the freeze image.
It is not possible to change the selection of this folder after the following step **5**.
An orange bar appears on the selection button for the destination folder.

5 Press [Freeze Enable], turning it on.

The signals of frame memory source buses 1 and 2 are assigned to the pair of FMs selected in step **2**, a freeze is now possible.

6 If necessary, make the video process settings *(see page 208)* or mask settings *(see page 209)* for application to the selected signal.

7 In the state in which you want to freeze, press one of the following in the <Freeze> group, to write the freeze image to temporary memory.

Frame: Freeze one frame.
Field: Freeze one field.
Off: Release the freeze, and delete the recorded freeze image.
After carrying out the freeze, to return to the state immediately before the freeze, press [Undo] in the <Freeze> group.

Notes

- All freeze images written to temporary memory are lost when the system is powered off.
- If you change the frame memory to use as in step **2** before saving the freeze images written to temporary memory, all the freeze images in temporary memory are lost, unless the auto store function has been enabled in setup. With the auto store function enabled, the freeze images written to temporary memory are saved automatically when the frame memory selection is changed.
- For the following signal formats, a field freeze is not possible.
  1080P/50, 1080P/59.94, 1080PsF/23.976, 1080PsF/24, 1080PsF/25, 1080PsF/29.97, 720P/50, 720P/59.94

Saving a freeze image (Store)

You can save an image in temporary memory which has been placed with the freeze function as a file in memory. You can save a single image in a single file and apply a name of up to eight characters to the file.

Notes

- When the system is powered off, all the files saved in memory are lost.
- When the signal format is 1080P, the file name is limited to seven characters.
  Each time a still image is saved, the remaining space is reduced by two frames.

To save a captured still image in a file, use the following procedure in the Still >Freeze/Store menu.

1 Press [Store].

The keyboard window *(see page 82)* appears.

2 In the keyboard window, enter the file name.

Notes

The following names cannot be used:
CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

3 In the keyboard window, press [Enter].

This saves the still image file in memory.
The destination folder is the folder selected in step **4** of "Freezing an image and writing it to memory."
If the entered folder name already exists, a message to confirm overwriting appears.
When the system is powered off, the file saved in memory is erased.

To carry out a freeze and store simultaneously (Freeze and Store)
Press [Freeze & Store], turning it on.
In this state, if you press [Frame] or [Field], this carries out a freeze, and simultaneously stores in a still image file.

Setting video processing

To set video processing for the signal selected on a frame memory source bus, use the following procedure in the Still >Freeze/Store menu.

1 In the <Video Process> group, press [Video Process], turning it on.

2 Use the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Overall gain of the video signal	–200.00 to +200.00
2	Y Gain	Y signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Y signal black level	–7.31 to +109.59

To return the settings to the default values, press [Unity] in the <Video Process> group.

Notes

When a pair setting is active, it is coupled to the video process on/off setting, but the above parameter settings are only valid for frame memory source bus 1. The pair setting cannot be used to set the frame memory source bus 2. If you want to set video process for frame memory source bus 1 only with the pair setting when old settings for frame memory source bus 2 remain, return the frame memory source bus 2 settings to their default values. When setting video process for the frame memory source bus 2, disable the pair setting.

Setting a mask

Masks can be set separately for frame memory source buses 1 and 2. To apply a mask to the signal selected on frame memory source bus 1, for example, use the following procedure in the Still >Freeze/Store menu.

1 Press [Box Mask], turning it on.

2 Use the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	–100.00 to +100.00
2	Left	Left position	–100.00 to +100.00
3	Right	Right position	–100.00 to +100.00
4	Bottom	Bottom position	–100.00 to +100.00

3 To link the masks on frame memory source buses 1 and 2, press [Mask Link], turning it on.

Recalling Still Images


You can recall an image file saved in memory, and allocate to any of the FM1 to FM8 outputs.

Recalling a still image

To recall a still image file saved in memory using the thumbnails, and assign it to an FM output, use the following procedure.

1 In the Frame Memory menu, select VF1 ‘Still’ and HF1 ‘Recall.’

The Recall menu appears.
- When [Pair] is on, only pair files (pairs of main file and sub file) are displayed.
- When [Pair] is off, both single files and pair files appear (see following figure).

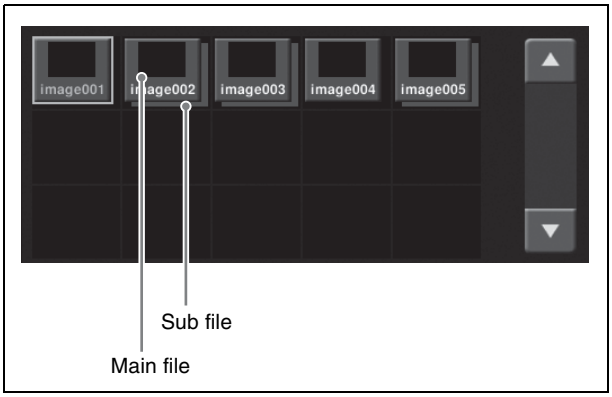

2 In the frame memory selection area, select the FM to be assigned *(see page 207)*.

3 If [Direct Recall] is on, press and turn it off.

4 Select the desired folder in the folder selection area. By pressing [More] to switch the display, you can select from a maximum of 12 folders.

Thumbnails of the files within the selected folder appear.

5 Using the arrow keys or turning the knob, scroll the file thumbnail display.

Knob	Parameter	Adjustment	Setting values
1	Scroll	Thumbnail display scrolling	1 to maximum value

6 Press the thumbnail of the still image you want to recall.

7 Press [Recall].

This recalls the still image file, which is assigned to the FM you selected in step **2**.

To recall in direct recall mode

Direct recall means that pressing a thumbnail immediately recalls the file.
In this mode, only the front thumbnail file is recalled.

1 In step **7** above, instead of pressing [Recall], press [Direct Recall].

2 Press the thumbnail for the file you want to recall.


To display the subsidiary file in front

With the direct recall mode on, press [Sub Display], turning it on.

To search by file name

1 In the Recall menu, press [Find].

The Find window appears.



2 Press [Find].

A keyboard window appears.

3 Enter the string you want to search for, and press [Enter].

This starts the search, and the indicator lights.
When the search ends, the files found are selected.

4 To move through the selected files, press [< Prev] or [Next >].

5 Press outside the Find window on the menu screen.

Image Output

There are two functions related to image output: the reposition function for moving the output image, and the lock function for fixing the output image.

Moving the output image (reposition function)

For up to two channels of FM1 to FM8 (one from FM1, FM3, FM5 and FM7 and the other from FM2, FM4, FM6 and FM8), you can move the output image with respect to the screen. The area of the screen around the image that has been moved is filled with black. There are two ways of carrying out this repositioning.

Normal mode: Movement in the horizontal direction is in two-pixel increments.

Black and white mode: Movement in the horizontal direction is in one-pixel increments, and for each pixel moved the color is inverted.

Notes

It is not possible to save an image moved with the reposition function directly to frame memory.

1 In the Frame Memory menu, select VF3 ‘Reposition/Lock’ and HF1 ‘Reposition.’

The Reposition menu appears. In this menu, you can also enable the V/K mode *(see page 208)*.

2 In the frame memory selection area, select the FM output *(see page 207)*.

3 In the <Reposition> group, select the movement mode.

Normal: Move in normal mode.
Black&White: Move in black & white mode.

4 With the knobs, adjust the parameters to move the image.

Knob	Parameter	Adjustment	Setting values
1	Position H	Move in horizontal direction	–200.00 to +200.00 a)
2	Position V	Move in vertical direction	–200.00 to +200.00 a)

a) See *page 169*.

The surroundings of the moved image on the screen are filled with black.

To return the image to the center position

In the <Reposition> group, press [Center].

Fixing the output image selection (lock function)

For the output of each of FM1 to FM8, this fixes the image at the current output. When this lock is enabled, even if the output is recalled in a snapshot or keyframe, the images output to FM1 to FM8 are preserved.

Notes

When the signal format is 1080P, this function cannot be used.

1 In the Frame Memory menu, select VF3 ‘Reposition/Lock’ and HF2 ‘Lock.’

The Lock menu appears.

2 In the frame memory selection area, select the FM output *(see page 207)*.

3 Press [Lock], turning it on.

This fixes the currently selected frame memory output image.
To release the lock, set [Lock] to off.

Continuously Capturing Still Images (Record)

You can continuously capture (freeze) a sequence of input video frames and store the sequence of the still images over a specified time interval.
The name of each image recorded in this way consists of a first character string followed by a second string.

First character string: A common part of name assigned to all the still images captured in one record operation. This string includes a maximum of four characters, which can be specified using a menu before carrying out the capture. The first string is automatically used as the clip name when the images are treated as a frame memory clip.

Second character string: A four-digit number (0000 or greater), which is incremented each time a still image is captured.

Notes

When using the record function to continuously capture frames, it is not possible to use the mask function.

Continuously freezing input images and writing to memory

1 In the Frame Memory menu, select VF1 ‘Still’ and HF4 ‘Animation Record.’

The Animation Record menu appears.

2 Select the desired frame memory *(see page 207)*.

3 To use V/K mode, press [V/K Mode], turning it on.

4 Press a button in the frame memory folder selection area, to select the folder to hold the freeze image *(see page 207)*.

Notes

The folder selected here is the destination folder for writing the freeze image.
It is not possible to change the selection of this folder after the following step **5**.
An orange bar appears on the selection button for the destination folder.

5 Press [Record Enable], turning it on.

The signals of frame memory source buses 1 and 2 are assigned to the pair of FMs selected in step **2**, the recording function is now possible.

6 Input the file name if required.

Pressing [File Name] displays the keyboard window and you can enter the first character string (up to four characters) of the file name.

7 Set the recording time if required.

Pressing [Duration] displays the numeric keypad window, in which you can enter the recording time in the form of timecode.
If you set the recording time to zero, this uses all frame memory in which storing is possible for recording.

8 If required, set video processing for the selected signal *(see page 208)*.

9 Press [Record], to start recording.

When the recording time is set, recording stops once the time has elapsed.

10 Press [Stop] to stop recording.

Even if the recording time is set, you can still stop recording before the set time has elapsed.

Recalling a Continuous Sequence of Still Images (Animation)

You can use a continuous sequence of images captured with the record function as keyframes to create an effect. By executing this effect you can recall the continuous sequence (animation).

Notes

- For example, to create an effect using FM1, FM1 must be assigned to a user region.
- To execute the effect, you must assign the user region to which FM1 is assigned to a region selection button in the numeric keypad control block and the Multifunction Flexi Pad control block.

For details of assigning to region selection buttons, see Chapter 19 "Control Panel Setup (Panel)" (Volume 2).

In the Frame Memory menu, effect creation follows the image file names. Of the eight characters in the file names, if files have the same characters except for the last three characters they are treated as an image file group, and the effect is created with the last three (numeric) characters in sequence.

Notes

When creating the effect in pair mode *(see page 203)*, the files used must be main files and sub files with the same last three (numeric) characters in the file name.

To recall a continuous sequence of still images, create an effect in the user region with the still image files as a keyframe, and run the created effect.

Notes

With the 720P format or 1080P format, you can continuously recall images using the frame memory in units of two frames only.

Creating an effect with still image files as a keyframe

1 In the Frame Memory menu, select VF1 'Still' and HF5 'Create Key Frame.'

The Create Key Frame menu appears.
- A thumbnail appears for each group of files having the same characters, except for the last three characters, in the file name.
- When [Pair] is on, only pair files (each pair comprising a main file and a sub file) appear.
- When [Pair] is off, both single files and pair files all appear.

2 In the frame memory selection area, select the frame memory to be assigned *(see page 207)*.

3 Select the desired folder in the folder selection area. By pressing [More] to switch the display, you can select from a maximum of 12 folders.

Thumbnails of the files within the selected folder appear.

4 Turn the knob to select the register number in the user region.

Knob	Parameter	Adjustment	Setting values
5	Register	Effect register number	1 to 99

Notes

To search for an empty register in the user region, use the numeric keypad control block or the Multifunction Flexi Pad control block.

*For details, see step **3** of "Recalling a Register" in Chapter 13 (Volume 2).*

5 Use the arrow keys or turn the knobs to scroll the thumbnail display of the files.

Knob	Parameter	Adjustment	Setting values
1	Scroll	Thumbnail display scrolling	1 to maximum value

6 Select the thumbnail of the files to be used for the keyframe.

7 If necessary, turn the knob to check the animation effect in the thumbnail display.

Knob	Parameter	Adjustment	Setting values
3	Viewer	Current frame position	00:00:00 to maximum value

8 Using the region selection buttons in the numeric keypad control block or the Multifunction Flexi Pad control block, select one of the regions (User1 to User8) to which the frame memory output signals have been assigned.

9 Carry out either of the following.

- To clear the effect register selected in step **4**, and create a new effect: press [Create Key Frame].
- To add to the end of the effect register selected in step **4**, press [Append Key Frame].

A confirmation message for creating the effect appears.
If there is an inappropriate condition for creating the effect, an error message appears.

For details of error messages, see "Error Messages" in the Appendix (Volume 2).

10 Press [OK].

This creates the effect in the selected user region register.

To cancel creating the effect
Press [Cancel].

Notes

- The effect is built with the selected files, in increasing order of the last three characters of the file name. If you do not want to include some of these files in the effect, first delete or rename them.
- A maximum of 99 keyframes can be included in a single effect.

Recalling a sequence of still images

Run the effect created by the foregoing procedure.
The procedure for doing this is the same as for any other effect.

For details, see "Executing Effects" in Chapter 13 (Volume 2).

Frame Memory Clip Function

What is a "frame memory clip"?

Movies can be read into frame memory, and recalled and played back. A movie held in frame memory is called a "frame memory clip."
A frame memory clip can be named using up to four characters *(see page 211)*.

Ancillary data

In a frame memory clip, in addition to the video image, you can also record and play back ancillary data which can be used as embedded audio.
To record the ancillary data, in the Setup menu the frame memory saving mode must be set to "save with ancillary data".

For details, see "Saving a Frame Memory Clip With Ancillary Data" in Chapter 18 (Volume 2).

Notes

- With this setting, the saving mode for still images also changes to "save with ancillary data," but when playing back a still image the ancillary data is never played.
- When you change the saving mode, the frame memory is initialized, and any existing recorded frame memory data is lost.
- When the signal format is 1080P, ancillary data is not supported.

Note on transferring ancillary data

Ancillary data is recorded when the frame memory saving mode is set to "save with ancillary data," and can be saved to an external storage device such as a hard disk or memory card, and recalled. However, the ancillary data can only be saved or recalled in the following circumstances.

- When the frame memory saving mode is set to "save with ancillary data.
- When ancillary data is present in the saved or recalled frame memory file.
- When the system signal format is the same as the signal format in the file.

When the frame memory saving mode is set to "save with ancillary data," the following ancillary data status information is added to a frame memory clip.

- Disable:
  In this state the ancillary data is not played. This is the status when [Ancillary Enable] in the Frame Memory >Clip menu is Off.

• Enable:
  In this state, ancillary data is present, and can be played back. This is the status when [Ancillary Enable] in the Frame Memory >Clip menu is On. This is the status after a clip recording operation.

This status information is saved in a file, and is followed when the file is recalled.

Frame memory clip settings

For frame memory clips, you can make the following settings using a menu or device control block (trackball/search dial/joystick).

- Start point
- Stop point
- Loop On/Off

The above settings can be saved in a snapshot register as snapshot attributes, and recalled.

Frame Memory Clip Operations

Notes

During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons *(see page 215)*, frame memory operations may not be performed properly.
Carry out frame memory operations after stopping clip playback.

Preparations for Operation

The preparations for using a frame memory clip (hereafter, a “clip”) are the same as for a still image operation.

For details, see “Preparations” (page 204) and “Selecting Outputs and Target Frame Memory” (page 207).

Recalling Clips


Recalling a clip

You can recall a clip from each of frame memories 1 to 8.

1 In the Frame Memory menu, select VF2 ‘Clip’ and HF1 ‘Recall.’

The Recall menu appears *(see following figure)*.

- When [Pair] is set to On, only pair files (sets of main file and sub file) are shown.
- When [Pair] is set to Off, both of single files and pair files are shown.

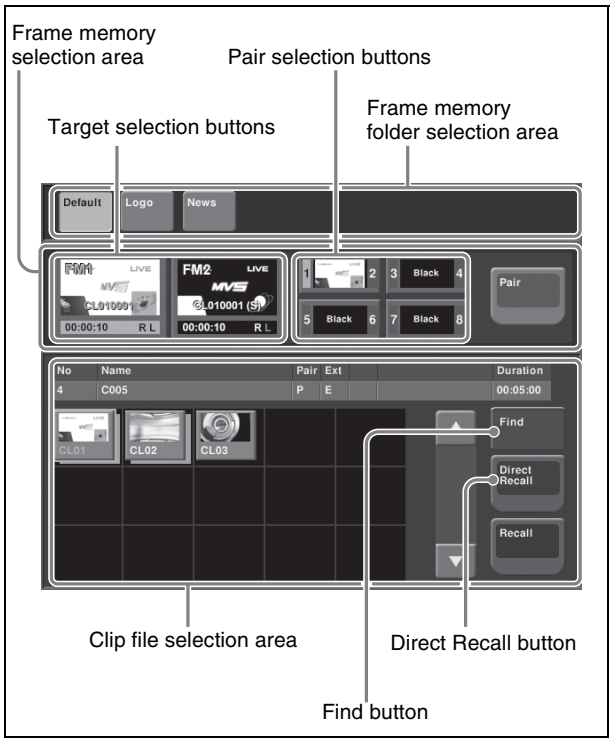

2 In the frame memory selection area, select an assigned target FM *(see page 207)*.

3 If [Direct Recall] is on, press the button, turning it off.

4 In the frame memory folder selection area, select the desired folder.
By pressing [More] to switch the displays, you can select from a maximum of 12 folders.

5 Using the arrow keys or turning the knob, scroll the file thumbnail display.

Knob	Parameter	Adjustment	Setting values
1	Scroll	Thumbnail display scrolling	1 to maximum value

6 Press the thumbnail of the clip you want to recall.

7 Press [Recall].

This recalls the clip file, which is assigned to the FM you selected in step **2**.
In pair mode, if a clip is selected, the main file is output to FM1, and the sub file to FM2. In single mode, when only one of FM1 and FM2 is selected, the front file on the thumbnail is output.

To recall in direct recall mode

Direct recall means that pressing a thumbnail immediately recalls the file.
In this mode, only the front thumbnail file is recalled.

1 In step **7** above, instead of pressing [Recall], press [Direct Recall].

2 Press the thumbnail for the file you want to recall.

To display the subsidiary file in front

With the direct recall mode on, press [Sub Display], turning it on.

To search the clip file by file name

Press [Find] *(see page 210)*.

Clip Playback

You can play a recalled clip by a menu operation or by using the device control block.


Notes

With a pair file recalled, it is possible to set [Pair] to Off and carry out a single file operation, but if you then set [Pair] to On again, the output of frame memory may be black. In such cases it is necessary to recall the pair file once more.

Playing a clip using the menu

1 In the Frame Memory menu, select VF2 ‘Clip’ and HF2 ‘Play.’

The Play menu appears. The status of the clip shown in the current target FM selection buttons appears here.

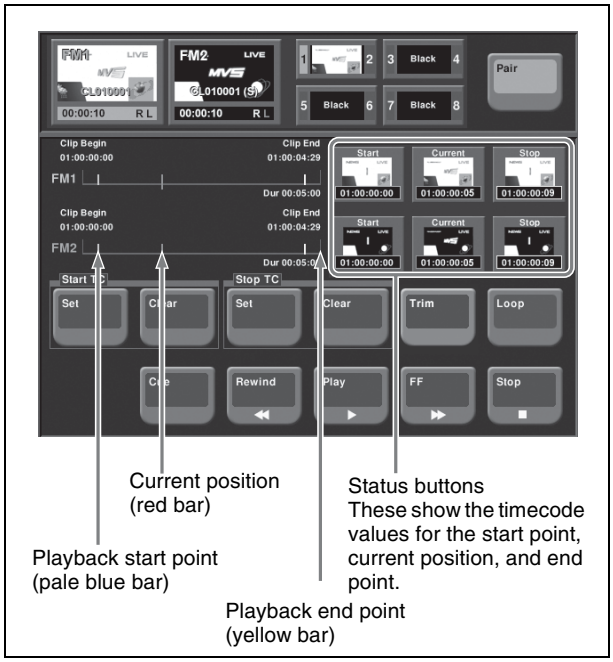

2 When [Pair] is Off, press a target FM selection button to select the target.

3 To set loop playback, press [Loop], turning it on.

4 To start playback, press [Play]. During playback, to stop, press [Stop].

To cue up
Press [Cue].

To play the image at the beginning of the clip (Clip Begin)
Press [Rewind].

To play the image at the end of the clip (Clip End)
Press [FF].

To specify the playback start point
To set the current position as the playback start point, in the <Start TC> group, press [Set]. To set a different position, press the [Start] status button, and enter a timecode value from the numeric keypad window.

To specify the playback stop point
Start playback, and at the desired position press [Stop] to stop playback, then in the <Stop TC> group, press [Set]. To set to any position, press the [Stop] status button, and enter a timecode value from the numeric keypad window.

To change the current position
To change the current position, press the [Current] status button, and enter a timecode value from the numeric keypad window.

To delete the parts of a clip file other than the playback part (trimming)

1 Set the playback start point and stop point.

2 Press [Trim].

A confirmation message appears.

3 Press [Yes].

Using the device control block (search dial) to play back clips

Notes

A frame memory clip must first be recalled with a menu operation.

1 With the device selection buttons, select the frame memory clip to be played (FM1 CLIP to FM8 CLIP).

If the pair mode is on, both main and subsidiary FMs light.

2 Press the [PLAY] button, turning it on.

To stop playback, press [STOP] or any of the [SHTL], [JOG], [CUE], [REW], [FF], and [ALL STOP] buttons.

For details of the buttons in the device control block (search dial), see "Device Control Block (Search Dial)" (page 49).

To specify the playback start point
To make the current position the playback start point, press the [START TC] button. To set a different position, press the [SET START TC] button, then enter the timecode from the numeric keypad control block.

To specify the duration
Press the [SET DUR] button, and enter a timecode from the numeric keypad control block. If the playback start point is already set, this automatically sets the playback stop point. If the playback stop point is already set, this automatically sets the playback start point. The duration setting is not displayed in the device control block.

To specify the playback stop point
Start playback, and at the desired position press the [STOP] button to stop playback, then press the [STOP TC] button. To set to any position, press the [SET STOP TC] button, and enter a timecode from the numeric keypad control block.

To carry out the variable speed playback
Use the search dial.

For details on using the search dial, see "Controlling the Tape/Disk Transport" in Chapter 12 (Volume 2).

To apply a loop to a frame memory clip
Press the [LOOP] button.

Using the device control block (trackball) or device control block (joystick) to play back clips

Notes

A frame memory clip must first be recalled with a menu operation.

1 Press the [DEV] button in the region selection buttons, and select the frame memory clip for playback (FM1 CLIP to FM8 CLIP).

If the pair mode is on, both main and subsidiary FMs light.

2 Press the [PLAY] button, turning it on.

To stop playback, press [STOP] or any of the [SHTL], [JOG], [CUE], [REW], [FF], and [ALL STOP] buttons.

For details of the buttons in the device control block (trackball) or device control block (joystick), see "Device Control Block (Trackball)" (page 45).

For details of the playback start point, stop point, and duration settings, see the previous item, "Using the device control block (search dial) to play back clips" (page 216).

To carry out the variable speed playback

Press any of the [SHTL], [JOG], and [VAR] buttons, then turn the Z-ring or move the joystick. The image changes in the forward direction when you turn the Z-ring clockwise, and in the reverse direction when you turn it counterclockwise. Move the joystick to the right for the forward direction and to the left for the reverse direction.

When you pressed the [JOG] button: Playback is at a speed corresponding to the turning speed of the Z-ring or the movement speed of the joystick.

When you pressed the [SHTL] button: Playback is at a speed corresponding to the rotation angle of the Z-ring or amount of movement of the joystick.

When you pressed the [VAR] button: Playback is at a speed corresponding to the rotation angle of the Z-ring or amount of movement of the joystick, in the range –1 to +3 times normal speed.

Clip Creation

You save a movie as a clip.


Notes

If the number of frame memory clips exceed 100 single files (50 pair files), an error appears.

Using the menu to record clips

1 In the Frame Memory menu, select VF2 'Clip' and HF3 'Record.'

The Record menu appears.

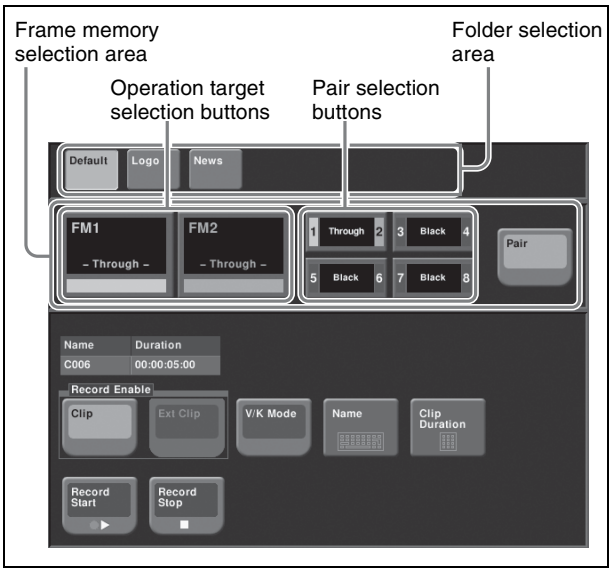

2 With [Pair] off, press the operation target selection button, to select the operation target.

3 In the folder selection area, select the folder containing the clip to be recorded.

4 In the <Record Enable> group, select the clip type.

- To record a normal clip, press [Clip].
- To record an extended clip, press [Ext Clip].

5 To set the clip name, press [Name].

A keyboard window appears.

6 Enter the clip name, and press [Enter].

7 To start recording, press [Record Start].

8 To end recording, press [Record Stop].

To set the clip duration

1 Press [Clip Duration].

A numeric keypad window appears.

2 Enter a timecode value or number of frames, and press [Enter].

Creating and Handling Frame Memory Folders

You can create, rename, and delete frame memory folders.

Creating a new folder

1 In the Frame Memory menu, select VF5 'Folder.'

The Folder menu appears. The status area shows a list of the current folder settings.

2 Select [New].

A keyboard window appears.

3 Enter the folder name, and press [Enter].

Changing the folder name

1 In the Frame Memory >Folder menu, select the folder with the arrow keys or by turning the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	Folder selection	1 to 12
2	Num	Number of files to select consecutively from selected file	1 to 12

2 Press [Rename].

A keyboard window appears.

3 Enter the new folder name, and press [Enter].

Notes

The following names cannot be used:
Default, Flash1, Flash2
CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

Deleting a folder

1 In the Frame Memory >Folder menu, select the folder with the arrow keys or by turning the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	Folder selection	1 to 12
2	Num	Number of files to select consecutively from selected file	1 to 12

To select all folders, select [All].

2 Press [Delete].

A confirmation message appears.

3 To carry out the deletion select [Yes], and to cancel the deletion select [No].

Notes

It is not possible to delete the default folder (named "Default").

Clip Output

As for still image operation, you can use the reposition and lock functions.

For details of the operation, see "Image Output" (page 210).

Recording and Playback of Ancillary Data

Preparations

To record ancillary data, it is first necessary in the Setup menu to select "save with ancillary data" as the frame memory saving mode.

For details, see "Saving a Frame Memory Clip With Ancillary Data" in Chapter 18 (Volume 2).

Recording ancillary data

To record ancillary data in a frame memory clip, use the Frame Memory >Clip >Record menu.

For details of the operating sequence, see "Clip Creation" (page 217).

To check ancillary data during recording

If the ancillary data to be recorded is embedded audio, by first setting the signal output to through mode, you can listen while recording.

For the method of setting the signal output to through mode, see "Signal Output Settings (Output Menu)" in Chapter 20 (Volume 2).

Notes

For [Freeze Enable] or [Record Enable], in the <Record Enable> group, pressing [Clip] or [Ext Clip] to turn them on or off may result in noise. Also, with these buttons in the On state, selecting the signal on the frame memory source bus may result in noise.

Playing back ancillary data

You can play ancillary data recorded in a frame memory clip by normal playback or an auto transition of the clip transition.

To play the ancillary data, you must use the following procedure to enable playback of the ancillary data.

For the subsequent playback operation, see "Clip Playback" (page 215).

Notes

- After recording a frame memory clip, the ancillary data state is enabled for playback.
- To play back the clip, set the signal output to through mode.
  For the method of setting through mode, see "Signal Output Settings (Output Menu)" in Chapter 20 (Volume 2).
- When the reposition function is on, ancillary data cannot be played back.
- Switching reposition function between on and off may cause noise.
- Only the AUX bus and edit preview bus can output ancillary data.
- Carrying out file operations on a frame memory clip may result in the ancillary data being discontinuous, or in noise occurring. However, if the first or last frame of the clip is deleted, noise will not occur.
- The audio sampling frequency is always 48 kHz.
- When you play back the recorded embedded audio, depending on the device to be used, noises are produced at the playback start point and end point. For details of devices that are used for playback, contact your Sony service or sales representative.

1 In the Frame Memory menu, select VF2 "Clip", HF5 "Ancillary Enable."

2 Select the frame memory folder and file to be played back.

3 Turn [Ancillary Enable] On.

Clip Transition Operations

A frame memory clip (movie) is played back, linked to a transition using a mix (dissolve) or wipe.
The following restrictions apply to the use of a clip transition.

- Key frame capture is not possible.
- It is not possible to apply a pattern limit.
- Transitions executed in two strokes, such as a preset color mix with the stroke mode set to Normal, or a DME wipe with a picture-in-picture pattern, will not execute correctly.
- It is not possible to vary the transition rate of a clip transition.
- Transition preview cannot be used.
- No instantaneous state of a clip transition can be saved as a snapshot.
- When recalling a snapshot including a clip transition during executing another clip transition, the follow-on transition does not operate properly. Be sure to complete the transition before recalling a snapshot.

Notes

When a clip transition is selected as the transition type, if one of the wipe direction selection buttons in the transition control block is lit, it indicates the direction of clip playback.

Setting a clip transition

The following example describes the case of a clip transition using FM 1&2 Clip on the M/E-1 bank.


Notes

To use a clip transition effectively, the image from the frame memory clip being played back during the clip transition should be seen in the M/E-1 program output. For example, inserting a key using frame memory output 1 and frame memory output 2.

1 Display the M/E-1 >Misc >Transition menu, and in the <Transition Type> group select "FM1&2 Clip."

2 Press [Clip Transition].

The Clip Transition menu appears.

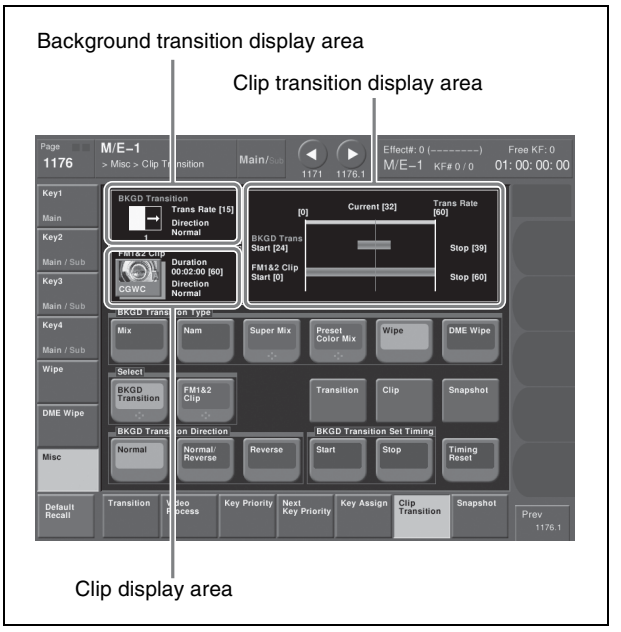

3 Press [Clip].

The status area shows a list of clips.

4 Select the clip to use in the clip transition.

5 Return to the Clip Transition menu, and in the <BKGD Transition Type> group, select the background transition type.


Notes

For details of the background transition selected here, see the various adjustments in the M/E-1 >Misc >Transition menu.

6 In the <Select> group, press [BKGD Transition].

7 Use either of the following methods to set the background transition start point independently of the clip playback timing.

- Move the fader lever to the desired position, and in the <BKGD Transition Set Timing> group press [Start].
- Turn knob 1 to set the number of frames. The left end of the reference axis *(see following figure)* is the position of frame 0.

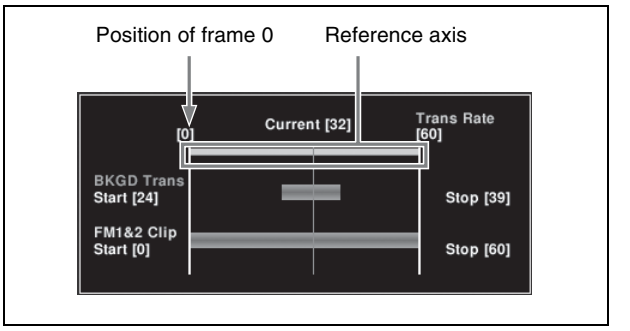

8 Using either of the following methods, set the end point of the background transition.

- Move the fader lever to the desired position, and in the <BKGD Transition Set Timing> group press [Stop].
- Turn knob 2 to set the number of frames.

9 If Wipe or DME Wipe is selected in the <BKGD Transition Type> group, in the <BKGD Transition Direction> group, select the background transition direction.

10 In the <Select> group, press [FM1&2 Clip].

11 Using either of the following methods, set the start point of the clip.

- Move the fader lever to the desired start point, and in the <Clip Transition Set Timing> group press [Start].
- Turn knob 1 to set the number of frames. The left end of the reference axis *(see previous figure)* is the position of frame 0.

Notes

It is not possible to set the end point.

12 In the <Clip Transition Direction> group, select the playback direction of the clip.

To reset the start point and end point

Press [Timing Reset].
The background transition start point and end point, and the clip start point are all reset.

Image Data Management

You can carry out the following operations on the files in which images are saved.
- Pair File Processing *(page 221)*
- Moving Files *(page 221)*
- Deleting Files *(page 221)*
- Renaming Files *(page 222)*

Notes

During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons *(see page 215)*, frame memory operations may not be performed properly. Carry out frame memory operations after stopping clip playback.

Pair File Processing

You can create a pair file from two single files. In the reverse direction, you can split a pair file into two single files.

Couple: You can create a pair file from two single still image files or clip files.

Separate: You can also separate a pair file into two single still image files or clip files.

Creating a pair file from two single files

Notes

Carrying out the following operation automatically switches [Pair] to On.

The following description applies to the case of FM1&2, but the procedures are similar for the other cases.

1 In the Frame Memory >Still >Recall menu or Frame Memory >Clip >Recall menu, recall the two single files you want to convert to a pair file, to FM1 and FM2.

2 In the Frame Memory menu, select VF4 'File' and HF1 'Pair Recombination.'

The Pair Recombination menu appears.

3 Press [Couple].

Splitting a pair file into two single files

Notes

Carrying out the following operation automatically switches [Pair] to Off.

The following description applies to the case of FM1and FM2, but the procedures are similar for the other cases.

1 In the Frame Memory >Still >Recall menu or Frame Memory >Clip >Recall menu, recall the pair file.

2 Select the folder in which the file to be moved is stored.

3 In the Frame Memory menu, select VF4 'File' and HF1 'Pair Recombination.'

The Pair Recombination menu appears.

4 Press [Separate].

Moving Files

1 In the Frame Memory menu, select VF4 'File' and HF4 'Move.'

The Move menu appears. The status area shows files to be moved in the upper area, and destination files in the lower area.

2 Select the folder which contains the file to be moved.

3 Using any of the following methods, select the file to be moved.

- Press the arrow keys to scroll the display.
- Press directly on the thumbnail in the status area.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	File selection	1 to maximum value
2	Num	Selection of number of files in sequence	1 to maximum value

4 Select the destination folder and file.

5 Press [Move].

Deleting Files

1 In the Frame Memory menu, select VF4 'File' and HF5 'Delete.'

The Delete menu appears. In the status area, whether pair mode is on or off, all of the saved files appear as thumbnails.

2 Select the folder which contains the file to be deleted.

3 Using either of the following methods, select the file to be deleted. If necessary, press the arrow keys to scroll the display.

- Press directly on the thumbnail in the status area.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	File selection	1 to maximum value
2	Num	Selection of number of files in sequence	1 to maximum value

- To delete all files, press [Select All], turning it on.
- When a clip thumbnail is selected, the still image files making up the clip are also selected for deletion.

4 If necessary, turn the knob to check the contents of the frame memory clip through the thumbnail display.

Knob	Parameter	Adjustment	Setting values
3	Viewer	For a movie, the current frame position. For a still image, no effect.	00:00:00 to maximum value

5 Press [Delete].

A message for confirming the deletion appears.

6 To confirm the deletion press [Yes], and to cancel press [No].

Renaming Files

1 In the Frame Memory menu, select VF4 ‘File’ and HF6 ‘Rename’

The Rename menu appears. In the status area, whether pair mode is on or off, all of the saved files appear as thumbnails.

2 Using either of the following methods, select the file to be renamed. If necessary, press the arrow keys to scroll the display.

- Press directly on the thumbnail in the status area.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	File selection	1 to maximum value

3 If necessary, turn the knob check the contents of the frame memory clip through the thumbnail display.

Knob	Parameter	Adjustment	Setting values
3	Viewer	For a movie, the current frame position. For a still image, no effect.	00:00:00 to maximum value

4 Press [Rename].

A keyboard window appears.

5 Enter the new name, then press [Enter] in the keyboard window.

Notes

The following names cannot be used:
CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

External Hard Disk Drive Access

You can connect a hard disk drive to the USB port of the switcher processor, to carry out the following operations.
Format: Format the hard disk.
Backup: Batch saving of files from frame memory to the hard disk.
Restore: Restoring frame memory from files saved on the hard disk.
Since image data saved in memory is lost when the system is powered off, using an external hard disk drive allows required data to be preserved.

Notes

- Only one hard disk drive can be connected to a single switcher processor.
- While the hard disk is being accessed, frame memory operations are not possible. This applies to all operations for frame memory including frame memory recall by a snapshot operation.
- During playback of a frame memory clip of the pair assigned to either of the target FM selection buttons *(see page 215)*, frame memory operations may not be performed properly. Carry out frame memory operations after stopping clip playback.
- When the signal format is 1080P, this function cannot be used.

Consult your Sony service representative or sales representative about the hard disk drives that can be connected.

Selecting the switcher

When the system is operating in Dual Simul mode, select the switcher on which to carry out formatting, file saving, and file recall operations.

For details of Dual Simul mode, see "Selecting the System Operation Mode" in Chapter 20 (Volume 2).

1 In the Frame Memory menu, select VF6 'External Device' and HF1 'Format' or HF2 'Backup/Restore.'

The Format menu or Backup/Restore menu appears.

2 In the region selection area *(see page 79)*, press [SWR].

A popup window for selecting the switcher appears.

3 Press [SWR1] or [SWR2] to select the switcher.

The button for the selected switcher lights.

You can select two switchers simultaneously. In this case, the last operated button lights green, and the other lights amber. The menu shows the information for the switcher lit green.

4 Press [OK].

Hard Disk Formatting

When you connect a hard disk drive for the first time, it is necessary to format the hard disk. This partitions the disk, creating 15 logical areas (FMHDD1 to FMHDD15).

1 In the Frame Memory menu, select VF6 'External Device' and HF1 'Ext HDD Format.'

The Ext HDD Format menu appears.
If in Dual Simul mode, select the switcher to operate *(see page 223)*.

To get the hard disk drive information
In the button area press [Refresh Status].
The Device item shows the product information for the hard disk drive.

2 Press [Format].

A popup window for confirming formatting appears.

Notes

Carrying out formatting erases any existing data on the hard disk.

3 Press [Yes].

This starts the hard disk formatting. A progress bar and numerical indication appear to show the progress of the operation.
When the operation is completed, a popup window reading "Success!!" appears.

4 Press [OK].

Saving Files

You can save all of the files from frame memory to the external hard disk drive.

Notes

Before carrying out this operation for the first time, it is necessary to format the hard disk *(see previous item, "Hard Disk Formatting")*.

1 In the Frame Memory menu, select VF6 'External Device' and HF2 'Ext HDD Backup/Restore.'

The Ext HDD Backup/Restore menu appears.
For each partition, a list of the directory names and number of files appears.
If in Dual Simul mode, select the switcher to operate *(see page 223)*.

To get the hard disk drive information
Press [Refresh Status].
The Device item shows the product information for the hard disk drive, and the names of directories.

2 Using any of the following methods, select a logical drive (FMHDD1 to FMHDD15).

- Press directly on the list to select.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Partition	Partition selection	1 to 15

3 In the <Backup> group, do either of the following.

- To replace the existing data, press [Replace].
- To save in addition to the existing data, press [Append].

A popup window for confirming file saving appears.

Notes

When you execute [Replace], all of the saved files in the logical drive is erased immediately before the saving operations.

4 Press [Yes].

This starts the file saving operation. If there is no directory, a directory is automatically created, and the files are saved within it. A progress bar and numerical indication appear to show the progress of the operation.
When the operation is completed, a popup window reading “Completed.” appears.

5 Press [OK].

To rename a directory

Select a directory in the list, and in the button area press [Rename].
In the keyboard window that appears, enter the new directory name, and press [Enter]. The name of a directory is limited to eight characters.

Notes

The following names cannot be used:
CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9 LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

Recalling Files

You can recall all of the saved files on the hard disk drive into frame memory.

1 Carry out steps **1** and **2** of the procedure *“Saving Files” (page 223)*.

Notes

It is not possible to select a partition (FMHDD1 to FMHDD15) of a hard disk in which no file is saved.

2 In the <Restore> group, do either of the following.

- To replace the existing data with the recalled data, press [Replace].
- To add the recalled data to the existing data, press [Append].

A popup window for confirming file recall appears.

Notes

When you execute [Replace], any existing data in frame memory is lost immediately before the recalling operations.

3 Press [Yes].

This starts the file recall operation. A progress bar and numerical indication appear to show the progress of the operation.
When the operation is completed, a popup window reading “Completed.” appears.

4 Press [OK].

Managing Images Using a DDR/VTR

Using a DDR/VTR for High-speed Backup and Restoring

You can save all files currently held in frame memory as a backup data set, by high-speed recording on video tape or other medium.
To restore the folder structure, it is necessary to save the automatically generated file list (of file name, length of clip, and so on) in memory.

Notes

- At the beginning of this backup data a red or blue image is automatically inserted when the data is created. Do not delete this image, as it is required for restoring the data.
- When set to Dual Simul mode, this function cannot be used.

High-speed recording of backup data to DDR or VTR

Notes

Before starting the backup, it is necessary to select the FM output to record on an AUX bus, for example, and input the AUX output to the DDR/VTR.

1 In the Frame Memory menu, select VF6 'External Device,' and HF4 'Backup to DDR/VTR.'

The Backup to DDR/VTR menu appears.

2 To save with ancillary data, output the frame memory output signal to the AUX bus.

3 In the <Backup Enable> group, select either of the following.

Clip/Still: Data from the first board (still images and clips)
Ext Clip: Data from the second board (extended clips)

4 Press [Backup Start].

The message "Preparing now..." is displayed in a popup window, and it changes to a confirmation message when the preparation is complete.

5 Start recording at the external device, and immediately after that press [Yes].

This starts the backup, and when completed a message appears.

6 Stop the recording at the external device, and press [OK].

7 To save the file list in memory, press [File >File Name Data].

The File >File Name Data menu appears.
The name of the file that is saved is fixed (FM_Bkup).

For details, see "Overview of File Operations" in Chapter 17 (Volume 2).

Restoring backup data from DDR or VTR

Notes

Before starting the restore operation, it is necessary to select the DDR/VTR output on the FM input bus.

1 In the Frame Memory menu, select VF6 'External Device' and HF5 'Restore from DDR/VTR.'

The Restore from DDR/VTR menu appears.

2 Press [File >File Name Data], to read the file list from the File Name Data menu.

For details, see "Overview of File Operations" in Chapter 17 (Volume 2).

3 To restore the ancillary data, select any of FM1, FM3, and FM5.

4 In the <Restore Enable> group, select either of the following.

Clip/Still: Data from the first board (still images and clips)
Ext Clip: Data from the second board (extended clips)

5 In the <Restore Type> group, press either of the following.

Replace: Replace the existing frame memory data with the recalled data.
Append: Add to the existing frame memory data.

Notes

If you selected "Ext Clip" in step **4**, "Append" is selected automatically.

6 Press [Restore Start].

A confirmation popup window appears.

7 Start playback at the external device, and immediately after that press [Yes].

Notes

Make sure to include that the red or blue image inserted at the beginning when the backup was made. If this image is not found, the clip or still image will not be played back correctly.

This starts the restore operation, and when completed a message appears.

8 Stop the playback at the external device, and press [OK].

Extracting Images from Video Tape

By recording a clip or still image stored on a video tape as a single clip (single file) under certain rules, you can automatically extract an image from the clip, and save as a separate frame memory file.


Notes

When the signal format is 1080P or when set to Dual Simul mode, this function cannot be used.

Relation between recorded state of video tape and files after extraction


The extraction is carried out according to the following rules.

Example 1: When only video signal clips and a still image are recorded (single files)

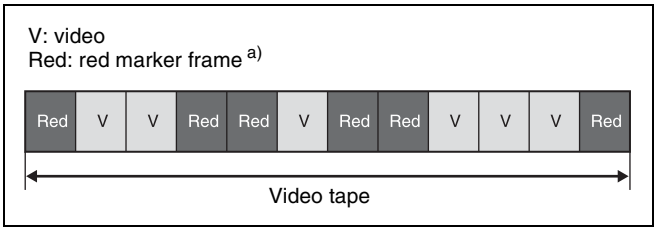

Result of extraction:
Each section surrounded by red marker frames is extracted as a clip (main file). If the red markers surround a single frame, then it is extracted as a still image. In the case above two clip files (main files) are extracted, and one still image file.

Example 2: When a video signal clip is followed by a key signal clip with the same number of frames (pair file)

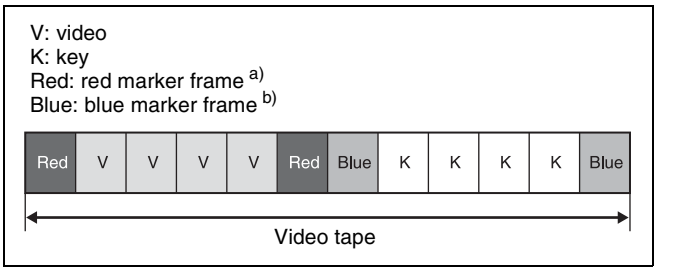

Result of extraction:
The section surrounded by red marker frames is extracted as the main file, and the section surrounded by blue marker frames is extracted as the sub file.
In the case above, one clip file (pair file) is extracted.

a) A red marker frame is a monochrome frame with the RGB signal levels respectively 100%, 0%, 0%.
b) A blue marker frame is a monochrome frame with the RGB signal levels respectively 0%, 0%, 100%.

Notes

- For extraction as a pair file, the main file and sub file must have the same number of frames.
- For image extraction as an extended clip, [Ext Clip] must be selected in the Record menu <Record Enable> group when the video tape content is recorded as a clip.
- For image extraction as still images, [Clip] must be selected in the Record menu <Record Enable> group when the video tape content is recorded as a clip.

1 In the Frame Memory >Clip >Record menu, record the tape image as a clip *(see page 217)*.

2 In the Frame Memory menu, select VF4 'File' and HF2 'Auto Extraction.'

The Auto Extraction menu appears.

3 Select a clip (single file) recorded from the tape.

4 Press [Extraction Start].

A confirmation popup window appears.

5 Press [Yes].

This starts the extraction, analyzes the currently selected single clip, and automatically extracts a movie (Clip) or still image (Still). When there is key data, a pair file is created.

To check the details of the images (still image/ clip)

Use the following knob operations.

Knob	Parameter	Adjustment	Setting values
1	No	File number	1 to maximum
3	Viewer	Timecode for selected image	00:00:00 to maximum

Color Backgrounds, Copy and Swap, and Other Settings

Chapter 8

Color Background

The dedicated generators generate color signals, and these can be used as color backgrounds in video effects.

Color background selection

There are two color backgrounds, color background 1 and color background 2, which you use by assigning to cross-point buttons.

Color combinations ("color mix")

The color generators can output the result of combining two colors, which are color 1 and color 2.

Using a pattern from a dedicated pattern generator, color 1 and color 2 can be combined in the boundary region, forming a color gradation. This is referred to in the menu system as "color mix."

You can also apply modifiers to the selected pattern.

When the "color mix" function is not used, the result is a flat color, and color 1 is always output.

You carry out color background settings in the Color Bkgd menu. This section describes the settings menu for color background 1 as an example.

Color Background Settings Menu

Accessing the Color Bkgd1 menu

Use either of the following operations.

- In the menu control block, select the top menu selection button [COLOR BKGD], and press VF1 'Color Bkgd1.'
- Press a cross-point button assigned to color background 1 twice in rapid succession.

Basic Color Background Setting Operations

Making a single-color matte (Flat Color)

If you are not using the "color mix" function to combine two colors, use the following procedure.

1. In the <Matte> group of the Color Bkgd 1 menu, press [Flat Color], turning it on.
2. Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Making a color combination (color mix)

To combine color 1 and color 2, use the following procedure.

1. In the <Matte> group of the Color Bkgd1 menu, press [Mix Color], turning it on.
2. Set the following parameters as required.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of softening of edge	0.00 to 100.00
5	Pattern	Pattern number	1 to 24 a)

a) The patterns are the same as for a standard wipe. *See "Wipe Pattern List" (page 357) in Appendix.*

You can also carry out the pattern selection by pressing [Mix Pattern Select] to display the Mix Ptn Select menu. Select any pattern appearing in the Mix

Ptn Select menu (standard wipe patterns 1 to 24), and you can then adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Edge softness	0.00 to 100.00

3 To adjust color 1, set [Color 1] on, and to adjust color 2 set [Color 2] on, then adjust the parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

4 If required, set the pattern modifiers.

When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00 a)
2	Position V	Vertical position	–200.00 to +200.00 a)

a) See *page 169*.

When turning [Multi] on and using replications of the same pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 a)

a) See *page 171*.

When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a) See *page 171*.

When turning [Pairing] on and making a wipe pattern like a Venetian blind

Knob	Parameter	Adjustment	Setting values
1	Width	Width of the slits	1 to 128 (integer)

When turning [Angle] on in the <Rotation> group and slanting the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–100.00 to +100.00 a)

a) See *page 170*.

When turning [Speed] on in the <Rotation> group and rotating the pattern at a constant rate

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00 a)

a) See *page 170*.

When selecting H (horizontal) or V (vertical) in the <Modulation> group and applying waviness to the pattern

(The modulation is always a sine wave.)

Notes

When using 1080PsF mode in an HD system, the modulation function is not available.

Knob	Parameter	Adjustment	Setting values
1	Amplitude	Amplitude of modulation	0.00 to 100.00
2	Frequency	Frequency of modulation	0.00 to 100.00
3	Speed	Speed of waves	–100.00 to +100.00 a)

a) See *"Applying modulation to the wipe pattern (Modulation)" (page 172)*.

5 To interchange color 1 and color 2, press [Color Invert], turning it on.

Copy and Swap

Overview of Copy and Swap

You can copy or swap the settings among the switcher banks or between keyers.
The following settings can be copied or swapped.

- Overall settings for the M/E-1 to M/E-4, and PGM/PST banks
- Keyer settings
- Wipe settings in a transition control block
- Wipe settings in an independent key transition control block
- DME wipe settings in a transition control block
- DME wipe settings in an independent key transition control block
- Matte data (color 1, color 2, and how to compose them)
- Color settings
- DME channel settings
- Format converter input settings (copy only)
- Format converter output settings (copy only)

You can carry out copy operations with a simple button operation. Swap operations, and copy operations on DME data can only be done with a menu operation.

M/E copy and M/E swap

You can copy and swap the overall bank settings among the M/E-1 to M/E-5, and PGM/PST banks.

Target bank	Target data
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5 PGM/ PST	Bank settings excluding the following data items: • Setup data • Flexi Pad settings • Snapshots • Keyframe effects • Key snapshots • Key memory

Notes

If a DME is being used on the source M/E bank, then if for example there are insufficient DME channels, it may not be possible to select the DME.
There are no such restrictions on a swap.

Keyer copy and keyer swap

You can carry out copy and swap operations among the keyers listed in the following table.

Target bank	Target keyer	Target data
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5	Keys 1 to 8	Key settings excluding the following data items: • Setup data • Key snapshots • Key memory
PGM/ PST	Downstream keys 1 to 8	

Notes

If a DME is being used on the source keyer for a copy or either keyer for a swap, then if for example there are insufficient DME channels, or the limit on using DME channels within an M/E bank is exceeded, it may not be possible to select the DME.

Wipe copy and wipe swap

You can copy and swap the wipe settings among the banks listed in the following table.

Target bank	Target data
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5 PGM/ PST	Wipe settings. It is not, however, possible to carry out copy or swap involving independent key transition wipe settings.

Wipe copy and wipe swap in the independent key transition control block

You can copy and swap the wipe settings among the keyers listed in the following table.

Target bank	Target keyer	Target data
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5	Keys 1 to 8	Wipe settings in the independent key transition control block.
PGM/ PST	Downstream keys 1 to 8	

DME wipe copy and DME wipe swap

You can copy and swap the DME wipe settings among the banks listed in the following table.

Target bank	Target data
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5 PGM/ PST	DME wipe settings. It is not, however, possible to carry out copy or swap involving independent key transition DME wipe settings.

DME wipe copy and DME wipe swap in the independent key transition control block

You can copy and swap the DME wipe settings among the keyers listed in the following table.

Target bank	Target keyer	Target data
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5	Keys 1 to 8 But excluding keys 5 to 8 on M/E-4 In the MVS-8000X	DME wipe settings in the independent key transition control block.
PGM/ PST	Downstream keys 1 to 8	

Matte data copy and swap

You can copy or swap the matte data among the color generators listed in the following table.

Target bank	Target keyer and data	
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5 PGM/PST	• Keys 1 to 8 • Downstream keys 1 to 8	• Matte data for key fill • Matte data for key edge fill
	Matte data for wipe border edge	
Color background	• Matte data for color background 1 • Matte data for color background 2	

Color data copy and swap

You can copy or swap the color data among the color generators listed in the following table.

Target bank	Target keyer and data	
M/E-1 M/E-2 M/E-3 M/E-4 M/E-5 PGM/PST	• Keys 1 to 8 • Downstream keys 1 to 8	• Colors 1 and 2 for key fill • Colors 1 and 2 for key edge fill • “Zabton” color data
	Colors 1 and 2 for wipe border	
	Color data for preset color mix	
Color background	• Colors 1 and 2 for color background 1 • Colors 1 and 2 for color background 2	
Frame memory	• FM1 color • FM2 color	

Target bank	Target keyer and data
DME ch1 to ch8	• Background • Border • Sepia • Light • Shade • Drop shadow (other than DME ch4 and DME ch8) • Trail

DME channel copy and swap

You can copy and swap the channel data among DME channels 1 to 4 or DME channels 5 to 8.
It is not possible to copy or swap the channel data between DME channels 1 to 4 and DME channels 5 to 8.

Notes

On the MVS-8000X, when the signal format is 1080P, the combinations for a copy or swap are restricted as follows.
- Channels 1 and 2
- Channels 3 and 4
- Channels 5 and 6
- Channels 7 and 8

On the MVS-7000X, when the signal format is 1080P, the above restriction also applies if using the MVE-8000A. There is no such restriction for the MKS-7470X/7471X.

Copying format converter data

You can copy data from one format converter input to another or from one output to another.

Notes

The copy source and destination data must be in the same signal format.

Copy and Swap Operations

Copy and Swap menu operations

In the menu operation section top menu selection buttons, press [COPY SWAP], then press VF1 ‘Copy/Swap’ or VF2 ‘Copy.’ The Copy/Swap menu appears.
Here a copy/swap operation on wipe data is described by way of example, using the Copy/Swap >Wipe menu, but the same general procedure applies to all of the following menus.
- M/E: Copying and swapping M/E data
- Key: Copying and swapping key data
- Wipe: Copying and swapping wipe data
- DME Wipe: Copying and swapping DME wipe data
- Matte: Copying and swapping matte data
- Color: Copying and swapping color data

- DME: Copying and swapping data by DME channels
- Format Converter: Copying format converter data

For an overview of the concepts involved, see "Copy and Swap" (page 230). For details of color corrector copy and swap, see "Copy and Swap Operations" (page 241).

Examples of Copy and Swap operations by a menu operation

As an example, to copy or swap wipe data, use the following procedure.

1 In the Copy/Swap menu, select HF3 'Wipe.'

The Copy/Swap >Wipe menu appears.
The status area shows lists for the copy/swap source on the left, and the copy/swap destination on the right.

2 In the <Data Select> group, select either of the following.

Wipe: The operation applies to wipes in the transition control block.
Key Wipe: The operation applies to wipes in the independent key transition control block.

3 Using any of the following methods, select the data to be copied or swapped.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs to make the setting.

Knob	Parameter	Adjustment	Setting values
1	Left No	Select data for copy/swap source	1 to maximum value [a) b)]
2	Right No	Select data for copy/swap destination	1 to maximum value [a) b)]

a) The following values apply to the MVS-8000X.
Transition control block wipe data: 1 to 5
Transition control block for independent key wipe data: 1 to 40
b) The following values apply to the MVS-7000X.
Transition control block wipe data: 1 to 6
Transition control block for independent key wipe data: 1 to 48

For details of the data affected, see "Copy and Swap" (page 230).

4 To copy, press [Copy], and to swap, press [Swap].

To undo a copy or swap

Press [Undo], to return to the state before the copy or swap was carried out.

Copy by Button Operation

You can carry out the following copy operations by a simple button operation.

- M/E copy
- Keyer copy
- Wipe copy
- DME wipe copy

Notes

On the CCP-6224/6324, it is not possible to carry out a copy by button operation.

Basic button operation

The basic button operation is to hold down the copy source button, then press the destination button.
You can undo the last operation using [Undo] in the menu *(see page 232).*

M/E copy button operation

In the Flexi Pad control block of each M/E bank, use the [SNAPSHOT] button.

To copy from M/E-1 to M/E-2

In the M/E-1 Flexi Pad control block, hold down the [SNAPSHOT] button, then press the [SNAPSHOT] button in the M/E-2 Flexi Pad control block.

Keyer copy button operation

To specify the copy source, use the key delegation buttons in the key control block, and to specify the copy destination, use the key delegation buttons in the independent key transition control block.

To copy from M/E-1 key 1 to M/E-2 key 2

In the key control block M/E delegation buttons, press [M/E 1], turning it on, then hold down the [KEY1] button, and in the M/E-2 independent key transition control block, press the [KEY2] button.

Wipe copy button operation

Use the [WIPE] button in the Flexi Pad control block of each M/E bank.

To copy the M/E-1 wipe to the M/E-2 wipe

In the M/E-1 Flexi Pad control block, hold down the [WIPE] button, then press the [WIPE] button in the M/E-2 Flexi Pad control block.

DME wipe copy button operation

Use the [DME] button in the Flexi Pad control block of each M/E bank.

To copy the M/E-1 DME wipe to the M/E-2 DME wipe

In the M/E-1 Flexi Pad control block, hold down the [DME] button, then press the [DME] button in the M/E-2 Flexi Pad control block.

Misc Menu Operations

In the Misc menu, you can carry out the following operations.

- Enabling and disabling operation from an external device, System Manager, or an editing keyboard.
- Enabling and disabling side flags on the background bus of each of the M/E-1 to M/E-5 and PGM/PST banks. *For the side flag function, see "Side Flags" (page 250).*
- Switching the safe title function on or off for each switcher output.
- Displaying the transition rate, independent key transition rate, and fade-to-black transition rate for each of the M/E and PGM/PST banks, and changing the settings.
- Setting the AUX mix transition rate.

Port Settings for Control From an External Device

Enabling or disabling control from an external device

1 In the menu control block, press the top menu selection button [MISC], then select VF1 'Enable' and HF1 'Port Enable.'

The Misc >Enable >Port Enable menu appears with the status area showing the settings of the following ports.

- Switcher Remote1 to Remote4 ports (RS-422A, D-sub 9-pin)
- Switcher GPI port (parallel, 25-pin)
- DME1/DME2 Editor ports (RS-422A, D-sub 9-pin)
- DME1/DME2 GPI ports (parallel, 25-pin)

When the signal format is 1080P, you can also make settings for DME3/DME4.

2 In the <Switcher> or <DME> group, press on the name of the port for which you want to disable control from an external device, turning it off.
To re-enable control for the port, press on its name once more.

Notes

For the AUX bus operation from the Remote 1 to Remote 4 ports of the switcher, the setting (Enable/Disable/Manual) in the Setup menu takes precedence. Only when the setting is "Manual," the settings made in the Port Enable menu apply.

For details, see "Interfacing With External Devices (Device Interface Menu)" in Chapter 19 (Volume 2).

DME override

1 In the menu control block, press the top menu selection button [MISC], then select VF1 'Enable' and HF1 'Port Enable.'

The Misc >Enable >Port Enable menu appears.

2 In the <DME Override> group, select the DME override mode.

DME Override: When a switcher snapshot or effect using a DME is recalled, forcibly select the DME that was used when saving.

On Air Protect: The operation is the same as the DME override function, except that a DME being used by an M/E bank or P/P bank that is on air will not be forcibly selected.

Notes

If effects using the same DME channel are selected simultaneously in two or more regions, the DME is selected with the order of precedence P/P >M/E1 >M/E2 >M/E3 >M/E4 >M/E5.

Enabling or disabling control from System Manager

By installing the BZPS-8000 System Management Software (System Manager), you can use a computer connected on a network for management of some switcher data and control operations.
To enable or disable this function, use the following procedure.

1 In the menu control block, press the top menu selection button [MISC], then select VF1 'Enable' and HF1 'Port Enable.'

The Misc >Enable >Port Enable menu appears.

2 Press [System Manager].

Each time you press the button toggles between enable and disable.

Editing Keyboard Settings

Notes

The following operations are only possible when a license for the BZS-8050 Editing Control Software is activated.

For details of license registration, see "Installation and Device Setup (Install/Unit Config Menu)" in Chapter 18 (Volume 2).

Enabling or disabling control from the editing keyboard

1 In the menu control block, press the top menu selection button [MISC], then select VF1 ‘Enable’ and HF2 ‘Plug-In Editor.’

The Misc >Enable >Plug-In Editor menu appears.

2 In the <Control From Plug-In Editor> group, press [Editor Enable].

Each time you press the button toggles between enable and disable.

To enable control of the preview bus only

When control from the editing keyboard is disabled (when [Editor Enable] is set to Disable), to enable control of the preview bus only, press [PVW Bus Enable] in the <Control From Plug-In Editor> group.

Safe Title Settings

Switching the safe title function on or off

1 In the menu control block, press the top menu selection button [MISC] and select VF2 ‘Safe Title.’

The Misc >Safe Title menu appears.

2 Using any of the following methods, select the signal to which the settings apply.

- Directly press the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob to make the setting.

Knob	Parameter	Adjustment	Setting values
1	Output	Signal to which the settings apply	1 to 48

Notes

- It is not possible to change the setting for the output for which the safe title is set off in the Setup menu.
- The safe title function cannot be used for output signals for which through mode is set to Enable in the Setup menu.

For more information about the Setup menu settings referred to above, see “Signal Input Settings (Input Menu)” and “Signal Output Settings (Output Menu)” in Chapter 20 (Volume 2).

3 Press [Safe Title] to set it on or off.

Displaying a List of Transition Rates and Changing the Settings

In the Misc >Transition >Key/ME/FTB menu, for each bank you can display a list of the M/E (or PGM/PST) transition rates and independent key (or DSK) transition rates, and change the settings.
These settings are linked to the other transition rate setting operations.
You can also display and set the fade-to-black transition rate.

Displaying the Transition >Key/ME/FTB menu

In the menu control block, press the top menu selection button [MISC], then select VF3 ‘Transition’ and HF1 ‘Key/ME/FTB.’
The Misc >Transition >Key/ME/FTB menu appears.

About the Transition >Key/ME/FTB menu display

The display of the independent key transition rate in the Misc >Transition >Key/ME/FTB menu depends on the selection in the <Key Transition> group of the Engineering Setup >Switcher >Transition menu for each of the M/E and PGM/PST banks.

When [Same] (On direction and Off direction settings the same) is selected in the <Key Transition> group: Only “Key” (or “DSK” in the PGM/PST bank) appears.

When [Independ] (On direction and Off direction settings independent) is selected in the <Key Transition> group: “Key(On)” and “Key(Off)” each appear. In the case of the PGM/PST bank, “DSK(On)” and “DSK(Off)” appear.

For details, see “Settings Relating to Video Switching (Transition Menu)” in Chapter 20 (Volume 2).

Setting the transition rate in the Transition >Key/ME/FTB menu

To set the M/E transition rate

For example, to make the settings for the M/E-1 bank, use the following procedure.

1 Press in the list in the status area of the Misc >Transition >Key/ME/FTB menu, to select M/E-1.

2 In the <Transition Rate> group, press [Transition].

3 Turn the knob to set the number of frames.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frames)

Notes

When a clip transition is selected as the transition type, it is not possible to change the transition rate in this menu.

To set the independent key transition rate

By way of example, the following is the procedure for settings of keys 1 to 4 in the M/E-1 block.

1 Press in the list in the status area of the Misc >Transition >Key/ME/FTB menu, to select M/E-1.

2 In the <Transition Rate> group, press [Key K1-K4].

To insert (on) or remove (off) keys individually, press [Key(On) K1-K4] or [Key(Off) K1-K4].

3 Turn the knobs to set the number of frames.

Knob	Parameter	Adjustment	Setting values
1	Key1 Trans Rate	Key 1 transition rate	0 to 999 (frames)
2	Key2 Trans Rate	Key 2 transition rate	0 to 999 (frames)
3	Key3 Trans Rate	Key 3 transition rate	0 to 999 (frames)
4	Key4 Trans Rate	Key 4 transition rate	0 to 999 (frames)

To set the fade-to-black transition rate in the Transition >Key/ME/FTB menu

1 In the Misc >Transition >Key/ME/FTB menu, press [FTB].

2 Turn the knob to set the number of frames.

Knob	Parameter	Adjustment	Setting values
1	Transition Rate	Transition rate	0 to 999 (frames)

Setting the AUX Mix Transition Rate

For details of AUX mix transitions, see "AUX Mix Transitions" (page 119).

1 In the menu control block, press the top menu selection button [MISC], then select VF3 'Transition' and HF3 'Aux Mix.'

The Misc >Transition > Aux Mix menu appears.

2 Use one of the following methods to select the target AUX bus (odd-numbered bus) in the status area list.

- Directly press the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	AUX bus selection	1 to 24

3 Turn the knob to set the number of frames.

Knob	Parameter	Adjustment	Setting values
2	Transition Rate	Transition rate	0 to 999 (frames)

AUX Menu Operations

AUX Bus Settings

Making video process settings for an AUX bus

1 In the Aux >Aux Bus menu, using any of the following methods, select the AUX bus to which the settings apply.

- Directly press the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob to make the setting.

Knob	Parameter	Adjustment	Setting values
1	AUX Bus	AUX bus selection	1 to 48 a)

a) When AUX mix transitions are enabled, even-numbered buses cannot be selected as the target.

2 Press [Video Process], turning it on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	–200.00 to +200.00
2	Y Gain	Luminance signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Black level	–7.31 to +109.59


To return adjustment values to their defaults, press [Unity].

Status Menu

The Status menu shows the following information.
- Operating status of the DME

Viewing the DME operating status

To view the DME operating status, press the top menu selection button [STATS] in the menu control block. This selects VF1 ‘DME Status’ and the Status menu appears.

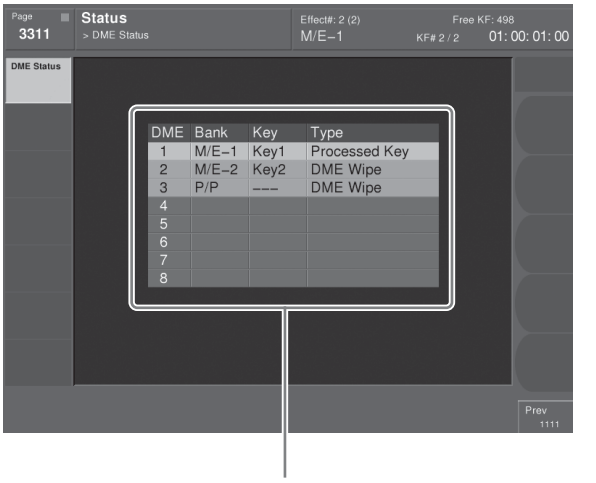

DME status display

For each DME channel, you can see how the DME is being used in the corresponding operation block.
The display background color also indicates the following differences in the way in which a DME is being used.

Blue: The DME is currently being used in other than the final program output.


Red: The DME is currently being used in the final program output.

Router Control Menu Operations

Using the Router >Router Control >Router Control menu, you can carry out router switching operations.

Checking the List of Inputs for Each Destination

You can check the list of signals currently input for each destination.
In the menu control block, press the top menu selection button [RTR], then select VF1 'Router Control' and HF1 'Router Control.'
The following menu appears, and the left side of the status area shows a list for destination assignments.

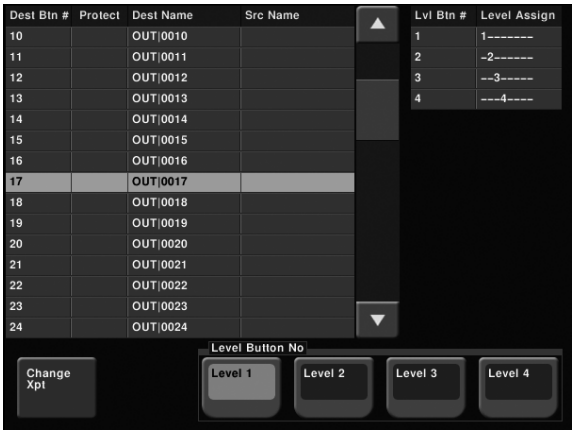

If in the Assign >RTR Mode Setting menu, [Inhibit] is set to On for a destination, the corresponding line appears in gray. Also, if [PROT] (protect) is set to ON for a source, using a BKS-R3xxx or R1xxx series Router remote control, a padlock icon appears.
The right side of the status area shows the level assignment status to the Level 1 to Level 4 buttons.

Selecting the level

In the <Level Button No> group at the lower right in the above illustration, press the selected level for switching.

Switching the Source for Each Destination

You can switch the source for each destination with a menu operation.
For the assignment of destinations and sources to buttons, use the Engineering Setup >Panel >Aux Assign >RTR Mode Setting menu.

For details, see "Using the Auxiliary Bus Control Block for Router Control" in Chapter 19 (Volume 2).

1 Press [Change Xpt].

The Router >Router Control >Router Control >Change Xpt menu appears.
Destination Select buttons appear in groups of 16.
Source Select buttons appear by group (maximum 24 buttons).

2 Press one of the Destination Select buttons, to select the destination for which you want to switch the source.

To change the group
Press one of the [1-16], [17-32], [33-48], and [49-64] buttons.

3 Press one of the Source Select buttons, to select the source you want to switch.

To change the group
Press one of the [1-24], [25-48], … [97-120], and [121-128] buttons.

Video Process

The term “video process” is applied to adjustments to the luminance and hue of the input video signal.
There are two types of adjustment, depending on the application:
- Adjustment of an individual input signal
- Image effects on a particular bus

Notes

These types of adjustment may be carried out independently. However, since they are implemented by the same hardware, if the same signal is subjected to processing twice, there may be limitations on the range of effects obtained in the final result.

Video Process Adjustments for Each Input Signal

For each signal input to the switcher, you can set video process on or off and set the parameters (Video Gain, Y Gain, C Gain, Hue Delay, and Black Level) in the Setup menu.

For details of the settings, see “Signal Input Settings” in Chapter 20 (Volume 2).

Video Process Adjustments on a Particular Bus

Buses to which the adjustments apply

For each of the following buses, you can switch video process adjustments on or off, and adjust the parameters.
- Following buses in the M/E-1 to M/E-5, and PGM/PST banks
  - Key fill buses for keys 1 to 8
  - Background A and background B buses
  - Utility 1 and utility 2 buses
- Frame memory source 1 and frame memory source 2 buses
- Aux 1 to 48 buses

These settings also apply to keyframes and snapshots.

Making the adjustments

Adjust VIDEO GAIN, Y GAIN, BLACK LEVEL, C GAIN, and HUE DELAY in the following menus.

Applicable bus		Menu used for operation	See page
M/E-1 to M/E-5 banks	Key fill buses for keys 1 to 8	M/E-1 to M/E-5 menus	*page 142*
	Background A and B buses	Video Process menu	*page 238*
	Utility 1 and 2 buses		
PGM/PST bank	Key fill buses for DSK1 to DSK8	PGM/PST menu	*page 142*
	Background A and B buses	Video Process menu	*page 238*
	Utility 1 and 2 buses		
Frame memory source 1 and 2 buses		Frame Memory menu	*page 208*
Aux 1 to 48 buses		AUX menu	*page 236*

Video Process Memory

When using video process adjustments for an image effect on a bus, this function saves the final values for each pair number for the signals. The video process on/off setting is not saved.
When you change the adjustments the values are automatically saved, and these last values are recalled when the pair number is selected.
In other words, by switching video process memory on, regardless of the video process information for each bus, you can carry out video process adjustments for each input signal.
The parameters saved are as follows.

VIDEO GAIN, Y GAIN, BLACK LEVEL, C GAIN, HUE DELAY

Switch the video process memory on or off in the Setup menu.

For details of setting operations, see “Settings Relating to Keys, Wipes, Frame Memory and Color Correction (Key/Wipe/FM/CCR Menu)” in Chapter 20 (Volume 2).

Video Process Settings

This section describes operations on the M/E-1 to M/E-5, and PGM/PST background A and B buses, and utility buses 1 and 2.
For these operations, use the Misc >Video Process menu in the respective operating bank.

For video process settings on other buses, see the following.

- *Settings for a particular input signal: "Signal input settings" in Chapter 20 (Volume 2)*
- *Key fill bus settings: "Video Processing" (page 142)*
- *Settings for frame memory source buses 1 and 2: "Setting video processing" (page 208)*
- *Settings for Aux 1 to 48 buses: "Making video process settings for an AUX bus" (page 236)*
- *Overview of video process: "Video Process" (page 238)*

This section describes an example on the background A bus of the M/E-1 bank.
For the background B bus or utility bus 1 or 2, make the adjustment with a similar procedure.

Making video process settings for each bus

1 In the menu control block, press the top menu selection button [M/E 1] and select VF7 'Misc' and HF2 'Video Process.'

2 In the <Bkgd-A> group, press [Video Process], turning it on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	–200.00 to +200.00
2	Y Gain	Luminance signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Black level	–7.31 to +109.59

To return the parameter settings to the defaults, press [Unity] in the <Bkgd-A> group.

Color Corrector

Chapter 9

Preparations

The color corrector enables video signal color correction (black balance/white balance adjustment, gamma correction, knee correction, etc.).

Notes

To use the color corrector, the BZS-8420X (for MVS-8000X) or the BZS-7420X (for MVS-7000X) Color Corrector Software is required. To use the software, you are required to input an install key.

For the method of inputting an install key, see "Installation and Device Setup (Install/Unit Config Menu)" in Chapter 18 (Volume 2).

Restrictions on color corrector and M/E combination

Signal format	When the color corrector output is selected		When the color corrector output is not selected
	3M/E system	4M/E to 6M/E systems	4M/E to 6M/E systems
Other than 720P	–	Reentry signal selection on a key bus or the utility 1 bus cannot be performed over a cascade of two or more M/E blocks (Restriction 2).	–
720P	Reentry signal selection on a key bus or the utility 1 bus cannot be performed over a cascade of two or more M/E blocks (Restriction 2).	Reentry signal selection on a key bus or the utility 1 bus cannot be performed (Restriction 1).	Reentry signal selection on a key bus or the utility 1 bus cannot be performed over a cascade of three or more M/E blocks (Restriction 2).

Example of restriction 2: When M/E-1 is selected on the M/E-2 background A bus (or background B bus, key bus, or utility 1 or 2 bus), then M/E-2 cannot be selected on the M/E-3 key bus or the utility 1 bus.

Assigning the color corrector input buses to AUX delegation buttons

There are two inputs for capturing material to the color corrector: the CCR1 bus and the CCR2 bus.

For details of the input assignment operation, see "Auxiliary Bus Control Block Settings (Aux Assign Menu)" in Chapter 19 (Volume 2).

Selecting the color correction input signal

After assigning CCR1 and CCR2 to AUX buses, use the following procedure.

1 Press the AUX delegation buttons assigned to CCR1 (or CCR2).

2 In the cross-point button row, select the signal to which you want to apply color correction.

Notes

The signals that can be selected on the CCR1 and CCR2 buses are primary inputs, premium inputs, format converter inputs and frame memory outputs (FM1 to FM8) only.
However you can make all the internal signals of the switcher selectable by a setting in the Setup menu.

For details, see "Selecting the Bank to Make the Settings" in Chapter 20 (Volume 2).

Selecting the color corrector output signal

By assigning the signal output from the color corrector to a cross-point button, you can make that signal available on that button.

For details of the assignment process, see "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume 2).

Accessing the CCR menu

For color correction operations, use the CCR menu.
To access the CCR menu, in the menu control block, press the top menu selection button [CCR].
The following description uses CCR1 as an example. To apply color correction to CCR2, replace VF1 'CCR1' by VF2 'CCR2,' and follow the same procedure.

Overall Color Corrector Operations

Enabling Color Corrector

To enable the functions of color corrector 1, for example, use the following procedure.

1 In the CCR menu, press VF1 'CCR1' and any HF.

2 In the <CCR> group, press [CCR], turning it on.

Returning all color corrector settings to their defaults

1 In the <CCR> group, press [Unity].

A confirmation message appears.

2 Press [Yes].

This returns all color corrector settings to their defaults, whether [CCR] is on or off.

Copy and Swap Operations

Copying color corrector data

1 In the CCR menu, press VF5 'Copy/Swap.'

The Copy/Swap menu appears.
The status area shows a copy source list on the left and a copy destination list on the right.

2 Using any of the following methods, select the copy source data and copy destination data.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Left No	Select copy source data	1 or 2
2	Right No	Select copy destination data	1 or 2

3 Press [Copy].

Swapping color corrector data

Refer to the procedure described in the previous item "Copying color corrector data." In step **3**, press [Swap] instead of [Copy].

To undo copy or swap

In the Copy/Swap menu, press [Undo].
The state before carrying out the copy or swap is restored.

Color Corrector Functions

This section describes the color corrector functions.
For each of the following operations, it is possible to copy or swap data between two color correctors (CCR1 and CCR2).

Input Video Processing Operations

Carry out the following corrections to a YUV signal before conversion to an RGB signal.

- Overall gain adjustment of the video signal
- Gain adjustment of the Y signal
- Gain adjustment of the C signal
- Hue delay
- Black level adjustment

To apply input video processing effects, use the following procedure.

1 In the CCR menu, press VF1 'CCR1' and HF1 'Input Process.'

The Input Process menu appears.

2 In the <Input Process> group, press [Input Process], turning it on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	–200.00 to +200.00
2	Y Gain	Y signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Black level	–116.90 to +116.90


To return the parameters to their default settings

Press [Unity] in the <Input Process> group.

Primary Color Correction Operations

Carry out the following corrections to each of the R, G, and B signals.

Black balance adjustment: setting the output level for a 0% level input signal.
White balance adjustment: setting the output level for a 100% level input signal.
Gamma correction: adjusting the curvature of the gamma curve.
Knee correction: adjusting the position of the maximum point of the gamma curve.

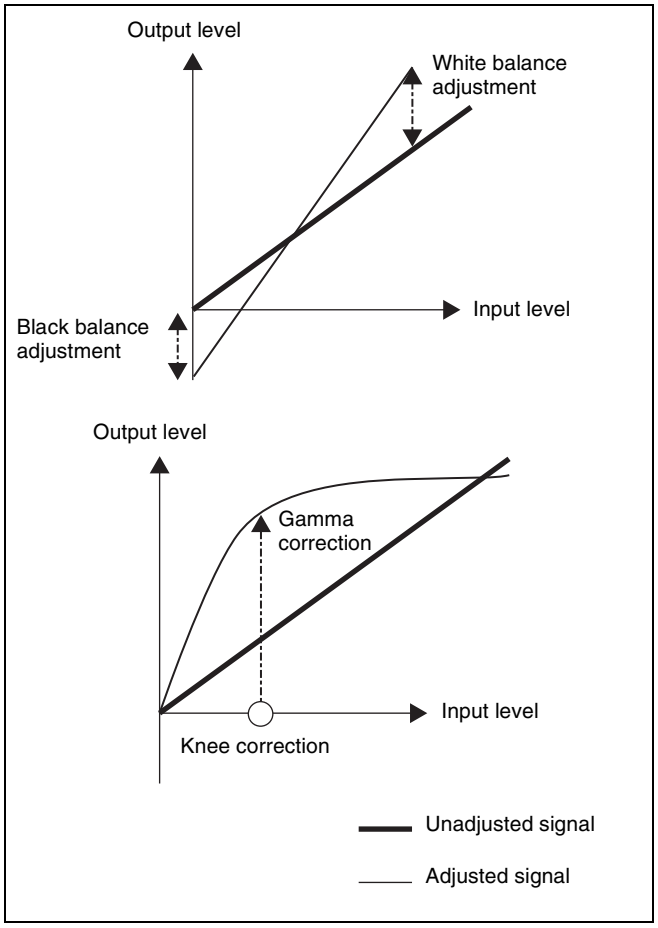

It is also possible to mask part of the region to be corrected.

Applying primary color correction

1 In the CCR menu, press VF1 'CCR1' and HF2 'Primary CCR.'

The Primary CCR menu appears.

2 In the <Primary CCR> group, press [Primary CCR], turning it on.

3 In the <Primary CCR Adjust> group, select the setting item.

Black: black balance adjustment
White: white balance adjustment
Gamma: gamma correction
Knee: knee correction

4 Depending on the selection in step **3**, adjust the following parameters.

When Black or Gamma is selected

Knob	Parameter	Adjustment	Setting values
1	Red	Red signal adjustment	–100.00 to +100.00
2	Green	Green signal adjustment	–100.00 to +100.00
3	Blue	Blue signal adjustment	–100.00 to +100.00
4	All	Simultaneous RGB adjustment	Red value is shown

When White is selected

Knob	Parameter	Adjustment	Setting values
1	Red	Red signal adjustment	0.00 to 200.00
2	Green	Green signal adjustment	0.00 to 200.00
3	Blue	Blue signal adjustment	0.00 to 200.00
4	All	Simultaneous RGB adjustment	Red value is shown

When Knee is selected

Knob	Parameter	Adjustment	Setting values
1	Red	Red signal adjustment	20.00 to 75.00
2	Green	Green signal gain	20.00 to 75.00
3	Blue	Blue signal gain	20.00 to 75.00
4	All	Simultaneous RGB adjustment	Red value is shown

To return the parameters to their default settings
In the <Primary CCR> group, press [Unity].

Masking a part of the primary color correction

Here the procedure for mask 1 operation is described by way of example. You can carry out mask 2 operation in a similar way.

1 In the Primary CCR menu, press [Mask1].

2 In the < Primary/Secondary Mask > group, press [Mask1], turning it on.

Notes

When [Mask 2] is selected in the Secondary CCR menu, linked to this setting it automatically changes from [Mask 2] to [Mask 1].

3 Press [Mask1 Adjust].

The Mask1 Adjust menu appears.

4 In the <Mask Source> group, select the mask source.

Box: signal from dedicated box generator
Pattern: signal from dedicated pattern generator

5 Depending on the selection in step **3**, adjust the following parameters.

When Box is selected

Knob	Parameter	Adjustment	Setting values
1	Top	Top position	–100.00 to +100.00
2	Left	Left position	–100.00 to +100.00
3	Right	Right position	–100.00 to +100.00
4	Bottom	Bottom position	–100.00 to +100.00
5	Soft	Degree of softness of box	0.00 to 100.00

When Pattern is selected

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of softness of pattern edge	0.00 to 100.00
5	Pattern	Pattern number	1 to 24

For the pattern selection, you can also press [Mask Ptn Select] in the Mask1 Adjust menu, then use the Mask Ptn Select menu.
Press any of the displayed patterns (standard wipe patterns 1 to 24) to select it, then you can adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Pattern size	0.00 to 100.00
2	Soft	Degree of softness of pattern edge	0.00 to 100.00

6 When selecting the pattern as a mask source, set the pattern modifiers as required.

When turning [Position] on and setting the pattern position

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–200.00 to +200.00 a)
2	Position V	Vertical position	–200.00 to +200.00 a)

a) See “Setting the wipe position (Positioner)” (page 169).

When turning [Multi] on and replicating the same pattern

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 a)

a) See “Setting the wipe pattern replication (Multi)” (page 171).

When turning [Aspect] on and setting the aspect ratio of the pattern

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a) See “Setting the wipe pattern aspect ratio (Aspect ratio)” (page 171).

When turning the [Angle] on in the <Rotation> group and slanting the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–100.00 to +100.00 a)

a) See “Angle” (page 170).

When turning [Speed] on in the <Rotation> group and rotating the pattern at a fixed rate

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00 a)

a) See “Speed” (page 170).

7 To invert the mask source, return to the Primary CCR menu and press [Pri/Sec Mask Invrt], turning it on.

Notes

The mask function is common to the primary color correction, secondary color correction, and spot color adjustment functions.

Secondary Color Correction Operations

For the six colors R (red), G (green), B (blue), Y (yellow), C (cyan), and M (magenta), adjust the luminance and saturation, and also the hue within a range of ±30 degrees of the center value for each color.
You can mask a part of the region to be corrected.

Applying secondary color correction

1 In the CCR menu, press VF1 ‘CCR1’ and HF3 ‘Secondary CCR.’

The Secondary CCR menu appears.

2 In the <Secondary CCR> group, press [Secondary CCR], turning it on.

3 In the <Secondary CCR Adjust> group, select the color for which you want to make the setting.

4 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	–100.00 to +100.00
2	Saturation	Saturation	0.00 to 200.00
3	Hue Delay	Hue delay	–180.00 to +180.00

To return the parameter settings to their default values


In the <Secondary CCR> group press [Unity].

Masking a part of the secondary color correction

Set [Mask] to On in the Secondary CCR menu, then carry out the same operation as described under *“Masking a part of the primary color correction” (page 243)*.

Luminance Processing Operations

After converting a signal to which RGB color correction has been applied to a YUV signal, divide the luminance levels into three regions, referred to as Dark, Middle, and Bright, and apply video signal adjustments to these regions.

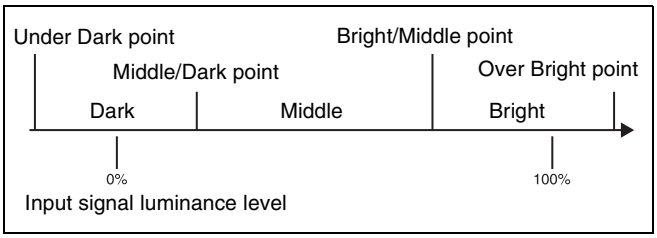


There are three modes for luminance processing, as follows.

Tint mode: adding a specified color to the original video signal.

Color Modify mode: adjusting the original video signal.

Y Modify mode: adjusting the output levels of the input luminance signal.

- White balance adjustment: setting the output level for an input luminance signal at the 100% level.
- Black balance adjustment: setting the output level for an input luminance signal at the 0% level.
- Y lift correction: adjusting the curvature of the curve.
- Y dark correction: adjusting the position of the maximum point of the curve.

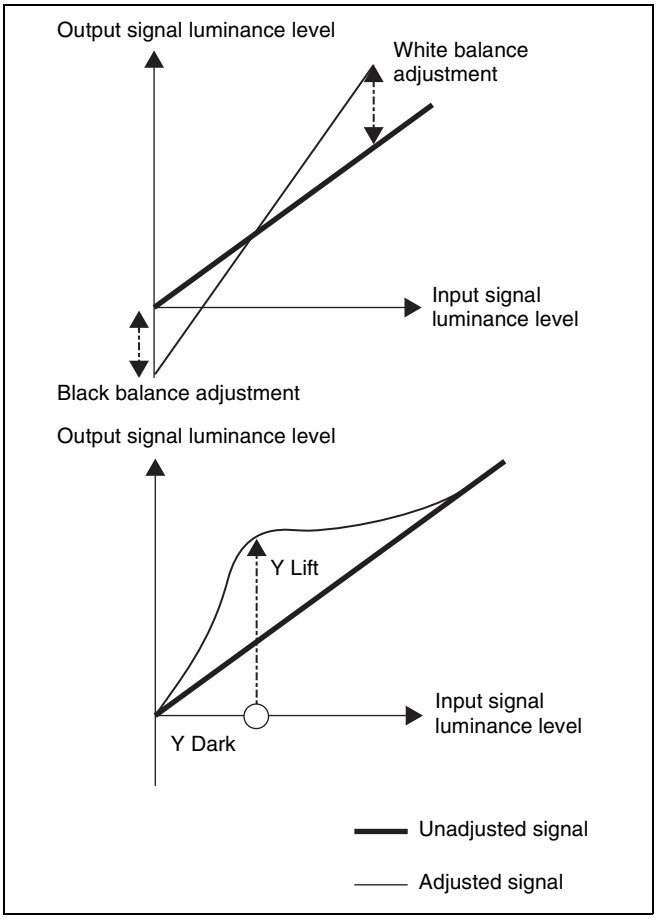

It is also possible to mask part of the region to be corrected.

Applying luminance processing

1 In the CCR menu, press VF1 ‘CCR1’ and HF5 ‘Luminance Process.’

The Luminance Process menu appears.

2 In the <Luminance Process> group, press [Luminance Process], turning it on.

3 In the <Mode> group, specify the adjustment mode.

Tint: add a specified color to the original video signal.
Color Modify: adjust the original video signal.
Y Modify: adjust the output levels of the input luminance signal.
When tint mode or color modify mode is selected, skip to step **4**.
When Y modify mode is selected, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	White	White balance adjustment	0.00 to 200.00
2	Black	Black balance adjustment	–100.00 to +100.00
3	Y Lift	Curvature of curve	–100.00 to +100.00
4	Y Dark	Position of maximum point of curve	–7.31 to +109.59

4 In the <Bound> group, make the settings for the three regions (Dark, Middle, and Bright).

[Level] parameters: set the boundaries of the three regions.

Knob	Parameter	Adjustment	Setting values
1	Over B Level	Luminance level of the Over Bright point	50.00 to 150.00
2	Mid B Level	Luminance level of the Bright/Middle point	10.00 to 120.00
3	Dark Mid Level	Luminance level of the Middle/Dark point	–20.00 to +90.00
4	Under D Level	Luminance level of the Under Dark point	–50.00 to +50.00

[Soft] parameters: set the degree of boundary softness of the three regions.

Knob	Parameter	Adjustment	Setting values
1	Over B Soft	Degree of softness at Over Bright point	15.00 to 70.00
2	Mid B Soft	Degree of softness at Bright/Middle point	15.00 to 42.50
3	Dark Mid Soft	Degree of softness at Middle/Dark point	15.00 to 42.50
4	Under D Soft	Degree of softness at Under Dark point	15.00 to 70.00

5 In the <Luminance Process Adjust> group, press [Dark], [Mid], or [Bright], and adjust the following parameters for the three regions.

In tint mode

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	–100.00 to +100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

In color modify mode

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	–100.00 to +100.00
2	C Gain	Chrominance signal gain	0.00 to 200.00
3	Hue Delay	Hue delay	–180.00 to +180.00

To return the parameters to their default settings

In the <Luminance Process> group, press [Unity].

Spot Color Adjustment

You can change the color of a specified color region to a different color, without affecting other regions. You can also mask part of such a region.
Then for the region other than the region whose color you have changed, you can make the following corrections.

- Video signal overall gain adjustment
- Y signal gain adjustment
- Y signal offset adjustment
- C signal gain adjustment
- C signal hue adjustment

Adjusting the color of the specified region (key)

1 In the CCR menu, press VF1 ‘CCR1’ and HF6 ‘Spot CCR/Output.’

The Spot CCR/Output menu appears.

2 In the <Spot CCR> group, press [Spot CCR], turning it on.

3 In the <Auto> group, press [Sample Mark], turning it on.

Notes

When [Sample Mark] is on, the effects of color adjustment outside the region of spot color adjustment *(see page 247)* and output video processing *(see page 248)* are temporarily disabled.
Turning [Sample Mark] off restores the former state.

4 Adjust the parameters so that the color you want to change is included within the sample mark.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal position	–100.00 to +100.00
2	Position V	Vertical position	–100.00 to +100.00
3	Size	Size	1.00 to 100.00

5 In the <Auto> group, press [Auto Start], to adjust the key automatically.

Notes

This automatic adjustment does not carry out key gain adjustment. If required, adjust the key gain as shown in step **6**.

6 Press [Key Adjust], and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	–7.31 to +109.59
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00
4	Gain	Key gain	–100.00 to +100.00

7 Press [Window], turning it on, to adjust the key detection range for spot color adjustment.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	0.00 to 100.00

8 In the <Spot CCR> group, press [Spot CCR] to display the parameters, and adjust the replacement color.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

To return the parameters to their default settings
In the <Spot CCR> group, press [Unity].

Masking a part of the spot color adjustment

Set [Mask] to On in the Spot CCR/Output menu, then carry out the same procedure as in *“Masking a part of the primary color correction” (page 243)*.

Adjusting the color outside the spot color adjustment region

1 In the Spot CCR/Output menu, press [Outer Out Proc] in the <Outer Out Proc> group, turning it on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	–200.00 to +200.00
2	Y Gain	Y signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Black level	–116.90 to +116.90

To return the parameters to their default settings
In the <Outer Out Proc> group, press [Unity].

Output Video Processing Operations

The following corrections are available for the YUV signal.
- Video signal overall gain adjustment
- Y signal gain adjustment
- Y signal offset adjustment
- C signal gain adjustment
- C signal hue adjustment

Applying output video processing effects

1 In the CCR menu, press VF1 ‘CCR1’ and HF6 ‘Spot CCR/Output.’

The Spot CCR/Output menu appears.

2 In the <Output Process> group, press [Output Process], turning it on.

3 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	–200.00 to +200.00
2	Y Gain	Y signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Black level	–116.90 to +116.90

To return the parameters to their default settings

In the <Output Process> group, press [Unity].

YUV Clip Operations

For each of the luminance and color difference signals, the following processing is available.

White clip: setting the maximum level of the luminance signal.

Dark clip: setting the minimum level of the luminance signal.

Positive clip: setting the maximum amplitude in the positive direction of the color difference signal.

Negative clip: setting the maximum amplitude in the negative direction of the color difference signal.

Applying YUV clip processing

1 In the CCR menu, press VF1 ‘CCR1’ and HF7 ‘YUV Clip/RGB Clip.’

The YUV Clip/RGB Clip menu appears.

2 In the <YUV Clip> group, press [YUV Clip], turning it on.

3 In the <YUV Clip Adjust> group, select the target for adjustment.

Luminance: settings for the luminance signal.
Chroma: settings for the color difference signal.

4 Depending on the selection in step **3**, adjust the following parameters.

When Luminance is selected

Knob	Parameter	Adjustment	Setting values
1	White Clip	White clip adjustment	–6.85 to +109.13
2	Dark Clip	Dark clip adjustment	–6.85 to +109.13

When Chroma is selected

Knob	Parameter	Adjustment	Setting values
1	U Posi Clip	Positive clip adjustment for U signal	–113.39 to +113.39
2	U Nega Clip	Negative clip adjustment for U signal	–113.39 to +113.39
3	V Posi Clip	Positive clip adjustment for V signal	–113.39 to +113.39
4	V Nega Clip	Negative clip adjustment for V signal	–113.39 to +113.39

To return the parameters to their default settings

In the <YUV Clip> group, press [Unity].

RGB Clip Operations

For each of the R, G, and B signals, you can make dark clip and white clip adjustments.

Making RGB clip adjustments

1 In the CCR menu, press VF1 ‘CCR1’ and HF7 ‘YUV Clip/RGB Clip.’

The YUV Clip/RGB Clip menu appears.

2 In the <RGB Clip> group, press [RGB Clip], turning it on.

3 In the <RGB Clip Adjust> group, select the item you want to adjust.

Dark: dark clip adjustment
White: white clip adjustment

4 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Red	Red signal adjustment	–50.00 to +149.99 a) –49.99 to +150.00 b)
2	Green	Green signal adjustment	–50.00 to +149.99 a) –49.99 to +150.00 b)
3	Blue	Blue signal adjustment	–50.00 to +149.99 a) –49.99 to +150.00 b)

Knob	Parameter	Adjustment	Setting values
4	All	Simultaneous RGB adjustment	Red value is shown

a) When Dark is selected
b) When White is selected

To return the parameters to their default settings

In the <RGB Clip> group, press [Unity].

Special Functions

Chapter 10

Side Flags

Overview

The term “side flags” refers to the areas to left and right of an image with aspect ratio 4:3 embedded within a 16:9 frame, when these areas are filled with a separate image selected from the utility 1 bus.
You can adjust the width of the side flag area.

Side Flag Settings

Input source aspect ratio, auto side flags, and auto crop settings

Aspect ratio 4:3 setting
Set the input signal to aspect ratio 4:3. If set to 16:9, the side flags are disabled.

Auto side flag setting
This function automatically applies side flags when a 4:3 signal is selected in the cross-point control block.

Auto crop setting
When carrying out a DME wipe, this function automatically crops the image during transition to 4:3.

Adjusting the width of the side flag area
You can set the left and right sides separately.

For the operation for the above setting, see “Settings for Switcher Configuration (Config Menu)” in Chapter 20 (Volume 2).

Enabling and disabling side flags with a menu operation

You can enable or disable side flags for the backgrounds (A and B) of each of the M/E and PGM/PST banks.

As an example, to enable side flags for background B row on the M/E-1 bank, use the following procedure.

1. In the menu control block, press the top menu selection button [MISC], then select VF1 ‘Enable’ and HF3 ‘Side Flags.’

   The Misc >Enable >Side Flags menu appears.
   The status area shows the buttons for Bkgd A and Bkgd B for each of the M/E-1 to M/E-5, and PGM/PST (P/P) banks.

2. In the <M/E-1 Side Flags> group, press [Bkgd B].

   Each time you press the button toggles between Enable and Disable.

To display a menu for the aspect ratio 4:3, auto side flags, and auto crop settings
In the Misc >Enable >Side Flags menu, press [Setup >SWER Side Flags].

To display a menu for assigning the side flags on/off function to a cross-point button
In the Misc >Enable >Side Flags menu, press [Side Flags Button Assign].

Enabling and disabling side flags with a button operation

For example, to enable side flags for the background B row of the M/E-1 bank, use the following procedure.

1. First, in the Setup menu assign the rightmost cross-point button to the [SIDE FLAG] button.

   For details of the assignment operation, see “Assigning a Cross-Point Button to Enable/Disable Side Flags” in Chapter 19 (Volume 2).

2. Press the [SIDE FLAG] button at the right end of the background B row of the M/E-1 bank.

   The button you pressed lights amber, and this enables the side flags.

Notes

- The operations of enabling or disabling the side flags by menu operation and by control panel button operation are linked.
- When the auto side flags are on, selecting a 4:3 video material automatically lights the [SIDE FLAG] button, but if you press this button, turning it off, the side flags are temporarily disabled.
  However, when you select a different 4:3 video material, the [SIDE FLAG] button automatically lights once again, enabling the side flags.

Creating an image with side flags

For example, to create an image with side flags in the background B row of the M/E-1 bank, use the following procedure.

1 In the M/E-1 bank cross-point control block, hold down the [UTIL] button, and in the background A row select the signal (utility bus 1 signal) you want to insert in the side flag areas.

2 In the background B row, press the cross-point button corresponding to the 4:3 video material.

At this point, if auto side flags are on, this automatically adds side flags to the 4:3 video material.

For details, see "Settings for Switcher Configuration (Config Menu)" in Chapter 20 (Volume 2).

3 Use either of the following methods to turn the side flags on.


- Use the Misc >Enable >Side Flags menu *(see page 250).*
- Use a cross-point button operation *(see previous item).*

This adds side flags to the 4:3 video material.


Wipe Action on Images with Side Flags

When a wipe is carried out on an image with side flags, all wipe patterns can be used.
The following illustration shows the action in a wipe.

Wipe from a 4:3 image to a 16:9 image

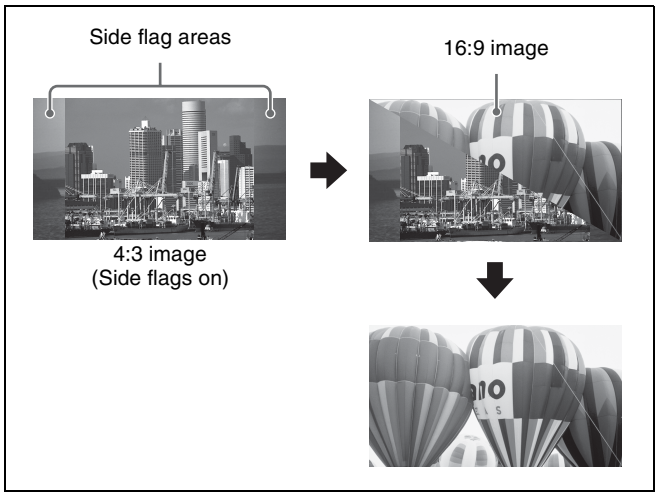

Wipe from a 4:3 image to another 4:3 image (when side flags are on for both images)

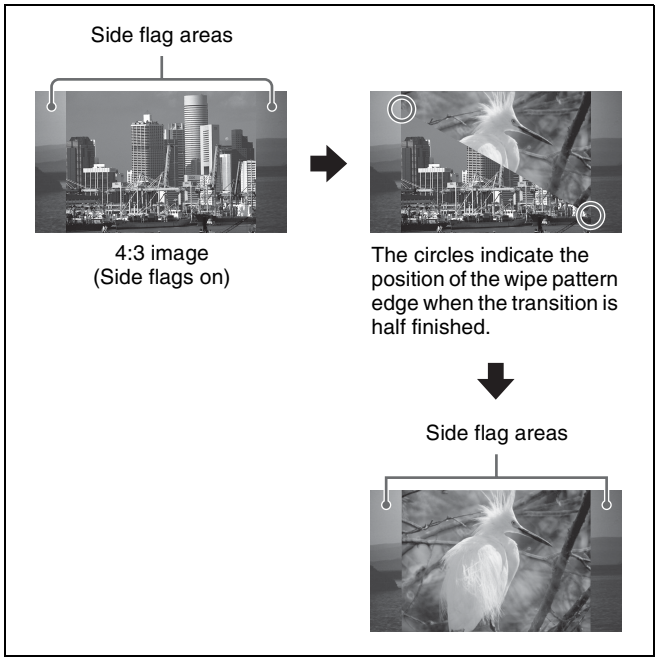

DME Wipe Action for an Image with Side Flags

When a DME wipe is carried out on an image with side flags, all wipe patterns can be used.
Depending on the setting (On/Off) of [Auto Crop] in the Engineering Setup >Switcher >Config menu, the appearance of the 4:3 image changes.


Notes

- When using the DME through SDI interface with [Auto Crop] being off, side flags are not added to the new image during DME wipe.
- For signals with the following DME wipe pattern selected on the DME external video bus (gray part shown in the pattern illustration), side flags are not applied when auto side flags are set to Off.
  - Two-channel page turn
  - Two-channel page roll
  - Two-channel frame in-out
  - Two-channel brick
  - Three-channel brick

The following illustration shows the action in a DME wipe.


DME wipe from a 4:3 image to a 16:9 image

Wipe action using slide (No. 1001)

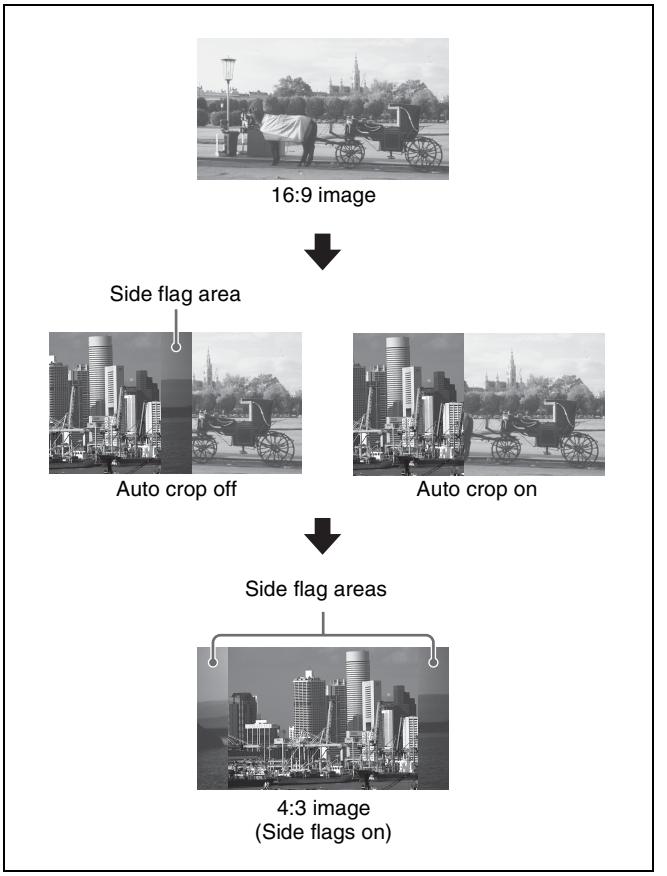

DME wipe from a 4:3 image to another 4:3 image (when side flags are on for both images)

Wipe action using squeeze (No. 1031)

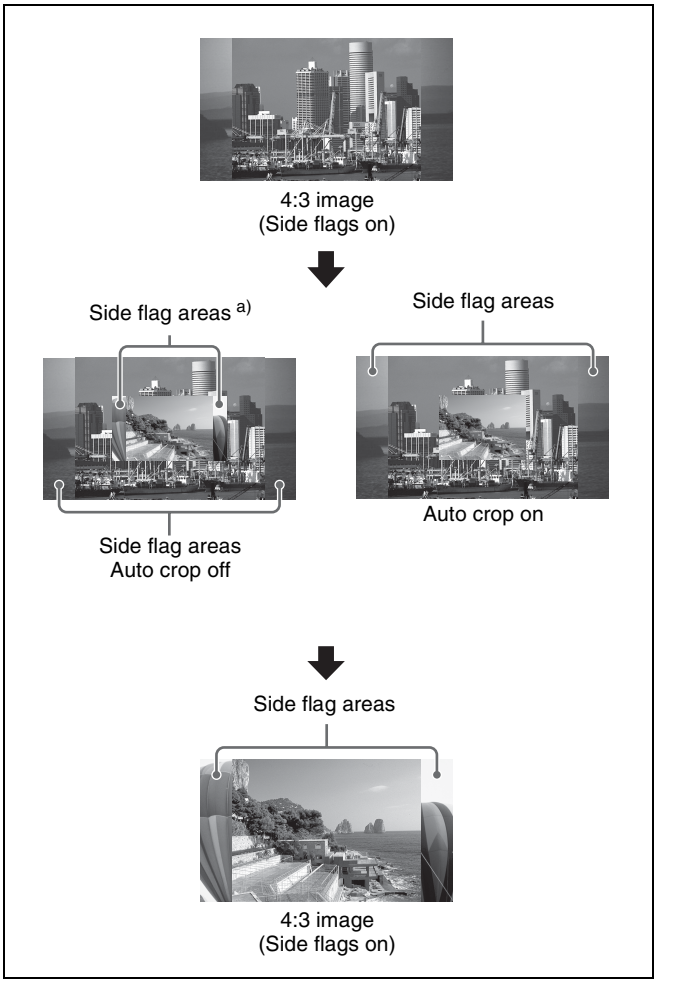

a) When using the DME through SDI interface, side flags are not added during a DME wipe.

Multi Program 2

Overview

What is Multi Program 2?

By operating the switcher in Multi Program 2 mode, a single switcher mix/effects bank can be used to create two separate video outputs, referred to as "main" and "sub." You can set backgrounds, keys, and transitions for each of main and sub. Keys 2 to 8, however, are common to main and sub.

Notes

To enable this function requires the BZS-8200X (for the MVS-8000X) or BZS-7200X (for the MVS-7000X) Multi Program 2 software.

Using the software


To use the Multi Program 2 software, you are required to enter an install key which validates the software. If the software has been factory installed, the install key is not required.
For the method of obtaining an install key, contact your Sony representative.
To obtain a key, you may be required to submit the unique device ID of the switcher you are using. You can check the unique device ID in the Install menu of the switcher.

For details of the operation, see "Installation and Device Setup (Install/Unit Config Menu)" in Chapter 18 (Volume 2).


Assigning main and/or sub to switcher banks

For Multi Program 2 operations, a single switcher bank may be shared, and switched between main and sub, or two separate switcher banks may be used, each dedicated to main or sub.

Example 1: Assigning M/E-1 main and sub to a single switcher bank, and switching between them

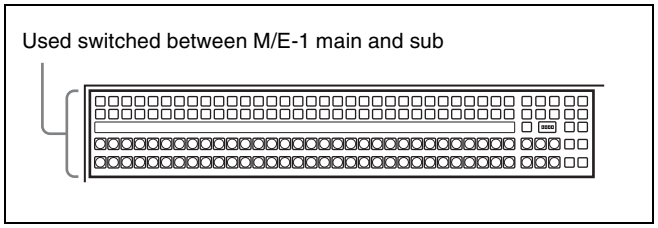

Example 2: Assigning separate switcher banks as "M/E-1 main dedicated" and "M/E-1 sub dedicated"

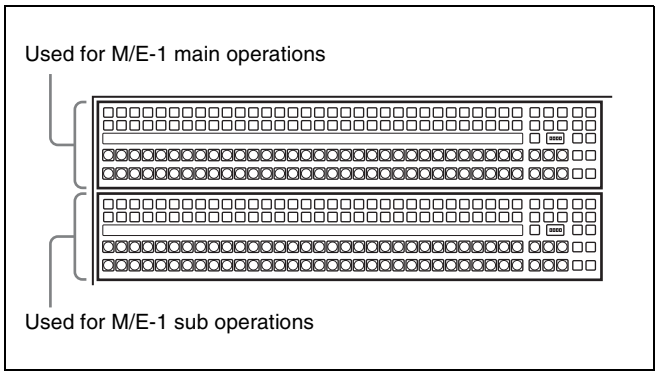

Video creation operations in Multi Program 2 mode

For each of main and sub, there are differences from the operations in standard mode.

For details, see "Differences between Multi Program 2 Mode and Standard Mode" (page 259).

Sequence of Operations in Multi Program 2

Basic operation sequence

Enter the BZS-8200X or BZS-7200X install key (first time only)
↓
Set Multi Program 2 operating mode for each switcher bank
↓
Assign output signals, and set the background configuration, key configuration, and key preview configuration
↓
For each switcher bank, make a main/sub assignment (one of main dedicated, sub dedicated, and main and sub shared)
↓
For a switcher bank assigned to main and sub shared, assign the [MAIN] and [SUB] delegation buttons
↓
Create the main and sub images
↓
Execute the transition

Optional operations

- Making separate main and sub assignments for buttons in the transition control block
- Making cross-point settings
- Enabling DME wipe operations for sub
- Inhibiting utility 2 bus signal selection
- Inhibiting key operations for main or sub keyer

- Including Multi Program 2 data in keyframes and snapshots
- Changing the key assignment for each output
- Assigning sub preview output to preview selection buttons in the fade-to-black control block
- Changing the matrix size to Standard
- Making settings for keyframe timeline operation
- Enabling reentry between the main and sub sides of the same M/E bank

Basic Operations (Required)

Entering the install key of the software (first time only)

After installing the BZS-8200X or the BZS-7200X Multi Program 2 software in the switcher, carry out the following procedure.

1 In the status area of the Engineering Setup >System >Install/Unit Config menu, select the switcher (SWRx), and press [License].

The License menu appears.

2 In the License menu, enter the install key.

For details of the operation, see "Installation and Device Setup (Install/Unit Config Menu)" in Chapter 18 (Volume 2).

3 Shut down the menus *(see page 80).*

4 Power the switcher and SCU off and on again.

Setting the operating mode for each switcher bank

To set a desired switcher bank to Multi Program 2 mode, use the following procedure.

1 Display the Engineering Setup >Switcher >Config menu.

2 Select the switcher bank from M/E-1 to M/E-5, and P/P.

3 In the <M/E Config> group, select [Multi Program2].

4 Repeat steps **2** and **3** as required, to set the operating mode for all desired switcher banks.

Assigning output signals for Multi Program 2 mode

To assign signals to outputs

Use the Engineering Setup >Switcher >Config >M/E Output Assign menu.

The difference from standard mode is that OUT1 is fixed, set to PGM1 (main program), and OUT6 is fixed, set to PGM2 (sub program), and that for the OUT2 to OUT5 signals you can assign any signal selected from the following.

PGM1, PGM2, PGM3, PGM4, PVW1, PVW2, K-PVW1, K-PVW2, CLEAN, SUB CLEAN

Notes

Each of main and sub can use a maximum of four of the six outputs (OUT1 to OUT6). The outputs can be used within the following limits.

- OUT1, OUT2: main only
- OUT3, OUT4: can be used for either main or sub
- OUT5, OUT6: sub only

For details, see "Selecting the System Operation Mode" in Chapter 18 (Volume 2).

To set the background and key configuration

Use the Engineering Setup >Switcher >Config >PGM Config menu.

The following are the differences from standard mode.

Background configuration: Consists of the following combinations.

- For main: Clean, Bkgd A, Bkgd B
- For sub: Sub Clean, Utility 2, Utility 3

Key configuration: Key1 can be set to "Enable" only when the background is Clean, Bkgd A, or Bkgd B.

For details, see "Setting the Operation Mode" in Chapter 20 (Volume 2).

To set the key preview configuration

Use the Engineering Setup >Switcher >Config >K-PVW Config menu.

The following are the differences from standard mode.

Background configuration: Clean or Sub Clean

Key configuration: Key1 can be set to "On" or "Link" only when the background is Clean.

For details, see "Setting the Operation Mode" in Chapter 20 (Volume 2).

To assign sub outputs to output connectors

Use the Engineering Setup >Switcher >Output >Output Assign menu.

You can assign a sub output signal to a switcher output connector number.

For details, see "Assigning Output Signals" in Chapter 20 (Volume 2).

Assigning main and/or sub to switcher banks

For each switcher bank for which Multi Program 2 mode is selected, set whether this is main dedicated, sub dedicated, or main and sub shared.

To assign main and sub to a single switcher bank

1 In the Engineering Setup >Panel >Config >MP2 Main/Sub Assign menu, select the switcher bank.

2 In the <Main/Sub Assign> group, select [Main&Sub].

Main: use for main operations.
Sub: use for sub operations.
Main&Sub: use for both main and sub operations. When "Main&Sub" is selected, it is necessary to assign [MAIN] and [SUB] delegation buttons to the control panel buttons.

To assign main and sub to two consecutive switcher banks

For example, to assign the first row (first switcher bank) to M/E-1 main, and the second row (second switcher bank) to M/E-1 sub, use the following procedure.

1 In the status area of the Engineering Setup >Panel >Config >MP2 Main/Sub Assign menu, select 1st Row (M/E-1), then press [Main] in the <Main/Sub Assign> group.

2 Press [Dual M/E Assign] to assign M/E to two banks.

In this state, both 1st Row and 2nd Row are set to main.

3 Set 2nd Row to [Sub].

This cancels the shift/non-shift assignment for dual M/E in standard mode.

Notes

It is not possible to assign the combinations of Main with Main&Sub, or Sub with Main&Sub.

Assigning the [MAIN] and [SUB] delegation buttons to buttons on the control panel

To assign the Main/Sub switching function to buttons in the transition control block

This applies to the standard type and compact type transition control block, and the CCP-6224/6324 control panel.

For details of the transition control block, see "Transition Control Block (Standard Type)" (page 37) and "Transition Control Block (Compact Type)" (page 68).

For details of the control panel, see "CCP-6224 2M/E Control Panel" (page 71), and "CCP-6324 3M/E Control Panel" (page 71).

1 In the Engineering Setup >Panel >Config menu, press [Program Button].

The Program Button menu appears.

2 Press [Transition Module1].

The Transition Module1 menu appears.

3 Select the switcher bank in the <Bank Select> group.

The buttons in the transition control block on the left appear in the currently assigned state.

4 Press the button whose assignment you wish to change.

The button you press appears in reverse video.

5 From the list on the right, select [MAIN], and press [Set].

The indication on the button changes according to the selection.

6 Repeat Step **4** and **5** to assign [SUB].

To assign to macro buttons in the cross-point control block

For details, see "Cross-Point Control Block" (page 32).

1 In the Engineering Setup >Panel >Config menu, press [Program Button].

The Program Button menu appears.

2 Press [Xpt Module].

The Xpt Module menu appears.

3 Select the switcher bank, then in the <PRE MCRO/POST MCRO> group, press [Main Sub].

You can now use the [PRE MCRO] button as [MAIN], and the [POST MCRO] button as [SUB].

To assign macro operations to different buttons

If in the above operation you assigned a Multi Program 2 function to the macro buttons, you can assign the PRE MCRO and POST MCRO functions to different buttons.

For details, see "Assigning Functions to User Preference Buttons" or "Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block" in Chapter 19 (Volume 2).

Examples of Operations in the Multi Program 2 Mode (When Sharing a Switcher Bank)

To create video on the M/E or PGM/PST bank assigned to both main and sub operations, use the following procedure.

1. Press the [MAIN] button, turning it on, and turning off the [SUB] button.
2. With the normal operations, create the main video.
3. Press the [SUB] button, turning it on, and turning off the [MAIN] button.

   Now you can create the sub video.
4. Create the sub video.

   The basic method of operation is the same as for the main video, except that the utility 2 bus signal is assigned to background A, and the utility 3 bus signal is assigned to background B.
   For sub, only keys 2 to 8 can be used, and for wipes, standard wipe patterns only. There are also other differences in operation from standard mode.

   For details, see "Differences between Multi Program 2 Mode and Standard Mode" (page 259) and "Restrictions on Using Multi Program 2 Mode" (page 259).
5. Press the [MAIN] and [SUB] buttons simultaneously, turning them on.

   If both buttons are lit, the control panel shows the status of main.
6. Carry out the transition.

   Both main and sub video images are switched.

Optional Operations

Making separate main and sub assignments for buttons in the transition control block

If you are using two switcher M/E banks dedicated to main and sub for Multi Program 2 operations, you can make separate transition control block button assignments for main and sub.

Notes


When using one M/E bank as "Main&Sub", separate settings are not possible.

The following example describes the operation for the left part (Transition Module1 menu), but operations in the Transition Module2 and Transition Module3 menus are similar.

1. In the Engineering Setup >Panel >Config menu, press [Link/Program Button].

   The Link/Program Button menu appears.
2. Press [Transition Module1].

   The Transition Module1 menu appears.
3. Press [Main] in the <Bank Select> group.

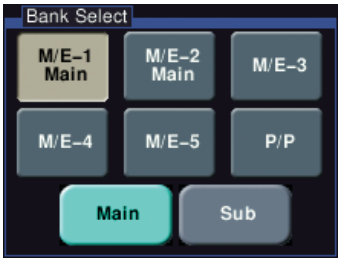

4. Select the bank of the transition control block you want to set.
   Here, by way of example, press [M/E-1 Main].

   The current assignment of the buttons appears in the screen.
5. Set the assignment for main.

   For details of settings, see "Setting Transition Control Block Button Assignments" in Chapter 19 (Volume 2).
6. Press [Sub], and set the assignment for sub.

   This makes separate assignments for main and sub.

Making cross-point settings

Cross-point assign tables can be set not only for main output but also for sub output.
You can set cross-point assign tables for the following banks.

M/E-1 SUB to M/E-5 SUB
P/P SUB

The table actually used is that for which the control panel delegation button is lit.

For details, see "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume 2).

Enabling DME wipe operations for sub

By factory default, DME wipe operations are inhibited for sub background. To enable them, in the Engineering Setup >Switcher >Config menu, set [DME Wipe Sub Enable] to On.
This setting applies to the whole control panel (all M/E banks and PGM/PST bank).

Notes

If a DME wipe for sub is recalled in a snapshot or keyframe, the image will not be handled correctly.

Inhibiting utility 2 bus signal selection

In Multi Program 2 mode, you can inhibit other uses of the utility 2 bus signal in order to use the signal as the background for sub.
This setting applies to the whole control panel (all M/E banks and PGM/PST bank).
In the Engineering Setup >Panel >Config >MP2 Main/Sub Assign menu, set [Util2 Inhibit] to On.
This inhibits operations of selecting from the background B row while holding down the [UTIL] button in the cross-point control block.

Inhibiting key operations for main or sub keyer

In the Engineering Setup >Panel >Config >Operation Inhibit >M/E Operation Inhibit menu, you can make settings to inhibit key operations on each of the main and sub keyers independently.

For details, see "Inhibiting Utility 2 Bus and Key Operations" in Chapter 19 (Volume 2).

Including Multi Program 2 data in recall operations of keyframes and snapshots

In the Engineering Setup >Switcher >Config menu, set [Recall M/E Config] to On.
When a keyframe or snapshot is stored or recalled, the following data is included.

M/E Config, PGM Config, M/E Output Assign, and Key PVW Config

For details of the above data, see "Setting the operating mode for each switcher bank" (page 254) and "Assigning output signals for Multi Program 2 mode" (page 254).

This setting applies to the whole control panel (all M/E banks and PGM/PST bank).

Notes

M/E Config data is saved, even when this setting is Off.

Changing the key assignment for each output (Misc menu)

In Multi Program 2 mode you can change the key assignments independently.
The following describes an example using M/E-1, but the operation is the same for other banks.

Notes

- This setting is linked to the setting in the Engineering Setup >Switcher > Config >PGM Config menu.
- It is not possible to make this setting while the above PGM Config menu is locked, or [Recall M/E Config] *(see previous item)* is set to Off.

1 In the M/E-1 menu, select first VF7 'Misc,' then HF5 'Key Assign.'

The Key Assign menu appears, and the current key assignment is shown in the status area.

2 Change the setting in "Key Enable" as required.

Keys recalled in a snapshot recall

If a snapshot is recalled independently on main or sub, this only retrieves the settings for the key assigned to the recalled side. For example, if key 1 and key 2 are assigned on main, and key 3 and key 4 are assigned on sub, then if you recall a snapshot on main, this only retrieves the settings for key 1 and key 2, and the state of key 3 and key 4 assigned on sub is not affected.

Assigning sub preview output to preview selection buttons

You can assign the sub preview output to a preview selection button in the fade-to-black control block or downstream key/fade-to-black control block.

For details, see "Overall Control Panel Settings (Config Menu)" in Chapter 19 (Volume 2).

When the Multi Program 2 license is valid, by assigning the "Shift" function to a button, you can assign two preview outputs, "Shift" and "Unshift" to a single button. To use the shift output, always assign "Shift" to some button.

Changing the matrix size to Standard

When using a router, if the matrix size is set to [128×128], it is not possible to control the utility 3 bus on the S-Bus. When using Multi Program 2, in the <Matrix Size> group

of the Engineering Setup >Router/Tally >Router menu, select other than [128 × 128].

For details, see "Assigning Switcher Inputs and Outputs to S-Bus Space" in Chapter 23 (Volume 2).

As for the bus number of the utility 3 bus, a DME Key bus number is used as follows.

No.	Bus (Standard)	Bus (MP2)
70	M/E-1 DME Key	M/E-1 Utility3
85	M/E-2 DME Key	M/E-2 Utility3
100	M/E-3 DME Key	M/E-3 Utility3
115	P/P DME Key	P/P Utility3

Making settings for timeline-related keyframe operations

To assign sub regions to the region selection buttons in the numeric keypad control block

In the Engineering Setup >Panel >Config >10 Key Region Assign menu, assign regions to the region selection buttons in the numeric keypad control block.

For details, see "Overall Control Panel Settings (Config Menu)" in Chapter 19 (Volume 2).

To make region and reference region selections using a menu

During snapshot or keyframe operations, you can select a region (including sub) in the Key Frame >Region Select menu. This is convenient for selecting some of the regions assigned to the numeric keypad control block or changing the reference region.

For details, see "Specifying the Region and Edit Points" in Chapter 13 (Volume 2).

To assign regions shown in the Timeline menu

You can select how regions assigned to region selection buttons appear in the Key Frame >Time Line menu.

For details, see "Settings in the Timeline Menu" in Chapter 13 (Volume 2).

Enabling reentry between the main and sub sides of the same M/E bank

In the Engineering Setup >Switcher >Config menu, set [MP2 Free Re-Entry] to On.

Notes

- Reentry adds a 1H delay to the video. Nested reentry may lead to problems in the video.
- A maximum of ten reentry stages are possible, with the final output having a delay of 5H.
- The selection order of reentry signals affects the number of lines by which the output signal is lowered.
- If a delay occurs in the image, even when the through mode is set, the ancillary data does not pass through.
- For example, it is possible to select the reentry of M/E-1 main on M/E-1 main.

Restrictions on mutual reentry when using Multi Program 2

The snapshot function is affected by this reentry function. When [MP2 Free Re-Entry] is On, and any of the switcher banks are in Multi Program 2 mode, then the following restrictions apply.

If you save and recall snapshots simultaneously with more than one region specified, the recorded state is played back in the order of precedence of regions (M/E-1 >M/E-2 >M/E-3 >M/E-4 >M/E-5 >P/P). Therefore, if you save and recall snapshots with more than one region specified, the cross-point settings may not be recalled correctly.

To recall the snapshots correctly, press the cross-point button before recalling the snapshots, to select a signal other than the reentry signal, then recall the snapshots.

Functions Added in Multi Program 2 Mode

- You can set video processing for the utility 3 bus signal.
- In the control panel and DCU GPI input settings and switcher GPI link settings, the actions that can be selected now also include "Sub Cut" and "Sub Auto Trans."
- A switcher GPI link can now be set also for the utility 3 bus.
- To the macro event configuration parameters and macro attachment settings, "Main & Sub" and "Sub" have been added.
- For cross-point button link settings, M/E-1 to M/E-5, and P/P "Sub Program," "Sub Preset," and "Sub Trans PGM" have been added to the link source bus.
- Snapshot attributes can now be set independently for main and sub.
- There are additional menus for sub which can be recalled by pressing a button twice.
- You can set [MP2 Auto Correct] to On or Off in the Effect menu or Snapshot menu. When this is set to On, for example, copy destination and source data is automatically recognized as main or sub, and the data interchanged.
- When the key adjustment mode is selected on the Multifunction Flexi Pad control block (or when the [KEY ADJ] button is lit), if you select the region selection button to which [M/E-x Sub] is assigned, the [TRNS] button operates as a button for the sub region.
- You can assign [SUB TRANS] to the key control block. This button functions as a [TRNS] button for the sub region.

Differences between Multi Program 2 Mode and Standard Mode

The differences from operation in standard mode are as follows.

Item		Main	Sub
Keys [a]		Keys 1 to 8 can be used	Keys 2 to 8 only can be used
Wipes (background)	Patterns	Same as standard mode	• Only standard patterns can be used • Pattern mix is not possible
	Modifiers	Same as standard mode	• Pairing, modulation, spring, spiral, and split cannot be used • Edge fill mattes are single-color only • Replication can be selected from four patterns
Wipes (key)		Same as wipes (background) for sub	
DME wipes	Use	Can be used	Cannot be used (Can be used, with a setting change)
	Patterns for 1 channel	For a dedicated interface, each of main and sub can be used. For the SDI interface, only one of main and sub can be used.	
	Patterns for 2 channels	Only one of main and sub can be used. For each M/E, the number of DMEs that can be used is the same as in standard mode.	
	Patterns for 3 channels		
	Backgrounds	Wipe edge fill matte (including color mix and other settings in the Matte Adjust menu)	Wipe edge fill matte (single-color only)
	Modifiers	Same as standard mode	Wipe border colors are single-color only
Transitions	Key priority	Cannot be used	
	Transition preview	Cannot be used	
	Preset color mix	Color matte or video signal selected on the utility 2 bus	Color matte only
Snapshots	Cross-point hold	Utility 2 cannot be set	Utility 3 is added. BKGD A/B and Key1 cannot be set.
Control from an editor		Same as standard mode	Cannot be used
Operation setting for switcher GPI inputs and outputs		Same as standard mode	Cannot be used

a) Keys 2 to 8 are common to main and sub.

Notes

- Allow a transition to complete before carrying out main and sub delegation switching.
- The sub background A bus (utility 2 bus) is shared with wipe edge border fill. Making a change to one affects the other.
- Even if the wipe border width is set to the same numeric value for main and sub, the same image is not obtained.

Restrictions on Using Multi Program 2 Mode

- The following functions are not available for sub:
  - Data copy and swap
  - Default recall (except for parametric recall)
  - [AUTO] button function *(see page 68)*
- Reentry is limited to four levels. Reentry is not possible for main and sub of the same M/E.
  However, this restriction can be removed.
  For details, see "Enabling reentry between the main and sub sides of the same M/E bank" (page 258).
- In the following cases, a transition using the fader lever may not be performed correctly:
  - When the main and sub bus toggle modes are set differently
  - For a pattern mix, preset color mix, and so on
- For an Internal bus link, GPI link, or External bus link, the "Utility 2" bus cannot be selected.
- Screen aspect, show key, and [MCRO ATTCH ENBL] button settings are common to main and sub.

- If a snapshot is recalled simultaneously for main and sub, or a keyframe is executed simultaneously for main and sub, then for the following common to main and sub the main settings are reflected.
  - Key
  - M/E Config
  - DME external video bus and utility 1 bus
- When a macro attachment is set on the DME utility 1 bus or DME utility 2 bus, it is not possible to make separate main and sub settings.
- When snapshots with different M/E Config settings are recalled:
  - If M/E Config data is not to be included in the snapshot data, the current system settings are used for snapshot reproduction.
  - If M/E Config data is to be included in the snapshot data first M/E Config data is set, and then other snapshot data is recalled.
- The bus override function is only available on the following buses:
  - M/E-1 to M/E-5 Main BKGD A/B buses
  - M/E-1 to M/E-5 Sub BKGD A/B buses (UTIL-2, UTIL-3 buses)
  - P/P Main PGM/PST bus
  - P/P Sub PGM/PST buses (UTIL-2, UTIL-3 buses)
- When a master snapshot or master timeline is executed with a key being assigned to both main and sub, it is uncertain which data will be reflected.
- When recalling a master snapshot with different register numbers for main and sub, the recall timing may differ by one field or more between main and sub.
- The link state is maintained even when M/E Config is changed. Set the link setting again, as required.
- Since keys 2 to 4 are shared between main and sub, when the main and sub fader lever positions are different, if you move the fader lever, the video changes instantaneously to the value of the most recently moved fader lever.
- When the transition type for main or sub is set to preset color mix, it is not possible to carry out independent key transition operation (common to main and sub).
- When the signal format is 1080P, snapshots, wipe snapshots, and effects created using a wipe for sub do not function correctly with a signal format other than 1080P. Similarly, those created with other than the 1080 signal format do not function correctly with a signal format of 1080P.

3D Support

Overview

Installing the following software enables video creation in 3D mode.

- BZS-8560X (for MVS-8000X) or BZS-7560X (for MVS-7000X) as the switcher upgrade software
- BZDM-8560 (for MVE-8000A/MVE-9000) or BZS-7561X (for MKS-7470X/7471X) as the DME upgrade software

Notes

- On the MVS-8000X, the M/E-4 bank is not used for 3D mode.
- On the MVS-7000X, the M/E configuration in 3D mode will be the same as that in 2M/E mode *(see page 266)*.
- The following signal formats support 3D.
  1080i/50, 1080i/59.94, 720P/50, 720P/59.94
- For details of the board configurations required for 3D mode, consult your Sony representative.

Using the software

To use the switcher upgrade software and DME upgrade software, you need to enter an install key to enable the software. It is not necessary to enter an install key if the software was factory-installed.


Ask your Sony representative about entering the install key.

At this time, the unique device ID may be required.
You can check the unique device ID in the Install menu of the switcher and DME.

For details of this operation, see "Installation and Device Setup (Install/Unit Config menu)" in Chapter 18 (Volume 2).

How the 3D display works

In 3D mode, two different images, for the left eye and the right eye, are displayed simultaneously, to be combined by the brain into a stereoscopic image.
Therefore, switcher and DME hardware is duplicated, with input signals for the left eye and right eye *(see the following figure)*.

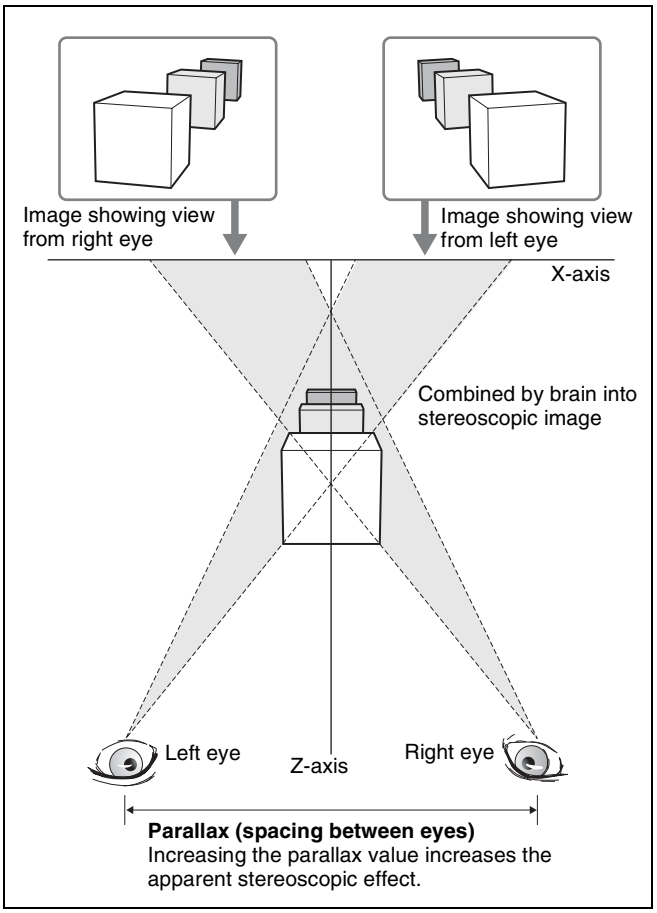

Preparations

Switching the system to 3D mode

Notes

It is only possible to switch to 3D mode when the system signal format is set to one of the following.
1080i/50, 1080i/59.94, 720P/50, 720P/59.94

1 Display the Engineering Setup >System >Format menu.

2 Press [3D Mode], turning it on.

A popup window appears, with a message.

3 Check the message, and select [Yes].

Input primary numbers for left and right signals

For the signals used in 3D mode for the left eye view and right eye view (referred to simply as left and right signals), select a combination of primary input numbers from two types (signals in the same slot and signals in different slots).

For some signals, such as titles, the same signal is used for both left and right.

Specify whether to use a combination of left and right signals in the same slot or different slots

1 Display the Engineering Setup >System > Install/Unit Config > Unit Config menu.

2 In <3D Connector Pair> group, select either of the following.

1-2 Mode: Specify a pair of left and right signals in the same slot.
1-21Mode: Specify a pair of left and right signals in different slots.

3 Press [Execute].

Combinations of left and right signals (Input terminals)

The following combinations of left and right signals are available depending on whether to use the signals in the same slot or different slots.

If [1-2 Mode] is selected on MVS-8000X

Left signals	Right signals
Slot 5	
Input 1	Input 2
Input 3	Input 4
:	:
Input 19	Input 20
Slot 6	
Input 21	Input 22
Input 23	Input 24
:	:
Input 39	Input 40
Slot 7	
Input 41	Input 42
Input 43	Input 44
:	:
Input 59	Input 60
Slot 8	
Input 61	Input 62
Input 63	Input 64
:	:
Input 79	Input 80
Slot 9	
Input 81	Input 82
Input 83	Input 84
:	:

Left signals	Right signals
Input 99	Input 100
Slot 10	
Input 101	Input 102
Input 103	Input 104
:	:
Input 119	Input 120
Slot 11	
Input 121	Input 122
Input 123	Input 124
:	:
Input 139	Input 140
Slot 12	
Input 141	Input 142
Input 143	Input 144
Slot 3	
Premium input 1	Premium input 2
Premium input 3	Premium input 4
:	:
Premium input 19	Premium input 20

If [1-21 Mode] is selected on MVS-8000X

Left signals	Right signals
Slot 5	**Slot 6**
Input 1	Input 21
Input 2	Input 22
:	:
Input 20	Input 40
Slot 7	**Slot 8**
Input 41	Input 61
Input 42	Input 62
:	:
Input 60	Input 80
Slot 9	**Slot 10**
Input 81	Input 101
Input 82	Input 102
:	:
Input 100	Input 120
Slot 11	
Input 121	Input 122
Input 123	Input 124
:	:
Input 139	Input 140
Slot 12	
Input 141	Input 142
Input 143	Input 144

Left signals	Right signals
Slot 3	
Premium input 1	Premium input 2
Premium input 3	Premium input 4
:	:
Premium input 19	Premium input 20

If [1-2 Mode] is selected on MVS-7000X

Left signals	Right signals
Slot 5	
Input 1	Input 2
Input 3	Input 4
:	:
Input 19	Input 20
Slot 6	
Input 21	Input 22
Input 23	Input 24
:	:
Input 39	Input 40
Slot 7	
Input 41	Input 42
Input 43	Input 44
:	:
Input 59	Input 60
Slot 8	
Input 61	Input 62
Input 63	Input 64
:	:
Input 79	Input 80

If [1-21 Mode] is selected on MVS-7000X

Left signals	Right signals
Slot 5	**Slot 6**
Input 1	Input 21
Input 2	Input 22
:	:
Input 20	Input 40
Slot 7	**Slot 8**
Input 41	Input 61
Input 42	Input 62
:	:
Input 60	Input 80


Setting input signals for 3D mode

For each primary input, to select whether separate left and right signals are used, or the same signal is shared between left and right, use the following procedure.

1 Display the Engineering Setup >Switcher > Config >3D Config menu.

2 Press [Input Link].

The Input Link menu appears.

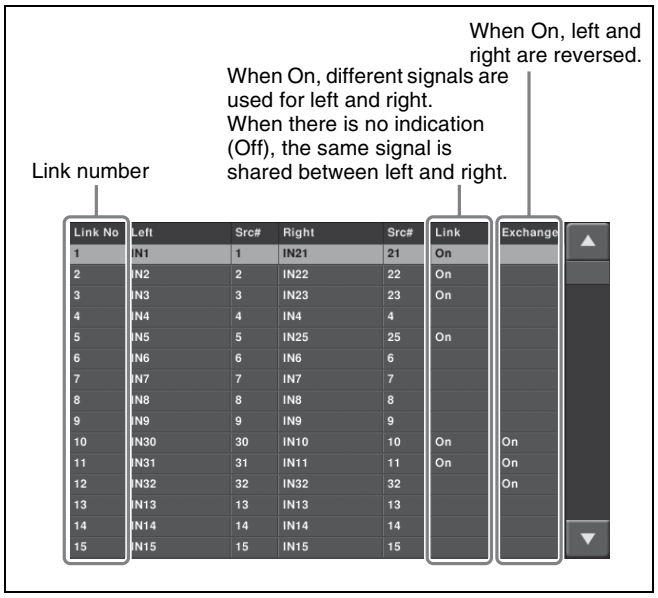

3 Using any of the following methods, select the link number to operate on.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Link No	Link number	1 to maximum value
3	Num	Select the number of consecutive numbers from the selected link number	1 to maximum value

4 Press [3D Input Link], and set the link to either of the following.

- To use separate left and right signals, set to On.
- To use the same signal shared between left and right, set to Off (no indication).

Notes

When this is set to "Off," one signal of the predetermined pair cannot be used.
For example, for IN1 and IN21, IN21 cannot be used, and is grayed out in the list.

5 Repeat steps **3** and **4**, to set all of the primary inputs in 3D mode.

Using pairs of primary input numbers reversed right-to-left

Press [L/R Input Exchange], setting it to On, to swap the left and right signals, and reverse the indications in the list. For example, when the left signal is IN1, and the right signal is IN21, this assigns IN21 to the left signal and IN1 to the right signal.

Notes

When [3D Input Link] is off and [L/R Input Exchange] is set to On, then the other input of the pair can be used. For example, when using IN1 shared between left and right, you can also use IN21 shared between left and right, and IN21 also appears in the list.


To assign inputs with the primary input numbers reversed left-to-right to cross-points

1 In the Input Link menu, set [L/R Input Exchange] to On, then display the Engineering Setup >Panel >Xpt Assign >Main, V/K Pair Assign menu.

In the Source field, "3D Exchange=xx" appears ("xx" is the input number linked to the input number at the position of the cursor).
In the example of the following figure, for IN11 "3D Exchange=31" appears.

2 Press [Set].

This sets IN31 in place of IN11.

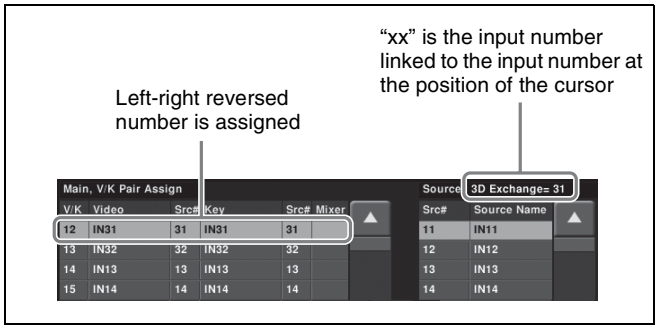

Combinations of left and right signals (output connectors)

The left and right signals are combined for the slots as follows.

If [1-2 Mode] is selected on MVS-8000X

Left signals	Right signals
Slot 13	
Output 1	Output 2
Output 3	Output 4
:	:
Output 19	Output 20

Left signals	Right signals
Slot 14	
Output 25	Output 26
Output 27	Output 28
:	:
Output 43	Output 44
Slot 15	
MSD1	MSD2
Output 21	Output 22
Output 23	Output 24
Output 45	Output 46
Output 47	Output 48

If [1-21 Mode] is selected on MVS-8000X

Left signals	Right signals
Slot 13	**Slot 14**
Output 1	Output 25
Output 2	Output 26
:	:
Output 20	Output 44
Slot 15	
MSD1	MSD2
Output 21	Output 22
Output 23	Output 24
Output 45	Output 46
Output 47	Output 48

If [1-2 Mode] is selected on MVS-7000X

Left signals	Right signals
Slot 9	
Output 1	Output 2
Output 3	Output 4
:	:
Output 19	Output 20
Slot 10	
Output 25	Output 26
Output 27	Output 28
:	:
Output 43	Output 44
Slot 11	
MSD1	MSD2
Output 21	Output 22
Output 23	Output 24
Output 45	Output 46
Output 47	Output 48

If [1-21 Mode] is selected on MVS-7000X

Left signals	Right signals
Slot 9	**Slot 10**
Output 1	Output 25
Output 2	Output 26
:	:
Output 20	Output 44
Slot 11	
MSD1	MSD2
Output 21	Output 22
Output 23	Output 24
Output 45	Output 46
Output 47	Output 48


Setting frame memory outputs for 3D mode

Select whether to use frame memory outputs 1 to 8 in combinations of left and right signals for 3D mode. The left and right combinations are fixed, as 1 and 5, 2 and 6, 3 and 7, and 4 and 8.

1 Display the Engineering Setup >Switcher >Config >3D Config menu.

2 Press [FM Output Link].

The FM Output Link menu appears.

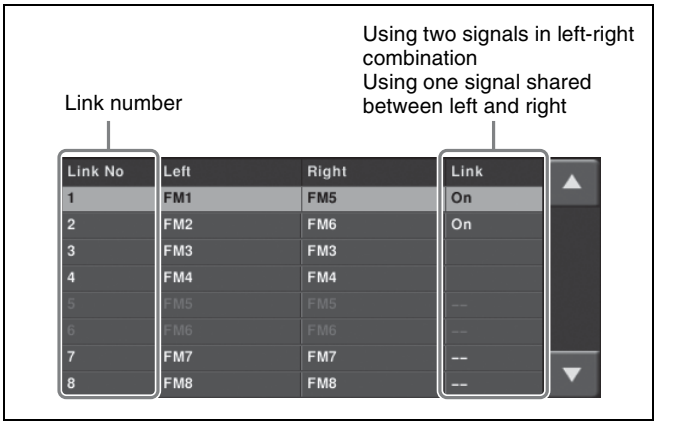

3 Using any of the following methods, select the link number.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Link No	Link number	1 to 8

Knob	Parameter	Adjustment	Setting values
3	Num	Select the number of consecutive numbers from the selected link number	1 to 8

4 Press [FM Link], and set the link to either of the following.

- To use the frame memory outputs in left and right combinations, set to On.
- To use the same frame memory output for left and right, set to Off (no indication).

Notes

When [FM Link] is On, frame memory output does not include ancillary data for the right image.

5 Repeat steps **3** and **4**, to set all of the frame memory outputs for 3D mode.

Functions for which left and right frame memory outputs are coupled when [FM Link] is On

Pair mode On/Off, clip playback, clip transition [1], clip transition snapshot

Carry out operations other than the above separately for left and right.

1) When [FM Link] is On, a clip for the right frame memory to be used in the clip transition cannot be selected in the following menus.
- M/E-1 >Misc >Transition >Clip Transition >Clip menu
- M/E-2 >Misc >Transition >Clip Transition >Clip menu
- P/P >Misc >Transition > Clip Transition > Clip menu
- The selection must be made in the Frame Memory >Clip >Recall menu

Switching the type of DME output signal (video/key) assigned to a monitor signal

The function for switching the signal type of the monitor output (one channel) to video or key is assigned to one of the Prefs buttons of the Menu control block or one of the buttons of the Utility/Shotbox control block (DME MON KEY command).

For details of the assignment, see "Settings Button Assignment (Prefs/Utility Menu)" in Chapter 19 (Volume 2).

To switch the signal type of DME output (video/key) assigned to a monitor signal

Press the DME MON KEY command assigned button and turn it on to assign DME key output to a monitor signal. Then press the button and turn it off to assign DME video output to a monitor signal.

For details of selection of the DME channels to be assigned to a monitor signal, see "Assigning a DME output signal as a monitor signal" (page 141).

Selecting the signal output from a DME monitor output connector

1 Display the Engineering Setup >DME >Output >Monitor Output menu.

2 Press [DME1] or [DME2] to select the DME to operate on.

3 On the left, select MONI OUT#1 or MONI OUT#2.

4 On the right, select the signal.

You can select any of Ch1 Video, Ch1 Key, Ch2 Video, and Ch2 Key.

5 Press [Set].

This assigns the signal.

Restrictions in 3D Mode

In 3D mode, the following restrictions apply.

Restrictions	Details
Functions that cannot be used in the switcher	• 73 or more signal inputs (MVS-8000X) or 41 or more signal inputs (MVS-7000X) • 11 or more premium input signals (MVS-8000X only) • 25 or more signal outputs • M/E-2 bank [a)] • M/E-3 bank • Key 5 to Key 8 [b)] • DME utility buses 1, 2 • Color corrector 2 • Format converter • AUX mix transition • Logical M/E Assign in the Engineering Setup >Switcher >Config menu
Functions that cannot be used on the DME	• DME channels 3, 4, 7, 8 • DME monitor output numbers 3 and 4 • Editor ports 3 and 4 when the editor port operation mode is set to "Independent"
Other restrictions	• Auto chroma keying is carried out on the left image. • Tallies are generated based on the left signal in the PGM/PST bank. • Dual Simul cannot be selected in the Engineering Setup >System >System Config menu.

a) In MVS-8000X
b) In MVS-7000X

Video Creation in 3D Mode

Adjusting the parallax using the DME

By adjusting the parallax *(see page 260)*, you can control the degree of depth perception.

1 Display the Global Effect >Ch1 to Ch4 >3D Mode menu.

2 To adjust the parallax, press [Parallax].

3 Turn the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	1ch Parallax	Adjust the parallax for channel 1	0.00 to 8.00
2	2ch Parallax	Adjust the parallax for channel 2	0.00 to 8.00

Notes

If the position of an image in three-dimensional space is in the plane of the monitor screen, adjusting the parallax does not change the 3D effect. In this case, adjust the parameters in the local coordinate space so that the image is either in front of or behind the plane of the screen before adjusting the parallax.

4 To adjust the perspective without changing a size or shape, press [Disparity].

5 Turn the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	1ch Disparity	Adjust the degree of depth perception for channel 1	–8.00 to 8.00
2	2ch Disparity	Adjust the degree of depth perception for channel 2	–8.00 to 8.00

M/E Configuration Switching

On the MVS-7000X, a single mix/effect board MKS-7210X can be shared among a number of M/E banks.

On up to a maximum of three boards, 2M/E mode, 3M/E mode, or 4M/E mode can be assigned. It is also possible to set no assignment.

Using this function, you can select the M/E configuration of the whole switcher from the following.

Number of assigned M/Es	Number of keys available on a single M/E	
1	8	
2	4	
3	M/E-1, M/E-2	2
	PGM/PST	4
4	2	

In this manual, using a single MKS-7210X board is referred to as 1M/E mode, 2M/E mode, 3M/E mode, or 4M/E mode depending on the maximum number of M/Es on which the board is used.

Notes

- When three or four M/Es are assigned to a board, the other two boards are automatically indicated as “Disable”, and assignment is no longer possible.
- When the signal format is 1080P, each MKS-7210X board can only be used on a single 1M/E and the number of available keys is 4.
- In 2M/E mode, DME selection on a single M/E is as follows.
  - Two places when the dedicated interface is used.
  - One place when the SDI interface is used.

Setting the number of M/Es for each board

Use the following procedure.

1 Display the Engineering Setup >System >Install/Unit Config >Unit Config >M/E Split menu.



2 In each of the <M/E Split (1st Board)> to <M/E Split (3rd Board)> groups, select one of [1ME] to [4ME].

For no assignment to any M/E, select [Disable].

3 Press [Execute].

Restrictions in 3M/E mode and 4M/E mode

In 3M/E mode and 4M/E mode, the following restrictions apply.

Classification	3M/E mode		4M/E mode	
Operation mode	All M/Es and P/P	DSK mode and multi-program 2 mode cannot be set.	All M/Es and P/P	• DSK mode and multi-program 2 mode cannot be set. • [Utility 2] cannot be selected for the background in multi-program mode.
	M/E-1, M/E-2	[Utility 2] cannot be selected for the background in multi-program mode.		
M/E assignment	All M/Es and P/P	Logical M/E Assign cannot be used.	All M/Es and P/P	Logical M/E Assign cannot be used.
Wipes	All M/Es and P/P	• Pattern mix cannot be used. • Pattern number 162 wipes cannot be used.	All M/Es and P/P	• Pattern mix cannot be used. • Pattern number 162 wipes cannot be used.
	M/E-2	• Random/diamond dust wipes can be used. • Dust mix cannot be used.	M/E-2, M/E-3	• Random/diamond dust wipes can be used. • Dust mix cannot be used.
Wipe border	M/E-2	Wipe border colors are single-color only.	M/E-2, M/E-3	Wipe border colors are single-color only.
M/E outputs	M/E-1, M/E-2	Out5 and Out6 cannot be used.	All M/Es and P/P	Out5 and Out6 cannot be used.
Signal selection	M/E-1, M/E-2	PROC V and PROC K signals cannot be selected with any cross-point button.	All M/Es and P/P	PROC V and PROC K signals cannot be selected with any cross-point button.
Utility bus	M/E-1	Since only one utility bus is available, utility 1 bus is used instead of utility 2 bus in the following functions. [a)] • Wipe border • Preset color mix • Backgrounds of DME wipes	M/E-1, P/P	Since only one utility bus is available, utility 1 bus is used instead of utility 2 bus in the following functions. • Wipe border • Preset color mix • Backgrounds of DME wipes
	M/E-2	Since only one utility bus is available, you cannot select the following functions. • Key border • Sub mask • Preset color mix • Wipe border	M/E-2, M/E-3	Since only one utility bus is available, you cannot select the following functions. • Key border • Sub mask • Preset color mix • Wipe border
	M/E-2	If you select a DME wipe which uses a utility bus for a background image, a color matte signal is used instead of a utility bus signal.	M/E-2, M/E-3	If you select a DME wipe which uses a utility bus for a background image, a color matte signal is used instead of a utility bus signal.

Classification	3M/E mode		4M/E mode	
Side flags	M/E-2	Side flags cannot be used.	M/E-2, M/E-3	Side flags cannot be used.
DME	M/E-1, M/E-2	The same restrictions as those for 4M/E apply.	All M/Es and P/P	• For the dedicated interface, DME can be used in only one place for each M/E. • For the SDI interface, DME wipes and processed keys cannot be used. • Only one-channel mode patterns can be selected for DME wipes.
	P/P	DMEs can be used in two places for a dedicated interface, or one place for an SDI interface.		

a) No restriction is applied to P/P. Thus, both utility buses 1 and 2 can be used for P/P.

DME Operations

Chapter 11

DME

DME (Digital Multi Effects) allows you to add three-dimensional effects such as image movement, rotation, magnification and shrinking, as well as a wide variety of special effects. DME is the general name for all of these effects.
You can use up to eight channels as dedicated DME channels.
Each channel can be used on its own or in combination with other channels, which allows you to create advanced effects with more complexity.
Functions that can be used differ with the models of DME.

For details, see "Functional Differences With Models of DME" (page 410) in Appendix.

Three-Dimensional Transformations


Transformation is the process of placing a video image in a three-dimensional DME coordinate space and subjecting it to manipulations such as movement, rotation, magnification or shrinking.

Three-dimensional coordinate space

Source coordinate space and target coordinate space


Images are placed in one of two types of coordinate space: source coordinate space and target coordinate space.

- The source coordinate space is a three-dimensional coordinate space with reference to the image itself. The X- and Y-axes are defined parallel to the plane of the image, and the Z-axis is defined perpendicular to the plane of the image. When you move the image, the coordinate axes also move.
- The target coordinate space is a three-dimensional coordinate space with reference to the output monitor screen. The X- and Y-axes are defined parallel to the plane of the monitor screen, and the Z-axis is defined perpendicular to the plane of the monitor screen. The coordinates do not move even if the image moves.

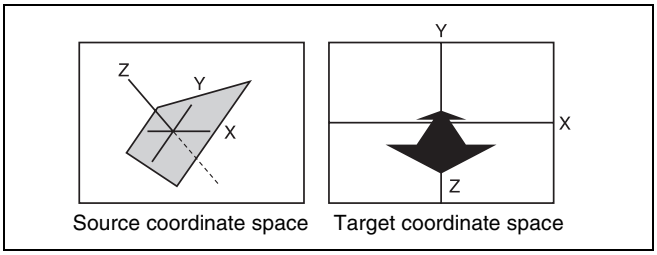

Source coordinate space and target coordinate space


For example, as shown in the following figure, the image moves in a different direction when you move it along the X-axis of the source coordinate space and along the X-axis of the target coordinate space.

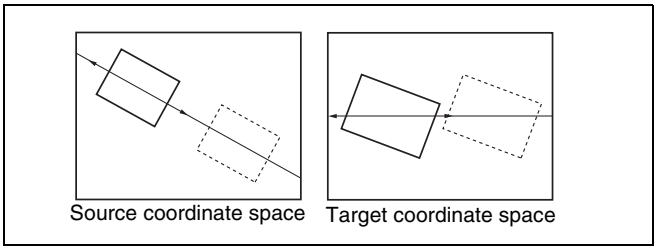

Movement along the X-axes of the source coordinate space and target coordinate space

Local coordinate space and global coordinate space

The coordinates of an individual DME channel are called its local coordinate space. The coordinates common to all channels are called the global coordinate space.
By switching from local to global coordinate space, you can add new movement to the movement of images in individual channels, and also apply transformation effects to multiple channels that have been combined by Global effects *(see page 349).*

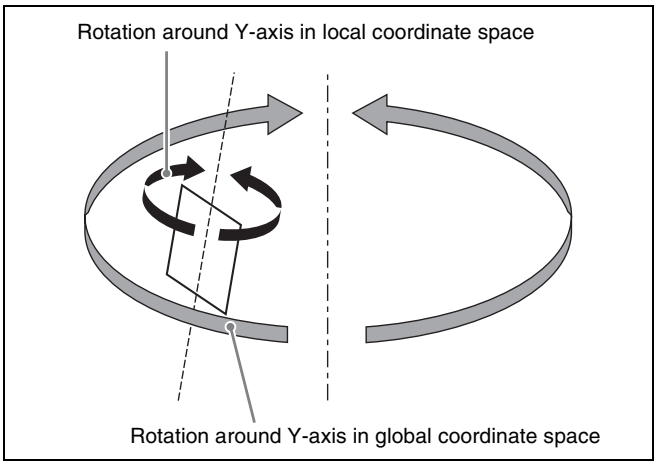

Local coordinate space and global coordinate space


Three-dimensional parameters

Three-dimensional parameters are X, Y, and Z values which define the position of an image, its axis of rotation, the position of an imaginary point of view on the image, and so on.

The standard values of parameters are as follows, depending on the aspect ratio of your monitor (4:3 or 16:9).

Values for 4:3 mode


- **Origin at center of image (source coordinate space) or center of monitor (target coordinate space)**
  X = 0.00, Y = 0.00, Z = 0.00
- **Upper right corner of image or monitor**
  When using SD format signals: X = 4.00, Y = 3.00, Z = 0.00
  When using HD format signals: X = 12.00, Y = 9.00, Z = 0.00
- **Lower left corner of image or monitor**
  When using SD format signals: X = –4.00, Y = –3.00, Z = 0.00
  When using HD format signals: X = –12.00, Y = –9.00, Z = 0.00

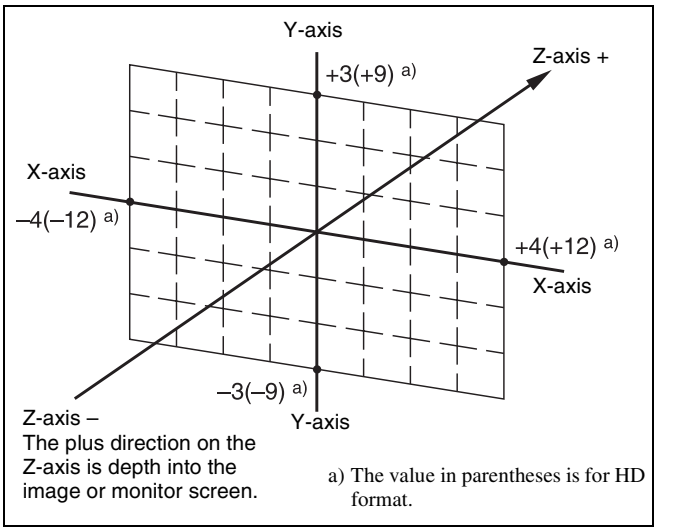

Values for X-, Y-, and Z-axes (4:3 mode)

Values for 16:9 mode

- **Origin at center of image (source coordinate space) or center of monitor (target coordinate space)**
  X = 0.00, Y = 0.00, Z = 0.00
- **Upper right corner of image or monitor**
  When using SD format signals: X = 4.00, Y = 2.25, Z = 0.00
  When using HD format signals: X = 16.00, Y = 9.00, Z = 0.00
- **Lower left corner of image or monitor**
  When using SD format signals: X = –4.00, Y = –2.25, Z = 0.00
  When using HD format signals: X = –16.00, Y = –9.00, Z = 0.00

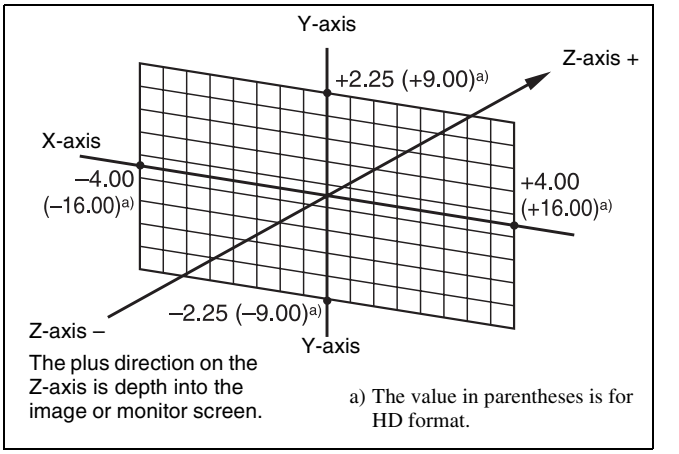

Values for X-, Y- and Z-axes (16:9 mode)

Limits of three-dimensional parameters

The following table shows the limits of three-dimensional transformation parameters.

The three-dimensional parameters of an image change when you use the trackball or Z-ring to execute a transformation. You can also execute a transformation by entering parameter values from the numeric keypad control block.

Operation mode	Limits of three-dimensional transformation parameters		
Location XYZ	HD format:		–999.9999 to +999.9999
	SD format:	4:3	–333.3333 to +333.3333
		16:9	–250.0000 to +250.0000
Rotation, Spin	–999.9999 to +999.9999		
Axis Location	HD format:		–999.9999 to +999.9999
	SD format:	4:3	–333.3333 to +333.3333
		16:9	–250.0000 to +250.0000
Location Size	0.0000 to +999.9999		
Aspect	0.0000 to +2.0000		
Perspective (X, Y)	HD format:		–999.9999 to +999.9999
	SD format:	4:3	–333.3333 to +333.3333
		16:9	–250.0000 to +250.0000
Perspective (Z)	0.0000 to 999.9999		
Skew	–9.9999 to +9.9999		

Detents

The system defines points called detents at regular intervals on the three-dimensional space. Pressing the [CTR] button *(see page 284)* in the device control block sets the current three-dimensional parameter values to the closest detent points.
The following table shows the interval between successive detents for each transformation operation mode *(see page 271)*.

Operation mode	Detent interval
Location XYZ	1.0000
Rotation, Spin	0.2500
Axis Location	1.0000
Location Size	0.2500
Aspect	1.0000 a)
Perspective (X, Y)	1.0000
Perspective (Z)	1.0000 a)
Skew	0.1000

a) When a value is smaller than 1, 1/Aspect or 1/Perspective (Z) is adjusted to an integral value.

Three-dimensional parameter default values

Each of the transformation operation modes has default values for three-dimensional parameters. If required, you can return the current value to the defaults by pressing the [CTR] *(see page 284)* button in the device control block twice in rapid succession.
The following table shows the default parameter values for each transformation operation mode.

Operation mode	Default value
Location XYZ	0.0000
Rotation, Spin	0.0000
Axis Location	0.0000
Location Size	1.0000
Aspect	1.0000
Perspective (X, Y)	0.0000
Perspective (Z)	1.0000
Skew	0.0000

Resetting of parameter values set in the source coordinate space

In some transformation operation modes, if you switch to the target coordinate space after setting up a three-dimensional transformation in the source coordinate space, the setting values in the source coordinate space (three-dimensional parameter values) are converted to values in the target coordinate space (source/target conversion). Once a conversion has taken place, the original source coordinate space parameters do not return to their original values when you switch back to the source coordinate space. They are reset to zeros.
Source/target conversion occurs in the following operation modes:
- Location XYZ
- Rotation


Transformation Operation Modes


The following operation modes are available for three-dimensional DME transformations. These operations are carried out in the device control block (trackball or joystick). *For details, see "Three-Dimensional Transformation Operations" (page 283).*

Location XYZ

Moves the image on the X-axis, Y-axis, or Z-axis. The direction of movement differs depending on whether you are manipulating the image in the source coordinate space or the target coordinate space.

Image movement in the source coordinate space


Movement on the X-axis


Movement on the Y-axis






Movement on the Z-axis

Image movement in the target coordinate space


Movement on the X-axis



Movement on the Y-axis



Movement on the Z-axis

Rotation

Rotates the image on the X-axis, Y-axis, or Z-axis. The type of rotation differs depending on whether you are manipulating the image in the source coordinate space or the target coordinate space.

Image rotation in the source coordinate space


Rotation around the X-axis


Rotation around the Y-axis






Rotation around the Z-axis

Image rotation in the target coordinate space


Rotation around the X-axis


Rotation around the Y-axis


Rotation around the Z-axis


Spin

When rotating the image in Rotation mode, it may not always be possible to achieve the kind of rotation around an axis that you want. Combining Rotation mode with Spin mode creates an effect that rotates the image around a specified axis. The type of rotation differs depending on whether you are manipulating the image in the source coordinate space or the target coordinate space. The way the image rotates around an axis is the same as in Rotation mode.


Axis location

Moves an axis of rotation in the source coordinate space.


Axis movement



Movement on the X-axis



Movement on the Y-axis



Movement on the Z-axis


Location size

Changes the size of the whole image.


- Because shrinking and magnification of the image in the source coordinate space is done in three-dimensional space, magnifying the image emphasizes the sense of perspective.

- Because shrinking and magnification of the image in the target coordinate space is a conversion of the two-dimensional image displayed on the monitor, shrinking and magnification does not change the shape of the image.

Magnification and shrinking in the source coordinate space




Magnification and shrinking in the target coordinate space



Aspect


In the source coordinate space, changes the aspect ratio in the X-axis direction and Y-axis direction, either independently or simultaneously.

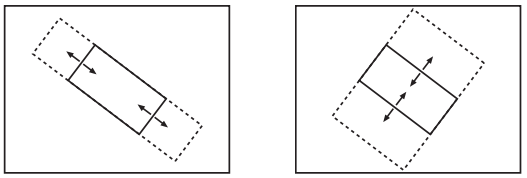

Perspective


In the target coordinate space, changes the perspective on the image by changing the virtual view point, without changing the position of the image.

The X-axis and Y-axis values define the position of the view point. The Z-axis value defines its distance from the image.

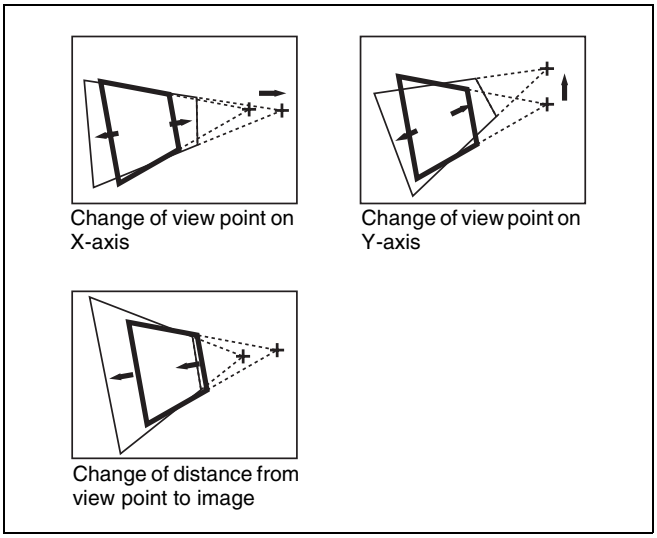

Skew

In the source coordinate space, change the skew of the image on the X-axis or Y-axis.

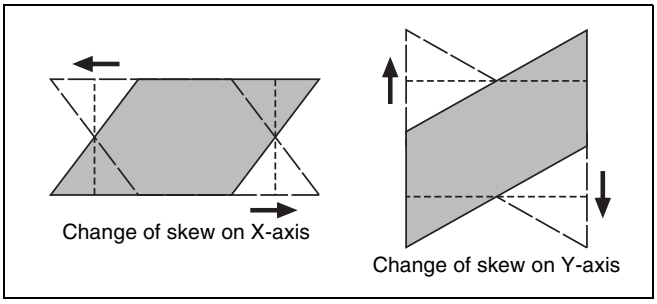

Graphics Display

Graphics display is a function that allows you to display wire frames, coordinate axes and a grid over the current DME image, to make it easier to create effects in three-dimensional coordinate space.
Graphics displayed by this function can also be output to the monitor output connector.
To make graphics display settings, use the DME menu. *For details, see "Graphics Display Operation" (page 287).*
You can display the following kinds of graphics.

Wire frames

A wire frame displays an image enclosed in a frames, so that you can check the position and size of the image. If there is a shadow *(see page 355),* a frame is shown for the shadow as well.

Coordinate axes


This is a three-dimensional display of coordinates in local or global coordinate space. You can check the origin of the axes and the directions of the X-, Y-, and Z-axes.

Channel ID

This displays the channel number so that you can check which channel you are using, a useful feature when you are working with multiple channels.

Channel IDs are displayed differently in local and global coordinate space.


- In local coordinate space, the channel number is displayed along with "F" or "B" to indicate whether you are looking at the front (F) or back (B) of the current wire frame. For example, "1F" means the front of the wire frame on channel 1 in local coordinate space.
- In global coordinate space, the channel number is displayed along with "G" to indicate global. For example, "G2" means channel 2 in global coordinate space.

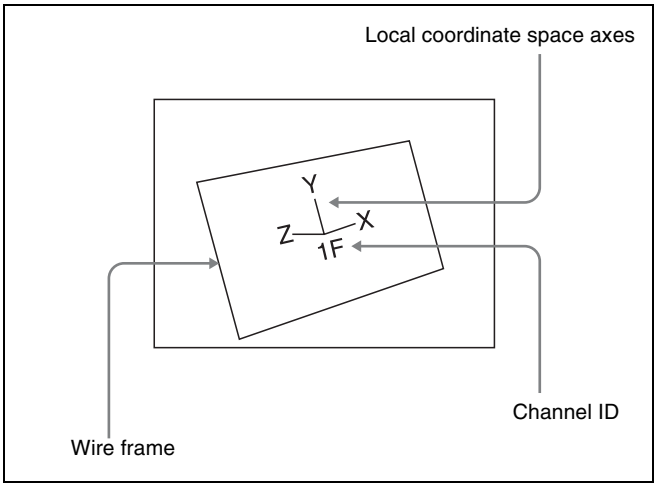

Wire frame, local coordinate space axes, and channel ID

Grid


This is a grid pattern representing the whole of the monitor screen. The grid makes it easy to set the position of an image in two-dimensional coordinates.

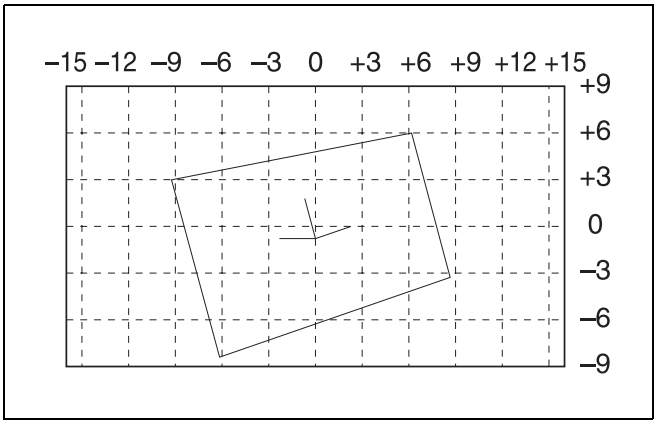

Grid (16:9 mode)

Shrinking the graphics display

You can shrink the graphics display so that you can see beyond the range displayed on the normal monitor screen. This makes it possible to visually set the location of images in a larger space. The range displayed on a normal monitor screen is indicated by a frame.

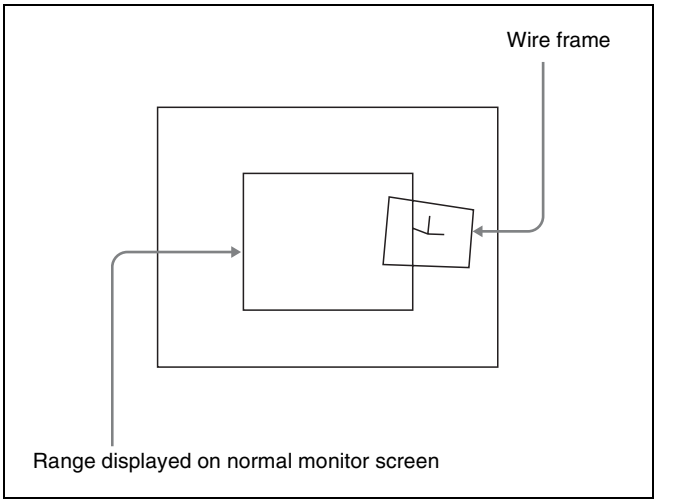

To automatically erase the graphic display

Turn Auto Erase on. The graphic display is erased automatically whenever a keyframe is executed. It is displayed again after the keyframe ends, after the time set in Recovery Time.

Flex Shadow center axis

When using the Flex Shadow function *(see page 296)*, turn Flex Shadow Axis on to display the Flex Shadow center axis. This is an effective aid in making settings for this function.

Notes

The Flex Shadow center axis function is not supported on the MVE-8000A.

Three-Dimensional Parameter Display

You can display a three-dimensional parameter list for the currently controlled image. When more than one DME channel is selected, the status of the reference channel is displayed.





For the method of displaying a parameter list and an example display, see "Viewing the three-dimensional parameter details" (page 286).




Special Effects


You can use DME to add a variety of special effects. The special effects shown below can be applied.

Functions that can be used differ with the models of DME. For details, see "Functional Differences With Models of DME" (page 410).


Edge effects

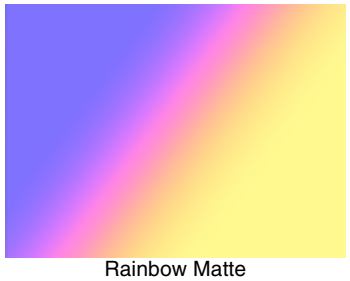Name	Effect/Image
Border *(See page 289.)*	Adds a border to the image frame. You can adjust the width (or thickness) of the border, its color, and the softness of the border edges. 
Crop *(See page 290.)*	Crops away the edges of the image. You can crop the top, bottom, left, and right sides individually or all together. You can also soften the cropped edges. 
Beveled Edge *(See page 291.)*	Gives an image a beveled edge. You can set the edge width and color. The inner edge softness and edge boundary softness can also be set.  Color  Lights
Key Border *(See page 292.)*	Adds borders to keys or gives a key consisting of an outline only. 
Art Edge *(See page 292.)*	Adds edges to the inner and outer side of the input image. The following items can be set. • Art edge width and position • Separate softening of the art edge inner and outer sides • Color of art edges **Examples of Art Edge source**  Gradation Matte  Rainbow Matte  Radial Gradation

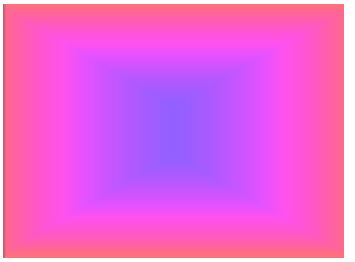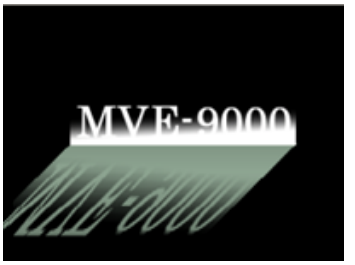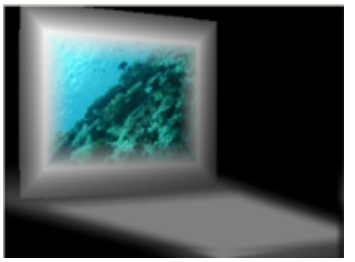Name	Effect/Image
	 Radial Rainbow Examples of Art Edge source [Rainbow Matte] 
Flex Shadow *(See page 296.)*	Allows a shadow to be added to the image using only one DME channel. The following settings can be made for the shadow. • The signal to use for the shadow - External: Generate shadow using input key signal. - Internal: Generate shadow using an internally generated, full-size DME key signal. • Shadow shrinking and magnification • Shadow position • Shadow color and density • Center axis of deformation • Shadow slant and perspective  Flex Shadow Source = External  Flex Shadow Source = Internal

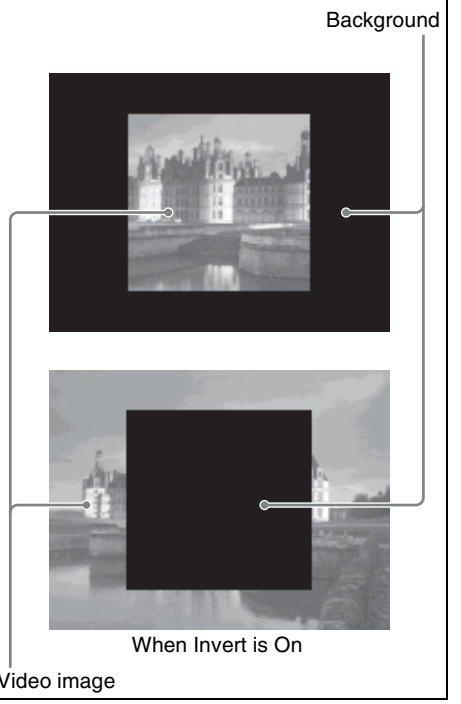
Name	Effect/Image
Wipe Crop *(See page 300.)*	Crops the video image to be visible inside or outside a wipe pattern. 



Effects for entire image


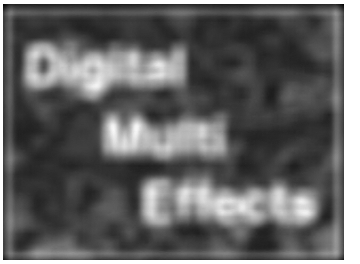
Name	Effect/Image
Defocus *(See page 303.)*	Defocuses the whole image. The degree of defocusing can be set simultaneously or separately for video and key signals. However, when the DME dedicated interface is used, the degree of defocusing can be set for video signals only. You can also cancel the black level leaking that occurs at the edge of the screen when the Defocus effect is used. 
Blur *(See page 304.)*	Applies a rounded blurring to the whole image.

Name	Effect/Image
Multi Move *(See page 305.)*	Shrinks the image and lines up a number of copies vertically and horizontally. You can specify the center point of the shrinking, the shrinking ratio, and the aspect ratio of the image screen. 

Effects for video image

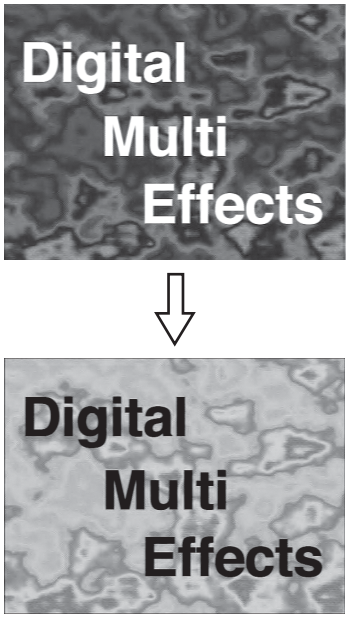Name	Effect/Image
Sepia *(See page 306.)*	Overlays a specified color onto the image. You can adjust the sepia color that is overlaid, and specify the degree of mixing between the original image and the sepia image.
Mono *(See page 306.)*	Converts the image into a monochrome image.
Posterization *(See page 306.)*	Coarsens the luminance gradations of the image, for a painting-like effect.
Solarization *(See page 306.)*	Coarsens the chroma gradations of the image, for a painting-like effect.
Nega *(See page 307.)*	Reverses the luminance or chroma of the image. 
Contrast *(See page 307.)*	Changes the contrast of the luminance and chroma of the image.




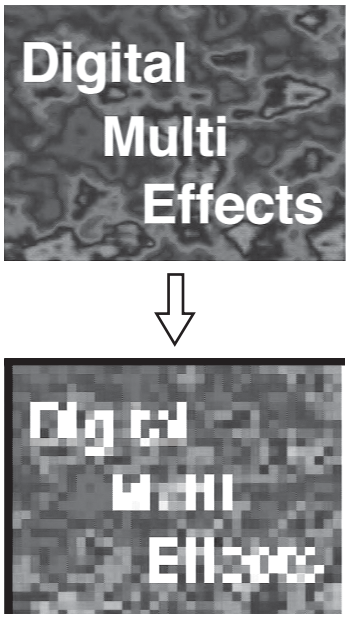
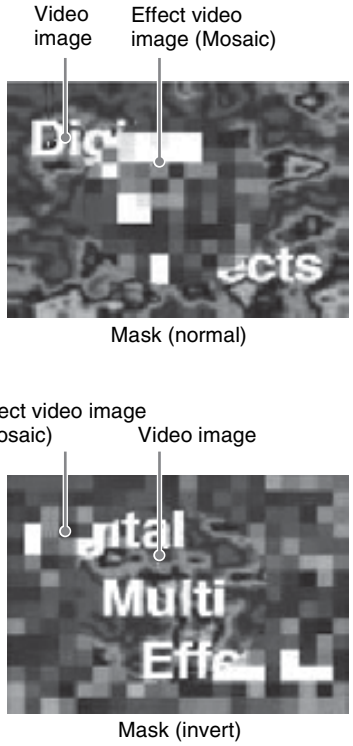
Name	Effect/Image
Mosaic *(See page 307.)*	Divides the image into small tiles so that it looks like a mosaic. You can specify the size and aspect ratio of the tiles. 
Mask *(See page 310.)*	Masks part of the picture, so that special effects are applied only inside a selected pattern. 




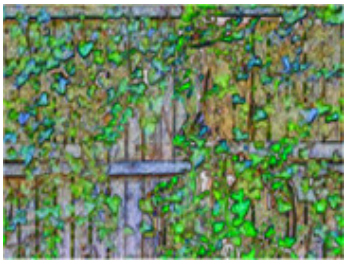
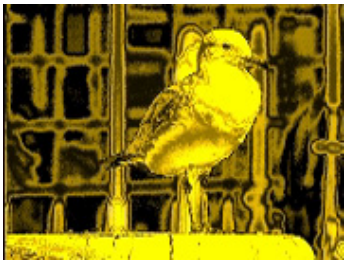
Name	Effect/Image
Sketch *(See page 307.)*	Provides a sketch-like effect based on the outlines of the image, using different touches such as sketch, edge color, drawing, relief, and sharp.  Sketch
Metal *(See page 309.)*	Provides a metallic gloss like that from gold, silver, or a rainbow colored surface. A metallic gloss can also be given to a freely selected color. 
Dim and Fade *(See page 309.)*	The Dim effect makes the image darker as it recedes into the distance. The Fade effect makes the image fade into the background as it recedes into the distance.  Fade
Glow *(See page 310.)*	Softens the edges of highlights, giving an effect like being struck by a soft light. 





Freeze effects



Freezes the input video. The video can also be frozen at a specified interval *(see page 312)*.

Nonlinear effects

Name	Effect/Image
Wave *(See page 313.)*	Produces a wave-like effect in the image. 
Mosaic Glass *(See page 315.)*	Makes the image rougher and finer at a specified interval. 
Flag *(See page 315.)*	Applies an effect like a flag waving in the wind. 
Twist *(See page 315.)*	Twists the image. 
Ripple *(See page 316.)*	Applies an effect like ripples moving across the image. 
Rings *(See page 319.)*	Partitions the image into rings that rotate while moving in the same direction. 

Name	Effect/Image
Broken Glass *(See page 319.)*	Partitions the image like broken glass, with shards flying outward. 
Flying Bar *(See page 320.)*	Divides the image into bars which peel off in two blocks as they move. 
Blind *(See page 320.)*	Divides the image into bars or wedges, with blocks rotating like the slats of venetian blinds. 
Split *(See page 321.)*	Splits the image upper and lower, left and right. 
Split Slide *(See page 321.)*	Divides the image into bars which slide alternately in reverse directions. 
Mirror *(See page 322.)*	Partitions the image vertically and horizontally, creating an image like a reflection in a mirror. 
Multi Mirror *(See page 322.)*	Divides the image into originals and reflections, lining them up vertically and horizontally. 

Name	Effect/Image
Kaleidoscope *(See page 323.)*	Creates an image like a view into a kaleidoscope. 
Lens *(See page 323.)*	Creates an image like a view through a lens. 
Circle *(See page 324.)*	Makes a circle with the image. 
Panorama *(See page 324.)*	Curves the upper and lower edges of the image to emphasize the sense of perspective. 
Page Turn *(See page 324.)*	Turns the image like a turning page. 
Roll *(See page 325.)*	Rolls the image up. 
Cylinder *(See page 325.)*	Winds the whole image onto a cylinder. 

Name	Effect/Image
Sphere *(See page 326.)*	Winds the whole image onto a sphere. 
Explosion *(See page 326.)*	Divides the image into fragments which expand as they fly out. 
Swirl *(See page 326.)*	Swirls the image. 
Melt *(See page 327.)*	Melts the image away from a specified part. 
Character Trail *(See page 328.)*	Extends the edge of the image like a trail. 


Corner Pinning effect


Name	Effect/Image
Corner Pinning *(See page 347.)*	Provides the effect of inserting the foreground in the background, allowing the four corners to be positioned freely, so that the image fills the quadrilateral outlined by the corners.  Background  Foreground (in cropped state)  Corner Pinning (when Crop Link is on)

Lighting effects

Name	Effect/Image
Lighting *(See page 329.)*	Provides the effect of light striking the image.  Normal  Specular  Mat
Spotlighting *(See page 336.)*	Creates the effect of a spotlight striking the surface of the image.

Recursive effects

Name	Effect/Image
Trail *(See page 331.)*	Recursively freezes the input video at regular intervals so that a trail of afterimages is created. You can make the afterimages stardust trails. 


Name	Effect/Image
Motion Decay *(See page 333.)*	Blurs the motion of a moving video by creating afterimages of the moving video. You can make the afterimages stardust trails. 
Keyframe Strobe *(See page 334.)*	Freezes the video each time the effect passes a keyframe. You can make the afterimages stardust trails.
Wind *(See page 335.)*	Strobes the image at regular intervals, and moves the frozen image in a fixed direction, leaving an afterimage. 

Background color

Adds a color or inputs an external signal to the background of the image *(see page 344)*.

Separate sides (effects for front and back sides)


Applies separate video signals and key signals to the front and back of the image *(see page 344)*.

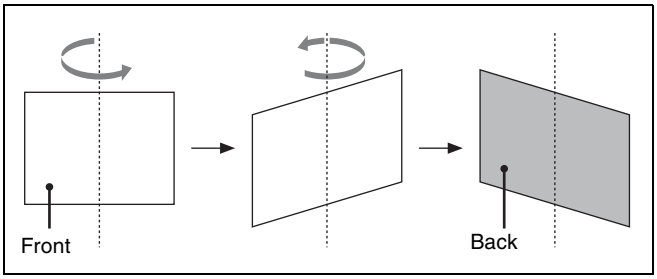

Front and back sides

Signal inversion (Invert effect)

Inverts the input video signal and/or key signal horizontally or vertically. You can make separate settings for the front and back *(see page 345)*.

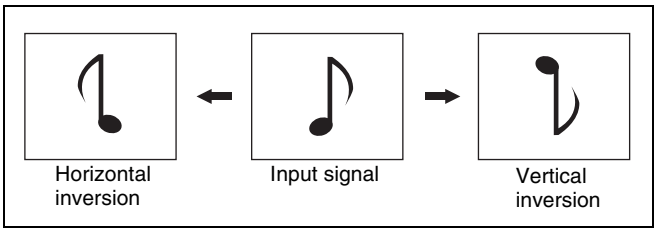

Inversion of input signal

Key density adjustment


Adjusts the key density for the key signal input to the DME *(see page 346)*.

Key source selection

Selects either the key signals received from the switcher or the key signals generated in the DME for application to the front and back of the image *(see page 281 or page 346)*.

Color mix setting

This is a combination of two colors with a pattern generator. This color mix signal can be used to fill parts such as a background or border *(see page 302)*.

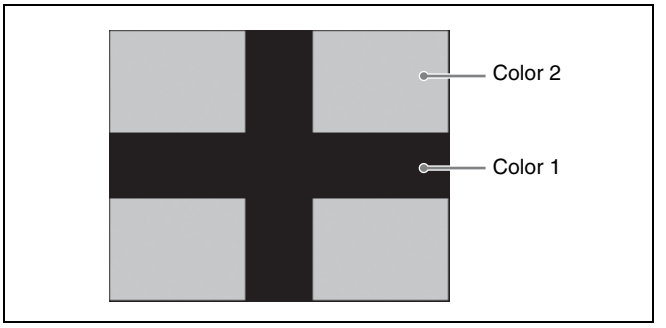

Global Effects

Global effects are special effects created by combining the images of successive channels. The following types of global effects are available.

- Combiner
- Brick
- Shadow

Devices for DME Support

The following boards and processors provide DME support.

The available functions depend on the type of DME being used. For details, see "Functional Differences With Models of DME" in Appendix (page 410).

MKS-7470X/7471X DME board set (MVS-7000X only)

Installing this in the MVS-7000X allows DME to be operated as though part of the switcher.
Each board supports two channels, and a maximum of two boards (four channels) can be used.
There are two types of interfaces available for connecting DMEs to the switcher: the dedicated interface and the SDI interface.

For details, see "Setting the Interface Between the DME and the Switcher" in Chapter 20 (Volume 2).

The use of the SDI interface requires an MKS-8110X 20-input board and an MKS-7171X DME output connector board. When using the SDI interface, the following operations are different from using the dedicated interface.

- Setting the input signals from the switcher to the MKS-7470X/7471X (AUX bus outputs), and signals returned to the switcher (reentry inputs).
  For details, see "Setting the AUX Bus Output and Reentry Input" in Chapter 20 (Volume 2).
- Selecting the combiner channels not in the key control block, but in the Global Effect menu.
  For details, see "Procedure for combine operation when using an SDI interface" (page 351)

MVE-8000A multi format DME processor

The MVE-8000A is a "Digital Multi Effects" with multi-format support.
For the MVE-8000A, an optional MKE-8021A Input/Output Board is available as a dedicated interface for integrated use with the switcher.
There are two types of interfaces available for connecting DMEs to the switcher: the dedicated interface and the SDI interface.

Notes

When using the SDI interface, the following operations are different from using the dedicated interface.

For details, see "Setting the Interface Between the DME and the Switcher" in Chapter 20 (Volume 2).

- Setting the input signals from the switcher to the MVE-8000A (AUX bus outputs), and signals returned to the switcher (reentry inputs). However, "Ext In" cannot be set for the DME channel.
  For details, see "Setting the AUX Bus Output and Reentry Input" in Chapter 20 (Volume 2).
- Selecting the combiner channels not in the key control block, but in the Global Effect menu *(see page 350)*.

MVE-9000 multi format DME processor

The MVE-9000 is a "Digital Multi Effects" with multi-format support.
For the MVE-9000, an optional MKE-9021A Input/Output Board is available as a dedicated interface for integrated use with the switcher.
There are two types of interfaces available for connecting DMEs to the switcher: the dedicated interface and the SDI interface.

For details, see "Setting the Interface Between the DME and the Switcher" in Chapter 20 (Volume 2).

Notes

When using the SDI interface, the following operations are different from when using the dedicated interface.

- Setting the input signals from the switcher to the MVE-9000 (AUX bus outputs), and signals returned to the switcher (reentry inputs).
  For details, see "Setting the AUX Bus Output and Reentry Input" in Chapter 20 (Volume 2).
- Selecting the combiner channels not in the key control block, but in the Global Effect menu *(see page 350)*.


Three-Dimensional Transformation Operations

Use the device control block to carry out three-dimensional DME transformations.

For details of three-dimensional DME coordinate space, see "Three-Dimensional Transformations" (page 269).

Basic Operations

This section explains how to use the device control block (trackball) to carry out three-dimensional transformations.

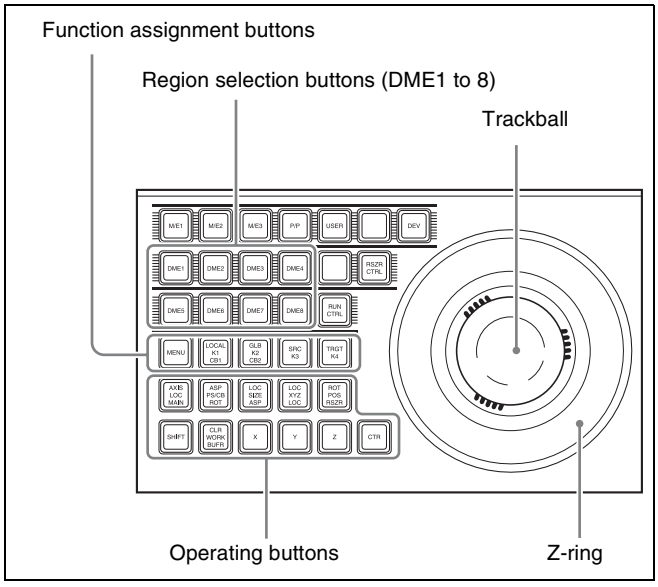

Device control block (trackball)

Buttons used when the three-dimensional transform operation mode is enabled

LOCAL: Enable operations in the DME local coordinate space.

GLB (global): Enable operations in the DME global coordinate space.
The [LOCAL] and [GLB] buttons can be selected at the same time.

SRC (source): Enable operations in the DME source coordinate space.

TRGT (target): Enable operations in the DME target coordinate space.
The [SRC] and [TRGT] buttons cannot be selected at the same time. When these buttons are held down, trackball and Z-ring operation is switched to a finer control (fine mode).

AXIS LOC (location): When this button is lit, the trackball moves the rotational axis of the image in the X-axis and Y-axis directions, and the Z-ring moves the axis in the Z-axis direction.

ASP PERS (aspect/perspective): When the [SRC] button is lit, pressing this button enables the trackball to control the X-axis and Y-axis directions independently, and the Z-ring controls the X-axis and Y-axis directions together, to vary the aspect ratio.
When the [SHIFT] button is held down and this button is pressed, the trackball controls the skew of the image in the X-axis and Y-axis directions.
When the [TRGT] button is lit, pressing this button enables the trackball to control the perspective of the image in the X-axis and Y-axis directions.
The Z-ring controls the distance to the viewpoint.

LOC (location) SIZE: When this button is lit, the Z-ring controls the image size.
The trackball moves the image in the X-axis and Y-axis directions.

LOC (location) XYZ: When this button is lit, the trackball moves the image in the X-axis and Y-axis directions, and the Z-ring moves the image in the Z-axis direction.

SHIFT: While holding down this button, pressing the [ASP PERS] button or [ROT] button switches to the shifted version of the corresponding function.

CLR WORK BUFR (clear work buffer): Press this button once to clear only the three-dimensional transform parameters of the information held in the work buffer. Press twice in rapid succession to clear all of the parameters, and return to the default state.

ROT (rotation): When this button is lit, the trackball rotates the image about the X- and Y-axes, and the Z-ring rotates the image about the Z-axis.
Pressing this while holding down the [SHIFT] button enables rotation of the image in the "Spin" mode. The trackball and Z-ring operate in the same manner.

X, Y, Z: These restrict which axes the trackball and Z-ring can control. You can select more than one.
When one of these buttons is selected, you can enter the parameter value for the corresponding axis using the numeric keypad control block.

CTR (center): Pressing this button changes the values of the three-dimensional parameters currently controlled by the trackball and Z-ring to the closest detent values. Pressing twice in rapid succession returns the parameter values to their defaults.

Transforming an image in three-dimensional coordinate space

1 With the region selection buttons, select the target channel of the operation.

You can press several of the buttons simultaneously to select several channels. In this case, the button that you pressed first lights in green, while buttons pressed subsequently light in amber.

2 With the function assignment buttons, select the three-dimensional coordinate space in which to perform the transformation.

LOCAL button: Selects local coordinate space.

GLB button: Selects global coordinate space. You can select this button and the [LOCAL] button simultaneously.

SRC button: Selects the source coordinate space.

TRGT button: Selects the target coordinate space ([SRC] and [TRGT] cannot be selected at the same time).

3 Press the button for the operation you want to do, turning it on, to select the transformation mode.

The trackball and Z-ring are assigned to the selected three-dimensional coordinate space transformation mode.

To move the image: Press the [LOC XYZ] button, turning it on.
You can move the image on the X- and Y-axes with the trackball and move it on the Z-axis with the Z-ring. Pressing the [LOC SIZE] button instead of the [LOC XYZ] button, turning it on, makes it possible to move the image on the X- and Y-axes.

To rotate the image: Press the [ROT] button, turning it on.
You can rotate the image on the X- and Y-axes with the trackball and rotate it on the Z-axis with the Z-ring.
To rotate the image in Spin mode, press the [ROT] button, turning it on, while holding down the [SHIFT] button. You can operate in the same way with the trackball and Z-ring.

To move an axis of rotation: With the [SRC] button selected in step **2**, press the [AXIS LOC] button, turning it on.
You can move the axis of rotation of the image on the X- and Y-axes of the image with the trackball, and on the Z-axis with the Z-ring.

To magnify or shrink the image: Press the [LOC SIZE] button, turning it on.
You can magnify and shrink the image with the Z-ring. Rotate counterclockwise to shrink, and clockwise to magnify.


To change the aspect ratio of the image: With the [SRC] button selected in step **2**, press the [ASP PERS] button, turning it on.
You can change the aspect ratio independently on the X- and Y-axes with the trackball, and change it simultaneously on both the X- and Y-axes with the Z-ring.

To change the perspective on the image: With the [TRGT] button selected in step **2**, press the [ASP PERS] button, turning it on.
You can change the perspective of the image on the X- and Y-axes with the trackball, and change the distance to the view point with the Z-ring.

To change the skew of the image: With the [SRC] button selected in step **2**, press the [ASP PERS] button, turning it on, while holding down the [SHIFT] button.
You can change the skew of the image along the X- and Y-axes with the trackball.

4 Depending on the axis of the change, operate the trackball and Z-ring as follows.


- To change on the X-axis, rotate the trackball horizontally.
  Parameter values increase as you rotate to the right, and decrease as you rotate to the left.



- To change on the Y-axis, rotate the trackball vertically.
  Parameter values increase as you rotate upward, and decrease as you rotate downward.



- To change on the Z-axis, rotate the Z-ring.
  Parameter values increase as you rotate clockwise, and decrease as you rotate counterclockwise. However, when you have pressed the [LOC XYZ] button to move the image, Z-axis parameters increase as you rotate counterclockwise, and decrease as you rotate clockwise.



To reduce the rate of change of the parameters (fine mode)
Carry out the trackball or Z-ring operations while holding down the [SRC] or [TRGT] button.

5 To restrict the change in the transformation to a specific axis, press the [X], [Y], or [Z] button, tuning it on.

This enables the trackball and Z-ring operations on the selected axis only.

Functions assignable to trackball and Z-ring operations

Button	Usable coordinate space	Trackball X-direction	Trackball Y-direction	Z-ring
LOC XYZ	Source, target	Move image on X-axis	Move image on Y-axis	Move image on Z-axis
ROT	Source, target	Rotate image on Y-axis	Rotate image on X-axis	Rotate image on Z-axis
SHIFT+ ROT	Source, target	Rotate image on Y-axis (Spin mode)	Rotate image on X-axis (Spin mode)	Rotate image on Z-axis (Spin mode)
AXIS LOC	Source	Move X-axis of rotation	Move Y-axis of rotation	Move Z-axis of rotation
LOC SIZE	Source, target	Move image on X-axis	Move image on Y-axis	Magnify and shrink image
ASP PERS	Source	Change aspect ratio on X-axis	Change aspect ratio on Y-axis	Change aspect ratio on X- and Y-axes simultaneously
	Target	Shift view point on X-axis	Shift view point on Y-axis	Change distance from view point to image
SHIFT+ ASP PERS	Source	Change skew on X-axis	Change skew on Y-axis	Change aspect ratio on X- and Y-axes simultaneously


Three-Dimensional Parameter Display

You can check the values of the three-dimensional parameters in the DME menu.

Displaying the three-dimensional parameters in the DME menu

In the menu control block, select the top menu selection button [DME].
The DME menu appears. The status area shows the three-dimensional parameters currently controlled by the device control block.

- When multiple DME channels are selected, this shows the parameters for the reference channel.
- When both Global and Local are selected, the three-dimensional parameters are shown for the channel (the reference channel) for which the button is lit green.

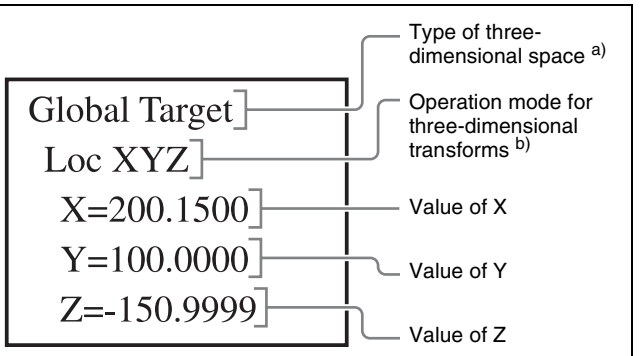

a) This shows one of Local Target, Local Source, Global Target, and Global Source.
b) This shows one of Loc XYZ, Loc Size, Rot, Spin, Axis Loc, Skew, Asp, and Pers.

Example three-dimensional parameter display (DME menu)

Viewing the three-dimensional parameter details

In the DME menu, press the menu title button (the [DME] in the upper left part of the screen).
The Status menu appears. This menu shows the three-dimensional parameters for the DME reference channel currently selected in the device control block.



Example three-dimensional parameter details

Entering Three-Dimensional Parameter Values

In addition to setting three-dimensional parameter values with the trackball and Z-ring, you can enter them directly from the numeric keypad control block.

Entering three-dimensional parameter values

1 In the device control block, press the [X], [Y], or [Z] button, turning it on.

The numeric keypad control block enters a mode in which you can enter parameters for the selected axis.

2 Enter a parameter value with the numeric keypad.

The number of significant digits after a decimal point is four.

3 Press the [ENTER] button.

The parameter value is changed, and the image changes.

To enter difference values

You can enter difference values by pressing the [+/–] button, entering the difference from the current value, and pressing the [TRIM] button to confirm. The [+/–] button toggles between "+" (plus) and "–" (minus) each time it is pressed.

Resetting three-dimensional parameter values

Pressing the [CTR] button in the device control block sets the current three-dimensional parameter values to the closest detent points *(page 271)*.
To reset three-dimensional parameter values to the defaults *(page 271)* for the current transformation operation mode, press the [CTR] button twice in rapid succession.

Clearing the working buffer

The working buffer is memory that holds the instantaneous state of an effect. To clear (initialize) only the three-dimensional transform parameters in the working buffer, press the [CLR WORK BUFR] button in the device control block.
To clear all of the parameters in the working buffer and initialize the DME system, press the [CLR WORK BUFR] button twice in rapid succession. It is necessary to do this for both the local coordinate space and global coordinate space.

As the initial DME state, you can specify whether to use the factory default settings or user settings in the Setup menu.

For details see "Selecting the State After Powering On (Start Up Menu)" in Chapter 18 (Volume 2).

Graphics Display Operation

Use the DME menu to make graphics display settings. You can make separate settings for separate channels. To select a target DME channel, use the device control block.

For the types of graphics displayed, see "Graphics Display" (page 273).

Displaying graphics

1 In the menu control block, select the top menu selection button [DME].

The DME menu appears.

2 Select VF6 'Input/Output' and HF4 'Graphic.'

The Graphic menu appears.

3 Turn [Graphic] on.

The system enters graphics display mode, enabling graphics to be displayed in the monitor screen.

4 Turn on the buttons of the graphics you want to show.

To show axes: Turn [Axis] on.
To show axis names: Turn [Axis Name] on.
To show the channel ID: Turn [Ch ID] on.
To show a wire frame: Turn [Wire Frame] on.
To show the grid: Turn [Grid] on.
To show the flex shadow axis: Turn [Flex Shadow Axis] on.
The selected graphics appear in the monitor screen.

Notes

The flex shadow axis function is not supported on the MVE-8000A.

5 If you want to shrink the graphics display to show the range not displayed on a normal monitor, turn [Scale] on and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Scale	Degree to which the graphics display is shrunk	0.00 to 100.00

As the value of the setting grows, the monitor shrinks further toward the center point.

6 To automatically erase the graphic display while the keyframes are executing, press [Auto Erase], turning it on, and then set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Recover Time	Time until graphic display appears again after keyframe execution	0 to 300 (frames)

Outputting graphics to the monitor output connector

In the Graphic menu, press [Monitor Out], turning it on. Graphics are displayed on the device connected to the monitor output connector.

Canceling Virtual Images


When a transformation is executed with an extreme degree of perspective set for an image, the part of the image exceeding the virtual view point is displayed wrapped around on the monitor screen. The wrapped-around portion is referred to as a virtual image.
Using the DME menu, you can make a setting not to show the virtual images.

Canceling virtual images

1 In the DME menu, select VF6 'Input/Output' and HF2 'Video/Key.'

The Video/Key menu appears.

2 Press [Wrap Around], turning it on.

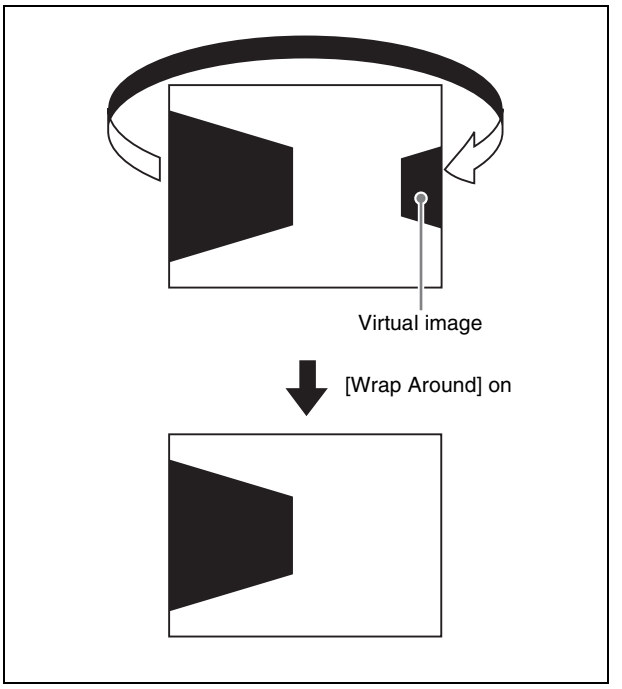

Applying Special Effects (Operations Common to Special Effects)

In this section, explanations of the operating procedures for individual special effects begin with selections from the DME menu. The following are common operations that you must do prior to selecting from the DME menu.

1 In the device control block, select the target DME channel.

2 In the menu control block, select the top menu selection button [DME].

The DME menu appears.

Applying Special Effects (Edge Effects)

Border Settings

Adding a border

1 In the DME menu, select VF1 'Edge' and HF1 'Border/Crop.'

The Border/Crop menu appears.

2 Press [Border], turning it on.

3 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Border width on left and right sides	Left value shown
2	V	Border width on top and bottom sides	Top value shown
3	All	Border width on all sides	Left value shown
5	Density	Border density	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Border width on top side	–6.00 to +6.00 (SD) –18.00 to +18.00 (HD)
2	Left	Border width on left side	–8.00 to +8.00 (SD) –24.00 to +24.00 (HD)
3	Right	Border width on right side	–8.00 to +8.00 (SD) –24.00 to +24.00 (HD)
4	Bottom	Border width on bottom side	–6.00 to +6.00 (SD) –18.00 to +18.00 (HD)
5	Density	Border density	0.00 to 100.00

16:9 mode

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Border width on left and right sides	Left value shown
2	V	Border width on top and bottom sides	Top value shown
3	All	Border width on all sides	Left value shown
5	Density	Border density	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Border width on top side	–4.50 to +4.50 (SD) –18.00 to +18.00 (HD)
2	Left	Border width on left side	–8.00 to +8.00 (SD) –32.00 to +32.00 (HD)
3	Right	Border width on right side	–8.00 to +8.00 (SD) –32.00 to +32.00 (HD)
4	Bottom	Border width on bottom side	–4.50 to +4.50 (SD) –18.00 to +18.00 (HD)
5	Density	Border density	0.00 to 100.00

Setting the border color

The operation differs depending on the DME used (MVE-8000A, MVE-9000 or MKS-7470X/7471X).

When the MVE-8000A is used

Press [Border Color], turning it on, and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

When the MVE-9000 or MKS-7470X/7471X is used

Use the buttons in the <Border Fill> group to select the signal to insert in the border.

Flat Color: single color

Mix Color: mix color signal set in the Color Mix menu *(see page 302)*

Ext Video: an external video signal input to the Ext IN connector

If Flat Color is selected, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

If Mix Color or Ext Video selected, the border color changes according to the mix color signal or external video signal.

Softening the border edges

Press [Border Soft], turning it on, and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Soft	Softness of inner side of border	0.00 to 100.00

Crop Settings

Cropping the image

1 In the DME menu, select VF1 'Edge' and HF1 'Border/Crop.'

The Border/Crop menu appears.

2 Press [Crop], turning it on.

3 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Crop positions on left and right sides	Left value shown
2	V	Crop positions on top and bottom sides	Top value shown
3	All	Crop positions on all sides	Left value shown

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Crop position on top side	–3.00 to +3.00 (SD) –9.00 to +9.00 (HD)
2	Left	Crop position on left side	–4.00 to +4.00 (SD) –12.00 to +12.00 (HD)
3	Right	Crop position on right side	–4.00 to +4.00 (SD) –12.00 to +12.00 (HD)
4	Bottom	Crop position on bottom side	–3.00 to +3.00 (SD) –9.00 to +9.00 (HD)

16:9 mode

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Crop positions on left and right sides	Left value shown
2	V	Crop positions on top and bottom sides	Top value shown
3	All	Crop positions on all sides	Left value shown

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Crop position on top side	–2.25 to +2.25 (SD) –9.00 to +9.00 (HD)
2	Left	Crop position on left side	–4.00 to +4.00 (SD) –16.00 to +16.00 (HD)
3	Right	Crop position on right side	–4.00 to +4.00 (SD) –16.00 to +16.00 (HD)
4	Bottom	Crop position on bottom side	–2.25 to +2.25 (SD) –9.00 to +9.00 (HD)

Signs of numeric settings

For H, V, and All settings, the sign (+/–) of the setting need not be considered. For example, in the case of an H setting, the value for Left is automatically regarded as a negative value, and the value for Right as a positive value, to display the image.
The following is an example of these settings.

Parameter	Entered value	Setting
H	1.5	Left=–1.50
		Right=1.50
	–1.5	Left=–1.50
		Right=1.50

4 To soften the edges of the image, press [Edge Soft], turning it on, and set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Soft	Softness of edges	0.00 to 100.00

Notes

Edges cannot be softened when the Crop effect is disabled.

To specify whether to invert the crop area when inverting the video image

In the <Invert/Crop Process> group, select either of the following.

Crop –> Invert: Set an axis of symmetry at the center of the input video, and invert both the desired area of video and the crop area horizontally and vertically around that axis of symmetry. The order of effect application is Crop > Invert.

Invert –> Crop: Set an axis of symmetry at the center of the input video, and invert only the desired area of video horizontally and vertically around that axis of symmetry. The order of effect application is Invert > Crop.

Beveled Edge Settings

Applying a beveled edge

1 In the DME menu, select VF1 'Edge' and HF2 'Beveled Edge.'

The Beveled Edge menu appears.

2 Press [Beveled Edge], turning it on.

3 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust width of left and right edges	0.00 to 4.00 (SD) 0.00 to 12.00 (HD)
2	V	Simultaneously adjust width of top and bottom edges	0.00 to 3.00 (SD) 0.00 to 9.00 (HD)
3	All	Simultaneously adjust width of all four edges	Value of H shown

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust width of left and right edges	0.00 to 4.00 (SD) 0.00 to 16.00 (HD)
2	V	Simultaneously adjust width of top and bottom edges	0.00 to 2.25 (SD) 0.00 to 9.00 (HD)
3	All	Simultaneously adjust width of all four edges	Value of H shown

4 In the <Edge Mode> group, select the type of edge.

Light: effect of light striking the edge

Knob	Parameter	Adjustment	Setting values
1	Top	Adjust luminance of top edge	–100.00 to +100.00
2	Left	Adjust luminance of left edge	–100.00 to +100.00
3	Right	Adjust luminance of right edge	–100.00 to +100.00
4	Bottom	Adjust luminance of bottom edge	–100.00 to +100.00
5	All	Simultaneously adjust luminance of all four edges	Value of Left shown

Color: colored edges. When this is selected, set the following parameters in the <Color Adjust> group.

- **To set the density**

Knob	Parameter	Adjustment	Setting values
1	Density	Adjust the color density	0.00 to 100.00

- **To set the colors for each edge (Top, Left, Right, Bottom, All)**


Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00 [a)]

Knob	Parameter	Adjustment	Setting values
2	Saturation	Saturation	0.00 to 100.00 a)
3	Hue	Hue	359.99 to 0.00 a)

a) For the All adjustment, the value for Left is shown.

5 To soften the inside of the edges and the boundaries between adjacent edges, turn on [Edge Soft], and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Inner Soft	Softness of the inside of edges	0.00 to 100.00
2	Bound Soft	Softness of the edge boundaries	0.00 to 100.00

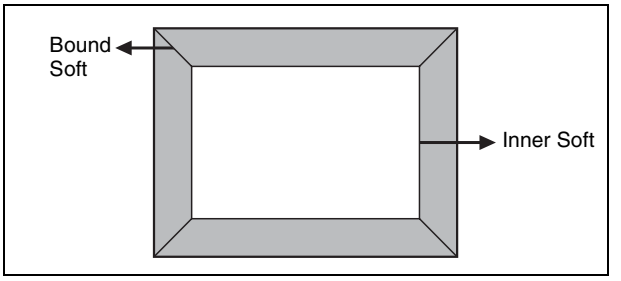

Key Border Settings

Notes

The Key Border function is not supported on the MVE-8000A.

Applying key borders

1 In the DME menu, select VF1 ‘Edge’ and HF3 ‘Key Border.’

The Key Border menu appears.

2 Press [Key Border], turning it on.

Notes

The key border function and Glow function *(see page 310)* cannot be turned on at the same time. Only the one most recently turned on is effective.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust width of left and right key borders	0.00 to 100.00
2	V	Simultaneously adjust width of top and bottom key borders	0.00 to 100.00
3	All	Simultaneously adjust width of all four key borders	Value of H shown
4	Soft	Softness of the key borders	0.00 to 100.00
5	Density	Density of the key borders	0.00 to 100.00

4 To set the key border color, press [Flat Color] and adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

To select an outline only key

Press [Outline], turning it on.

Art Edge Settings

Notes

The Art Edge function is not supported on the MVE-8000A.

Applying art edges

1 In the DME menu, select VF1 ‘Edge’ and HF4 ‘Art Edge.’

The Art Edge menu appears.

2 Press [Art Edge], turning it on.

Notes

The Defocus, Blur, Key Border, and Glow effects cannot be applied to the Art Edge sections.

3 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust width of left and right edges	Value of Left shown
2	V	Simultaneously adjust width of top and bottom edges	Value of Top shown
3	All	Simultaneously adjust width of all four edges	Value of Left shown
5	Density	Density of edges	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Width of top edge	0.00 to 6.00 (SD) 0.00 to 18.00 (HD)
2	Left	Width of left edge	0.00 to 8.00 (SD) 0.00 to 24.00 (HD)
3	Right	Width of right edge	0.00 to 8.00 (SD) 0.00 to 24.00 (HD)
4	Bottom	Width of bottom edge	0.00 to 6.00 (SD) 0.00 to 18.00 (HD)
5	Density	Density of edges	0.00 to 100.00

16:9 mode

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust width of left and right edges	Value of Left shown
2	V	Simultaneously adjust width of top and bottom edges	Value of Top shown
3	All	Simultaneously adjust width of all four edges	Value of Left shown
5	Density	Density of edges	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Width of top edge	0.00 to 4.50 (SD) 0.00 to 18.00 (HD)
2	Left	Width of left edge	0.00 to 8.00 (SD) 0.00 to 32.00 (HD)
3	Right	Width of right edge	0.00 to 8.00 (SD) 0.00 to 32.00 (HD)
4	Bottom	Width of bottom edge	0.00 to 6.00 (SD) 0.00 to 18.00 (HD)
5	Density	Density of edges	0.00 to 100.00

Adjusting the position of art edges

1 In the Art Edge menu, press [Edge Position], turning it on.

2 Adjust the following parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.


4:3 mode

Knob	Parameter	Adjustment	Setting values
1	Top	Position of top edge	–3.00 to +3.00 (SD) –9.00 to +9.00 (HD)
2	Left	Position of left edge	–4.00 to +4.00 (SD) –12.00 to +12.00 (HD)
3	Right	Position of right edge	–4.00 to +4.00 (SD) –12.00 to +12.00 (HD)
4	Bottom	Position of bottom edge	–3.00 to +3.00 (SD) –9.00 to +9.00 (HD)
5	All	Adjust the position of all four edges	Value of H shown

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	Top	Position of top edge	–2.25 to +2.25 (SD) –9.00 to +9.00 (HD)
2	Left	Position of left edge	–4.00 to +4.00 (SD) –16.00 to +16.00 (HD)
3	Right	Position of right edge	–4.00 to +4.00 (SD) –16.00 to +16.00 (HD)
4	Bottom	Position of bottom edge	–2.25 to +2.25 (SD) –9.00 to +9.00 (HD)
5	All	Adjust the position of all four edges	Value of H shown

Example: Moving the right edge position in the “minus” direction.

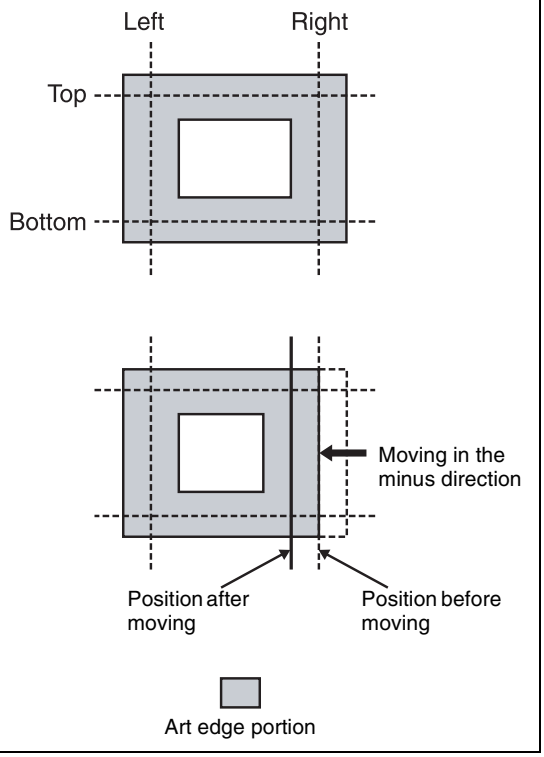

Softening the inner and outer sides of art edges

1 In the Art Edge menu, press [Soft], turning it on.


2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Inner H	Simultaneously adjust softness of left and right inner edges	0.00 to 100.00
2	Inner V	Simultaneously adjust softness of top and bottom inner edges	0.00 to 100.00
3	Outer H	Simultaneously adjust softness of left and right outer edges	0.00 to 100.00
4	Outer V	Simultaneously adjust softness of top and bottom outer edges	0.00 to 100.00
5	All	Simultaneously adjust softness of all inner and outer edges.	Value of Outer H shown

Setting the way in which art edge colors change

1 In the <Art Edge Source> group of the Art Edge menu, select the color pattern to apply to the art edges.

Flat Color: Uses Color 1 *(see page 296)* as a flat color.
Gradation Matte: Color 1 changes to Color 2 *(see page 296)* at the border lines *(see step **2** (page 294))*.
Rainbow Matte: The color set as Color 1 changes hue into color on the border lines.
Radial Gradation: Color 1 on the inner side is mixed into Color 2 on the outer side, according to the shape of the art edge.
Radial Rainbow: The hue of Color 1 on the inner side changes into Color 2 on the outer side, according to the shape of the art edge.
Rainbow Gradation: Color 3 *(see “Color 3 settings” (page 296))* overwrites Radial Rainbow, giving a gradation effect.

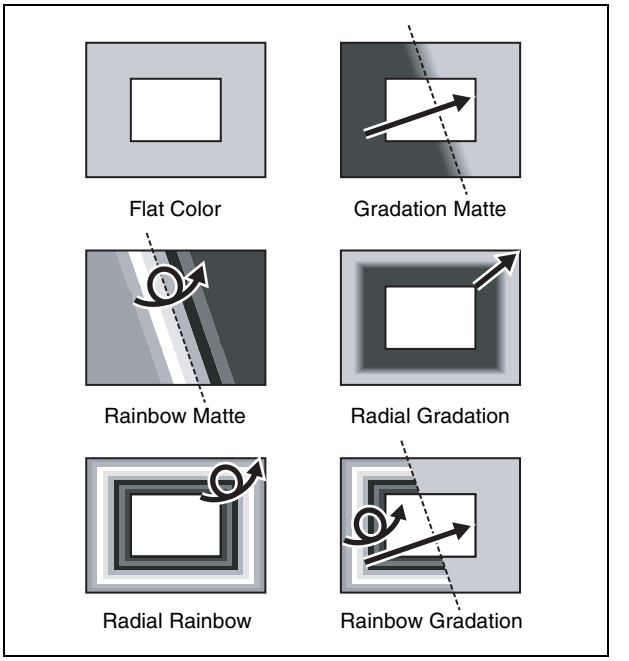

2 When you select other than [Flat Color], set the gradation border lines for the selected pattern.

Border line parameters for Gradation Matte and Rainbow Matte
The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Knob	Parameter	Adjustment	Setting values
1	H	Position of gradation border in horizontal direction	–8.00 to +8.00 (SD) –24.00 to +24.00 (HD)
2	V	Position of gradation border in vertical direction	–6.00 to +6.00 (SD) –18.00 to +18.00 (HD)
3	Soft	Softness of gradation border region	0.00 to 100.00

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	H	Position of gradation border in horizontal direction	–8.00 to +8.00 (SD) –32.00 to +32.00 (HD)
2	V	Position of gradation border in vertical direction	–4.50 to +4.50 (SD) –18.00 to +18.00 (HD)
3	Soft	Softness of gradation border region	0.00 to 100.00

Radial Gradation and Radial Rainbow parameters

Knob	Parameter	Adjustment	Setting values
3	Soft	Softness of gradation border region	0.00 to 100.00

Rainbow Gradation parameters

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

• 4:3 mode

Knob	Parameter	Adjustment	Setting values
1	H	Position of gradation border in horizontal direction	–8.00 to +8.00 (SD) –24.00 to +24.00 (HD)
2	V	Position of gradation border in vertical direction	–6.00 to +6.00 (SD) –18.00 to +18.00 (HD)
3	RBW Soft	Softness of rainbow border region	0.00 to 100.00
4	GRD Soft	Softness of gradation border region	0.00 to 100.00

• 16:9 mode

Knob	Parameter	Adjustment	Setting values
1	H	Position of gradation border in horizontal direction	–8.00 to +8.00 (SD) –32.00 to +32.00 (HD)
2	V	Position of gradation border in vertical direction	–4.50 to +4.50 (SD) –18.00 to +18.00 (HD)
3	RBW Soft	Softness of rainbow border region	0.00 to 100.00
4	GRD Soft	Softness of gradation border region	0.00 to 100.00

3 When Gradation Matte or Rainbow Matte is selected, set modifiers as required.

When turning [Angle] on in the <Rotation> group and slanting the pattern


Knob	Parameter	Adjustment	Setting values
1	Angle	Rotation angle of pattern	–8.00 to +8.00 a)

a) –1.00 is one rotation in counterclockwise direction. +1.00 is one rotation in clockwise direction. 0.00 is no rotation.

When turning [Speed] on in the <Rotation> group and rotating the pattern at a specified speed

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation speed of pattern	–100.00 to +100.00 a)

a) –100.00 is four rotations per second in counterclockwise direction. +100.00 is four rotations per second in clockwise direction. 0.00 is no rotation.

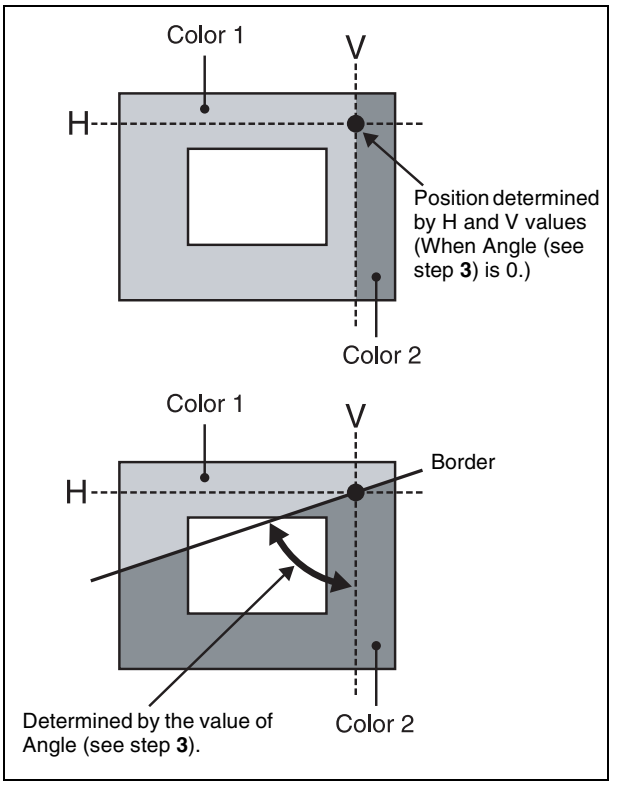

Setting art edge colors

1 In the Art Edge menu, turn on the button (Color 1 to Color 3) for the color for which you want to make settings in the <Color Adjust> group.

2 Adjust the following parameters.

Color 1 settings

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Color 2 settings

Notes

Color 2 cannot be set when [Flat Color] is selected in the <Art Edge Source> group.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue Offset	Hue range	–540.0 to +540.0

Color 3 settings


Notes

Color 3 can be set only when [Rainbow Gradation] is selected in the <Art Edge Source> group.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue Offset	Hue range	–540.0 to +540.0

Relationship between Hue and Hue Offset

For example, when the Hue value of Color 1 is 180.00, and the Hue Offset value of Color 2 is –540.00, the relationship is as shown below, with the hue changing within the Hue Offset range of Color 1 and Color 2.

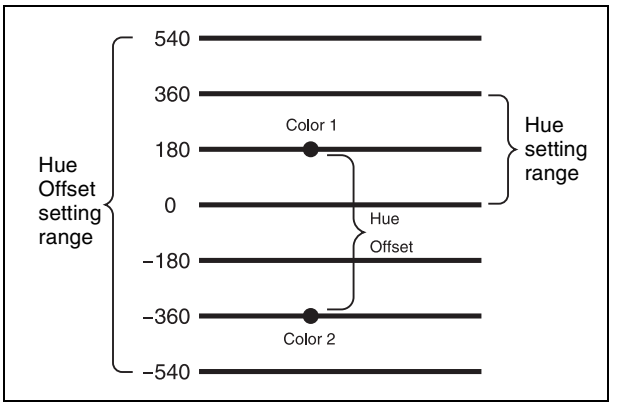

Rounding art edge corners

Press [Round Corner], turning it on.
The art edge corners on the inner and outer sides are rounded.

Notes

This function is available only when [Soft] is on.

Flex Shadow Settings

Notes

- The Flex Shadow function is not supported on the MVE-8000A.
- On the MKS-7470X/7471X, the Flex Shadow function can be used except for the following.
  - [External] in the Flex Shadow Source group
  - [Ext Video] in the Flex Shadow Fill group
- "Mix Color" or "Ext Video" can only be applied to one of the background *(see page 344)*, flex shadow, trail *(see page 331)*, and wind *(see page 335)* effects.
  If you select "Mix Color" or "Ext Video" in one of these settings, a selection of "Mix Color" or "Ext Video" in any of the other effects is disabled, and "Flat Color" is selected in its place.
- When executing combining four channels of DME images, "Mix Color" and "Ext Video" in the flex shadow and background effects cannot be selected.

Applying a flex shadow

1 In the DME menu, select VF1 ‘Edge’ and HF5 ‘Flex Shadow.’

The Flex Shadow menu appears.

2 Press [Flex Shadow], turning it on.

Notes

The Flex shadow function cannot be enabled when the following functions are enabled.
- Any nonlinear effect
- Brick
- Shadow

3 Adjust the following parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Knob	Parameter	Adjustment	Setting values
1	H	Move shadow horizontally	–8.00 to +8.00 (SD) –24.00 to +24.00 (HD)
2	V	Move shadow vertically	–6.00 to +6.00 (SD) –18.00 to +18.00 (HD)
3	Size All	Enlarge or shrink horizontally and vertically	Value of Size H *(see page 297)* shown
4	Soft [a]	Softness of shadow	0.00 to 100.00
5	Density	Density of shadow	0.00 to 100.00

a) The Soft parameter is valid only when [Internal] is selected in the <Flex Shadow Source> group.

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	H	Move shadow horizontally	–8.00 to +8.00 (SD) –32.00 to +32.00 (HD)
2	V	Move shadow vertically	–4.50 to +4.50 (SD) –18.00 to +18.00 (HD)
3	Size All	Enlarge or shrink horizontally and vertically	Value of Size H *(see page 297)* shown
4	Soft [a]	Softness of shadow	0.00 to 100.00
5	Density	Density of shadow	0.00 to 100.00

a) The Soft parameter is valid only when [Internal] is selected in the <Flex Shadow Source> group.

4 In the <Flex Shadow Source> group, select the signal to use for the flex shadow.

External: Generate the shadow using an input signal.
Internal: Generate the shadow using a full-size key signal.

5 In the <Flex Shadow Fill> group, select the signal to insert in the flex shadow.

Flat Color: single color
Mix Color: mix color signal set in the Color Mix menu *(see page 302)*
Ext Video: an external video signal input to the Ext IN connector

6 Only if Flat Color is selected in step **5**, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Adjusting the size of the flex shadow

1 In the Flex Shadow menu, press [Size], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size H	Enlarge or shrink horizontally	0.00 to 2.00
2	Size V	Enlarge or shrink vertically	0.00 to 2.00
3	Size All	Enlarge or shrink horizontally and vertically	Value of Size H shown
4	Soft [a]	Softness of shadow	0.00 to 100.00
5	Density	Density of shadow	0.00 to 100.00

a) The Soft parameter is valid only when [Internal] is selected in the <Flex Shadow Source> group.

Setting the center point of the flex shadow

1 In the Flex Shadow menu, press [Axis Loc], turning it on.

2 Adjust the following parameters.


The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Knob	Parameter	Adjustment	Setting values
1	Axis Loc H	Move the shadow center axis horizontally	–8.00 to +8.00 (SD) –24.00 to +24.00 (HD)
2	Axis Loc V	Move the shadow center axis vertically	–6.00 to +6.00 (SD) –18.00 to +18.00 (HD)

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	Axis Loc H	Move the shadow center axis horizontally	–8.00 to +8.00 (SD) –32.00 to +32.00 (HD)
2	Axis Loc V	Move the shadow center axis vertically	–4.50 to +4.50 (SD) –18.00 to +18.00 (HD)

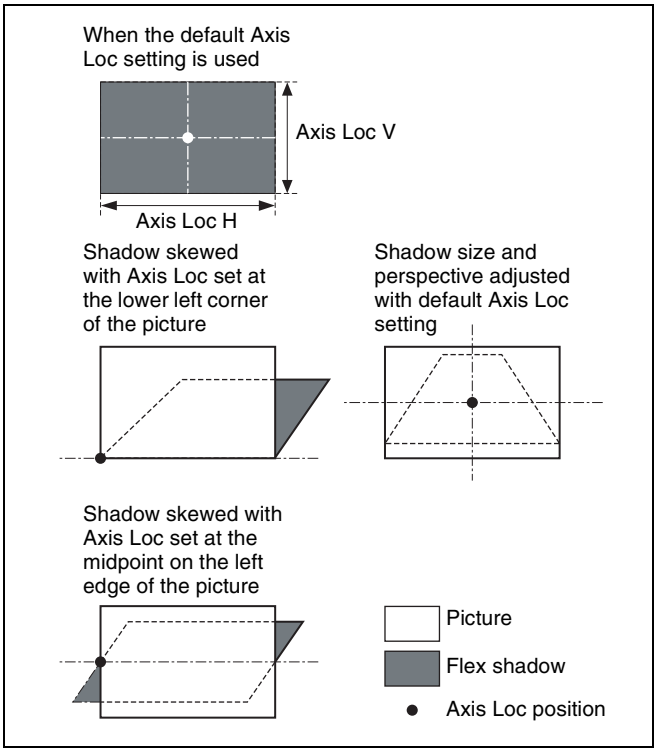

The flex shadow central axis appears when the [Flex Shadow Axis] function is enabled in the Graphic menu.

For details, see "Graphics Display Operation" (page 287).

Skewing the flex shadow

1 In the Flex Shadow menu, press [Skew], turning it on.

2 Adjust the following parameters.


Knob	Parameter	Adjustment	Setting values
1	Skew H	Skew horizontally	–100.00 to +100.00
2	Skew V	Skew vertically	–100.00 to +100.00

Adding perspective to the flex shadow

1 In the Flex Shadow menu, press [Perspective], turning it on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Perspective H	Add horizontal perspective	–100.00 to +100.00
2	Perspective V	Add vertical perspective	–100.00 to +100.00

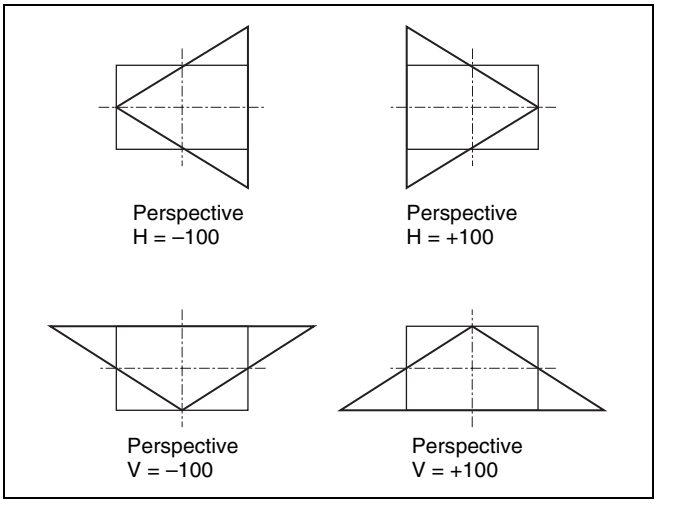


Inverting the flex shadow

In the <Invert> group of the Flex Shadow menu, select the direction to invert the shadow.


H: Invert the shadow in the horizontal direction. The inversion is applied around the axis of the knob 2 parameter Axis Loc V set with [Axis Loc].


V: Invert the shadow in the vertical direction. The inversion is applied around the axis of the knob 1 parameter Axis Loc H set with [Axis Loc].

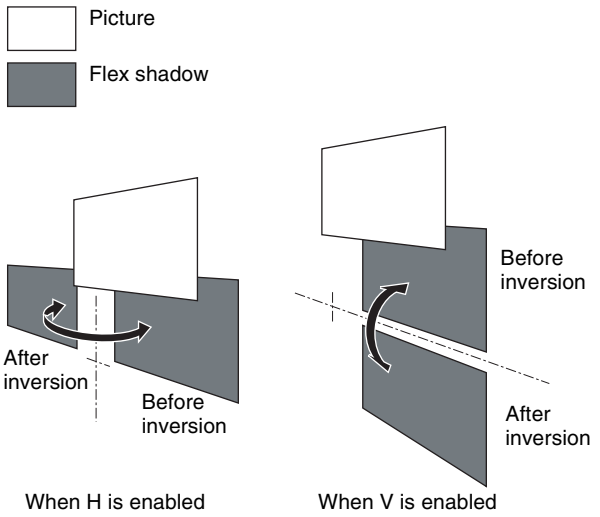

Setting a combine shadow

When there are several images, adds a flex shadow in the depth of an image or overlays multiple flex shadows.

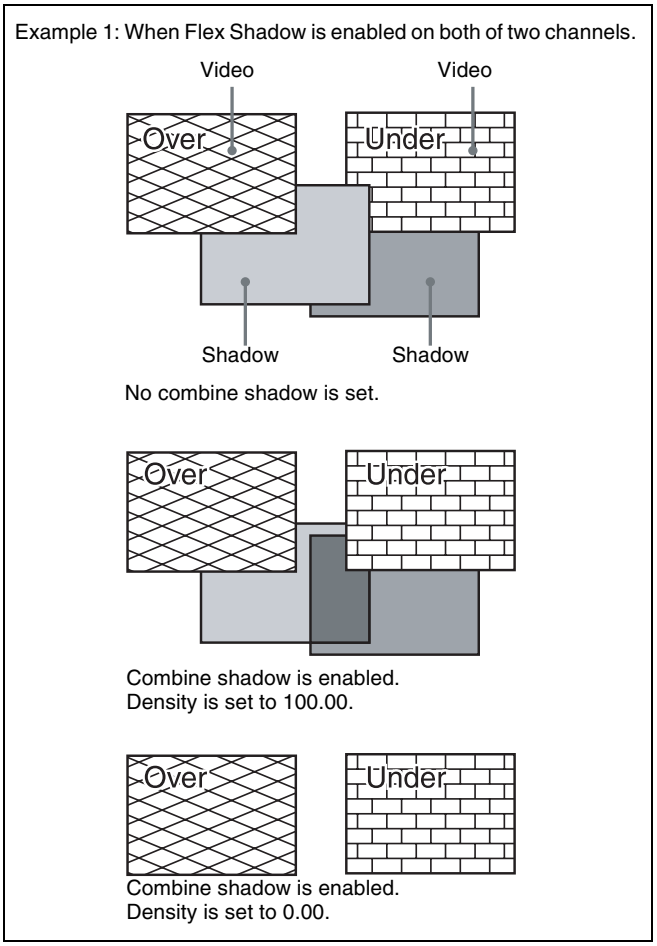

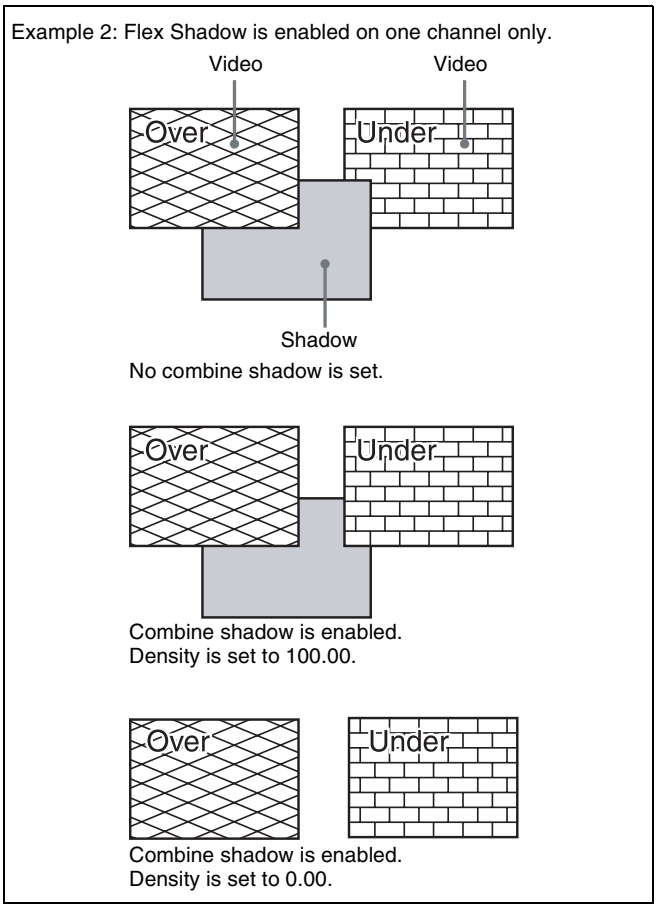

1 In the Flex Shadow menu, press [Combine Shadow], turning it on.

2 Adjust the following parameter.


Knob	Parameter	Adjustment	Setting values
1	Density	Density of combine shadow	0.00 to 100.00

Notes

- The Combine Shadow effect is applied to all shadows, not only the sections where shadows overlap.
- Combine Shadow is enabled when the Flex Shadow effect and the global effect Combiner are enabled. In this state, Combine Shadow remains enabled even if the global effect is disabled.
- In Combine Shadow, the settings for the channel with the lowest number among the channels being combined are enabled.

Flex shadow creation example

The flow of flex pattern creation will be explained using the following pattern as an example.

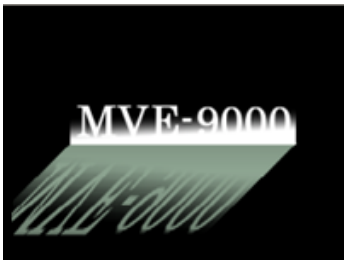

1 Press [Flex Shadow], turning it on.

2 In the <Flex Shadow> group, select [External].

3 Turn [Axis Loc] on and use knob 2 to set the Axis Loc V parameter so that the center of the flex shadow deformation is at the bottom of the picture (for HD format and 16:9 mode: Axis Loc V = –9.00).
The following steps will be easier if you display the flex shadow axis graphic by pressing [Flex Shadow Axis] in the Graphic menu.

4 Press [V] in the <Invert> group, turning it on, to invert the flex shadow vertically.

5 Turn [Size] on and use knob 2 to set the Size V parameter so that the shadow extends vertically (for HD format and 16:9 mode: Size V = 1.50).

6 Press [Skew], turning it on, and use knob 1 to set the Skew H parameter so that the parallel lines appear to emerge from the depth at the right (for HD format and 16:9 mode: Skew H = –50.00).

Wipe Crop Settings

Notes

- The wipe crop function is not supported on the MVE-8000A.
- When wipe crop is on, any mask that was on is turned off.
- When brick is on, wipe crop cannot be turned on. To turn wipe crop on, it is first necessary to turn brick off.
- In the <Shaped Video> group of the Video/Key menu, when [Output] is off, unless you set [Bkgd] in the HF1 'Bkgd' menu to on, the wipe crop effect will not function.

Applying the wipe crop effect

To select the pattern

1 In the DME menu, select VF1 'Edge' and HF6 'Wipe Crop.'

The Wipe Crop menu appears.

2 Press [Wipe Crop], turning it on.

3 Press [Pattern Select].

The Pattern Select menu appears.

4 From the displayed patterns (standard wipe patterns 1 to 24 and 304), press any pattern to select it.

In this state, you can use the knobs to adjust the size of the pattern. *For details of parameters, see the next item.*

To set the pattern size and position

1 In the Wipe Crop menu, press [Position/Size].

2 Set the following parameters.

The setting range for the parameters depends on the signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

For SD format

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–8.00 to +8.00
2	V	Vertical position	–6.00 to +6.00 a) –4.50 to +4.50 b)
3	Size	Pattern size	0.00 to 100.00
5	Pattern	Pattern number	1 to 24, 304

a) For 4:3 mode
b) For 16:9 mode

Notes

When pattern number 304 is selected, the effect of settings in the <Edge> group varies with the Size setting.

For HD format

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–24.00 to +24.00 a) –32.00 to +32.00 b)
2	V	Vertical position	–18.00 to +18.00
3	Size	Pattern size	0.00 to 100.00
5	Pattern	Pattern number	1 to 24, 304

a) For 4:3 mode
b) For 16:9 mode

Notes

When pattern number 304 is selected, the effect of settings in the <Edge> group varies with the Size setting.

To invert the regions of the cropping

In the Wipe Crop menu, press [Invert], turning it on.

Setting the aspect ratio of the wipe crop pattern (Aspect)

1 In the Wipe Crop menu, press [Aspect], turning it on.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a) When set to a negative value, the image is stretched vertically, to become taller.
When set to a positive value, the image is stretched horizontally, to become wider.

Rotating the wipe crop pattern (Rotation)

1 In the <Rotation> group of the Wipe Crop menu, select one of the following.

Angle: Incline the pattern through a fixed angle.
Speed: Rotate the pattern at a fixed speed.

2 Depending on the selection in step **1**, set the following parameter.

When Angle is selected

Knob	Parameter	Adjustment	Setting values
1	Angle	Angle of pattern rotation	–8.00 to +8.00 a)

a) –1.00 represents a whole turn counterclockwise, and +1.00 represents a whole turn clockwise. 0.00 is the original state.

When Speed is selected

Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation rate of pattern	–100.00 to +100.00 a)

a) –100.00 represents a speed of four whole turns counterclockwise per second, and +100.00 represents a speed of four whole turns clockwise per second. 0.00 is the stationary state.

Applying modulation to the wipe crop pattern (Modulation)

1 In the <Modulation> group of the Wipe Crop menu, select one of the following.

H (horizontal modulation): Modulate the pattern to apply waving in the horizontal direction.
V (vertical modulation): Modulate the pattern to apply waving in the vertical direction.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Amplitude	Amplitude of modulation	0.00 to 100.00
2	Frequency	Frequency of modulation	0.00 to 100.00
3	Speed	Speed of waves	–100.00 to +100.00

Replicating the wipe crop pattern (Multiplication)

1 In the Wipe Crop menu, press [Multi], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H Multi	Number of repetitions of pattern horizontally	1 to 63
2	V Multi	Number of repetitions of pattern vertically	1 to 63
3	Invert Type	Replication layout	1 to 4 a)

a) See the replication patterns (page 171).

Modifying the wipe crop pattern edge

You can apply a border to the wipe crop pattern, or soften the boundary.

1 In the <Edge> group of the Wipe Crop menu, select one of the following.

Border: border
Soft: soft edge
Soft Border: soft border

2 Depending on the selection in step **1**, set the following parameters.

When Border is selected

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00

When Soft is selected

Knob	Parameter	Adjustment	Setting values
1	Soft	Edge softness	0.00 to 100.00

When Soft Border is selected

Knob	Parameter	Adjustment	Setting values
1	Width	Border width	0.00 to 100.00
2	Inner Soft	Border inner softness	0.00 to 100.00
3	Outer Soft	Border outer softness	0.00 to 100.00

Selecting the signal or color to be inserted in the wipe crop border

When you are applying a border or soft border to the wipe crop, you can select the signal or color to be inserted in the border.

1 In the <Border Fill> group of the Wipe Crop menu, select one of the following.

Flat Color: flat color
Mix Color: a mix color signal combining color 1 and color 2 *(see the next section, "Color Mix Settings")*
Ext Video: an external video signal input to the Ext IN connector

2 When Flat Color is selected in step **1** only, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Color Mix Settings

Notes

The color mix function is not supported on the MVE-8000A.

Creating a color combination pattern

To select the pattern

1 In the DME menu, select VF1 'Edge' and HF7 'Color Mix.'

The Color Mix menu appears.

2 Press [Mix Pattern Select].

The Mix Pattern Select menu appears.

3 Press any of the displayed patterns (standard wipe patterns 1 to 24) to select it.

In this state, you can adjust the pattern size and border softness with the knobs.

For details of the parameters, see the next item.

To set the pattern size and position

1 In the Color Mix menu, press [Position/Size].

2 Set the following parameters.

The setting range for the parameters depends on the system selected signal format (SD/HD) and aspect ratio (4:3/16:9), as follows.

For SD format

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–8.00 to +8.00
2	V	Vertical position	–6.00 to +6.00 a) –4.50 to +4.50 b)
3	Size	Pattern size	0.00 to 100.00
4	Soft	Softness of the pattern	0.00 to 100.00
5	Pattern	Pattern number	1 to 24

a) For 4:3 mode
b) For 16:9 mode

For HD format

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–24.00 to +24.00 a) –32.00 to +32.00 b)
2	V	Vertical position	–18.00 to +18.00
3	Size	Pattern size	0.00 to 100.00
4	Soft	Softness of the pattern	0.00 to 100.00
5	Pattern	Pattern number	1 to 24

a) For 4:3 mode
b) For 16:9 mode

To invert the regions of the two colors

In the Color Mix menu, press [Color Invert], turning it on.

Adjusting the color 1 and color 2

1 In the Color Mix menu, to adjust color 1 press [Color1], and to adjust color 2 press [Color2].

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Modifying the color combination pattern

See the following pages.

- *"Setting the aspect ratio of the wipe crop pattern (Aspect)" (page 301)*
- *"Replicating the wipe crop pattern (Multiplication)" (page 301)*
- *"Rotating the wipe crop pattern (Rotation)" (page 301)*
- *"Applying modulation to the wipe crop pattern (Modulation)" (page 301)*

Applying Special Effects (Effects on the Overall Video Signal)

Defocus Settings

Applying the Defocus effect

1 In the DME menu, select VF2 'Video Modify' and HF1 'Defocus/Blur.'

The Defocus/Blur menu appears.

2 Press [Defocus], turning it on.

Notes

On the MVE-8000A, the Defocus and Glow effects cannot be enabled at the same time. The effect which was turned on most recently is enabled.

3 In the <Defocus Mode> group, select the signal to which to apply the defocus effect.

Video/Key: Video signal and key signal
Video: Video signal only
Key: Key signal only

Notes

"Key" can be selected only when the DME is connected through an SDI interface.

4 Set the parameters.

When Video/Key is selected (with DME dedicated interface)

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal defocusing of video and key signals	0.00 to 100.00
2	V	Vertical defocusing of video and key signals	0.00 to 100.00
3	All	Horizontal and vertical defocusing of video and key signals	H value shown

When Video/Key is selected (with SDI-interfaced DME)

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	V/K H	Horizontal defocusing of video and key signals	Video H value shown
2	V/K V	Vertical defocusing of video and key signals	Video V value shown
3	V/K All	Horizontal and vertical defocusing of video and key signals	Video H value shown
4	Video All	Horizontal and vertical defocusing of video signal	Video H value shown
5	Key All	Horizontal and vertical defocusing of key signal	Key H value shown

Parameter group [2/2]

Knob	Parameter	Adjustment	Settings values
1	Video H	Horizontal defocusing of video signal	0.00 to 100.00
2	Video V	Vertical defocusing of video signal	0.00 to 100.00
3	Key H	Horizontal defocusing of key signal	0.00 to 100.00
4	Key V	Vertical defocusing of key signal	0.00 to 100.00

When Video is selected

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal defocusing of video signal	0.00 to 100.00
2	V	Vertical defocusing of video signal	0.00 to 100.00
3	All	Horizontal and vertical defocusing of video signal	H value shown

When Key is selected (with SDI-interfaced DME)

Knob	Parameter	Adjustment	Settings values
1	H	Horizontal defocusing of key signal	0.00 to 100.00
2	V	Vertical defocusing of key signal	0.00 to 100.00
3	All	Horizontal and vertical defocusing of key signal	H value shown

5 To cancel black level leaking that can occur at the edge of the screen when the Defocus effect is enabled, press [Clean Defocus], turning it on.

Masking the Defocus effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Blur Settings

Applying the Blur effect

1 In the DME menu, select VF2 ‘Video Modify’ and HF1 ‘Defocus/Blur.’

The Defocus/Blur menu appears.

2 Press [Blur], turning it on.

Notes

On the MVE-8000A, the Glow and Blur effects cannot be enabled at the same time. The effect which was turned on most recently is enabled.

3 When the DME is connected through an SDI interface, in the <Blur Mode> group, select the signal to which you want apply the Blur effect.

Video/Key: Video signal and key signal
Video: Video signal only
Key: Key signal only

4 Set the parameters.

When the DME dedicated interface is used

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal defocusing of video and key signals	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
2	V	Vertical defocusing of video and key signals	0.00 to 100.00
3	All	Horizontal and vertical defocusing of video and key signals	H value shown

When Video/Key is selected (with SDI-interfaced DME)

Parameter group [1/2]

Knob	Parameter	Adjustment	Settings values
1	V/K H	Horizontal defocusing of video and key signals	Video H value shown
2	V/K V	Vertical defocusing of video and key signals	Video V value shown
3	V/K All	Horizontal and vertical defocusing of video and key signals	Video H value shown
4	Video All	Horizontal and vertical defocusing of video signal	Video H value shown
5	Key All	Horizontal and vertical defocusing of key signal	Key H value shown

Parameter group [2/2]

Knob	Parameter	Adjustment	Settings values
1	Video H	Horizontal defocusing of video signal	0.00 to 100.00
2	Video V	Vertical defocusing of video signal	0.00 to 100.00
3	Key H	Horizontal defocusing of key signal	0.00 to 100.00
4	Key V	Vertical defocusing of key signal	0.00 to 100.00

When video is selected (with SDI-interfaced DME)

Knob	Parameter	Adjustment	Settings values
1	H	Horizontal defocusing of video signal	0.00 to 100.00
2	V	Vertical defocusing of video signal	0.00 to 100.00
3	All	Horizontal and vertical defocusing of video signal	H value shown

When Key is selected (with SDI-interfaced DME)

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal defocusing of key signal	0.00 to 100.00
2	V	Vertical defocusing of key signal	0.00 to 100.00
3	All	Horizontal and vertical defocusing of key signal	H value shown

Masking the Blur effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Multi Move Settings

Applying the Multi Move effect

1 In the DME menu, select VF2 ‘Video Modify’ and HF2 ‘Multi Move.’

The Multi Move menu appears.

2 Press [Multi Move], turning it on.

3 Set the parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Knob	Parameter	Adjustment	Setting values
1	Center X	X-value of shrinking center point	–4.00 to +4.00 (SD) –12.00 to +12.00 (HD)
2	Center Y	Y-value of shrinking center point	–3.00 to +3.00 (SD) –9.00 to +9.00 (HD)
3	Size	Shrinking ratio	0.00 to 100.00

Knob	Parameter	Adjustment	Setting values
4	Aspect	Aspect ratio of shrunken images	–100.00 to +100.00 a)

a) Specify minus values to stretch the image in the vertical direction, and plus values to stretch the image in the horizontal direction.

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	Center X	X-value of shrinking center point	–4.00 to +4.00 (SD) –16.00 to +16.00 (HD)
2	Center Y	Y-value of shrinking center point	–2.25 to +2.25(SD) –9.00 to +9.00 (HD)
3	Size	Shrinking ratio	0.00 to 100.00
4	Aspect	Aspect ratio of shrunken images	–100.00 to +100.00 a)

a) Specify minus values to stretch the image in the vertical direction, and plus values to stretch the image in the horizontal direction.

Sepia Settings

Applying the Sepia effect

1 In the DME menu, select VF2 ‘Video Modify’ and HF3 ‘Color Modify.’

The Color Modify menu appears.

2 Press [Sepia], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Mix Y	Y signal mix amount	0.00 to 100.00
2	Mix C	Chroma signal mix amount	0.00 to 100.00
3	Mix All	Y signal and chroma signal mix amount	Mix Y value shown

4 To set the color of the sepia image, press [Sepia Color], turning it on, and adjust the parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Masking the Sepia effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Mono Settings

Applying the Mono effect

1 In the DME menu, select VF2 ‘Video Modify’ and HF3 ‘Color Modify.’

The Color Modify menu appears.

2 Press [Mono], turning it on.

Masking the Mono effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Posterization and Solarization Settings

You can specify the degree of luminance coarsening.
You can specify the degree of chroma coarsening.

Applying the Posterization or Solarization effect

1 In the DME menu, select VF2 ‘Video Modify’ and HF3 ‘Color Modify.’

The Color Modify menu appears.

2 Press [Poster/Solar], turning it on.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Poster	Coarseness of luminance gradations (Posterization parameter)	0.00 to 100.00
2	Solar	Coarseness of chroma gradations (Solarization parameter)	0.00 to 100.00

Masking the Posterization or Solarization effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Nega Settings

Applying the Nega effect

1 In the DME menu, select VF2 ‘Video Modify’ and HF3 ‘Color Modify.’

The Color Modify menu appears.

2 Press [Nega Y] or [Nega C], turning it on, or press both buttons, turning them on.

Nega Y: Reverse the luminance.
Nega C: Reverse the chroma.

Masking the Nega effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Contrast Settings

Applying the Contrast effect


1 In the DME menu, select VF2 ‘Video Modify’ and HF3 ‘Color Modify.’

The Color Modify menu appears.

2 Press [Contrast], turning it on.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Y Clip	Luminance clip level	+109.59 to –7.31
2	Y Gain	Luminance contrast gradient	–100.00 to +100.00
3	Y Offset	Luminance offset level increment	–100.00 to +100.00
4	C Gain	Chroma contrast gradient	–100.00 to +100.00

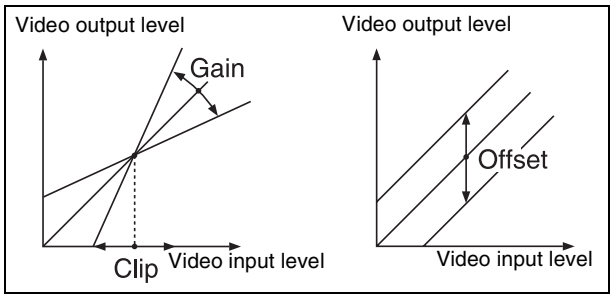

Clip, Gain, Offset

Masking the Contrast effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Mosaic Settings

Applying the Mosaic effect

1 In the DME menu, select VF2 ‘Video Modify’ and HF4 ‘Mosaic.’

The Mosaic menu appears.

2 Press [Mosaic], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Size	Size of tiles	0.00 to 100.00
2	Aspect	Aspect ratio of tiles	–100.00 to +100.00 a)

a) Specify minus values to stretch the tiles in the vertical direction, and plus values to stretch the tiles in the horizontal direction.

Masking the Mosaic effect with a selected pattern

Press [Mask] to display the Mask menu, and set the pattern type and modifiers *(see page 310)*.

Sketch Settings

Applying the Sketch effect

1 In the DME menu, select VF7 ‘Enhanced Video Modify’ and HF1 ‘Sketch.’

The Sketch menu appears.

2 Press [Sketch], turning it on.

3 Select the method for applying outlines in the <Sketch Mode> group.

Sketch: Apply an effect like a sketch.
Edge Color: Enhance the outlines.
Draw: Apply an effect like a line drawing.
Relief: Apply a bas-relief effect.
Sharp: Increase the apparent sharpness.

4 Set the following parameters, according to the method selected in step **3**.

When Sketch is selected

Knob	Parameter	Adjustment	Setting values
1	Mix	Mix amount for Sketch video and input video	0.00 to 100.00 a)
2	Clip	Reference level for outline extraction	–100.00 to +100.00 b)
3	Gain	Image gain for outline extraction	–100.00 to +100.00
4	C Gain	Chroma gain of input video	–100.00 to +100.00

a) 100.00 gives an image completely transformed by the Sketch effect. 0.00 is the original input image.
b) The larger the Clip value, the narrower the outline width.

When Edge Color is selected

Knob	Parameter	Adjustment	Setting values
1	Mix	Mix amount for Edge Color video and input video	0.00 to 100.00 a)
2	Clip	Reference level for outline extraction	–100.00 to +100.00 b)

a) 100.00 gives an image completely transformed by the Sketch effect. 0.00 is the original input image.
b) The larger the Clip value, the narrower the outline width.

When Draw is selected

Knob	Parameter	Adjustment	Setting values
1	Mix	Mix amount for Draw video and input video	0.00 to 100.00 a)
2	Clip	Reference level for outline extraction	–100.00 to +100.00 b)
3	Gain	Image gain for outline extraction	–100.00 to +100.00

a) 100.00 gives an image completely transformed by the Sketch effect. 0.00 is the original input image.
b) The larger the Clip value, the narrower the outline width.

When Relief is selected

Knob	Parameter	Adjustment	Setting values
1	Mix	Mix amount for Relief video and input video	0.00 to 100.00 a)
2	Offset	Relief luminance level	–100.00 to +100.00
3	Gain	Image gain for outline extraction	–100.00 to +100.00
4	Angle	Direction of relief image light source	–8.00 to +8.00

a) 100.00 gives an image completely transformed by the Sketch effect. 0.00 is the original input image.

When Sharp is selected

Knob	Parameter	Adjustment	Setting values
1	H	Simultaneously adjust the left and right resolution	0.00 to 100.00
2	V	Simultaneously adjust the top and bottom resolution	0.00 to 100.00
3	All	Simultaneously adjust the resolution of all four sides	0.00 to 100.00
5	Coring	Minimum value of edge to emphasize	0.00 to 100.00

5 If you selected other than “Sharp” in step **3**, depending on the necessity, proceed as follows.

To adjust the outline color for Edge Color or Draw
Turn [Edge Matte] on and set the following parameters to set the outline color.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

To set the color of the sections other than the outlines for Draw

Press [Matte], turning it on, and adjust the following parameters to set the color of the sections other than the outlines.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

To select the signal to mix with the relief pattern for Relief

In the <Chroma Type> group, select the signal to mix with the relief pattern.

Matte: Select a single color. The following parameters can be adjusted.

Knob	Parameter	Adjustment	Setting values
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Video: Select the input video signal.

6 To invert white and black in the extracted video, or to invert the outlines and the sections other than the outlines, press [Nega], turning it on.

Masking the Sketch effect with a selected pattern

Press [Mask] to display the Mask menu and set the type of pattern and modifiers *(see page 310)*.

Metal Settings

Applying the Metal effect

1 In the DME menu, select VF7 ‘Enhanced Video Modify’ and HF2 ‘Metal.’

The Metal menu appears.

2 Press [Metal], turning it on.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Mix Ratio	Mix amount for Metal video and input video	0.00 to 100.00
2	Y Clip	Clip level of input signal Y level	0.00 to 100.00
3	Y Gain	Amount of gain for clip adjusted input signal Y level	–100.00 to +100.00
4	Y Offset	Offset added to clip and gain adjusted input Y signal	0.00 to 100.00

4 In the <Metal Mode> group, select the type of metallic gloss.

Gold: Give a gold gloss to the input video.
Silver: Give a silver gloss to the input video.
Rainbow: Give a rainbow color gloss to the input video.
Variable: Give a metallic gloss to the input video in any color by adjusting the following parameters.

Knob	Parameter	Adjustment	Setting values
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Masking the Metal effect with a selected pattern

Press [Mask] to display the Mask menu and set the type of pattern and modifiers *(see page 310)*.

Dim and Fade Settings

Notes

The Dim and Fade functions are not supported on the MVE-8000A.

Applying the Dim effect

1 In the DME menu, select VF7 ‘Enhanced Video Modify’ and HF3 ‘Dim & Fade.’

The Dim & Fade menu appears.

2 Press [Dim], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Start	Point where dimming starts (dim start point)	–100.00 to +100.00

Knob	Parameter	Adjustment	Setting values
2	Gain	Degree of dimming	0.00 to 100.00

4 Press [Flat Color] and set the parameters for the color of the depths of the picture.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Applying the Fade effect

1 In the DME menu, select VF7 ‘Enhanced Video Modify’ and HF3 ‘Dim & Fade.’

The Dim & Fade menu appears.

2 Press [Fade], turning it on.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Start	Point where fading starts (fade start point)	–100.00 to +100.00
2	Gain	Degree of fading	0.00 to 100.00

Glow Settings

Applying the Glow effect

1 In the DME menu, select VF7 ‘Enhanced Video Modify’ and HF4 ‘Glow.’

The Glow menu appears.

2 Press [Glow], turning it on.

Notes

- On the MVE-9000 and MVS-7470X/7471X, the key border function and Glow function cannot be turned on at the same time. The function most recently turned on is effective.
- On the MVE-8000A, the Defocus and Glow effects or the Blur and Glow effects cannot be turned on at the same time. The effect most recently turned on is effective.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for highlight detection	0.00 to 100.00
2	Gain	Amount of gain for highlights	–100.00 to +100.00
3	Soft	Softness	0.00 to 100.00

4 Press [Matte] and set the glow color.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Inverting the highlight areas

Press [Glow Invert], turning it on.
The highlight and non-highlight areas are inverted.

Masking the Glow effect with a selected pattern

Press [Mask] to display the Mask menu and set the type of pattern and modifiers *(see page 310)*.

Notes

When the signal format is 1080P on the MKS-7470X/7471X, masking will cause the edges to get blurred.

Mask Settings

Applying masks

1 In the DME menu, select VF2 ‘Video Modify’ and HF7 ‘Mask.’

The Mask menu appears.

2 In the <Mask> group, press the button for the group of the effect to which you want to apply the mask, turning it on.

Effect Gp 1: Posterization, Solarization, Nega, Sepia, Mono, Contrast, Mosaic, Sketch, Metal
Effect Gp 2: Defocus, Blur, Glow

Notes

On the MVE-8000A, Effect Gp 1 and Effect Gp 2 cannot be turned on at the same time.

3 Press [Position/Size].

4 Set the mask source parameters.

The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

4:3 mode

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–8.00 to +8.00 (SD) –24.00 to +24.00 (HD)
2	V	Vertical position	–6.00 to +6.00 (SD) –18.00 to +18.00 (HD)
3	Size	Size of mask	0.00 to 100.00
4	Soft	Softness of mask	0.00 to 100.00
5	Pattern	Pattern number	21, 24, 304 a)

a) This setting value is not supported on the MVE-8000A.

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal position	–8.00 to +8.00 (SD) –32.00 to +32.00 (HD)
2	V	Vertical position	–4.50 to +4.50 (SD) –18.00 to +18.00 (HD)
3	Size	Size of mask	0.00 to 100.00
4	Soft	Softness of mask	0.00 to 100.00
5	Pattern	Pattern number	21, 24, 304 a)

a) This setting value is not supported on the MVE-8000A.

5 To invert the mask source, press [Invert], turning it on.

6 As required, set the modifiers for the mask pattern.

When turning [Aspect] on and adjusting the pattern aspect ratio

Knob	Parameter	Adjustment	Setting values
1	Aspect	Aspect ratio	–100.00 to +100.00 a)

a) When a minus value is specified, the picture is extended in the vertical direction. When a plus value is specified, the picture is extended in the horizontal direction.

When turning [Angle] on in the <Rotation> group and slanting the pattern

Knob	Parameter	Adjustment	Setting values
1	Angle	Rotation angle of pattern	–8.00 to +8.00 a)

a) –1.00 is one rotation in counterclockwise direction. +1.00 is one rotation in clockwise direction. 0.00 is no rotation.


When turning [Speed] on in the <Rotation> group and rotating the pattern at a specified speed


Knob	Parameter	Adjustment	Setting values
1	Speed	Rotation speed of pattern	–100.00 to +100.00 a)

a) –100.00 is four rotations per second in counterclockwise direction. +100.00 is four rotations per second in clockwise direction. 0.00 is no rotation.

Notes on applying a mask effect with a DME (only when using the MKS-7470X/7471X or MVE-9000)


In the <Mask> group of the DME >Video Modify >Mask menu, if [Effect Gp1] and [Effect Gp2] are simultaneously set to On, then the border or beveled edge is also masked. The following explains this with the example of using a circular mask pattern.

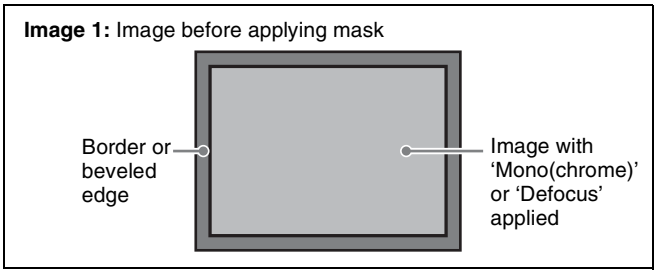

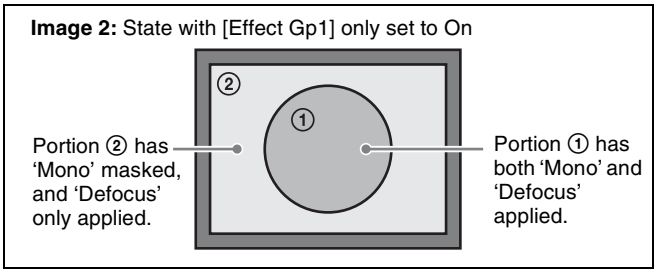

In the state corresponding to image 2, if you switch [Effect Gp2] to On, then the mask should be applied to portion ② only, but in fact the border or beveled edge is also masked.

Image 3: State with [Effect Gp1] and [Effect Gp2] set to On

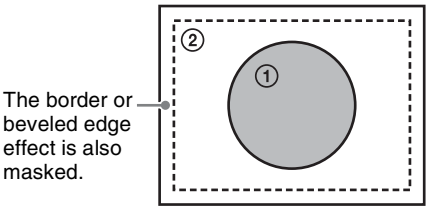

Freeze Settings

Freezes the input video. The following types are available:

Hard Freeze: Freezes the input video at an arbitrary timing.

Time Strobe: Freezes the input video at specified intervals for a specified length.

Film: Slows the apparent frame rate, for an effect like film. You can specify the ratio of advancement.

For Hard Freeze and Time Strobe, you can select the first field or the frame as the freeze timing.

Notes

When 720P or 1080P signal format is used, the Film mode cannot be selected.

To apply a Freeze effect, start by displaying the Freeze menu. In the DME menu, select VF3 ‘Freeze’ and HF1 ‘Freeze.’

Applying the Hard Freeze effect

1 In the <Freeze Timing> group, select the signal freeze timing.

Frame: Freeze one frame of signal.
Field 1: Freeze the first field of signal.

2 In the <Freeze> group, press [Hard Freeze], turning it on.

Applying the Time Strobe effect

1 In the <Freeze Timing> group, select the signal freeze timing.

Frame: Freeze one frame of signal.
Field 1: Freeze the first field of signal.

Notes

The freeze timing setting is not required when the following signal formats are being used.

1080P/50, 1080P/59.94, 1080PsF/23.976, 1080PsF/24, 1080PsF/25, 1080PsF/29.97, 720P/50, 720P/59.94

2 In the <Freeze> group, press [Time Strobe], turning it on.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Duration	Freeze interval	1 to 255 (frames)
2	Live	Ratio of live video inserted between freeze images	0.00 to 100.00

Applying the Film effect

Notes

When 720P or 1080P signal format is used, the Film mode cannot be selected.

1 In the <Freeze> group, press [Film], turning it on.

2 Set the parameter.

Knob	Parameter	Adjustment	Setting values
1	Film	Ratio of frame advance	0.00 to 100.00

Applying Special Effects (Nonlinear Effect Settings)

You can add a variety of effects, including effects that change the shape of the image as a whole.

1 In the DME menu, select VF4 'Non Linear/Corner Pin' and HF1 'Non Linear.'

A menu for selecting the various effects appears.

2 Display the menu for the effect that you want to apply by pressing its button.

3 Make the settings for the selected effect.

Notes

- It is not possible to apply two or more nonlinear effects at the same time. Turning any nonlinear effect on automatically turns all other nonlinear effects off.
- The Flex Shadow function cannot be enabled when any of the nonlinear effects Page Turn, Roll, Cylinder, and Sphere is enabled.
- However, the Flex Shadow function is not supported on the MVE-8000A.

To turn an effect off

In the setting menu, press the button for the effect name, turning it off, or in the Type menu press [OFF] in the lower right part of the window.

Wave Settings

There are two modes: H&V and Size. You can set the size and frequency of the waves, the wave form, the amount of wave movement, and the range. In H&V mode, you can also set the wave angle.


To apply the Wave effect

With the Wave menu displayed, use the following procedure.

1 In the <Mode> group, select the wave modulation mode.

H&V: Modulate vertically and horizontally without changing the size of the image. This mode allows waves to be created in both the vertical and horizontal directions at the same time.

Size: Create waves by reducing and expanding the image. This mode allows waves to be created in one direction only.

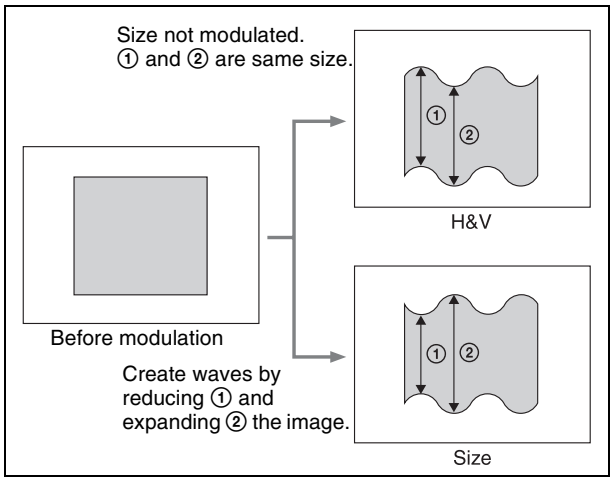

2 Set the following parameters, according to the selected mode.

When H&V is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Amp H	Amplitude of waves in horizontal direction	0.00 to 100.00
2	Freq H	Frequency of waves in horizontal direction	0.00 to 100.00
3	Offset H [a]	Horizontal direction in which to offset wave phase and amount of movement	–16.00 to +16.00 [c] –64.00 to +64.00 [d]
4	Speed H [b]	Horizontal direction and speed of waves	–100.00 to +100.00
5	Slant	Slant of waves	–8.000 to +8.000

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Amp V	Amplitude of waves in vertical direction	0.00 to 100.00
2	Freq V	Frequency of waves in vertical direction	0.00 to 100.00

Parameter group [2/2]


Knob	Parameter	Adjustment	Setting values
3	Offset V [a]	Vertical direction in which to offset wave phase and amount of movement	–16.00 to +16.00 [c] –64.00 to +64.00 [d]
4	Speed V [b]	Vertical direction and speed of waves	–100.00 to +100.00
5	Slant	Slant of waves	–8.000 to +8.000

a) Set when Lock is on.
b) Set when Lock is off.
c) Setting for SD 4:3, SD 16:9
d) Setting for HD 4:3, HD 16:9

When Size is selected

Knob	Parameter	Adjustment	Setting values
1	Amp H	Amplitude of waves	0.00 to 100.00
2	Freq H	Frequency of waves	0.00 to 100.00
3	Offset H [a]	Direction in which to offset wave phase and amount of movement	–16.00 to +16.00 [c] –64.00 to +64.00 [d]
4	Speed H [b]	Direction and speed of waves	–100.00 to +100.00
5	Slant	Slant of waves	–8.000 to +8.000

a) Set when Lock is on.
b) Set when Lock is off.
c) Setting for SD 4:3, SD 16:9
d) Setting for HD 4:3, HD 16:9

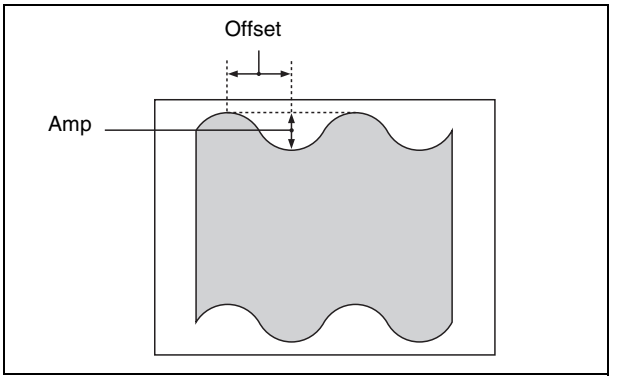

To stop the waves

Press [Lock], turning it on.
With each press, the waves alternately stop and start moving again.

To select the waveform

Press [Form] and set the following parameters.

When H&V mode is selected

Knob	Parameter	Adjustment	Setting values
1	Form H	Waveform in horizontal direction	1 to 6 [a]
2	Form V	Waveform in vertical direction	1 to 6 [a]

When Size mode is selected

Knob	Parameter	Adjustment	Setting values
1	Form H	Waveform	1 to 6 [a]

a) 1 (SINE): Sine wave
2 (PARABOLA): Parabola wave
3 (TRIANGLE): Triangular wave
4 (RECTANGLE): Rectangular wave
5 (CIRCLE): Circular wave
6 (CUBIC): Cubic wave

To randomize the modulated waveform

1 Press [Random], turning it on.

2 Set the following parameters.

When H&V mode is selected

Knob	Parameter	Adjustment	Setting values
1	Random H	Degree of randomness in horizontal waveform modulation	0.00 to 100.00
2	Random V	Degree of randomness in vertical waveform modulation	0.00 to 100.00
3	Random All	Degree of randomness in both vertical and horizontal directions	Random H value shown

When Size mode is selected

Knob	Parameter	Adjustment	Setting values
1	Random H	Degree of randomness in waveform modulation	0.00 to 100.00

To limit the wave range

1 Press [Range], turning it on.

2 Set the following parameters.

When H&V mode is selected


Knob	Parameter	Adjustment	Setting values
1	Size H	Amount of horizontal wave modulation	0.00 to 100.00
2	Offset H	Center point of horizontal modulation range	–8.000 to +8.000 a) –32.000 to +32.000 b)
3	Size V	Amount of vertical wave modulation	0.00 to 100.00
4	Offset V	Center point of vertical modulation range	–8.000 to +8.000 a) –32.000 to +32.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

When Size mode is selected

Knob	Parameter	Adjustment	Setting values
1	Size H	Amount of wave modulation	0.00 to 100.00
2	Offset H	Center point of modulation range	–8.000 to +8.000 a) –32.000 to +32.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

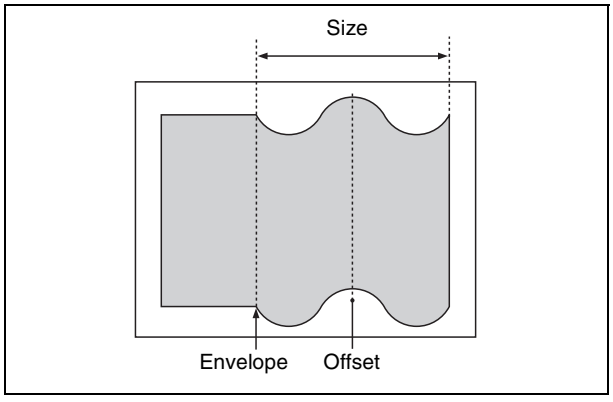

To smooth the range envelope when the wave range is limited

1 Press [Range Envelope], turning it on.

2 Set the following parameters.

When H&V mode is selected

Knob	Parameter	Adjustment	Setting values
1	Envelope H	Smoothness of envelope in horizontal direction	0.00 to 100.00
2	Envelope V	Smoothness of envelope in vertical direction	0.00 to 100.00

When Size mode is selected

Knob	Parameter	Adjustment	Setting values
1	Envelope H	Smoothness of envelope	0.00 to 100.00

To reverse the wave range

To reverse the horizontal wave range set with [Range]:
Press [Range Rev H], turning it on.

To reverse the vertical wave range set with [Range]:
Press [Range Rev V], turning it on.

Mosaic Glass Settings

There are two modes: H&V and Size. You can set the size and frequency of waves in the image, the wave form, the amount of wave movement, and the range. In H&V mode, you can also set the wave angle.

To apply the Mosaic Glass effect

Display the Mosaic Glass menu.
The items displayed in the Mosaic Glass menu and the functions of the knobs are the same as for the Wave menu *(see page 313)*.

Flag Settings

There are two modes: H&V and Size. You can set the size and frequency of waves in the image, the wave form, the amount of wave movement, and the range. In H&V mode, you can also set the wave angle.

To apply the Flag effect

Display the Flag menu.
The items displayed in the Flag menu and the functions of the knobs are the same as for the Wave menu *(see page 313)*.

Twist Settings

You can twist the image in the horizontal or vertical direction.
You can set the size and frequency of waves in the image, the wave form, the amount of wave movement, and other parameters.

To apply the Twist effect

With the Twist menu displayed, set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Amp V	Amplitude of twist in vertical direction	0.00 to 100.00
2	Freq V	Frequency of twist in vertical direction	0.00 to 100.00
3	Offset V [a]	Amount of movement in twist phase in the vertical direction	–16.00 to +16.00 [c] –64.00 to +64.00 [d]
4	Speed V [b]	Speed and direction of twist movement in vertical direction	–100.00 to +100.00
5	Slant	Slant of twist	–8.000 to +8.000

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Amp H	Amplitude of twist in horizontal direction	0.00 to 100.00
3	Offset H [a]	Amount of movement in twist phase in the horizontal direction	–100.00 to +100.00
5	Slant	Slant of twist	–8.000 to +8.000

a) Set when Lock is on.
b) Set when Lock is off.
c) Setting for SD 4:3, SD 16:9
d) Setting for HD 4:3, HD 16:9

To stop the waves

Press [Lock], turning it on.
With each press, the waves alternately stop and start moving again.

To select the waveform

Press [Form] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Form H	Waveform in horizontal direction	1 to 6 [a]
2	Form V	Waveform in vertical direction	1 to 6 [a]

a) 1 (SINE): Sine wave
2 (PARABOLA): Parabola wave
3 (TRIANGLE): Triangular wave
4 (RECTANGLE): Rectangular wave
5 (CIRCLE): Circular wave
6 (CUBIC): Cubic wave

Ripple Settings


There are four modes: Radial, Angular, Both, and Shape. The direction of modulation differs depending on the mode. You can set the size and frequency of the ripples, their direction and speed, their center point, and other parameters. In Shape mode, you can select ripple shapes other than circles (stars, etc.).

To apply the Ripple effect


With the Ripple menu displayed, use the following procedure.

1 In the <Mode> group, select the ripple modulation mode.

Radial: Points on radii of the same length from the center of the ripples behave in the same way.
Angular: Points at the same angle from the center of the ripples behave in the same way.
Both: Both Radial and Angular ripples are applied.
Shape: The ripples can have shapes such as stars or hearts in addition to circles.

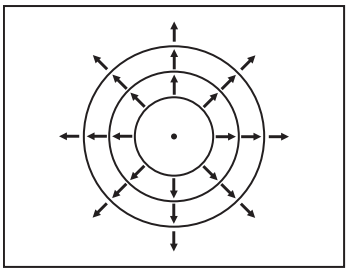

Modulation along radii (Radial mode)

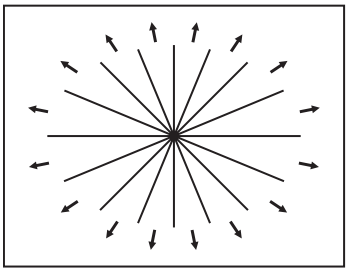

Modulation along periphery (Angular mode)

Modulation modes and directions

2 Set the following parameters, depending on the selected modulation mode.

When Radial mode is selected

Knob	Parameter	Adjustment	Setting values
1	Amp R	Ripple amplitude along radius	0.00 to 100.00
2	Freq R	Ripple frequency along radius	0.00 to 100.00
3	Offset R [a]	Direction along radius in which to offset ripple phase and amount of movement	–8.000 to +8.000 [c] –32.000 to +32.000 [d]
4	Speed R [b]	Ripple direction along radius and speed	–100.00 to +100.00
5	Amp A	Ripple amplitude along periphery	0.00 to 100.00

a) Set when Lock is on.
b) Set when Lock is off.
c) Setting for SD 4:3, SD 16:9
d) Setting for HD 4:3, HD 16:9

When Angular mode is selected

Knob	Parameter	Adjustment	Setting values
1	Amp A	Ripple amplitude along periphery	0.00 to 100.00
2	Freq A	Ripple frequency along periphery	0.00 to 100.00
3	Offset A [a]	Direction along periphery in which to offset ripple phase and amount of movement	–8.000 to +8.000
4	Speed A [b]	Ripple direction along periphery and speed	–100.00 to +100.00
5	Amp R	Ripple amplitude along radius	0.00 to 100.00

a) Set when Lock is on.
b) Set when Lock is off.

When Both mode is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Amp R	Ripple amplitude along radius	0.00 to 100.00
2	Freq R	Ripple frequency along radius	0.00 to 100.00
3	Offset R [a]	Direction along radius in which to offset ripple phase and amount of movement	–8.000 to +8.000 [c] –32.000 to +32.000 [d]
4	Speed R [b]	Ripple direction along radius and speed	–100.00 to +100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Amp A	Ripple amplitude along periphery	0.00 to 100.00
2	Freq A	Ripple frequency along periphery	0.00 to 100.00
3	Offset A [a]	Direction along periphery in which to offset ripple phase and amount of movement	–8.000 to +8.000
4	Speed A [b]	Ripple direction along periphery and speed	–100.00 to +100.00

a) Set when Lock is on.
b) Set when Lock is off.
c) Setting for SD 4:3, SD 16:9
d) Setting for HD 4:3, HD 16:9

When Shape mode is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Amp R	Ripple amplitude	0.00 to 100.00
2	Freq R	Ripple frequency	0.00 to 100.00

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
3	Offset R [a]	Direction in which to offset ripple phase and amount of movement	–8.000 to +8.000 [c] –32.000 to +32.000 [d]
4	Speed R [b]	Ripple direction and speed	–100.00 to +100.00
5	Shape	Ripple shape	1 to 4 [e]

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Aspect	Ripple aspect ratio	–100.00 to +100.00
2	Angle	Ripple angle	–8.000 to +8.000

a) Set when Lock is on.
b) Set when Lock is off.
c) Setting for SD 4:3, SD 16:9
d) Setting for HD 4:3, HD 16:9
e) 1 (Circle): Circle
2 (Rectangle): Rectangle
3 (Star): Star
4 (Heart): Heart

To limit the direction in which modulation is applied

By pressing [Plus Only], turning it on, you can limit the direction in which modulation is applied (the direction in which the image expands) to the plus direction only.

To set the ripple center point

1 Press [Position], turning it on.

2 Set the following parameters, depending on the selected modulation mode.

When Shape is selected

Knob	Parameter	Adjustment	Setting values
1	H	Ripple center point in horizontal direction	–5.000 to +5.000 [a] –20.000 to +20.000 [b]
2	V	Ripple center point in vertical direction	–3.000 to +3.000 [a] –12.000 to +12.000 [b]

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

When other than Shape is selected

Knob	Parameter	Adjustment	Setting values
1	H	Ripple center point in horizontal direction	–8.000 to +8.000 [a] –32.000 to +32.000 [b]
2	V	Ripple center point in vertical direction	–6.000 to +6.000 [a] –18.000 to +18.000 [b]

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

To limit the ripple range

1 Press [Range], turning it on.

2 Set the following parameters.

When Radial or Shape mode is selected

Knob	Parameter	Adjustment	Setting values
1	Size R	Amount of ripple modulation along radius	0.00 to 100.00
2	Offset R	Center of modulation range along radius	–8.000 to +8.000 [a] –32.000 to +32.000 [b]

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

When Angular mode is selected

Knob	Parameter	Adjustment	Setting values
1	Size A	Amount of ripple modulation along periphery	0.00 to 100.00
2	Offset A	Center of modulation range along periphery	–8.000 to +8.000

When Both mode is selected

Knob	Parameter	Adjustment	Setting values
1	Size R	Amount of ripple modulation along radius	0.00 to 100.00
2	Offset R	Center of modulation range along radius	–8.000 to +8.000 [a] –32.000 to +32.000 [b]

Knob	Parameter	Adjustment	Setting values
3	Size A	Amount of ripple modulation along periphery	0.00 to 100.00
4	Offset A	Center of modulation range along periphery	–8.000 to +8.000

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

To reverse the ripple range

When modulation mode is Radial, Both, or Shape: Press [Range Rev R], turning it on.

When modulation mode is Both or Angular: Press [Range Rev A], turning it on.

Other settings

You can turn [Lock], [Form], [Random], and [Range Envelope] on to do the following.

- Stop the waves
- Select the wave shape
- Randomize the waveform
- Smooth the range envelope when the wave range is limited

For Lock, Form, Random, and Range Envelope functions, see "Wave Settings" (page 313).

Rings Settings

You can set the degree of transition, the degree of randomness in the distance moved by each block, the amount of movement, the width of the partitions, the degree of randomness in partition width, the center point, the starting angle, and other parameters.

To apply the Rings effect

With the Rings menu displayed, use the following procedure.

1 To make transition settings, press [Transition] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Transition	Degree of transition	0.000 to 100.000
2	Random	Degree of randomness in distance moved by each block	0.000 to 100.000
3	Spiral	Amount of movement toward periphery accompanying transition	–1.000 to +1.000

2 To set the partition method, press [Partition] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Width	Width of partition	0.000 to 100.000
2	Random	Degree of randomness in partition width	0.000 to 100.000
3	Angle	Starting angle of effect	–8.000 to +8.000

3 To set the ring center position, press [Position] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal center position	–5.000 to +5.000 a) –20.000 to +20.000 b)
2	V	Vertical center position	–4.000 to +4.000 a) –16.000 to +16.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

4 To partition into pixels, press [Pixel], turning it on, and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Density	Degree to which image disappears around periphery	0.00 to 100.00
2	Random	Degree of jaggedness at block edges	0.00 to 100.00

Broken Glass Settings

You can set the degree of transition, the degree of randomness in the distance moved by each block, the amount of movement, the width of the partitions, the degree of randomness in partition width, the center point, the starting angle, and other parameters.
You can also fix the direction in which shards scatter.

To apply the Broken Glass effect

Display the Broken Glass menu.
The functions of the knobs in the Broken Glass menu are the same as those of the Rings menu *(see page 319)*, with the exception of [Direction].

To fix the direction in which shards scatter

Press [Direction], turning it on.

Flying Bar Settings

You can set the degree of transition, the degree of randomness in the distance moved by each block, the direction of movement, the width of the partitions, the degree of randomness in partition width, the partition angle, and other parameters.

To apply the Flying Bar effect

With the Flying Bars menu displayed, use the following procedure.

1 To make transition settings, press [Transition] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Transition	Degree of transition	0.000 to 100.000
2	Random	Degree of randomness in distance moved by each block	–100.000 to +100.000
3	Angle	Direction of movement	–8.000 to +8.000

2 To set the partition method, press [Partition] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Width	Width of partition	0.000 to 100.000
2	Random	Degree of randomness in partition width	0.000 to 100.000
3	Angle	Partition angle	–8.000 to +8.000

Blind Settings

There are two modes: Bar and Wedge. You can set the number of rotations by blocks, the perspective, the width and position of blocks, the direction, the center position, and other parameters.

To apply the Blind effect

With the Blind menu displayed, use the following procedure.

1 In the <Mode> group, select [Bar] or [Wedge].

2 To make transition settings, press [Transition] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Rotation	Number of rotations of the blocks	–8.000 to +8.000
2	Perspective	Degree of randomness in distance moved by each block	0.000 to 100.000

3 To set the partition method, press [Partition] and set the following parameters.

When Bar was selected in step 1

Knob	Parameter	Adjustment	Setting values
1	Width	Width of partition	0.000 to 100.000
2	Offset	Degree of randomness in partition width	–5.000 to +5.000 a) –20.000 to 20.000 b)
3	Angle	Starting angle of effect	–8.000 to +8.000

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

When Wedge was selected in step 1

Knob	Parameter	Adjustment	Setting values
4	No	Width of blocks	0.000 to 100.000
5	Phase	Partition position	–8.000 to +8.000

To set the wedge center position

When Wedge is selected in the <Mode> group, you can set the wedge center position.

1 Press [Position].

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal center position	–8.000 to +8.000 a) –32.000 to +32.000 b)
2	V	Vertical center position	–6.000 to +6.000 a) –18.000 to +18.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Split Settings

You can set the degree to which the image is split, the split positions, and other parameters.

To apply the Split effect

With the Split menu displayed, use the following procedure.

1 In the <Mode> group, select the split method.

Single: Leave gaps between splits.
Double: Fill gaps between splits with the same image.

2 Set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Transition H	Degree of left and right separation	–100.00 to +100.000
2	Transition V	Degree of top and bottom separation	–100.00 to +100.000

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Top	Amount of movement of top	–100.00 to +100.000
2	Left	Amount of movement of left	–100.00 to +100.000
3	Right	Amount of movement of right	–100.00 to +100.000
4	Bottom	Amount of movement of bottom	–100.00 to +100.000

To set the split position

1 Press [Position].

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Degree of left and right separation	–4.000 to +4.000 [a] –16.000 to +16.000 [b]
2	V	Degree of top and bottom separation	–3.000 to +3.000 [a] –12.000 to +12.000 [b]

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Split Slide Settings

You can set the degree of transition, the degree of randomness in the distance moved by each block, the degree of sliding, block width, block angle, and other parameters.

To apply the Split Slide effect

With the Split Slide menu displayed, set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Transition H	Degree of transition in horizontal direction	–100.00 to +100.000
2	Random H	Degree of randomness in distance moved by blocks in horizontal direction	0.00 to 100.00
3	Skew H	Degree of skew in horizontal direction	0.00 to 100.00
4	Width H	Horizontal width of partition	0.00 to 100.00
5	Angle	Angle of partition line	–8.000 to +8.000

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Transition V	Degree of transition in vertical direction	–100.00 to +100.000
2	Random V	Degree of randomness in distance moved by blocks in vertical direction	0.00 to 100.00
3	Skew V	Degree of skew in vertical direction	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
4	Width V	Vertical width of partition	0.00 to 100.00
5	Angle	Angle of partition line	–8.000 to +8.000

To set the partition position

1 Press [Position], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal partition position	–5.000 to +5.000 a) –20.000 to +20.000 b)
2	V	Vertical partition position	–5.000 to +5.000 a) –20.000 to +20.000 b)


a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Mirror Settings

You can choose to reflect in the directions left to right, right to left, bottom to top, top to bottom, or any combination of directions. You can also set the position of the border between original and reflections.

To apply the Mirror effect

With the Mirror menu displayed, press [Left to Right], [Right to Left], [Top to Bottom], or [Bottom to Top] to set the reflection method (multiple selections possible).
Left to Right: Reflect left side on right.
Right to Left: Reflect right side on left.
Top to Bottom: Reflect top side on bottom.
Bottom to Top: Reflect bottom side on top.

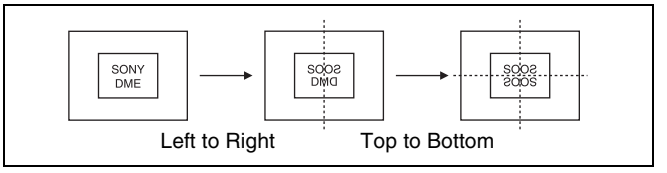

To set the position of the border between original and reflection

1 Press [Position].

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal border position	–8.000 to +8.000 a) –32.000 to +32.000 b)
2	V	Vertical border position	–6.000 to +6.000 a) –24.000 to +24.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Multi Mirror Settings

You can set the width of the original, the center position of the original, the offset of the image with fixed mirrors, the direction of the mirrors, and other parameters.

To apply the Multi Mirror effect

With the Multi Mirror menu displayed, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Interval H	Horizontal distance between mirrors (original width)	0.000 to 10.000 a) 0.000 to 40.000 b)
2	Offset H	Amount of horizontal offset of image with mirrors fixed	–4.000 to +4.000 a) –16.000 to +16.000 b)
3	Interval V	Vertical distance between mirrors (original width)	0.000 to 10.000 a) 0.000 to 40.000 b)
4	Offset V	Amount of vertical offset of image with mirrors fixed	–4.000 to +4.000 a) –16.000 to +16.000 b)
5	Angle	Mirror angle	–8.000 to +8.000

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

To set the center position of original image

1 Press [Position], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal original image center position	–4.000 to +4.000 a) –16.000 to +16.000 b)

Knob	Parameter	Adjustment	Setting values
2	V	Vertical original image center position	–4.000 to +4.000 a) –16.000 to +16.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Kaleidoscope Settings

You can set the number of blocks, the partition reference point and angle, horizontal and vertical offsets, a reflection position, and other parameters.

To apply the Kaleidoscope effect

With the Kaleidoscope menu displayed, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Number	Number of blocks	0.00 to 100.00
2	Phase	Angle of partition reference point	–8.000 to +8.000
3	Offset H	Amount of horizontal offset	–4.000 to +4.000 a) –16.000 to +16.000 b)
4	Offset V	Amount of vertical offset	–3.000 to +3.000 a) –12.000 to +12.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

To reflect the kaleidoscope image as if in a mirror

1 To reflect in the horizontal direction, press [Mirror H], turning it on.

2 To reflect in the vertical direction, press [Mirror V], turning it on.

To set the reflection position

1 Press [Position], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal reflection position	0.000 to 4.000 a) 0.000 to 16.000 b)
2	V	Vertical reflection position	0.000 to 3.000 a) 0.000 to 12.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

To cyclically repeat part of the original and its reflection

Press [Cyclic], turning it on.

Lens Settings

You can set the shape and aspect ratio of the lens, the angle, the magnification ratio, the curve ratio, the size, the center position, and other parameters.
You can also choose to display only the portion of the image that is seen through the lens.

To apply the Lens effect

With the Lens menu displayed, use the following procedure.

1 In the <Mode> group, select the lens shape.

- **Circle**
- **Rectangle**
- **Star**
- **Heart**
- **Bar**
- **Cross**

2 Depending on the selected lens shape, set the following parameters.

When Circle, Rectangle, Star, or Heart is selected

Knob	Parameter	Adjustment	Setting values
1	Magnify H	Magnification ratio	–100.00 to +100.00
2	Curve H	Curve ratio	–100.00 to +100.00
3	Size H	Size	0.00 to 100.00
4	Angle	Slant angle	–8.000 to +8.000
5	Aspect	Aspect ratio	–100.00 to +100.00

When Bar is selected

Knob	Parameter	Adjustment	Setting values
1	Magnify H	Magnification ratio	–100.00 to +100.00
2	Curve H	Curve ratio	–100.00 to +100.00
3	Size H	Size	0.00 to 100.00
4	Angle	Slant angle	–8.000 to +8.000

When Cross is selected

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Magnify H	Horizontal magnification ratio	–100.00 to +100.00
2	Curve H	Horizontal curve ratio	–100.00 to +100.00

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
3	Size H	Horizontal size	0.00 to 100.00

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Magnify V	Vertical magnification ratio	–100.00 to +100.00
2	Curve V	Vertical curve ratio	–100.00 to +100.00
3	Size V	Vertical size	0.00 to 100.00

To make only the lens part visible

Press [Lens Only], turning it on.
The parts of the image outside the lens are removed.

To set the lens center position

1 Press [Position], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal lens center position	–5.000 to +5.000 a) –20.000 to +20.000 b)
2	V	Vertical lens center position	–4.000 to +4.000 a) –16.000 to +16.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Circle Settings

You can set the size of the circle, and make the axis of modulation vertical.

To apply the Circle effect

With the Circle menu displayed, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Radius	Size of circle	0.00 to 100.00

To make the axis of modulation vertical

Press [Mod V], turning it on.
The axis of modulation when converting to the circle becomes vertical.

Panorama Settings

You can set the horizontal and vertical curve ratio, and the curve center position.

To apply the Panorama effect

With the Panorama menu displayed, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Curve H	Horizontal curve ratio	–100.00 to +100.00
2	Curve V	Vertical curve ratio	–100.00 to +100.00
3	Position H	Horizontal curve center position	–4.000 to +4.000 a) –16.000 to +16.000 b)
4	Position V	Vertical curve center position	–3.000 to +3.000 a) –12.000 to +12.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Page Turn Settings

There are four modes: H&V, H, V, and Off. You can select the turn position, the radius of the turned portion, the amount and angle of turning, and the input video for the front and back pages.

To apply the Page Turn effect

With the Page Turn menu displayed, use the following procedure.

1 In the <Split Mode> group, select the split mode.

H&V: The image turns as it is split from the center into 4 parts: left, right, upper, lower.
H: The image turns as it is split from the center into 2 parts: left, right.
V: The image turns as it is split from the center into 2 parts: upper, lower.
When nothing is selected (Off): There are no splits and the image turns from the edge.

2 Press [Page Turn], then set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Radius	Radius of turn part	0.00 to 100.00
2	Offset	Amount of turn	–100.00 to +100.00

Knob	Parameter	Adjustment	Setting values
3	Angle	Angle of turn	–0.250 to +0.000 a) –0.250 to +0.250 b) –0.500 to +0.000 c) –8.000 to +8.000 d)

a) When split mode is H&V
b) When split mode is H
c) When split mode is V
d) When split mode is off

To set the input signal of the back page

1 In the <Back Video> group, select the signal input into the back page.

Self: Use the same signal as the front page.
Flat: Use a flat color.
Hue Rotation: Gradually vary the hue.
2nd Ch: Use the 2nd channel video signal.
To select "2nd Ch," it is first necessary to select the second DME on the keyer using DME.

2 Adjust the following parameters, according to the selected input signal.

When Flat is selected

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

When Hue Rotation is selected

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Speed	Speed at which hue changes	–12.00 to +12.00

Notes

When using a page turn effect with one channel, the following restrictions apply.
- In an MVE-8000A HD system, when the input is for example a title, parts of the back page other than the title appear as black.
- For the MKS-7470X/7471X, the same restrictions as above apply to all signal formats.

Roll Settings

There are four modes: H&V, H, V, and Off. You can select the turn position, the radius of the turned portion, the amount and angle of turning, and the input video for the front and back pages.

To apply the Roll effect

Display the Roll menu.
The knobs in the Roll menu have the same functions as those in the Page Turn menu *(see page 324)*.

Notes

When using a roll effect with one channel, the following restrictions apply.
- In an MVE-8000A HD system, when the input is for example a title, parts of the back page other than the title appear as black.
- For the MKS-7470X/7471X, the same restrictions as above apply to all signal formats.

Cylinder Settings

You can set the degree of winding onto the cylinder, the radius, the horizontal position of the wound image, and front and back side output for the image.

To apply the Cylinder effect

With the Cylinder menu displayed, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Radius	Degree to which image is wound onto the cylinder	0.00 to 100.00
2	Min R	Radius of the cylinder	0.00 to 100.00
3	Offset	Horizontal position of the image wound onto cylinder	–100.00 to +100.00

The procedure for selecting the input signal in the <Back Video> group is the same as for the Page Turn menu *(see page 324)*.

Notes

When using a cylinder effect with one channel, the following restrictions apply.
- In an MVE-8000A HD system, when the input is for example a title, parts of the inner surface other than the title appear as black.
- For the MKS-7470X/7471X, the same restrictions as above apply to all signal formats.

Sphere Settings

You can set the degree of winding onto the sphere, the radius, the horizontal position of the wound image, and front and back side output for the image.

Notes

You cannot monitor the part of a rotating sphere that corresponds to its axis on the monitor screen.

To apply the Sphere effect

Display the Sphere menu.
The knobs in the Sphere menu have the same functions as those in the Cylinder menu *"Cylinder Settings" (page 325)*.

Notes

When using a sphere effect with one channel, the following restrictions apply.
- In an MVE-8000A HD system, when the input is for example a title, parts of the inner surface other than the title appear as black.
- For the MKS-7470X/7471X, the same restrictions as above apply to all signal formats.

Explosion Settings

You can set the pattern shape and aspect ratio, the center position, the amount of movement by fragments, the curvature of the transition path, and other parameters.

To apply the Explosion effect

With the Explosion menu displayed, use the following procedure.

1 In the <Mode> group, select the explosion pattern.

- **Circle**
- **Rectangle**
- **Star**
- **Heart**
- **Ellipse**

2 Set the following parameters.

When Circle was selected in step 1

Knob	Parameter	Adjustment	Setting values
1	Transition	Degree of transition	0.00 to 100.00
2	Curve	Degree to which image periphery expands	0.00 to 100.00
3	Spiral	Degree of curvature of transition path	–100.00 to +100.00

When Rectangle, Star, Heart, or Ellipse was selected in step 1

Knob	Parameter	Adjustment	Setting values
1	Transition	Degree of transition	0.00 to 100.00
2	Curve	Degree to which image periphery expands	0.00 to 100.00
3	Aspect	Aspect ratio of waveform	–100.00 to +100.00
4	Angle	Slant of waveform	–8.000 to +8.000

To make the fragments stardust

1 Press [Pixel], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Density	Degree to which image disappears	0.00 to 100.00
2	Random	Degree of randomness in flying out fragment positions	0.00 to 100.00

To set the explosion center point

1 Press [Position], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Center point in horizontal direction	–5.000 to +5.000 a) –20.000 to +20.000 b)
2	V	Center point in vertical direction	–4.000 to +4.000 a) –16.000 to +16.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Swirl Settings

You can set the amount of swirl, the swirl region, the amount of rotation, and the swirl center position.

To apply the Swirl effect

With the Swirl menu displayed, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Transition	Swirl amount	0.00 to 100.00
2	Center	Amount of rotation in center of swirl	–8.000 to +8.000
3	Outer	Amount of rotation outside of Area	–8.000 to +8.000
4	Area	Region of swirl	0.00 to 100.00

To make the tip of the swirl stardust

1 Press [Pixel], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Density	Degree to which image disappears	0.00 to 100.00
2	Random	Trail type and amount of stardust	0.00 to 100.00

To set the center position of the swirl

1 Press [Position], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	H	Horizontal center position of swirl	–8.000 to +8.000 a) –32.000 to +32.000 b)
2	V	Vertical center position of swirl	–6.000 to +6.000 a) –18.000 to +18.000 b)

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

Melt Settings

You can set the degree of transition, the degree of extension in the image, the jaggedness of the melting sections, and the amplitude, frequency, amount of movement, and speed of the melting sections. You can also set the slant of the borders, the shape of the sections that begin to melt, and other parameters.

To apply the Melt effect

With the Melt menu displayed, use the following procedure.

1 In the <Direction> group, select the direction in which the image melts away.

Up: Melting occurs upward.
Down: Melting occurs downward.

2 To make transition settings, press [Transition] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Transition	Degree of transition	0.00 to 100.00
2	Curve	Degree to which image stretches	0.00 to 100.00
3	Random	Degree of jaggedness at melted part	0.00 to 100.00

3 To make wave settings for the melting part, press [Border] and set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Amp	Amplitude of waves	0.00 to 100.00
2	Freq	Frequency of waves	0.00 to 100.00
3	Offset a)	Amount of wave phase offset	–16.000 to +16.000 c) –64.000 to +64.000 d)
4	Speed b)	Direction and speed of waves	–100.00 to +100.00
5	Slant	Slant of border	–100.00 to +100.00

a) Set when Lock is on.
b) Set when Lock is off.
c) Setting for SD 4:3, SD 16:9
d) Setting for HD 4:3, HD 16:9

To stop the waves in the melting part

Press [Lock], turning it on.
With each press, the waves alternately stop and start moving again.

To select the shape of the part beginning to melt

Press [Form] and set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Form	Waveform	1 to 8 a)

a) 1 (SINE): Sine wave
2 (PARABOLA): Parabola wave
3 (TRIANGLE): Triangular wave

4 (RECTANGLE): Rectangular wave
5 (CIRCLE): Circular wave
6 (CUBIC): Cubic wave
7 (MELT1): Melting wave 1
8 (MELT2): Melting wave 2

To make the melting part stardust

1 Press [Pixel], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Density	Degree to which image disappears	0.00 to 100.00
2	Random	Degree to which pixel positions become more randomized further from the center	0.00 to 100.00

Character Trail Settings

You can set the effect starting position, the degree of expansion, the slant angle of the effect region, and trail direction, the degree to which the image disappears, the trail type and amount of stardust, and other parameters.

To apply the Character Trail effect

With the Character Trail menu displayed, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Transition	Position where effect starts	–8.000 to +8.000 [a] –32.000 to +32.000 [b]
2	Expand	Degree of expansion	0.00 to 100.00
3	Trans Angle	Angle of slanting in effect region	–8.000 to +8.000
4	Trail Angle	Direction of trail	–100.00 to +100.00

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

To make the tip of the swirl stardust

1 Press [Pixel], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Density	Degree to which image disappears	0.00 to 100.00
2	Random	Trail type and amount of stardust	0.00 to 100.00

Applying Special Effects (Lighting and Recursive Effects)

Lighting Settings

You can specify the intensity and color of the light and the lighting pattern. The following lighting patterns are available:

Plane: Illumination of the entire screen.

Bar: Bar illumination. You can specify the width and angle of the bar, and its softness.

Preset: Lighting pattern suitable for nonlinear effects.

When Bar is selected, the following modes can be selected.

Normal: Emphasizes the bar highlight area.

Specular: An effect like light striking a surface with metallic reflections.

Mat: An effect like light striking paper, cloth, or another diffusively reflective surface.

Notes

The function for setting the bar mode of the lighting area is not supported on the MVE-8000A.

Applying the Lighting effect

1 In the DME menu, select VF5 'Light/Trail' and HF1 'Lighting.'

The Lighting menu appears.

2 Press [Lighting], turning it on.

3 In the <Light Pattern> group, select the lighting pattern Plane, Bar or Preset.

4 Set the parameters.

The parameters differ as follows, depending on the selected lighting pattern.

When Plane is selected

Knob	Parameter	Adjustment	Setting values
1	Light	Intensity of light in highlight area	0.00 to 100.00
5	Total Ambient	Brightness of whole image	0.00 to 100.00 a)

a) You can make the Lighting effect more effective by adjusting [Total Ambient] to lower the brightness of the entire image. This setting is used both by this effect and by the Spotlighting effect.

Notes

The Total Ambient parameter is not supported on the MVE-8000A.

When Bar is selected

Knob	Parameter	Adjustment	Setting values
1	Light	Intensity of light in highlight area	0.00 to 100.00
2	Ambient	Intensity of light in ambient area	0.00 to 100.00
5	Total Ambient	Brightness of whole image	0.00 to 100.00 a)

a) You can make the Lighting effect more effective by adjusting [Total Ambient] to lower the brightness of the entire image. This setting is used both by this effect and by the Spotlighting effect.

Notes

The Total Ambient parameter is not supported on the MVE-8000A.

When Preset is selected


Knob	Parameter	Adjustment	Setting values
1	Light	Intensity of light in highlight area	0.00 to 100.00
2	Ambient	Intensity of light in ambient area	0.00 to 100.00
3	Shade	Intensity of light in shade area	0.00 to 100.00 a)
5	Total Ambient	Brightness of whole image	0.00 to 100.00 b)

a) Setting is available when nonlinear effect page turn, roll, cylinder, or sphere is selected.

b) You can make the Lighting effect more effective by adjusting [Total Ambient] to lower the brightness of the entire image. This setting is used both by this effect and by the Spotlighting effect.

Notes

The Total Ambient parameter is not supported on the MVE-8000A.

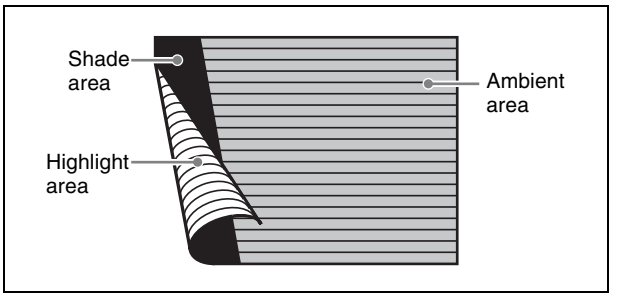

The three regions for which the light intensity can be set

Setting the bar shape of the highlight area


When you select [Bar] or [Preset] in step **3** of "Applying the Lighting effect" *(page 329)*, use the following procedure to set the shape of the bar.

1 Turn [Light Modify] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	X	X-value of bar center point	–8.00 to +8.00 a) b) –24.00 to +24.00 c) –32.00 to +32.00 d)
2	Y	Y-value of bar center point	–6.00 to +6.00 a) –4.50 to +4.50 b) –18.00 to +18.00 c) d)
3	Angle e)	Angle of bar	–8.00 to +8.00
4	Width	Width of bar	0.00 to 100.00
5	Soft	Softness of edges	0.00 to 100.00

a) For SD 4:3
b) For SD 16:9
c) For HD 4:3
d) For HD 16:9
e) There are some nonlinear effects for which Angle cannot be used.

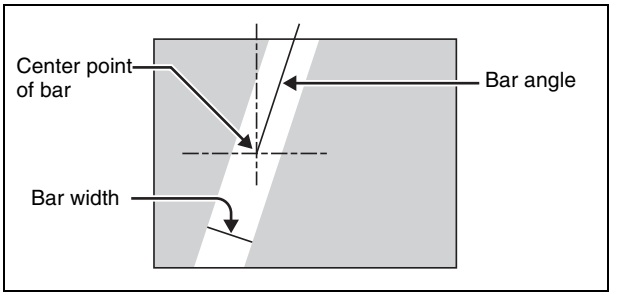

Bar shape parameters

Setting the color of the light in the highlight area

1 Turn [Light Color] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Setting the bar shape of the shade area

You select [Preset] in step **3** of "Applying the Lighting effect" *(page 329)*, and then use the following procedure to set the bar shape of the shade area.

1 Turn [Shade Modify] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	X	X-value of bar center point	–8.00 to +8.00 a) –24.00 to +24.00 b) –32.00 to +32.00 c)
4	Width	Width of bar	0.00 to 100.00
5	Soft	Softness of edges	0.00 to 100.00

a) For SD 4:3 and SD 16:9
b) For HD 4:3
c) For HD 16:9

Setting the color of the shade in the shade area

1 Turn [Shade Color] on.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Setting the bar mode of the highlight area

You select [Bar] in step **3** of "Applying the Lighting effect" *(page 329)*, and then use the following procedure to set the bar mode of the highlight area.

Notes

The bar mode of the highlight area is not supported on the MVE-8000A.

1 Select the mode in the <Bar Light Mode> group.

Normal: Emphasizes the bar highlight area.
Specular: An effect like light striking a surface with metallic reflections.

Mat: An effect like light striking paper, cloth, or another diffusively reflective surface.


2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Intensity	Intensity of diffuse light area	0.00 to 100.00
2	Offset	Offset of center of diffuse light area	–4.00 to +4.00 a) –12.00 to +12.00 b) –16.00 to +16.00 c)
3	Width	Width of diffuse light area	0.00 to 100.00
4	Soft	Softness of diffuse light area	0.00 to 100.00

a) For SD 4:3 and SD 16:9
b) For HD 4:3
c) For HD 16:9

3 When you select Normal or Mat in step **1**, press [Bar Diffuse Color], turning it on, and adjust the following parameters to set the color of the diffuse light area.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

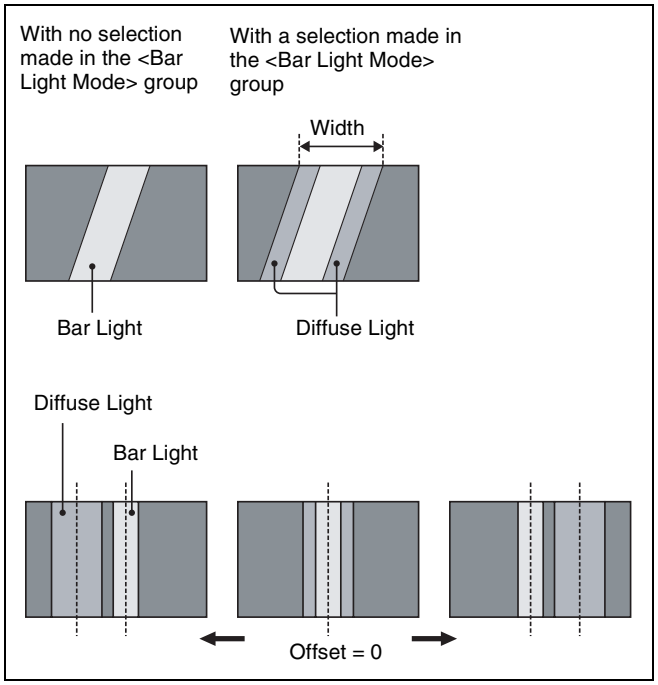

Trail Settings

Notes

Turning Trail on when Motion Decay, Keyframe Strobe, or Wind is on turns it off automatically.

Applying the Trail effect

1 In the DME menu, select VF5 ‘Light/Trail’ and HF2 ‘Trail.’

The Trail menu appears.

2 Press [Trail], turning it on.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Decay	Degree to which the trail is left	0.00 to 100.00 a)
2	Interval	Freeze interval	1 to 255 (frames)
3	Live	Proportion of the interval between two successive freeze images for which the video is run	0.00 to 100.00

a) 0.00 is no trail. At 100.00, the trail does not disappear.

4 To erase the trail, press [Trail Eraser], turning it on.

Switching the priority between the current image and trail superimposed

In the <Priority> group, select the method of superimposition.
Over: Current image is on top.
Under: Trail is on top.

Selecting the source to create a trail

In the <Trail Source> group, select the source to create a trail.

Notes

- “Rainbow,” “Mix Color,” and “Ext Video” are not supported on the MVE-8000A.
- “Mix Color” or “Ext Video” can only be applied to one of the background *(see page 344)*, flex shadow *(see page 296)*, trail, and wind *(see page 335)* effects.
  If you select “Mix Color” or “Ext Video” in one of these

settings, a selection of “Mix Color” or “Ext Video” in any of the other effects is disabled, and “Flat Color” is selected in its place.
- When executing combining four channels of DME images, “Mix Color” and “Ext Video” in the flex shadow and background effects cannot be selected.

Freeze Video: Use freeze images of the input video as source of the trail.

Flat Color: Use a flat color matte as source of the trail. You can set the following parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Hue Rotate: Use a color matte whose hue varies slightly with each frame for the trail of the afterimages. You can set the following parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue Speed	Speed at which the hue changes	–12.00 to +12.00

Mix Color: Insert a mix color signal set in the Color Mix menu *(see page 302)* in the afterimage portion.

Ext Video: Insert the external video signal input to the Ext IN connector in the afterimage portion.

Rainbow: Use a freeze image with the hue changing every frame in the afterimage portion. The difference from “Hue Rotate” is that many colors appear simultaneously.

For details of the Rainbow parameters, see the “Hue Rotate” item above.

Erasing the afterimages that remain in memory whenever a keyframe is passed

Press [Trail Eraser], turning it on.
When the effect passes a keyframe, the afterimage is erased before writing a new afterimage.

Selecting the freeze timing

In the <Trail Freeze Timing> group, select the timing for freezing a trail.
Frame: freeze in frame units.
Field: freeze in field units.

Notes

The freeze timing setting is not required when the following signal formats are being used.

Signal formats: 1080P/50, 1080P/59.94, 1080PsF/23.976, 1080PsF/24, 1080PsF/25, 1080PsF/29.97, 720P/50, 720P/59.94

Defocusing the afterimage portion (Defocus)

Notes

The function to defocus the trail afterimage portion is not supported on the MVE-8000A.

1 Press [Defocus], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Defocus V	Defocusing of the video signal	0.00 to 100.00
2	Defocus K	Defocusing of the key signal	0.00 to 100.00

Applying stardust to the afterimage portion

The afterimage portion becomes stardust, and gradually disappears.

1 Press [Dust], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Trail Dust	Amount of the afterimage disappearing as stardust [a)]	0.00 to 100.00
2	Dust Soft	Timing with which stardust disappears	0.00 to 100.00
3	Dust Size	Size of stardust	0.00 to 100.00
4	Dust Aspect	Aspect ratio of stardust	–100.00 to +100.00

a) The way in which the afterimage disappears is affected by both Decay and Trail Dust parameter adjustments.

Setting a combine process

Select whether to add the Trail effect before or after the combine.


Notes

- The combine process function is not supported on the MVE-8000A.
- When you change the selection in the <Combine Process> group, the afterimages which had been added up to then disappear.
- When you do not combine images, the Trail effect only is applied, regardless of the selection in the <Combine Process> group.

Select one of the following in the <Combine Process> group.

Combine –> Trail: Add the Trail effect after the combine. As the trail parameters, the data for the channel with the lowest number among the channels being combined is enabled.

Trail –> Combine: Add the Trail effect before the combine. Trails parameters can be set independently for each channel.

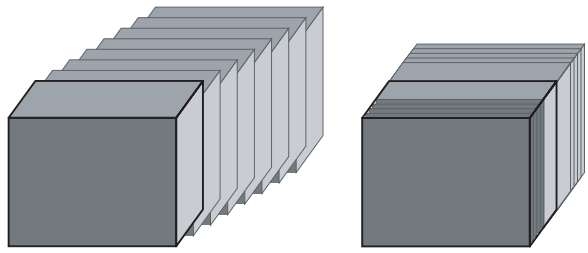

Motion Decay Settings

Notes

When you turn on motion decay, if the Trail, Keyframe Strobe or Wind effect is on, it automatically goes off.

Blurring image motion

1 In the DME menu, select VF5 'Light/Trail' and HF3 'Motion Decay.'

The Motion Decay menu appears.

2 Press [Motion Decay], turning it on.

3 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Video Decay	Degree of blurring of the video signal	0.00 to 100.00 a)

a) At the setting 0.00, there is no afterimage. At a setting of 100.00, the afterimage does not decay.

4 In the <Decay Mix Mode> group, select the way in which the video signal is blurred.

Soft: mix the live image and the afterimage.
Hard: show the lighter of the live image and afterimage.

5 To erase the afterimage, press [Decay Eraser], turning it on.

Erasing the afterimages that remain in memory whenever a keyframe is passed

Press [Decay Eraser], turning it on.
When the effect passes a keyframe, the afterimage is erased before writing a new afterimage.

Selecting the freeze timing

In the <Decay Freeze Timing> group, select the timing for motion decay freezing.
Frame: freeze in frame units.
Field: freeze in field units.

Notes

The freeze timing setting is not required when the following signal formats are being used.

1080P/50, 1080P/59.94, 1080PsF/23.976, 1080PsF/24, 1080PsF/25, 1080PsF/29.97, 720P/50, 720P/59.94

Applying stardust to the afterimage portion

The afterimage portion becomes stardust, and gradually disappears.

1 Press [Dust], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Decay Dust	Amount of the afterimage disappearing as stardust a)	0.00 to 100.00
2	Dust Soft	Timing with which stardust disappears	0.00 to 100.00
3	Dust Size	Size of stardust	0.00 to 100.00
4	Dust Aspect	Aspect ratio of stardust	–100.00 to +100.00

a) The way in which the afterimage disappears is affected by both the Video Decay and Decay Dust parameter adjustments for the motion decay.

Keyframe Strobe Settings

Notes

When you turn on keyframe strobe, if the Trail, Motion Decay or Wind effect is on, it automatically goes off.

Leaving a trail of afterimages of the image

1 In the DME menu, select VF5 'Light/Trail' and HF4 'KF Strobe.'

The KF Strobe menu appears.

2 Press [KF Strobe], turning it on.

3 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Decay	Degree of blurring of the video signal	0.00 to 100.00 a)

a) At the setting 0.00, there is no afterimage. At a setting of 100.00, the afterimage does not decay.

4 To erase the afterimage, press [KF Strobe Eraser], turning it on.

Selecting the overlay priority for movie and still images (video freeze image)

In the <Priority> group, select the way in which the images are overlaid.

Over: the movie is on top, and the still image is underneath.

Under: the movie is underneath, and the still image is on top.

Mix: the movie and still images are mixed; adjust the following parameter with the knob.

Knob	Parameter	Adjustment	Setting values
1	Mix	Mix amount of the still image with respect to the movie	0.00 to 100.00 a)

a) The 0.00 setting is the same as Over, and the 100.00 is the same as Under.

Selecting the freeze timing

In the <KF Freeze Timing> group, select the timing for freezing the keyframe strobe.

Frame: freeze in frame units.

Field: freeze in field units.

Notes

The freeze timing setting is not required when the following signal formats are being used.

1080P/50, 1080P/59.94, 1080PsF/23.976, 1080PsF/24, 1080PsF/25, 1080PsF/29.97, 720P/50, 720P/59.94

Erasing the afterimages that remain in memory whenever a keyframe is passed

Press [KF Strobe Eraser], turning it on.

When the effect passes a keyframe, the afterimage is erased before writing a new afterimage.

Applying stardust to the afterimage portion

The afterimage portion becomes stardust, and gradually disappears.

1 Press [Dust], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	KF Strobe Dust	Amount of the afterimage disappearing as stardust a)	0.00 to 100.00
2	Dust Soft	Timing with which stardust disappears	0.00 to 100.00
3	Dust Size	Size of stardust	0.00 to 100.00
4	Dust Aspect	Aspect ratio of stardust	–100.00 to +100.00

a) The way in which the afterimage disappears is affected by both the Decay and KF Strobe Dust parameter adjustments for the keyframe strobe.

Disabling the keyframe strobe afterimage

Press [KF Strobe Disable], turning it on.

If you turn this function on when creating a keyframe, even as the effect passes a keyframe, no afterimage remains.

Setting a combine process

Select whether to add the Keyframe Strobe effect before or after the combine.

Notes

- The combine process function is not supported on the MVE-8000A.
- When you change the selection in the <Combine Process> group, the afterimages which had been added up to then disappear.

- When you do not combine images, the Keyframe Strobe effect only is applied, regardless of the selection in the <Combine Process> group.

Select one of the following in the <Combine Process> group.

Combine –> KF STRB: Add the Keyframe Strobe effect after the combine.
As parameters, the data for the channel with the lowest number among the channels being combined is enabled.

KF STRB –> Combine: Add the Keyframe Strobe effect before the combine.
Parameters can be set independently for each channel.

Wind Settings

Notes

- The wind function is not supported on the MVE-8000A.
- When wind is turned on, any of the following effects that are on are turned off.
  - Trail
  - Motion decay
  - Keyframe strobe

Applying the wind effect

1 In the DME menu, select VF5 'Light/Trail' and HF5 'Wind.'

The Wind menu appears.

2 Press [Wind], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Decay	Amount of afterimage displayed	0.00 to 100.00 a)
2	Shift H	Extension in the horizontal direction	–100.00 to +100.00
3	Shift V	Extension in the vertical direction	–100.00 to +100.00

a) 0.00 represents no afterimage, and 100.00 represents no decay in the afterimage.

4 To erase the afterimages, press [Wind Eraser], turning it on.

Selecting the signal for the afterimage portion

In the <Wind Source> group, select the image to fill the afterimage portion.

Notes

- "Mix Color" or "Ext Video" can only be applied to one of the background *(see page 344)*, flex shadow *(see page 296)*, trail *(see page 331)*, and wind effects.
  If you select "Mix Color" or "Ext Video" in the wind settings, a selection of "Mix Color" or "Ext Video" in any of the other effects is disabled, and "Flat Color" is selected in its place.
- When executing combining four channels of DME images, "Mix Color" and "Ext Video" cannot be selected.

Freeze Video: Freeze the input image to use as the afterimage.

Flat Color: Use a single color matte for the afterimage; you can set the following parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Hue Rotate: Use a single color matte with the hue changing for each frame as the afterimage; you can set the following parameters with the knobs.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue Speed	Rate at which hue changes	–12.00 to +12.00

Mix Color: Insert a mix color signal *(see page 302)* in the afterimage portion.

Ext Video: Insert the external video signal input to the Ext IN connector in the afterimage portion.

Rainbow: Use a freeze image with the hue changing every frame in the afterimage portion. The difference from "Hue Rotate" is that many colors appear simultaneously.

For details of the Rainbow parameters, see the "Hue Rotate" item above.

Applying modulation to the afterimage portion (Modulation)

1 In the Wind menu, press [Modulation], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Amp H	Horizontal amplitude of the wave	0.00 to 100.00
2	Freq H	Horizontal frequency of the wave	–100.00 to +100.00
3	Amp V	Vertical amplitude of the wave	0.00 to 100.00
4	Freq V	Vertical frequency of the wave	–100.00 to +100.00

For details of Priority, Wind Freeze Timing, Wind Eraser, Defocus, Dust, and Combine Process in the Wind menu, see "Trail Settings" (page 331).

Spotlighting Settings

You can set up to three light sources (lights 1 to 3).

Notes

- The Spotlighting effect is not supported on the MVE-8000A.
- The BZDM-9050 Texture Lighting Software (for MVE-9000) is required to set lights 2 and 3.
- When the global effect Combiner is enabled, the settings of the smallest-numbered channel selected for the Combiner are used.

Adjustments to the image surface

The following adjustments can be made to the image surface struck by the light.

- Adjusting the brightness of the whole image
- Selecting the image surface effect
- Test sphere function
- Adjusting the bumpiness of the image surface
- Coordinate axis on surface of image
- Texture deformations

Selecting the image surface effect

Flat: The image surface is unchanged, causing the selected light source to appear as the effect.

Texture: A texture appears on the surface of the image. Textures can be selected from among 30 patterns *(see page 409)*.

Non Linear: Spotlighting effect is applied to an area to which a DME nonlinear effect is applied.

Notes

The BZDM-9050 is required to enable Texture and Non Linear settings on the MVE-9000.


Test sphere function

A test sphere is a translucent sphere virtually embedded in the center of the input picture to provide an intuitive way for you to check the position and direction of the spotlight. When you change the position or direction of a light source, the side of the sphere closest to the light source grows brighter. You can easily check the position and direction of the light source by viewing the test sphere *(see page 338)*.


Coordinate axis on surface of image

Specify where to apply the texture or test sphere on the image surface.

Move: The texture moves together with the DME image.

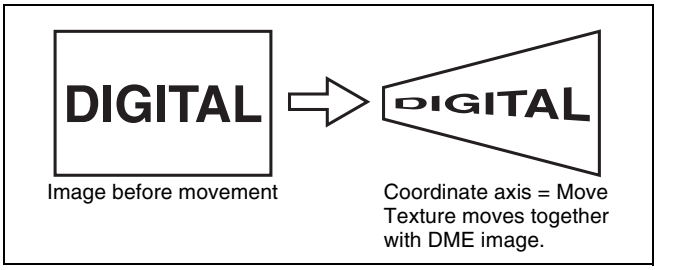


Fix: The texture does not move, even if the DME image moves.

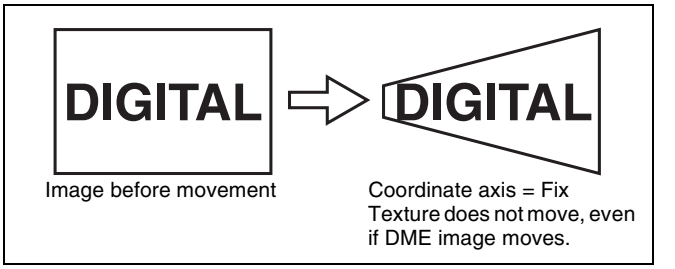

Texture deformations

You can change the texture pattern, position, and size, and use the repetition function.

The following figure shows examples of a texture pattern repeated in the X and Y directions.

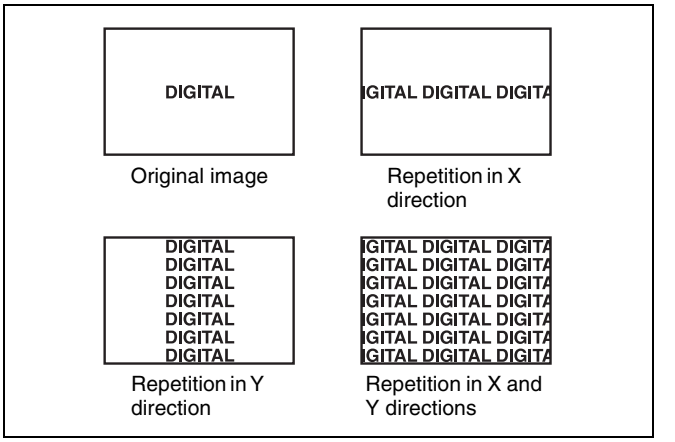

Setting lights

Light source types


The following type of light sources are available (*see figure*).

Parallel: Parallel light source

Point: Point light source. As the light source is placed further away, the illuminated range becomes wider and the light becomes weaker.

Line: Line light source

Whole: Non-directional light source which illuminates the whole image.

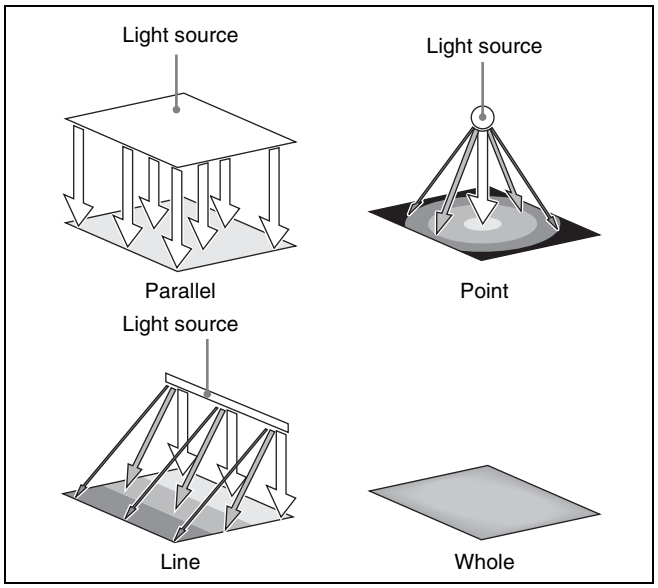


Linking and unlinking image and spotlight

The spotlight can move together with a DME image, or be fixed in place.

Source: Place the light source in source coordinate space. The spotlight is linked and moves when the image moves.

Target: Place the light source in target coordinate space. The spotlight does not move, even when the image moves.

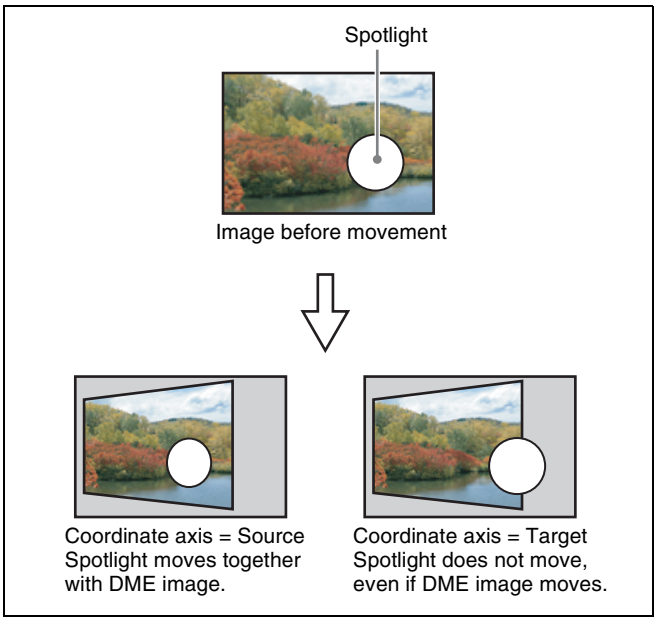


Selecting the lighted area

You can select the area lit by the spotlight.

FRGD: The light strikes the image foreground.

BKGD: The light strikes the image background.

Both: The light strikes both foreground and background.

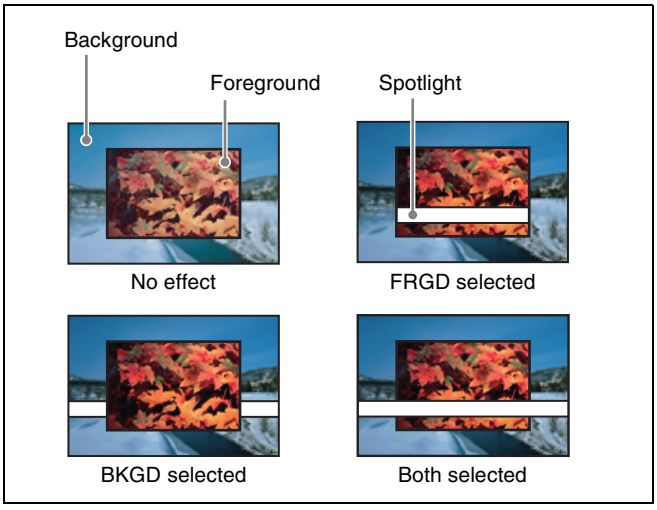

Surface Flat

For the currently selected light source only, you can forcibly make the image surface effect flat.

This is effective when you have selected texture as image surface effect and want a flat effect for one light source only.

Light shape

Creates the light shape.

- Select the shape pattern
  For shape patterns, see "Shape Patterns" (page 409).
- Set the size, degree of deformation, softness, and rotation.


Ring settings

Shines the light with a hole in the middle, like a doughnut. Adjust the following parameters.

Offset: Distance to move the center of the ring from the initial position (the position set when selecting the light source in the <Spot Mode> group).

Radius: Inner side radius of the ring.

Angle: When an Offset is set, the rotation angle of the ring around the initial center position.

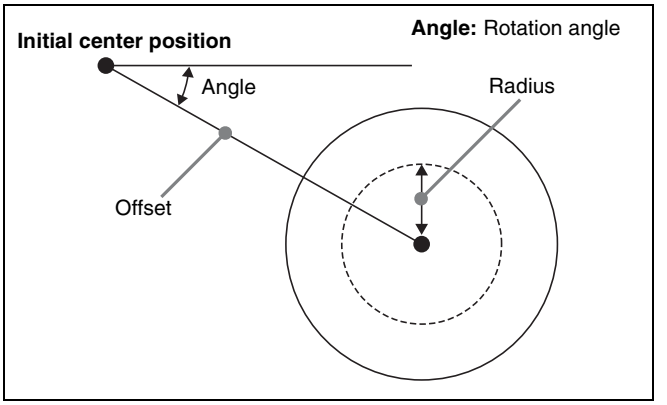

Fill blending modes


Specifies the way in which the light is blended with the image.

Mix: Light as if reflected from a mirror. The light can be given a color.

Multiply: Light as if reflected from a dull surface (diffuse reflection).

Relation between test spheres and parallel rays


The following figure shows an example of the effect of parallel rays on a test sphere.

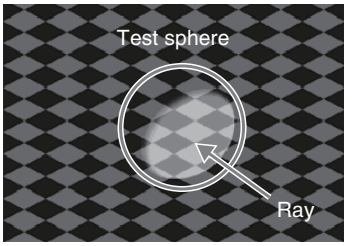

The direction of a ray is defined by longitude and latitude.

- Longitude: A direction (angle), expressed as a plus value for clockwise rotation in the plus direction with respect to the X axis of the input picture.
- Latitude: Latitude

The following figure shows the relationships between the longitude and latitude of parallel rays, input picture, and test sphere.

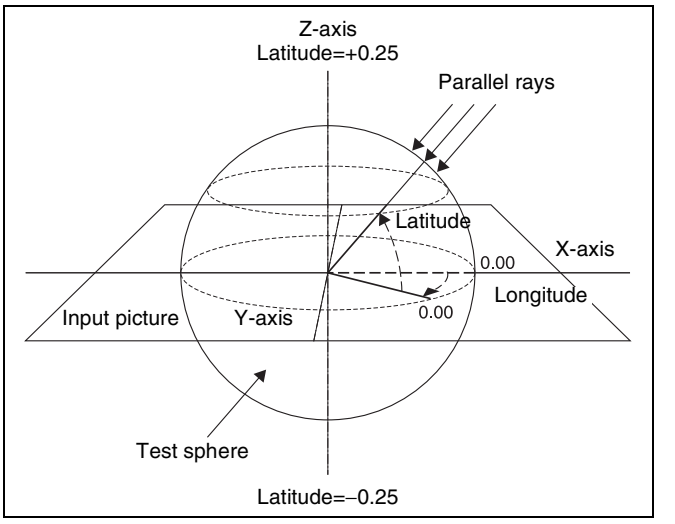

The unit of these direction parameters is the number of rotations, with 360° (1 rotation) expressed as 1.00, in the same way as 3D rotation parameters.


The following relationships apply in the example shown in the figure.

Parameter	Setting	Angle
Longitude	0.12	45°
Latitude	0.12	45°

The fractional part of the setting after the decimal point corresponds to an angle 0 to 360°. If the fractional parts of two setting values are the same, the effect is the same even if the integral parts are different.

The integral part of a setting value is used when moving a light source with keyframes.

For example, when the longitude of a light source rotates in the clockwise direction from 0.88 (315°) to 0.12 (45°), it rotates in the counterclockwise direction (the angle grows smaller) if the above values are used. In this case, the value of the second keyframe can be set to 1.12 (360° + 45°).

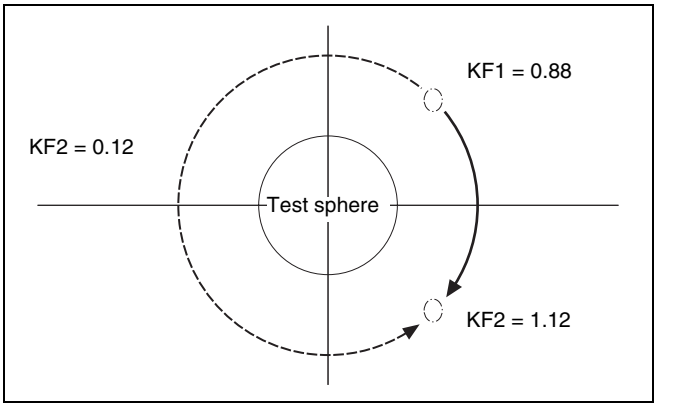

Keyframe trajectory

Setting the surface where light strikes the image

1 In the DME menu, select VF5 'Light/Trail' and HF6 'Spot Lighting.'

The Spot Lighting menu appears.

2 Press [Spot Lighting], turning it on.

3 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Total Ambient	Brightness of whole image	0.00 to 100.00

- Lowering the brightness of the image makes Spotlighting more effective.
- The Total Ambient setting is shared with the Lighting function.

4 In the <Surface Select> group, select the state of the surface struck by the light.

Flat: The image surface is unchanged, causing the selected light source to appear as the effect.
Texture: A texture appears on the surface of the image.
Non Linear: The Spotlighting effect is applied to an area to which a DME nonlinear effect is applied.

Notes

- The BZDM-9050 Texture Lighting Software (for MVE-9000) is required to enable Texture or Non Linear.
  An install key must be entered to use the software. *For details, see "Installation and Device Setup (Install/Unit Config Menu)" in Chapter 18 (Volume 2).*
- The Spotlighting Non Linear setting is effective for the following nonlinear effects. For any other nonlinear effect, the result of selecting the Non Linear setting is the same as selecting Flat.
  Wave, Mosaic Glass, Flag, Ripple, Lens, Panorama, Page Turn, Roll.

5 If you selected Texture or Non Linear in step **4**, set the following parameters.

Parameters when you selected Texture

• SD format

Knob	Parameter	Adjustment	Setting values
1	X	Movement in X-axis direction	–8.00 to +8.00 a)
2	Y	Movement in Y-axis direction	–6.00 to +6.00 b)
3	Size X	Image size in X-axis direction	0.50 to 16.00
4	Size Y	Image size in Y-axis direction	0.50 to 16.00
5	Amp	Emphasize bumps and depressions	–100.00 to +100.00 c)

a) Minus moves left, plus moves right.
b) Minus moves down, plus moves up.
c) Plus emphasizes bumps in texture, minus emphasizes depressions. 0.00 is a flat surface.

• HD format

Knob	Parameter	Adjustment	Setting values
1	X	Movement in X-axis direction	–32.00 to +32.00 a)
2	Y	Movement in Y-axis direction	–24.00 to +24.00 b)
3	Size X	Image size in X-axis direction	0.50 to 16.00
4	Size Y	Image size in Y-axis direction	0.50 to 16.00
5	Amp	Emphasize bumps and depressions	–100.00 to +100.00 c)

a) Minus moves left, plus moves right.
b) Minus moves down, plus moves up.
c) Plus emphasizes bumps in texture, minus emphasizes depressions. 0.00 is a flat surface.

Parameters when you selected Non Linear

Knob	Parameter	Adjustment	Setting values
5	Amp	Distance of light	–100.00 to +100.00 a)

a) Light appears from Z direction. At –100.00 the light goes deepest, at +100.00 the whole image is lit like a flat effect.

6 If you selected Texture in step **4**, select the pattern as explained in the next section "To select a texture pattern."

7 If you selected Texture in step **4**, select the way it is applied in the <Surface Axis> group.

Move: The texture moves together with the DME image.
Fix: The texture does not move, even if the DME image moves.

For the difference between these application methods, see "Coordinate axis on surface of image" (page 336).

Notes

If Non Linear is selected in the <Surface Select> group, Fix is disabled. Behavior is the same as Move.

To select a texture pattern

1 In the Spot Lighting menu, press [Texture Ptn Select].

The Texture Ptn Select menu appears.
Two lists appear in the status area. The list on the left displays the number and name of the currently selected texture. The list on the right is for selecting a texture.

2 In the <Texture Pattern> group, press [User] or [Factory] to select the texture pattern list.

User: List of texture patterns created by the user. *See "Adding User Texture Patterns" in Chapter 18 (Volume 2).*
Factory: List of texture patterns stored in the system when shipped from the factory.

3 Do one of the following to select a texture.

- Press directly on the list on the right of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Texture No	Texture	1 to 30 [a] 101 to maximum value [b]

a) When Factory is selected
b) When User is selected. The setting value range depends on the number of texture patterns installed.

4 Press [Set].

The texture selected in step **2** appears in the list on the left of the status area.

To set a test sphere

1 In the Spot Lighting menu, press [Test Sphere], turning it on.

A test sphere effect appears on the image surface.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
5	Amp	Distance of light	–100.00 to +100.00 [a]

a) Light appears from Z direction. At –100.00 the light goes deepest, at +100.00 the whole image is lit like a flat effect.

For details of the relationship of test spheres and light sources, see "Relation between test spheres and parallel rays" (page 338).

Setting light sources

Up to three light sources (Light 1 to Light 3) for Spotlighting can be set by menus.

Light source menu

The following three light source menus are available.

Light source	Menu
Light 1	DME >Light/Trail >Spot Lighting >Light 1
Light 2	DME >Light/Trail >Spot Lighting >Light 2
Light 3	DME >Light/Trail >Spot Lighting >Light 3

Notes

The BZDM-9050 Texture Lighting Software (for MVE-9000) is required to enable Light 2 and Light 3.
An install key must be entered to use the software.

For details, see "Installation and Device Setup (Install/Unit Config Menu)" in Chapter 18 (Volume 2).

To set light source data

The following example shows how to set light source data with the Light 1 menu.
If you use multiple light sources, use the same procedure for all light sources.

1 In the <Spot Lighting Adjust> group of the Spot Lighting menu, press [Light 1].

The Light 1 menu appears.

2 Press [Light 1], turning it on.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Total Ambient	Brightness of whole image	0.00 to 100.00
2	Intensity	Intensity (brightness) of the light source	0.00 to 100.00
3	Soft	Softness of the lighted area	0.00 to 100.00

- Lowering the brightness of the image makes Spotlighting more effective.
- The Total Ambient setting is shared with the Lighting function.

4 In the <Spot Mode> group, select the type of light source *(see page 337)*.

Parallel: Parallel light source. The direction can be set.

Point: Point light source. The position can be set.
Line: Line light source. The position and angle can be set.
Whole: Non-directional light source which illuminates the whole image (no settings).

5 According to the selected light source type, set the following parameters.

When you selected Parallel

Knob	Parameter	Adjustment	Setting values
1	Longitude	Longitude	–8.00 to +8.00 a)
2	Latitude	Latitude	–8.00 to +8.00

a) Minus moves counterclockwise, plus moves clockwise.

When you selected Point
• SD format

Knob	Parameter	Adjustment	Setting values
1	X	Movement in X-axis direction	–6.00 to +6.00 a)
2	Y	Movement in Y-axis direction	–6.00 to +6.00 b)
3	Z	Movement in Z-axis direction	–6.00 to +6.00 c)

a) Minus moves left, plus moves right.
b) Minus moves down, plus moves up.
c) Minus moves forward, plus moves deeper.

• HD format

Knob	Parameter	Adjustment	Setting values
1	X	Movement in X-axis direction	–24.00 to +24.00 a)
2	Y	Movement in Y-axis direction	–24.00 to +24.00 b)
3	Z	Movement in Z-axis direction	–24.00 to +24.00 c)

a) Minus moves left, plus moves right.
b) Minus moves down, plus moves up.
c) Minus moves forward, plus moves deeper.

When you selected Line

• SD format

Knob	Parameter	Adjustment	Setting values
1	X	Movement in X-axis direction	–6.00 to +6.00 a)
2	Y	Movement in Y-axis direction	–6.00 to +6.00 b)
3	Z	Movement in Z-axis direction	–6.00 to +6.00 c)
4	Longitude	Longitude	–8.00 to +8.00 d)

a) Minus moves left, plus moves right.
b) Minus moves down, plus moves up.
c) Minus moves forward, plus moves deeper.
d) Minus moves counterclockwise, plus moves clockwise.

• HD format

Knob	Parameter	Adjustment	Setting values
1	X	Movement in X-axis direction	–24.00 to +24.00 a)
2	Y	Movement in Y-axis direction	–24.00 to +24.00 b)
3	Z	Movement in Z-axis direction	–24.00 to +24.00 c)
4	Longitude	Longitude	–8.00 to +8.00 d)

a) Minus moves left, plus moves right.
b) Minus moves down, plus moves up.
c) Minus moves forward, plus moves deeper.
d) Minus moves counterclockwise, plus moves clockwise.

6 In the <Axis Select> group, select the coordinate space in which to place the light source.

Source: Place the light source in the source coordinate space. The spotlight moves when the image moves.
Target: Place the light source in the target coordinate space. The spotlight does not move, even when the image moves.

For details of the coordinate space in which to place the light source, see "Linking and unlinking image and spotlight" (page 337).

To set a test sphere

1 In the Light 1 menu, press [Test Sphere], turning it on.

A test sphere effect appears on the surface of the image.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
5	Amp	Distance of light	–100.00 to +100.00 a)

a) Light appears from Z direction. At –100.00 the light goes deepest, at +100.00 the whole image is lit like a flat effect.

To select the lighted area

In the <Area Select> group, select one of the following.
FRGD: The light strikes the image foreground.
BKGD: The light strikes the image background.
Both: The light strikes both foreground and background.

For more information about the lighted area, see "Selecting the lighted area" (page 337).

Notes

• If you select [Multiply] in the <Fill Blending Mode> group of the Light Color Adjust menu *(see page 343)*,

the light effect is not applied to the background, even if you select BKGD or Both.

- If the setting of [Brilliancy] in the <Fill Source> group of the Light Color Adjust menu *(see page 343)* is 100.00, the light effect is not applied to the background, even if you select BKGD or Both.
- When the global effect Combiner is set to Mix or Depth, the light effect is not applied to the background, even if you select BKGD or Both.

To select Surface Flat

Press [Surface Flat], turning it on.
If you have selected anything other than Flat in the <Surface Select> group of the Spot Lighting menu, the part corresponding only to the surface being struck by the currently set light from the light source is shown in the same way as if Flat had been selected.

To set the shape of the light

1 Press [Shape], turning it on.

2 Set the following parameters.

SD format

Knob	Parameter	Adjustment	Setting values
1	Shape Ptn	Shape pattern	1 to 2 a)
2	Size	Shape size	0.00 to 6.00
3	Deform	Amount of shape deformation	0.00 to 100.00 b)
4	Soft	Softness of shape pattern	0.00 to 100.00
5	Angle	Angle of shape pattern rotation	–8.00 to +8.00 c)

a) For more information about the shape patterns, see "Shape Patterns" *(page 409)* in the Appendix.
b) 0 is a round shape, and 100 is the shape of the pattern. Smaller values make the pattern more rounded.
c) –1.00 is one rotation in the counterclockwise direction. +1.00 is one rotation in the clockwise direction.

HD format

Knob	Parameter	Adjustment	Setting values
1	Shape Ptn	Shape pattern	1 to 2 a)
2	Size	Shape size	0.00 to 24.00
3	Deform	Amount of shape deformation	0.00 to 100.00 b)
4	Soft	Softness of shape pattern	0.00 to 100.00
5	Angle	Angle of shape pattern rotation	–8.00 to +8.00 c)

a) For more information about the shape patterns, see "Shape Patterns" *(page 409)* in the Appendix.
b) 0 is a round shape, and 100 is the shape of the pattern. Smaller values make the pattern more rounded.
c) –1.00 is one rotation in the counterclockwise direction. +1.00 is one rotation in the clockwise direction.

To rotate the shape pattern

1 Press [Shape Speed], turning it on.

The display on knob 5 that was visible when [Shape] was selected changes.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
5	Speed	Rotation direction and speed	–100.00 to +100.00 a)

a) –100.00 is four rotations per second in the counterclockwise direction, and +100.00 is four rotations per second in the clockwise direction. 0.00 stops the rotation.

To change the light to a ring shape

Notes

If you select Parallel or Whole *(see page 340)* in the <Spot Mode> group and shaping is disabled, the Ring parameter cannot be set.

1 Press [Ring], turning it on.

2 Set the following parameter.

SD format

Knob	Parameter	Adjustment	Setting values
1	Offset	Offset from center position (radius)	–6.00 to +6.00
2	Radius	Radius of ring	0.00 to 6.00
3	Angle	Rotation angle of ring	–8.00 to +8.00 a)

a) –1.00 is one rotation in the counterclockwise direction and +1.00 is one rotation in the clockwise direction.

Notes

There is no Radius setting when Line is selected in the <Spot Mode> group.

HD format

Knob	Parameter	Adjustment	Setting values
1	Offset	Offset from center position (radius)	–24.00 to +24.00
2	Radius	Radius of ring	0.00 to 6.00
3	Angle	Rotation angle of ring	–8.00 to +8.00 a)

a) −1.00 is one rotation in the counterclockwise direction and +1.00 is one rotation in the clockwise direction.

Notes

There is no Radius setting when Line is selected in the <Spot Mode> group.

To rotate the ring

1 Press [Ring Speed], turning it on.

The display on knob 3 that was visible when [Ring] was selected changes.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
3	Speed	Rotation speed and direction	–100.00 to +100.00 a)

a) −100.00 is four rotations per second in the counterclockwise direction, and +100.00 is four rotations per second in the clockwise direction. 0.00 stops the rotation.

To invert the lighted area

Press [Light Invert], turning it on.

To add color to the light source

1 In the Light 1 menu, press [Light Color Adjust].

The Light Color Adjust menu appears.

2 In the <Fill Blending Mode> group, select how the light and image should be blended.

Mix: Light as if reflected from a mirror.
Multiply: Light as if reflected from a dull surface (diffuse reflection).

3 If you selected Mix, select the fill color in the <Fill Source> group.

Flat Color: A monochrome matte.
Hue Rotation: Color matte with a color that gradually varies.

4 According to the selection, set the following parameters.

When you selected Flat Color

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00
4	Brilliancy	Brilliance of surface struck by light	0.00 to 100.00 a)

a) 100.00: The image beneath the light shines through.

When you selected Hue Rotation

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Speed	Speed at which hue changes	–12.00 to +12.00 a)
4	Brilliancy	Brilliance of surface struck by light	0.00 to 100.00 b)

a) −12.00 is a 360-degree rotation every second in the counterclockwise direction. +12.00 is a 360-degree rotation every second in the clockwise direction.
b) 100.00: The image beneath the light shines through.

Copying or swapping light source settings

You can copy or swap the setting from one light source (Light 1 to Light 3) to another light source.

1 In the Spot Lighting menu, press [Copy/Swap].

The Copy/Swap menu appears.
Two lists appear in the status area. The list on the left shows the copy or swap sources, and the list on the right shows the copy or swap destinations.

2 Do one of the following to select the target data.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Left No	Copy or swap source data	1 to 3
2	Right No	Copy or swap destination data	1 to 3

3 Press [Copy] to copy, or [Swap] to swap.

To undo a copy or swap

Press [Undo]. Settings are returned to their values before the copy or swap.

Applying Special Effects (Other Effects)

Background Settings

Adds a color or inputs an external signal to the background of the image.

Notes

Signal selection for this purpose is not supported on the MVE-8000A.

Applying the Background effect

1 In the DME menu, select VF6 'Input/Output' and HF1 'Bkgd.'

The Bkgd menu appears.

2 Press [Bkgd], turning it on.

The Background effect is enabled. Only if Flat Color is selected in the <Bkgd Fill> group, you can adjust the parameters with the knobs.

3 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Selecting the signal to insert in the background

When using the MVE-9000, you can select the signal to insert in the background.
With [Bkgd] set on, use the following procedure.

1 In the <Bkgd Fill> group, select one of the following.

Flat Color: single color
Mix Color: mix color signal set in the Color Mix menu *(see page 302)*
Ext Video: an external video signal input to the Ext IN connector

Notes

- "Mix Color" or "Ext Video" can only be applied to one of the background, flex shadow *(see page 296)*, trail *(see page 331)*, and wind *(see page 335)* effects. If you select "Mix Color" or "Ext Video" in one of these settings, a selection of "Mix Color" or "Ext Video" in any of the other effects is disabled, and "Flat Color" is selected in its place.
- When executing combining four channels of DME images, "Mix Color" and "Ext Video" cannot be selected.

2 Only if Flat Color is selected in step **1**, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00

Separate Sides Settings

Applies separate video signals and key signals to the front and back of the image.

Applying the Separate Sides effect

1 In the DME menu, select VF6 'Input/Output' and HF2 'Video/Key.'

The Video/Key menu appears.

2 Press [Separate Side], turning it on.

The Separate Sides effect is enabled. If the video and key signals currently being output to the monitor are the front side, you can select the front signals. If they are the back side, you can select the back signals. Video and key signals are selected with the cross-point control blocks of each M/E bank or the PGM/PST bank.

Shaped Video Settings

For each of the front and back sides of the image, specifies whether to handle input video from the switcher as shaped video (key processed signals).
You can also make these settings for the output video.

Notes

- When using an SDI interface, with the [PROC KEY] not selected in the output destination buttons, then the shaped video function is enabled.
- When using the dedicated interface or SDI interface, with [PROC KEY] selected in the output destination buttons, since the input video signal to the first channel is always set to the key processed signal on the switcher, the shaped video setting is always on. For the second and

third channel signals, this will be turned off. For the output video, this is always on.

Switching shaped video on or off

1 In the DME menu, select VF6 'Input/Output' and HF2 'Video/Key.'

The Video/Key menu appears.

2 In the <Shaped Video> group, press each of the following buttons to switch it on or off.

Front Input: When this is on, the front image of the input video signal is treated as shaped video.
Back Input: When this is on, the back image of the input video signal is treated as shaped video.
Output: When this is on, the output video signal is treated as shaped video.

About on and off for shaped video input (Front Input/Back Input)

Switch shaped video on and off according to the input video signals.
For example, switch the shaped video input on when the input signal is a key processed image such as computer graphics.
Switch the shaped video input off when the input signal is not key processed, for example when a video signal taken with a camera is cut out with a title or other key signal.

About on and off for shaped video output

Switch the shaped video output on and off to match the on and off state of the switcher clean video mode.
Also, when the shaped video output is on, it is recommended that the switcher key type be set to linear key.

About the relationship between shaped video output and effects

When the shaped video output is off, the video signal before key processing is output. According to the selected effect, the following states may result.
(a) The output video signal is affected by the key signal.
(b) When key processing is done, a different image may appear in the parts which are removed.
(c) There is no change in the output video signal for effects which are applied to key signals only.

When multiple effects are applied, the order of priority is (a) > (b) > (c).
The following explains the relationship between effects and states (a), (b), and (c).

(a) The output video signal is affected by the key signal

The output video signal is affected by the key signal when the following effects are selected. To prevent the signal from being affected, set the DME key source to Int Key, or choose an appropriate input key signal.

Page Turn, Roll, Cylinder, Sphere, Spotlighting, global effects (Combiner, Brick, Shadow)

(b) When key processing is done, a different image may appear in the parts which are removed

The following states result, depending on the selected effect.
Removal with the key can be checked by turning the background on.

Border, Beveled Edge: Added also to the outer side of the cropped video signal.
Trail, Keyframe Strobe: The key signal level of the afterimage portion varies with adjustments of the knob (Decay), but the afterimage portion of the video signal does not disappear until Trail Eraser (KF Strobe Eraser) is turned on or the effect is turned off.
Lighting: The Lighting effect is applied to the whole picture.
Spotlighting: If BKGD or Both is selected in the <Area Select> group, light strikes the entire background.

(c) No change in the output video signal for effects which are applied to key signals only

The following states result, depending on the selected effect.
Removal with the key can be checked by turning the background on.

Crop: The Copy effect is applied to the key signal only. The video signal does not change.
Edge Soft: The Edge Soft effect is applied to the key signal only. The video signal does not change.
Shadow, Flex Shadow, Combine Shadow: The key signal density changes. The video signal does not change.
Fade: The key signal density changes according to depth data. The video signal does not change.
Key Density: The key signal density changes. The video signal does not change.

Invert Settings

Inverts the input video signal and/or key signal horizontally or vertically. You can make separate settings for the front and back.

Applying the Invert effect

1 In the DME menu, select VF6 'Input/Output' and HF2 'Video/Key.'

The Video/Key menu appears.

2 In the <Front> group (to invert front signals) or the <Back> (to invert back signals), press the following buttons, turning them on.

H Invert: Invert video and key signals horizontally.
V Invert: Invert video and key signals vertically.

Key Density Settings

You can adjust the key density for the key signal input to the DME.

Setting the key density

1 In the DME menu, select VF6 'Input/Output' and HF2 'Video/Key.'

The Video/Key menu appears.

2 Press [Key Density], turning it on.

3 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Key Density	Key density	0.00 to 100.00

Key Source Selection

You can select either the key signals received from the switcher or the key signals generated in the DME for application to the front and back of the image.

Selecting the key source signals

Notes

When the shaped video setting *(see page 344)* is on, it is not possible to select the key source. It is fixed as "Ext Key" as listed in the following.

1 In the DME menu, select VF6 'Input/Output' and HF2 'Video/Key.'

The Video/Key menu appears.

2 In the <Front Key> group or <Back Key> group respectively, press one of the following, turning it on.

Ext Key: Use the key signal sent from the switcher as the key source.
Int Key: Use the full-size DME internal key signal as the key source.
Lum Key: Use the input video luminance signal as the key source.

3 When Ext Key or Lum Key is selected in step **2**, set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Clip	Reference level for key signal generation	–7.31 to +109.59
2	Gain	Key sensitivity	–100.00 to +100.00

Notes

- The Ext Key and Lum Key in the <Front Key> group share clip and gain settings. Similarly, Ext Key and Lum Key in the <Back Key> group also share clip and gain settings.
- The Ext Key parameter setting is only enabled when the shaped video setting is off.

Interpolation Settings

Specifies the methods used for interpolation processing of input video signals and input key signals.
For input video signals, you can select from the following four methods.

- Detect changes in the luminance and chrominance signals separately, and switch automatically between fields and frames. You can select the degree of change detection.
- Detect changes in the luminance signal separately, and switch automatically between fields and frames. You can select the degree of change detection.
- Do interpolation in field units.
- Do interpolation in frame units.

For input key signals, you can select from the following three methods.

- Detect changes in the luminance signal separately, and switch automatically between fields and frames. You can select the degree of change detection.
- Do interpolation in field units.
- Do interpolation in frame units.

You can also select the number of pixels used in interpolation processing, and select the method used to show the picture reduced or expanded.
Further, you can apply an anti-moiré filter to reduce the moiré patterns created by interpolation.

Notes

- Interpolation processing is possible for the following signal formats and DME systems.
  - MVE-8000A: 480i/59.94, 576i/50
  - MVE-9000 and MKS-7470X/7471X: 480i/59.94, 576i/50, 1080i/59.94, 1080i/50
- The anti-moiré filter is effective when using the MVE-8000A.

Selecting an interpolation method for input video signals

1 In the DME menu, select VF6 ‘Input/Output’ and HF3 ‘Process.’

2 In the <Video Field/Frame Mode> group, select the interpolation method for the video signal.

Adaptive Y/C: Detect changes in the luminance and chrominance components of the video signal separately, and switch automatically between fields and frames.
Adaptive Y: Detect changes in the luminance component of the video signal separately, and switch automatically between fields and frames.
Field: Do interpolation in field units. This gives natural movement, suitable for moving video.
Frame: Do interpolation in frame units. This gives higher image precision, suitable for still pictures.

3 When you select Adaptive Y/C or Adaptive Y in step **2**, set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Mode	Degree of motion detection	1 to 4

4 In the <Key Field/Frame Mode> group, select the interpolation method for the key signal.

Adaptive: Detect changes in the luminance component of the key signal separately, and switch automatically between fields and frames.
Field: Do interpolation in field units. This gives natural movement, suitable for moving video.
Frame: Do interpolation in frame units. This gives higher image precision, suitable for still pictures.

5 When you select Adaptive in step **4**, set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Mode	Degree of motion detection	1 to 4

6 In the <Interpolation Mode> group, set the number of pixels to use in interpolation.

Multi: Use multi-point interpolation. This gives higher picture quality.
Linear: Use two-point interpolation.

7 In the <Filter Mode> group, select the method used to show the picture reduced or expanded.

Mode1 (standard): Even when the picture is reduced, add compensation so that it can be seen clearly.
Mode2 (soft): Suppress aliasing when expanding or reducing the picture.
Mode3 (sharp): Do not suppress aliasing when expanding or reducing the picture.

Applying the anti-moiré filter

You can reduce the moiré patterns created by interpolation when an image is enlarged, compressed, or rotated.

Notes

This function is effective when using MVE-8000A.

1 In the DME menu, select VF6 ‘Input/Output’ and HF3 ‘Process.’

The Process menu appears.

2 Press [Anti Moire Filter], turning it on.

3 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Anti Moire Filter	Amount of moiré reduction	1 to 8

Corner Pinning Settings

Notes

When the Brick effect is enabled, the Corner Pinning function cannot be used.

Setting the Foreground Corner Pinning positions

1 In the DME menu, select VF4 ‘Non Linear/Corner Pin’, HF2 ‘Corner Pinning.’

The Corner Pinning menu appears.

2 Set [Corner Pinning] to On.

3 Set [Corner Marker] to On.

A marker appears for each corner. The marker for the selected corner is distinguished from the other markers.



4 In the <Corner Select> group, select the corner to operate on.

Top Left: Top left
Top Right: Top right
Bottom Left: Bottom left
Bottom Right: Bottom right
All: All four corners

5 Turn the knobs to adjust the position of the corner selected in step **4**.

The parameter setting ranges depend on the system's selected signal format (SD/HD) and aspect ratio (4:3/16:9) combination, as follows.

4:3 mode

Knob	Parameter	Adjustment	Setting values
1	Pos X	Movement in X-axis direction	–8.00 to +8.00 (SD) a) –24.00 to +24.00 (HD) a)
2	Pos Y	Movement in Y-axis direction	–6.00 to +6.00 (SD) a) –18.00 to +18.00 (HD) a)

a) When the selection for operation is "All," the Top Left value appears, and the knobs move all four corners correspondingly.

16:9 mode

Knob	Parameter	Adjustment	Setting values
1	Pos X	Movement in X-axis direction	–8.00 to +8.00 (SD) a) –32.00 to +32.00 (HD) a)
2	Pos Y	Movement in Y-axis direction	–4.50 to +4.50 (SD) a) –18.00 to +18.00 (HD) a)

a) When the selection for operation is "All," the Top Left value appears, and the knobs move all four corners correspondingly.

Resetting the corner positions

In the Corner Pinning menu, press [Reset Corner].

Selecting the area used for pinning

When the foreground is cropped, press [Crop Link] to select either of the following.

On: Use the area of the cropped image for positioning

Off: Use the area of the entire image, including the part hidden by cropping (shaded in the diagram below) for positioning



Area positioned by pinning when Crop Link is On



Area positioned by pinning when Crop Link is Off

(The bold frame shows the area used for positioning.)

Adjusting the density of the foreground

You can adjust the density of the foreground image to be translucent so that the background shows through, making it easier to position the corners.

Notes

This setting is not saved in a key frame or snapshot.

1 In the Corner Pinning menu, set [Video Through] to On.

2 Turn the knob to adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
4	Density	Image density	0.00 to 100.00

Adjusting the zoom

You can enlarge the image around the corner being adjusted, to allow fine positioning of the corner.

Notes

- This setting is not saved in a key frame or snapshot.
- This function is only enabled when combine is set.
- When all four corners are being positioned, this function cannot be used.

1 In the Corner Pinning menu, press [Zoom Enable], turning it On.

2 Turn the knob to adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
5	Zoom	Degree of zooming in on the corners	1.00 to 16.00



Zoom Off



Zoom On



Global Effect Operations

Overview

Global effects are special effects created by combining the images of successive channels. The Global Effect menu is used to add these effects. The following types of global effects are available.

Notes

On the MVE-8000A, when the signal format is 1080P, of the following effects, three or more channel combiner and brick effects cannot be used.

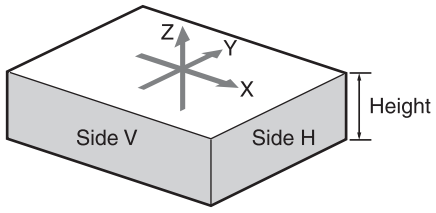Name	Effect/Image
Combiner	Automatically combines the selected images when multiple channels are selected on one keyer or for one transition.
Brick	Creates a rectangular parallelepiped from 3 successive channels. 
Shadow	Gives the image a shadow. 

Operations Common to All Global Effects

In this section, explanations of the operating procedures for individual global effects begin with selections from VF1 ‘Ch1 - Ch4’ in the Global Effect menu. The following are common operations that you must do prior to selecting from this menu.

1 In the device control block, select the target DME channel.

2 In the menu control block, press the top menu selection button [GLB EFF], then select VF1 ‘Ch1 - Ch4.’

The Global Effect >Ch1 - Ch4 menu appears.


Combiner Settings

When multiple channels are selected on one keyer or for one transition, the Combiner automatically combines the selected images. Up to four channels can be combined. You can also control the way in which the combination is carried out, as a mix or an overlap with priority set automatically. For a mix, you can control the relative amounts of each channel.
Images can also be crossed in three dimensions.


Notes

Three-dimensional image crossing is not supported on the MVE-8000A.


Combination of channel 1 (Ch1) and channel 2 (Ch2)

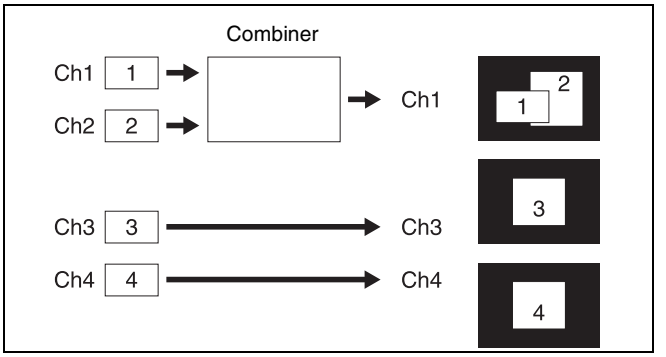


Combination of Ch1, Ch2, and Ch3

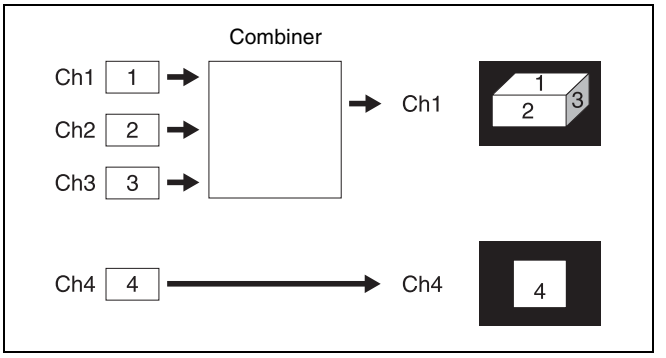


Combination of Ch1 and Ch2 / combination of Ch3 and Ch4

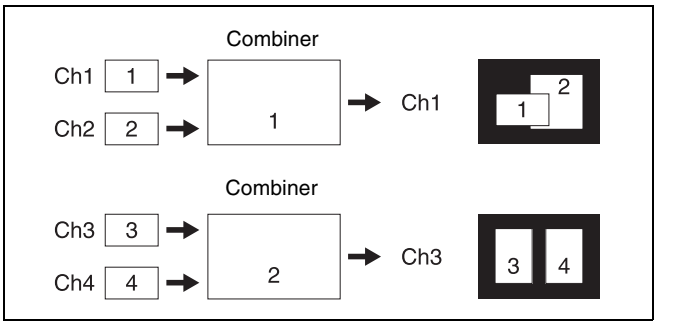

Combination of Ch1, Ch2, Ch3, and Ch4

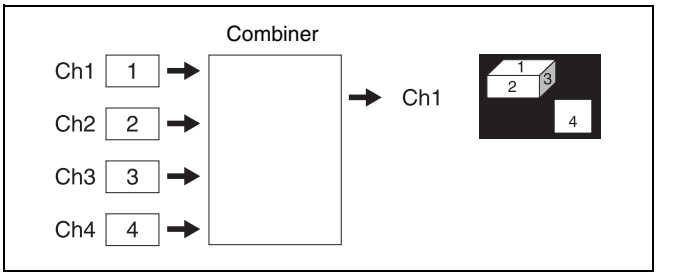


Mixing Ch1 and Ch2

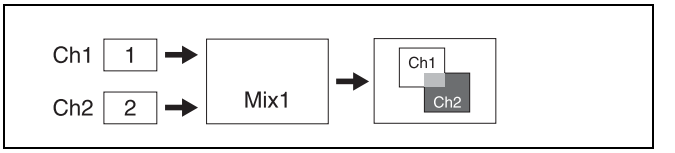

If the Mix1 setting is 70, the proportion of the channels in the mixed portion in the previous illustration is as shown in the following table.

Combination	Indication in figure	Ch1	Ch2
Ch1 and Ch2		30%	70%

Mixing Ch1, Ch2, and Ch3

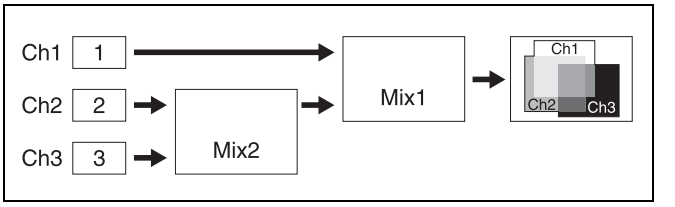


If the Mix1 setting is 70 and the Mix2 setting is 40, the proportions of the channels in the mixed portions in the previous illustration are as shown in the following table.

Combination	Indication in figure	Ch1	Ch2	Ch3
Ch1 and Ch2		30%	70%	–
Ch2 and Ch3		–	60%	40%
Ch1 and Ch3		30%	–	70%

Combination	Indication in figure	Ch1	Ch2	Ch3
Ch1, Ch2, and Ch3		30%	42%	28%


Pairwise mixing of Ch1 and Ch2, and Ch3 and Ch4

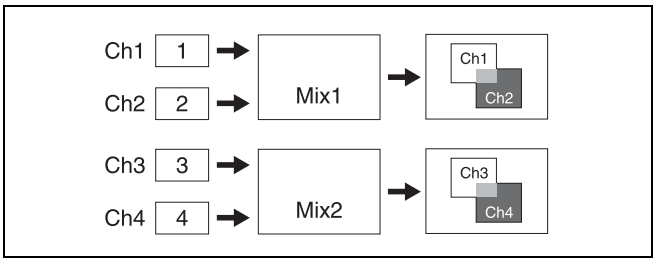

If the Mix1 setting is 70 and the Mix2 setting is 40, the proportions of the channels in the mixed portions in the previous illustration are as shown in the following table.

Combination	Indication in figure	Ch1	Ch2	Ch3	Ch4
Ch1 and Ch2		30%	70%	–	–
Ch3 and Ch4		–	–	60%	40%

Ch1 crossed with Ch2

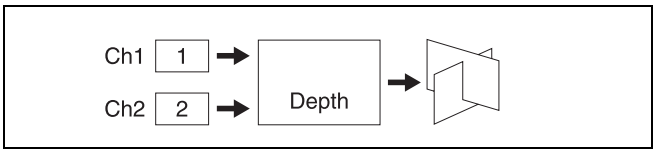

Setting the combiners

The setting menu differs according to the combiner usage status.
This section shows the cases of “Ch1+Ch2+Ch3” and “Ch1+Ch2, Ch3+Ch4” as examples.

For details of operating procedures when using an SDI interface, see “Procedure for combine operation when using an SDI interface” (page 351).


1 In the Global Effect >Ch1- Ch4 menu, select HF1 ‘Combiner Priority.’

The Combiner Priority menu appears.


2 If [Mix], [Auto] or [Depth] is on, turn it off.

3 Set the overlap priority for “Ch1+Ch2+Ch3” or “Ch1+Ch2, Ch3+Ch4” as follows.

For case “Ch1+Ch2+Ch3”
Under <Priority1> to <Priority3>, press [Ch1], [Ch2], and [Ch3], respectively, to set the overlap priority.
Priority1: Select the channel with the highest priority.
Priority2: Select the channel with the second highest priority.
Priority3: Select the channel with the lowest priority.

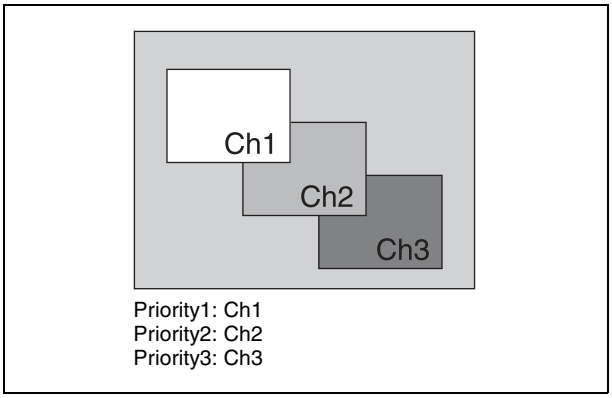

For case “Ch1+Ch2, Ch3+Ch4”
Under <Combiner 1 Priority 1> and <Combiner 1 Priority 2>, press [Ch1] and [Ch2], respectively, and under <Combiner 2 Priority 1> and <Combiner 2 Priority 2>, press [Ch4] and [Ch3], respectively, to set the priorities for overlaying the images.

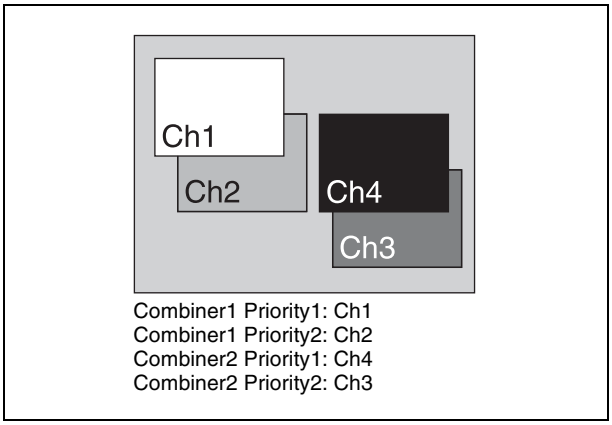

Procedure for combine operation when using an SDI interface

Use the following procedure only when the DME with an SDI interface.

Notes

It is not possible to select channels with buttons in the key control block.
In the following, the example given is that channels 2 and 3 are combined, then channels 1+2 and channels 3+4 are combined, but other combinations are also possible.

1 In the Global Effect menu, select VF1 ‘Ch1-Ch4’ and HF7 ‘Combine Gp Select.’

The Combine Gp Select menu appears.

2 In the <Combine Gp Select> group, select the channel combination.

- To combine channels 2 and 3, press [Ch2+Ch3], turning it on.
- To combine the previously combined combinations of channels 1 and 2, and channels 3 and 4, press [Ch1+Ch2] and [Ch3+Ch4], turning them on.

Notes

The only two buttons that can be selected simultaneously are the combination of [Ch1+Ch2] and [Ch3+Ch4].

The selected channels are combined.

To cancel a combine

When for example [Ch2+Ch3] is on, pressing [Ch2+Ch3] once more turns it off. Alternatively, pressing a different combination button to select it cancels the combine selection for the current combination.

Mixing the images of up to four consecutive channels

1 In the Combiner Priority menu, press [Mix], turning it on.

2 Adjust the following parameters.

For case "Ch1+Ch2"

Knob	Parameter	Adjustment	Setting values
1	Mix	Mix degree	0.00 to 100.00 a)

a) See "Mixing Ch1 and Ch2" *(page 350)*.

For case "Ch1+Ch2+Ch3"

Knob	Parameter	Adjustment	Setting values
1	Mix1	Mix degree for mix of channel 1 with result of Mix2	0.00 to 100.00 a)
2	Mix2	Mix degree for channels 2 and 3	0.00 to 100.00 a)

a) See "Mixing Ch1, Ch2, and Ch3" *(page 350)*.

For case "Ch1+Ch2+Ch3+Ch4"

Knobs 1 and 2 set the same parameters as "For case 'Ch1+Ch2+Ch3'," respectively. Knob 3 is additionally effective, which sets the parameter Mix3 (in the same setting value range as with knobs 1 and 2).

Mixing pairwise the images of channels 1 and 2, and channels 3 and 4

1 In the Combiner Priority menu, press [Combiner1 Mix], turning it on.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Mix1	Mix degree for channels 1 and 2	0.00 to 100.00 a)

a) See "Pairwise mixing of Ch1 and Ch2, and Ch3 and Ch4" *(page 351)*.

3 Press [Combiner2 Mix], turning it on.

4 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Mix2	Mix degree for channels 3 and 4	0.00 to 100.00 a)

a) See "Pairwise mixing of Ch1 and Ch2, and Ch3 and Ch4" *(page 351)*.

Automatically setting the priority of overlapping images

To set the system so that the priority of overlapping images is automatically determined by their position on the Z-axis, in the Combiner Priority menu, press [Auto], turning it on.

Notes

It is not possible to cross images. If an image is rotated, the priority is determined by the position on the Z-axis of the center of the image.

Crossing images from up to four consecutive channels in three dimensions

Notes

The three-dimensional crossing function is not supported on the MVE-8000A.

1 In the Combiner Priority menu, press [Depth], turning it on.

2 Set the following parameters.

For case "Ch1+Ch2"

Knob	Parameter	Adjustment	Setting values
1	Soft	Softness of edges of crossed section	0.00 to 100.00

For case “Ch1+Ch2+Ch3”

Knob	Parameter	Adjustment	Setting values
1	Soft1	Softness of edges of channel 1 and channel 2 crossed section	0.00 to 100.00
2	Soft2	Softness of edges of channel 2 and channel 3 crossed section	0.00 to 100.00

For case “Ch1+Ch2+Ch3+Ch4”
Knobs 1 and 2 set the same parameters as “For case ‘Ch1+Ch2+Ch3’,” respectively. Knob 3 is additionally effective, which sets the parameter Soft3 (in the same setting value range as with knobs 1 and 2).

Crossing images from channels 1 and 2, and channels 3 and 4 in three dimensions

Notes

The three-dimensional crossing function is not supported on the MVE-8000A.

1 In the Combiner Priority menu, press [Combiner1 Depth], turning it on.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Soft1	Softness of edges of channel 1 and channel 2 crossed section	0.00 to 100.00


3 Press [Combiner2 Depth], turning it on.

4 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Soft2	Softness of edges of channel 3 and channel 4 crossed section	0.00 to 100.00

Brick Settings

Brick allows you to create a rectangular parallelepiped by using images of three consecutive channels.
The Brick effect can combine Ch1, Ch2, and Ch3, or combine Ch2, Ch3, and Ch4. The three images are displayed as shown in the following figure.

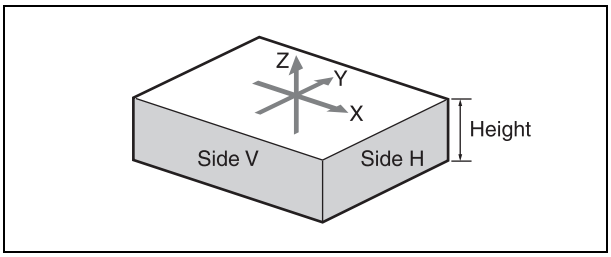

Combinations of Ch1, Ch2, and Ch3
Upper side: Ch1 image
Side V: Ch2 image
Side H: Ch3 image

Combinations of Ch2, Ch3, and Ch4
Upper side: Ch2 image
Side V: Ch3 image
Side H: Ch4 image
You can adjust the height of the brick, the overlap between the three images and the way to insert the side images.

Applying the Brick effect

1 In the Global Effect >Ch1 - Ch4 menu, select HF2 ‘Brick.’

The Brick menu appears.

2 Press [Brick], turning it on.

The Brick effect is enabled, and a rectangular parallelepiped (brick) showing the images of three channels appears. You can use the knobs to adjust parameters for the height of the brick and the overlap between the three images.

Notes

- When the Brick effect is enabled, the Z-axis position of the front image in the source coordinate frame is shifted by the amount of half the height. Therefore, the image is somewhat magnified.
- The flex shadow function cannot be enabled when Brick is enabled.

However, the flex shadow function is not supported on the MVE-8000A.

3 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Height	Height of brick	0.00 to 8.00 [a] 0.00 to 32.00 [b]
2	Front Overlap	Front overlap	–100.00 to +100.00
3	Side H Overlap	Side H overlap	–100.00 to +100.00
4	Side V Overlap	Side V overlap	–100.00 to +100.00

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

4 Specify the way to insert the side images when the height is changed by pressing one of the following buttons in the <Side V> group or the <Side H> group.

Crop: Crop the parts that do not fit into the side without shrinking the picture. You can set the following parameters.
The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

• 4:3 mode

Knob	Parameter	Adjustment	Setting values
1	H	Position of left crop	–4.00 to +4.00 (SD) –12.00 to +12.00 (HD)
2	V	Position of top crop	–3.00 to +3.00 (SD) –9.00 to +9.00 (HD)
3	Rotation	Angle of rotation, when rotated around the Z-axis of the source space	0/90/180/270°

• 16:9 mode

Knob	Parameter	Adjustment	Setting values
1	H	Position of left crop	–4.00 to +4.00 (SD) –16.00 to +16.00 (HD)
2	V	Position of top crop	–2.25 to +2.25(SD) –9.00 to +9.00 (HD)
3	Rotation	Angle of rotation, when rotated around the Z-axis of the source space	0/90/180/270°

The set position becomes the upper left corner of Side V or Side H. The right and bottom sides of the inserted image are set automatically.

Compress: Images are inserted after being compressed. You can set the following parameters.
The valid ranges of the parameter values depend on the combination of signal format (SD/HD) and aspect ratio (4:3/16:9) selected in the system, as follows.

• 4:3 mode

Knob	Parameter	Adjustment	Setting values
1	Top	Position of top crop	–2.83 to +3.00 (SD) –8.50 to +9.00 (HD)
2	Left	Position of left crop	–4.00 to +3.83 (SD) –12.00 to +11.50 (HD)
3	Right	Position of right crop	–3.83 to +4.00 (SD) –11.50 to +12.00 (HD)
4	Bottom	Position of bottom crop	–3.00 to +2.83 (SD) –9.00 to +8.50 (HD)
5	Rotation	Angle of rotation, when rotated around the Z-axis of the source space	0/90/180/270°

• 16:9 mode

Knob	Parameter	Adjustment	Setting values
1	Top	Position of top crop	–2.12 to +2.25 (SD) –8.50 to +9.00 (HD)
2	Left	Position of left crop	–4.00 to +3.87 (SD) –16.00 to +15.50 (HD)
3	Right	Position of right crop	–3.87 to +4.00 (SD) –15.50 to +16.00 (HD)
4	Bottom	Position of bottom crop	–2.25 to +2.12 (SD) –9.00 to +8.50 (HD)
5	Rotation	Angle of rotation, when rotated around the Z-axis of the source space	0/90/180/270°

The part of the image defined by Top, Left, Right, and Bottom is magnified or shrunk to fit into Side V or Side H.

To invert the image in a side face


For example, to invert the image on the front of Side H in the <Side H Front> group, press the following buttons, turning them on.

Invert H: To invert horizontally.

Invert V: To invert vertically.

For the images on the other faces, use a similar operation in the following groups:

- Back image of Side H: <Side H Back> group
- Front image of Side V: <Side V Front> group
- Back image of Side V: <Side V Back> group

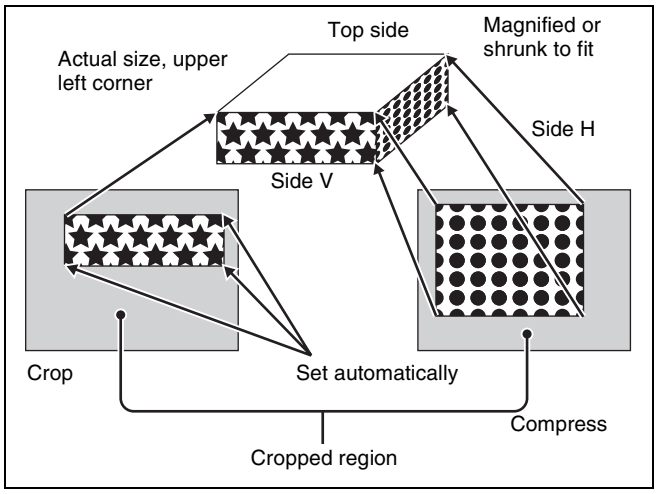

Shadow Settings

The effect uses two successive channels. You can adjust the position and density of the shadow with respect to the image, and the color of the shadow. The channel with the largest number (for example, Ch2 in the case of Ch1 and Ch2) becomes the shadow.

Notes

When the Combiner function is off, the shadow effect cannot be used.

Applying the Drop Shadow effect

The Shadow menu allows you to apply the Drop Shadow effect. To access the Shadow menu, in the Global Effect >Ch1 - Ch4 menu select HF3 'Shadow.'
Depending on the selected combiner channels, the valid buttons differ as follows.

Combiner channel selection	Button				
	Ch1 Shadow	Ch2 Shadow	Ch3 Shadow	Ch1+ Ch2 Shadow	Ch2+ Ch3 Shadow
Ch1+Ch2	Valid				
Ch2+Ch3		Valid			
Ch3+Ch4			Valid		
Ch1+Ch2 +Ch3	Valid	Valid		Valid	
Ch2+Ch3 +Ch4		Valid	Valid		Valid
Ch1+Ch2 +Ch3+Ch 4	Valid	Valid	Valid	Valid	

Taking Ch1 Shadow as an example, the following explains the procedure for applying the Drop Shadow effect.

1 Press [Ch1 Shadow], turning it on.

The Drop Shadow effect is enabled, and channel 2 becomes the channel for the shadow to the image. You can adjust the position and density of the shadow with the knobs.

Notes

The flex shadow function cannot be enabled when Drop Shadow is enabled.
However, the flex shadow function is not supported on the MVE-8000A.

2 Set the parameters.

Knob	Parameter	Adjustment	Setting values
1	Position H	Horizontal shadow position	–8.00 to +8.000 a) –32.00 to +32.000 b)
2	Position V	Vertical shadow position	–8.00 to +8.000 a) –32.00 to +32.000 b)
3	Density	Density of shadow	0.00 to 100.00

a) Setting for SD 4:3, SD 16:9
b) Setting for HD 4:3, HD 16:9

3 In the <Ch1 Shadow Source> group, select the shadow source signal.


Video: Select Ch2 video input as the shadow.
Flat Color: Select a matte color as the shadow.

4 When you select Flat Color in step **3**, adjust the parameters.

Knob	Parameter	Adjustment	Setting values
1	Luminance	Luminance	0.00 to 100.00
2	Saturation	Saturation	0.00 to 100.00
3	Hue	Hue	359.99 to 0.00


To combine the video images after applying a shadow

Use the Combiner function to select channel 1 + channel 2 and channel 3 + channel 4, then turn [Ch 1 Shadow] and [Ch 3 Shadow] on.



To apply a shadow after combining the video images

Use the Combiner function to select channel 1 + channel 2 + channel 3 + channel 4, then turn [Ch 1 + Ch 2 Shadow] on.

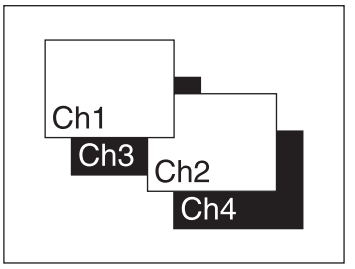





Appendix (Volume 1)

Wipe Pattern List

Interpreting the illustrations for patterns

The black part of the pattern represents the old video, and the white part the new video, with the wipe taking place in the direction of the arrow.

Standard Wipes

1		2		3		4		5		6	
7		8		9		10		11		12	
13		14		15		16		17		18	
19		20		21		22		23		24	















Enhanced Wipes

26		27		29		49		300		301	
302		303		304							

Rotary Wipes

100		101		102		103		104		105	
106		107		150		151		156		158	
160		162		516		518		604		606	
624		661									

Mosaic Wipes

200		201		202		203		206		207	
208		209		210		211		212		213	
220		221		222		223		224		225	
226		227		228		229		230		231	
232		233		234		235		236		237	
238		239		240		241		242		243	
244		245		246		247		250		251	
252		253		254		255		256		257	
260		261		262		263		264		265	
266		267		268		269					

Random/Diamond Dust Wipes

270		271		272		273		274	





DME Wipe Pattern List

Notes


When 3M/E mode or 4M/E mode is selected on the MVS-7000X, there are cases in which utility bus 1 (U1) appears instead of utility bus 2 (U2) and utility bus 2 (U2) does not appear.

DME Wipe Patterns Available in One-Channel Mode





Slide

1001		1002		1003		1004		1005		1006	
1007		1008									

Split

1011		1012		1013	

Squeeze

1021		1022		1023		1024		1025		1026	
1027		1028		1029		1030		1031			

Door

1041		1042		1043		1044		1045		1046	
1047		1048									


2D trans

1051		1052		1053		1054		1055		1056	
1057		1058		1061		1062		1063		1064	
1068											


3D trans

1071		1072		1074		1076		1077		1088	
1091		1092		1093		1094					

Flip tumble

1101		1102		1103		1104		1109		1110	
1121		1122		1124		1131		1132		1133	
1135											

Frame in-out

1201		1202		1203		1204		1205		1206	
1207		1208		1221		1222		1223		1224	

Picture-in-picture

1251	

Page turn

1301		1302		1303		1304		1305		1306	
1307		1308		1309		1310		1311		1312	
1313		1315		1316		1317		1318		1341	
1342		1343		1344		1345					

Page roll

1321		1322		1323		1324		1325		1326	
1327		1328		1329		1330		1331		1332	
1333		1335		1336		1337		1338		1346	
1347		1348		1349		1350					

Mirror

1355		1356		1357		1358	

Sphere

1365	

Character trail

1371		1372	


Wave

1378		1379	


Ripple

1381	

Split slide

1384		1385		1386		1387		1388		1389	

Sparkle

1391		1393		1394		1396		1398		1399	

Mosaic

1701	

Defocus

1702	







User programmable DME

The illustrations for patterns 1901 to 1999 show an effect register number or register name.







1901		• • •	1999	

DME Wipe Patterns Available in Two-Channel Mode





Slide

2601		2602		2603		2604		2605		2606	
2607		2608									


Squeeze

2621		2622		2623		2624		2625		2626	
2627		2628									

3D trans

2631		2632		2633		2634		2642		2644	

Picture-in-picture

2651		2652	

Page turn

2701		2702		2703		2704		2705		2706	
2707		2708		2709		2710		2711		2712	
2713		2715		2716		2717		2718		2741	
2742		2743		2744		2745					



Page roll

2721		2722		2723		2724		2725		2726	
2727		2728		2729		2730		2731		2732	
2733		2735		2736		2737		2738		2746	
2747		2748		2749		2750					

Brick


2801		2802		2803		2804		2811		2812	
2813		2814									

Frame in-out

2851		2852		2853		2854		2861		2862	
2863		2864									


User programmable DME

The illustrations for patterns 2901 to 2999 show an effect register number or register name.

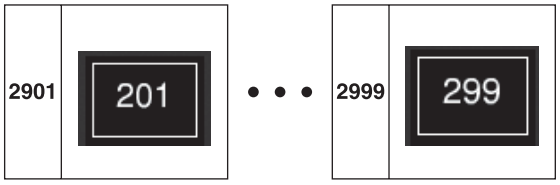


DME Wipe Patterns Available in Three-Channel Mode

Brick






User programmable DME

The illustrations for patterns 3901 to 3999 show an effect register number or register name.




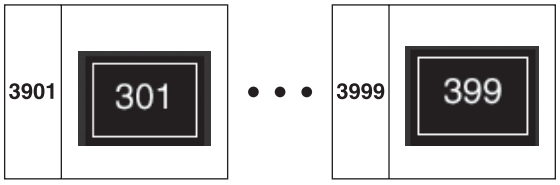


Resizer DME Wipe Pattern List

Slide

7001		7002		7003		7004		7005		7006	
7007		7008									

Squeeze

7021		7022		7023		7024		7025		7026	
7027		7028		7029		7030		7031			


Frame in-out

7201		7202		7203		7204		7205		7206	
7207		7208		7221		7222		7223		7224	

Menu Tree

Recalling Menus

This section details the menu structure, and shows the top menu selection buttons in the menu control block which are used to access the menus.

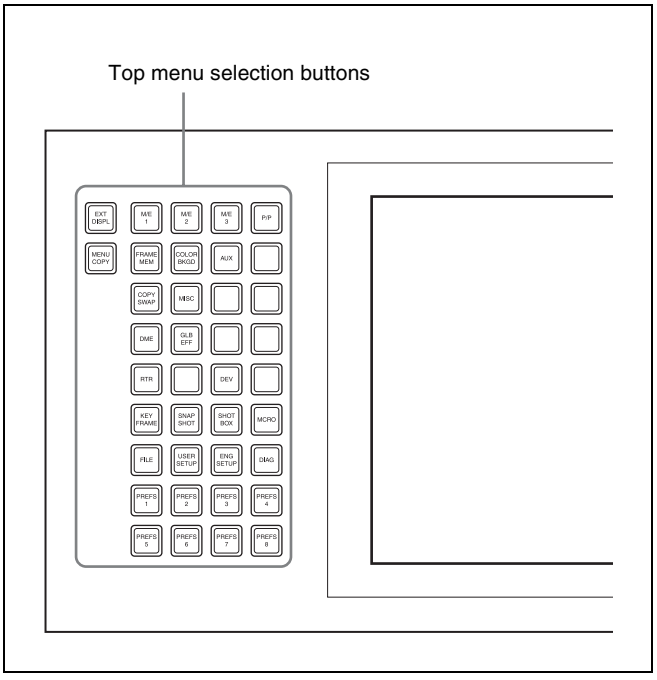

Menu control block

Some menus can also be accessed by pressing other buttons twice in rapid succession.

For more details, see "Overview" (page 75).

Notes

Some menus may not appear, depending on the model.

M/E-1 to M/E-5 Menus


The functions in the M/E-1, M/E-2, M/E-3, M/E-4, and M/E-5 menus are the same, but the menu page numbers are distinguished as follows.

M/E-1 menus: 11xx, M/E-2 menus: 12xx,
M/E-3 menus: 13xx, M/E-4 menus: 81xx,
M/E-5 menus: 82xx


In this section, the numbers for the M/E-1 menus are given as examples.

Notes

M/E-5 menus are displayed only in 6M/E configurations on the MVS-7000X.

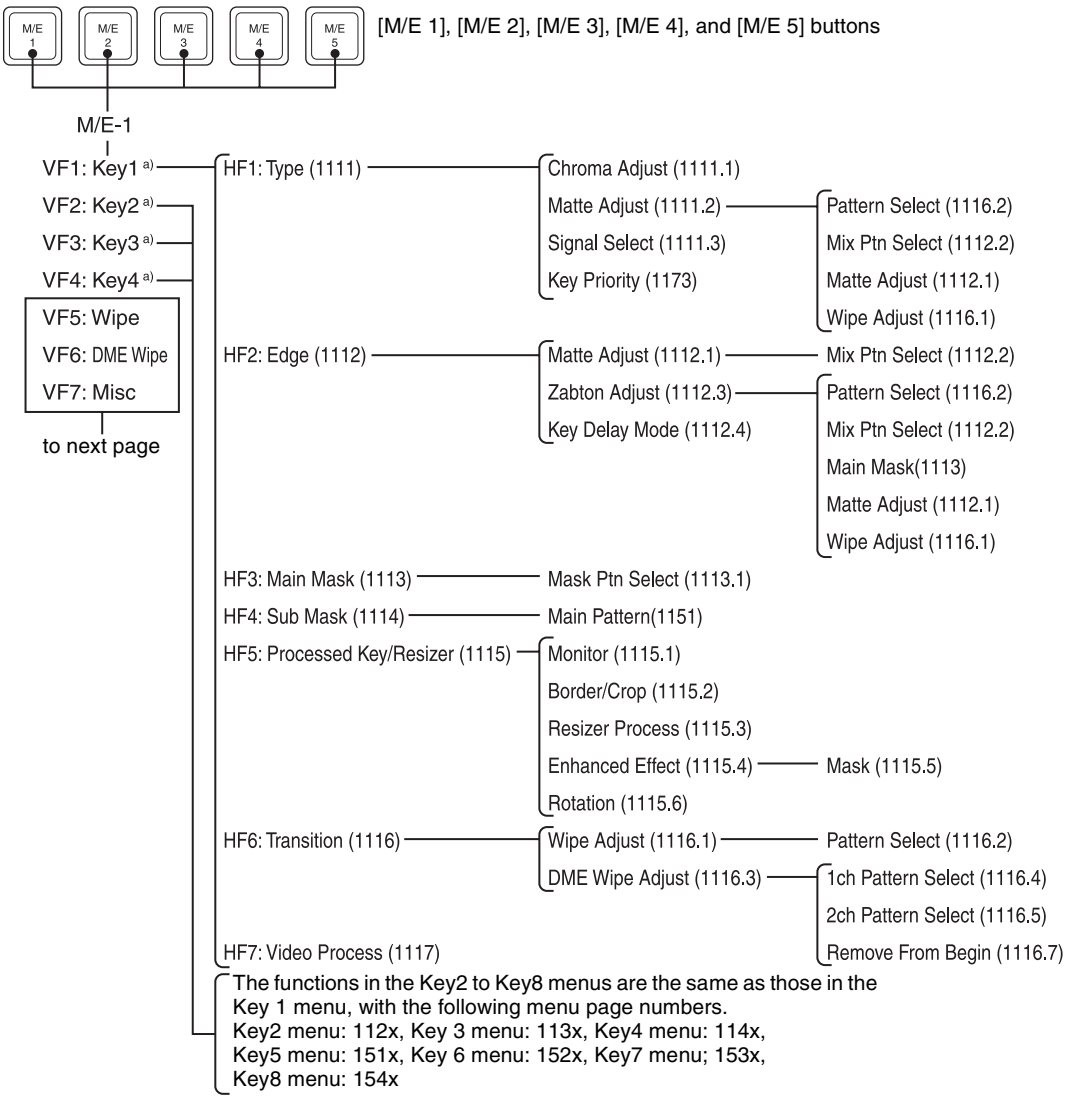


a) For VF1 to VF4, either of the groups Key1 to Key4 and Key5 to Key8 appears.

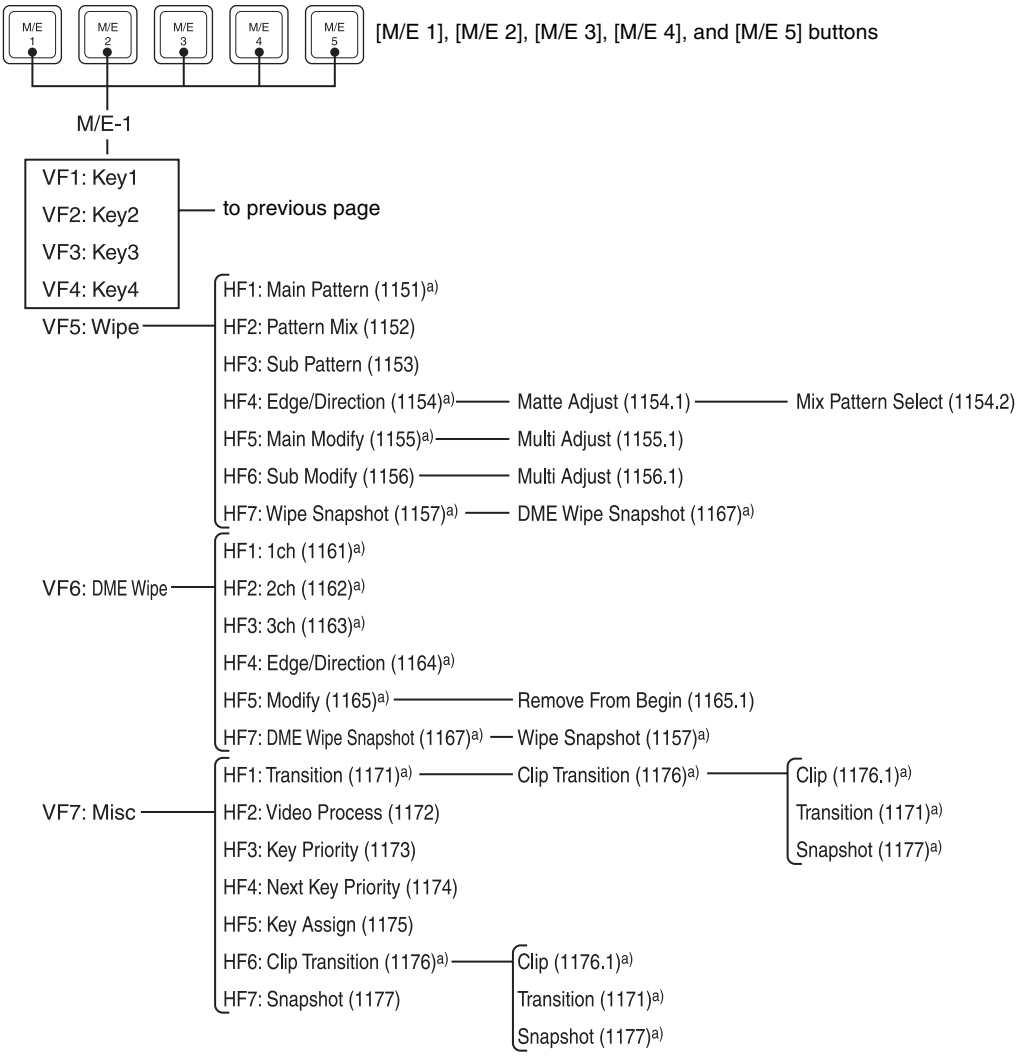


a) In Multi Program 2 mode, the menus for sub are displayed with 400 higher numbers than the above for main.

PGM/PST Menu

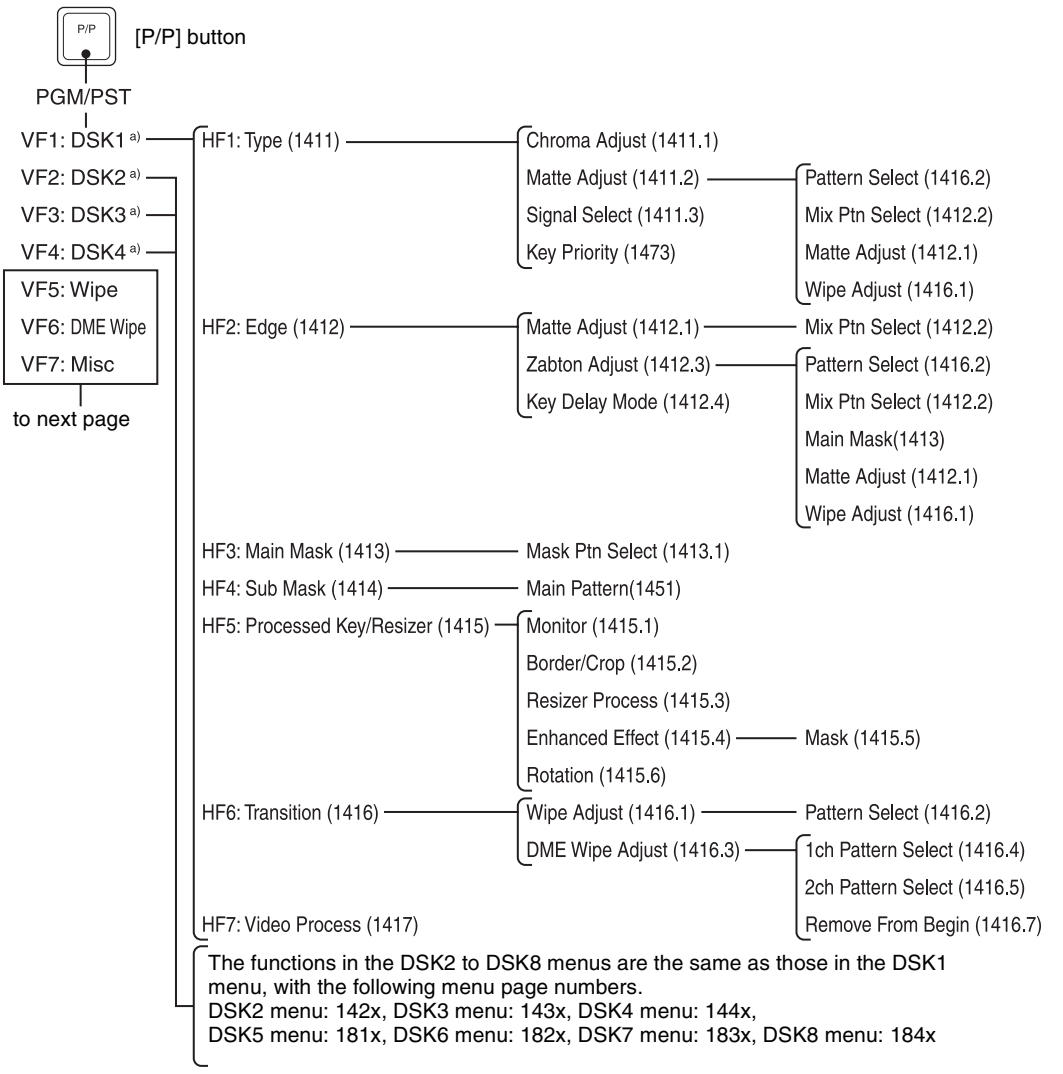


a) For VF1 to VF4, either of the groups Key1 to Key4 and Key5 to Key8 appears.

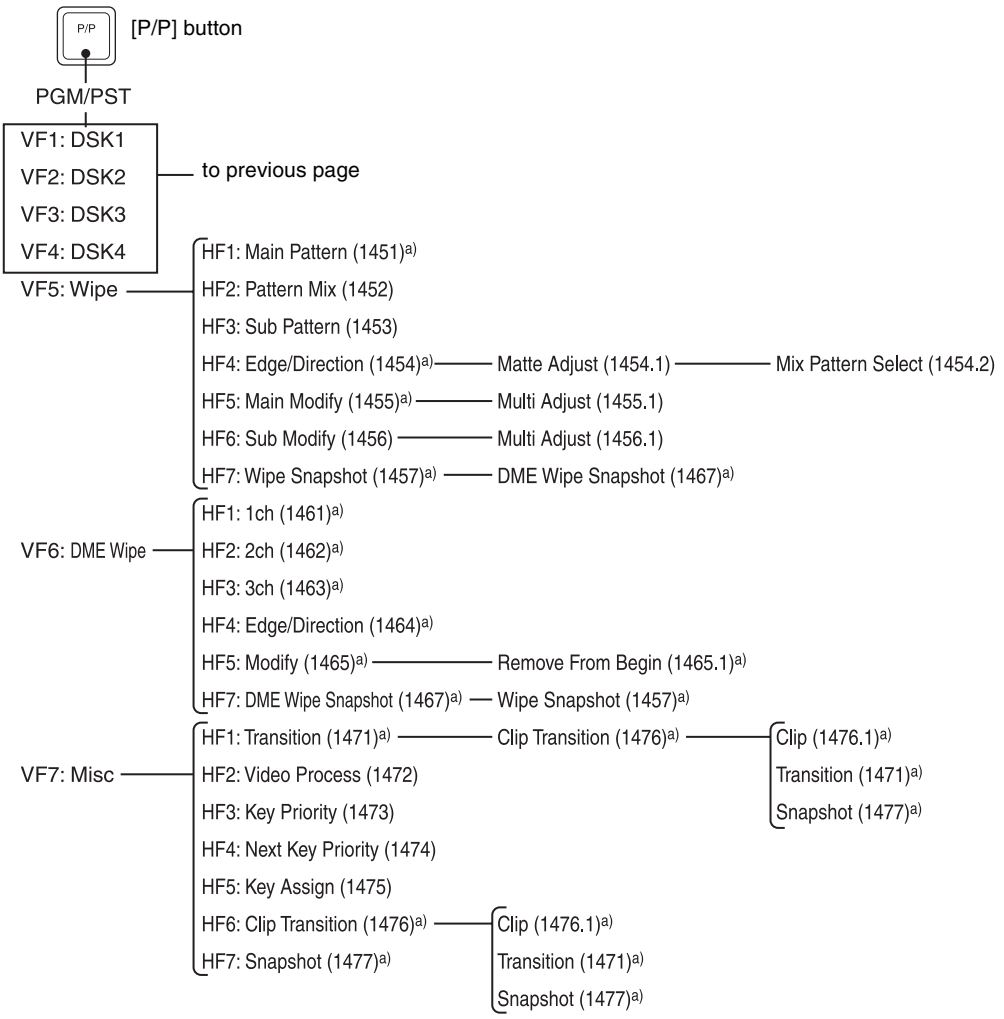


a) In Multi Program 2 mode, the menus for sub are displayed with 400 higher numbers than the above for main.


Frame Memory Menu

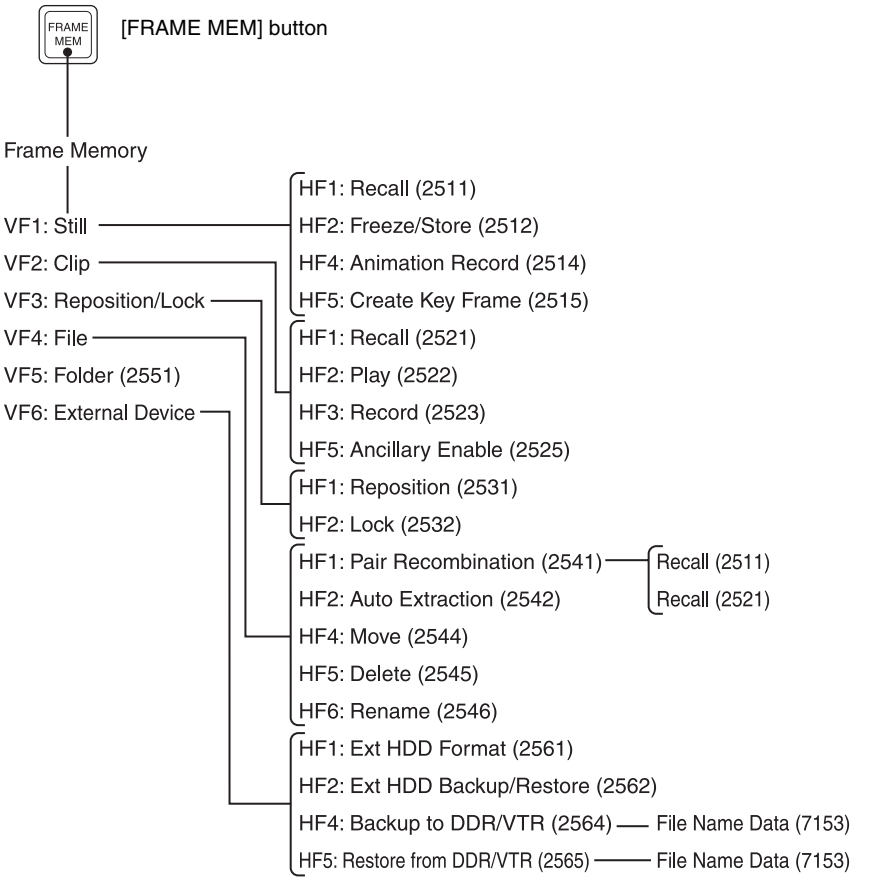


Color Bkgd Menu

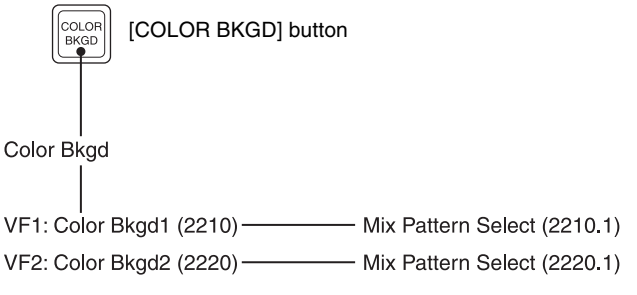


AUX Menu




CCR Menu

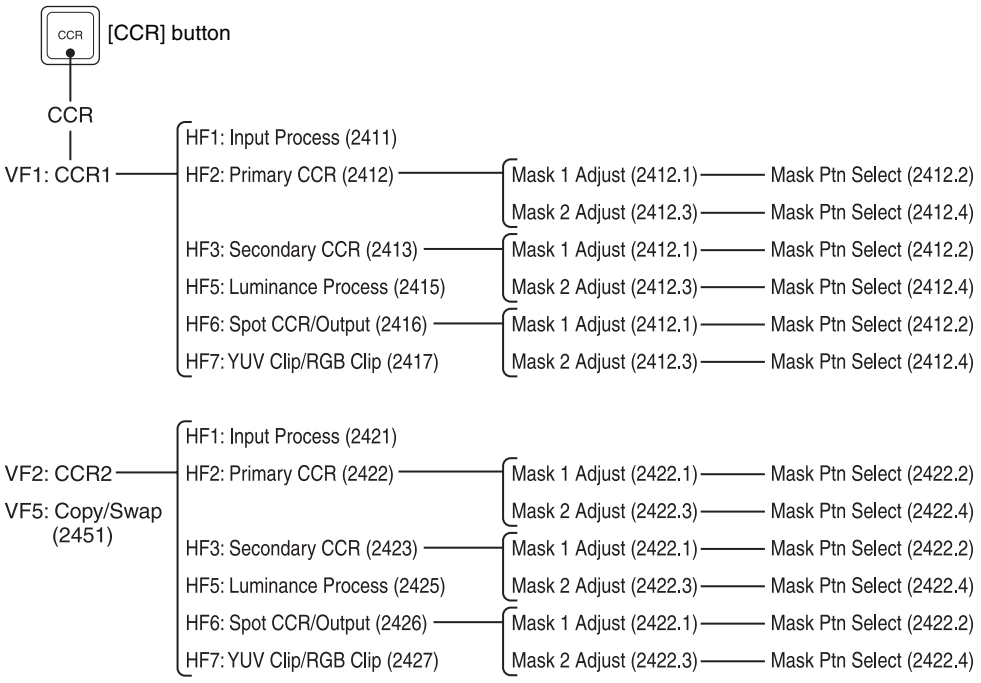


Copy/Swap Menu

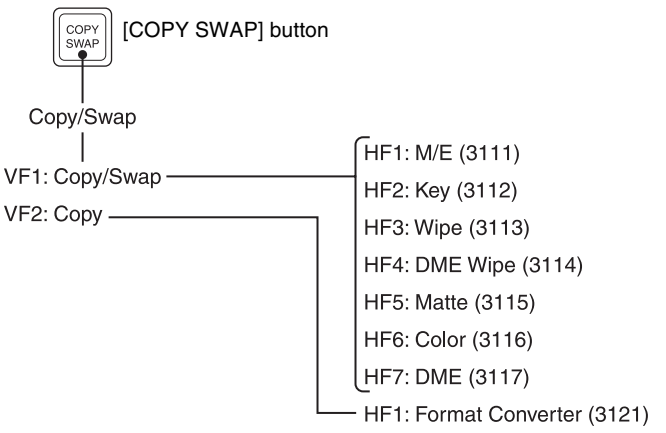


Misc Menu

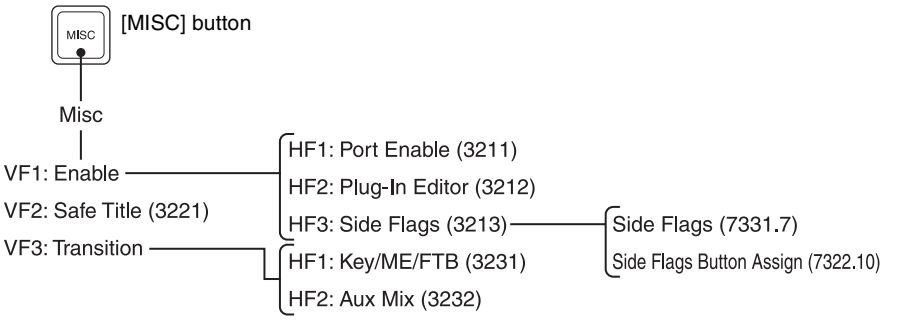


Status Menu




DME Menu

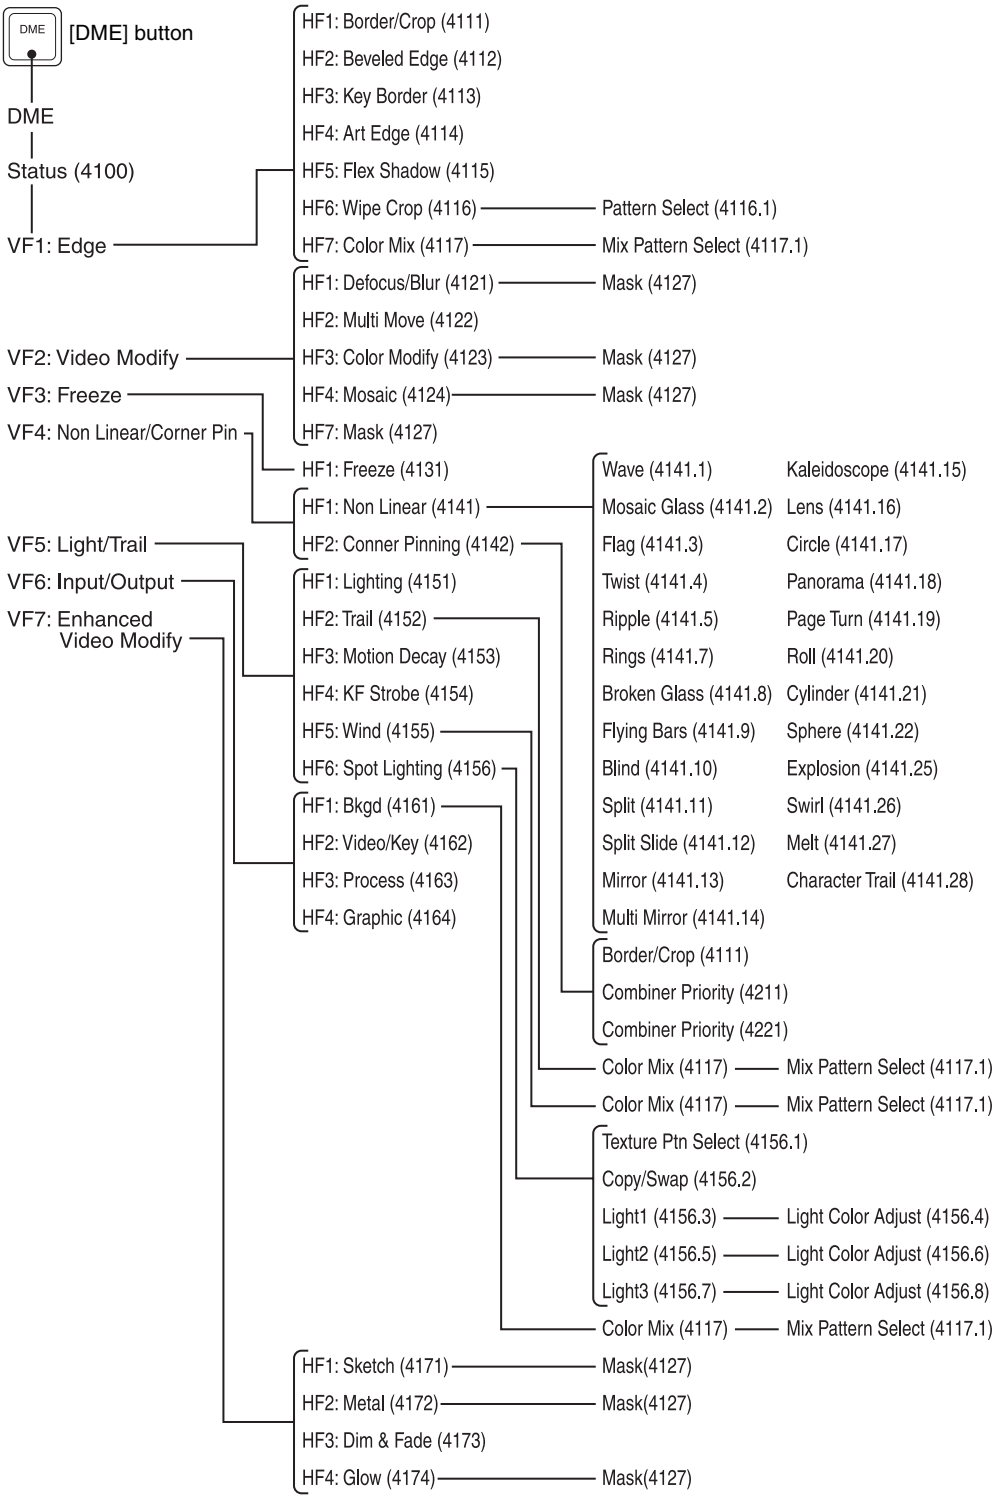
DME
[DME] button
DME
Status (4100)
VF1: Edge
VF2: Video Modify
VF3: Freeze
VF4: Non Linear/Corner Pin
VF5: Light/Trail
VF6: Input/Output
VF7: Enhanced Video Modify
HF1: Border/Crop (4111)
HF2: Beveled Edge (4112)
HF3: Key Border (4113)
HF4: Art Edge (4114)
HF5: Flex Shadow (4115)
HF6: Wipe Crop (4116)
Pattern Select (4116.1)
HF7: Color Mix (4117)
Mix Pattern Select (4117.1)
HF1: Defocus/Blur (4121)
Mask (4127)
HF2: Multi Move (4122)
HF3: Color Modify (4123)
Mask (4127)
HF4: Mosaic (4124)
Mask (4127)
HF7: Mask (4127)
HF1: Freeze (4131)
HF1: Non Linear (4141)
Wave (4141.1)
Kaleidoscope (4141.15)
Mosaic Glass (4141.2)
Lens (4141.16)
Flag (4141.3)
Circle (4141.17)
Twist (4141.4)
Panorama (4141.18)
Ripple (4141.5)
Page Turn (4141.19)
Rings (4141.7)
Roll (4141.20)
Broken Glass (4141.8)
Cylinder (4141.21)
Flying Bars (4141.9)
Sphere (4141.22)
Blind (4141.10)
Explosion (4141.25)
Split (4141.11)
Swirl (4141.26)
Split Slide (4141.12)
Melt (4141.27)
Mirror (4141.13)
Character Trail (4141.28)
Multi Mirror (4141.14)
HF2: Conner Pinning (4142)
Border/Crop (4111)
Combiner Priority (4211)
Combiner Priority (4221)
HF1: Lighting (4151)
HF2: Trail (4152)
Color Mix (4117)
Mix Pattern Select (4117.1)
HF3: Motion Decay (4153)
HF4: KF Strobe (4154)
HF5: Wind (4155)
Color Mix (4117)
Mix Pattern Select (4117.1)
HF6: Spot Lighting (4156)
Texture Ptn Select (4156.1)
Copy/Swap (4156.2)
Light1 (4156.3)
Light Color Adjust (4156.4)
Light2 (4156.5)
Light Color Adjust (4156.6)
Light3 (4156.7)
Light Color Adjust (4156.8)
HF1: Bkgd (4161)
Color Mix (4117)
Mix Pattern Select (4117.1)
HF2: Video/Key (4162)
HF3: Process (4163)
HF4: Graphic (4164)
HF1: Sketch (4171)
Mask(4127)
HF2: Metal (4172)
Mask(4127)
HF3: Dim & Fade (4173)
HF4: Glow (4174)
Mask(4127)


Global Effect Menu

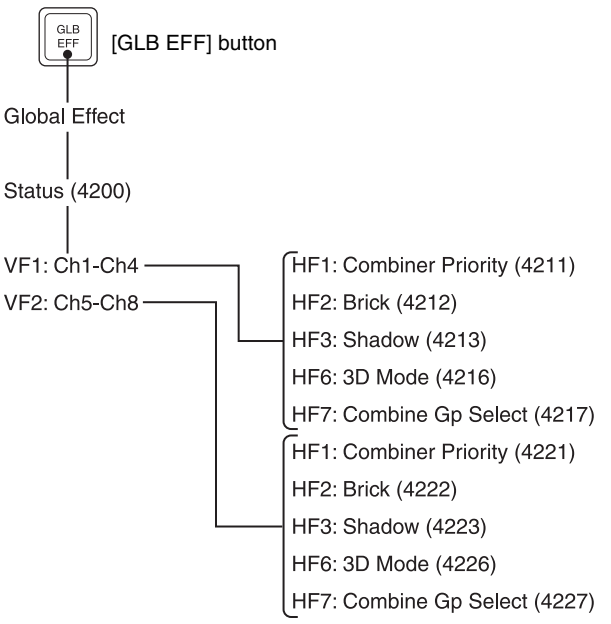


Router Menu

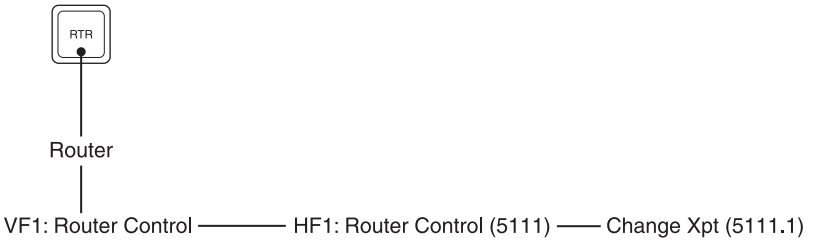


Device Menu

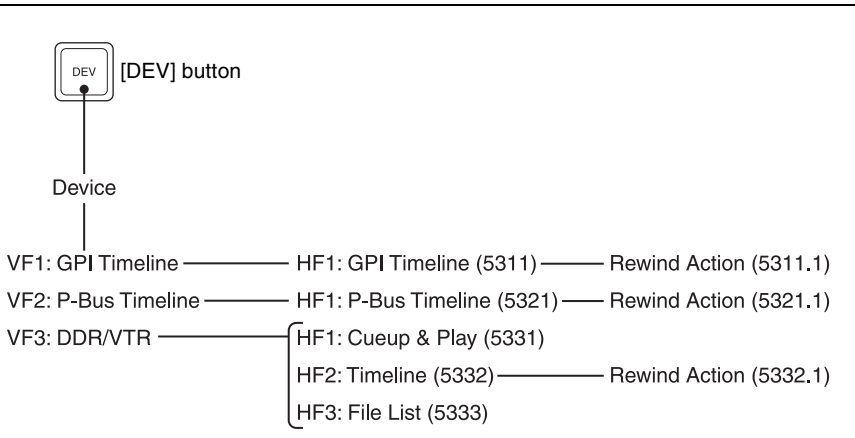


Macro Menu

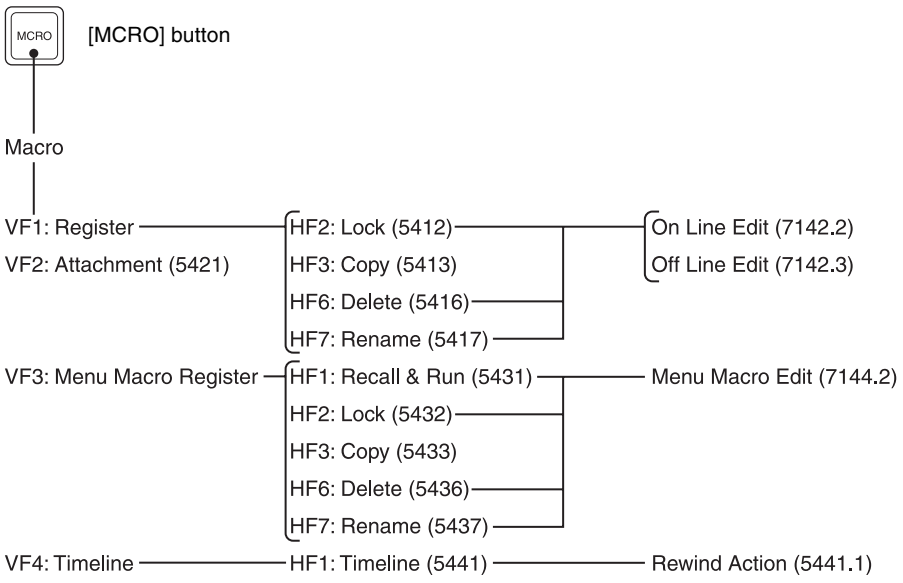
MCRO
[MCRO] button
Macro
VF1: Register
VF2: Attachment (5421)
VF3: Menu Macro Register
VF4: Timeline
HF2: Lock (5412)
HF3: Copy (5413)
HF6: Delete (5416)
HF7: Rename (5417)
HF1: Recall & Run (5431)
HF2: Lock (5432)
HF3: Copy (5433)
HF6: Delete (5436)
HF7: Rename (5437)
HF1: Timeline (5441)
On Line Edit (7142.2)
Off Line Edit (7142.3)
Menu Macro Edit (7144.2)
Rewind Action (5441.1)


Key Frame Menu

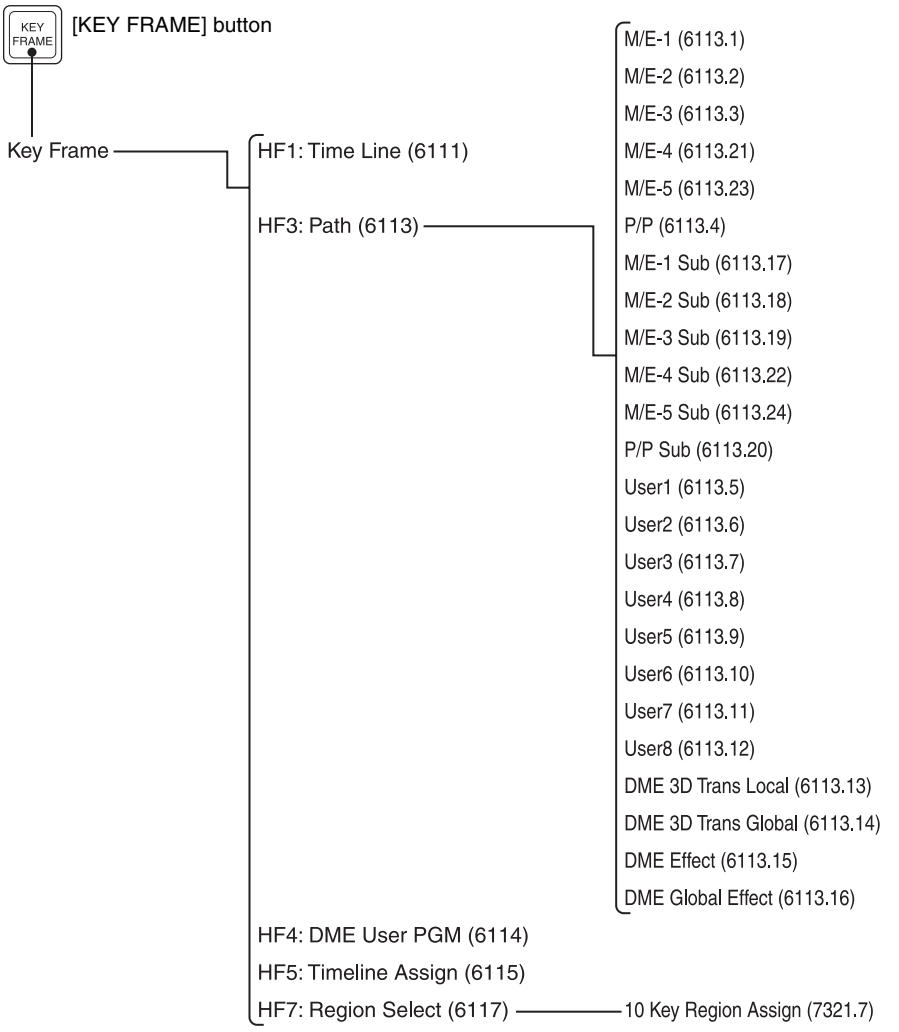


Effect Menu

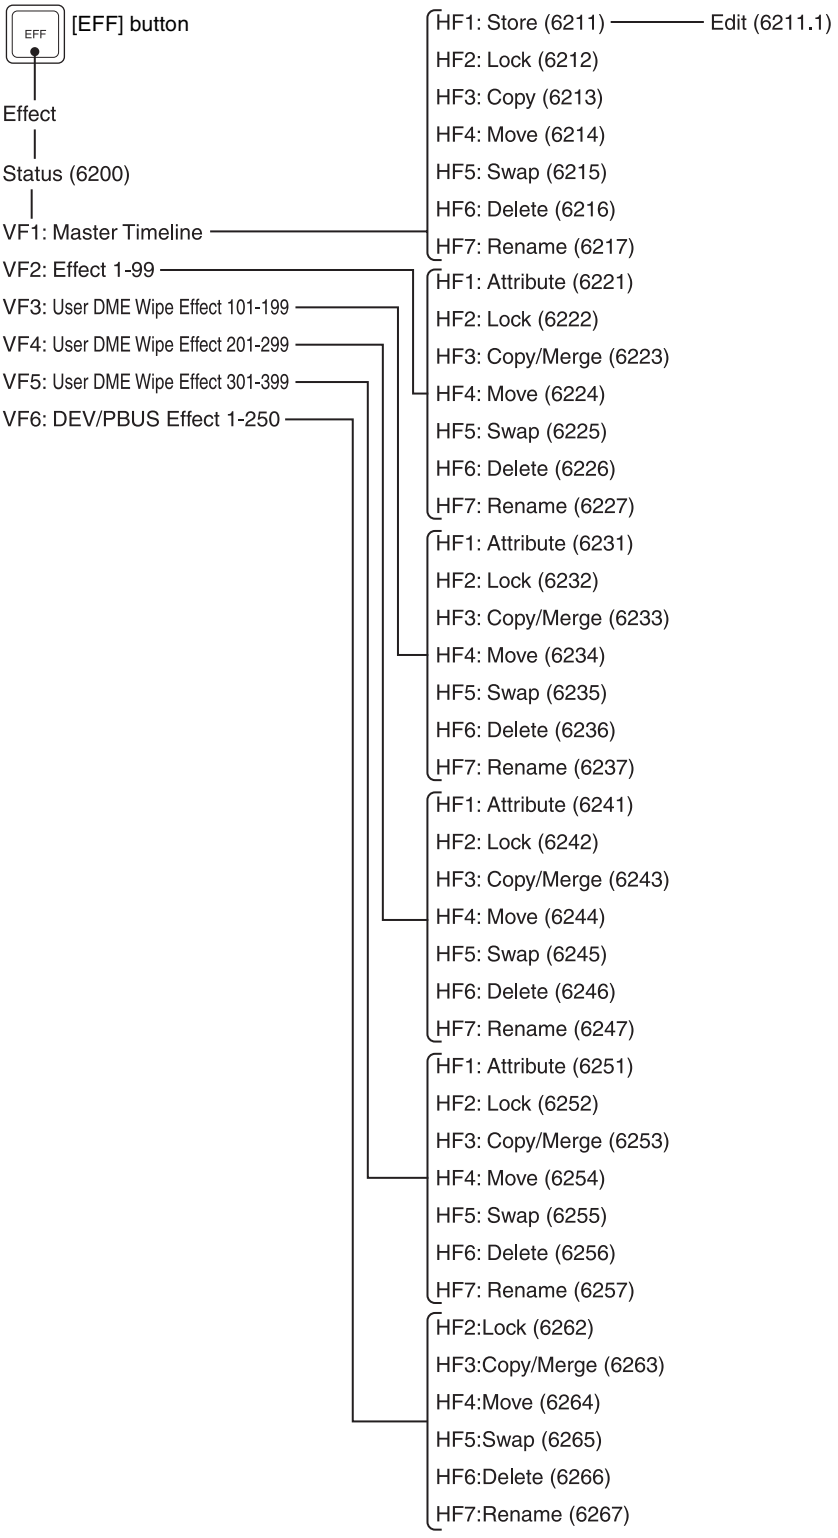
EFF
[EFF] button
Effect
Status (6200)
VF1: Master Timeline
VF2: Effect 1-99
VF3: User DME Wipe Effect 101-199
VF4: User DME Wipe Effect 201-299
VF5: User DME Wipe Effect 301-399
VF6: DEV/PBUS Effect 1-250
HF1: Store (6211)
Edit (6211.1)
HF2: Lock (6212)
HF3: Copy (6213)
HF4: Move (6214)
HF5: Swap (6215)
HF6: Delete (6216)
HF7: Rename (6217)
HF1: Attribute (6221)
HF2: Lock (6222)
HF3: Copy/Merge (6223)
HF4: Move (6224)
HF5: Swap (6225)
HF6: Delete (6226)
HF7: Rename (6227)
HF1: Attribute (6231)
HF2: Lock (6232)
HF3: Copy/Merge (6233)
HF4: Move (6234)
HF5: Swap (6235)
HF6: Delete (6236)
HF7: Rename (6237)
HF1: Attribute (6241)
HF2: Lock (6242)
HF3: Copy/Merge (6243)
HF4: Move (6244)
HF5: Swap (6245)
HF6: Delete (6246)
HF7: Rename (6247)
HF1: Attribute (6251)
HF2: Lock (6252)
HF3: Copy/Merge (6253)
HF4: Move (6254)
HF5: Swap (6255)
HF6: Delete (6256)
HF7: Rename (6257)
HF2:Lock (6262)
HF3:Copy/Merge (6263)
HF4:Move (6264)
HF5:Swap (6265)
HF6:Delete (6266)
HF7:Rename (6267)


Snapshot Menu

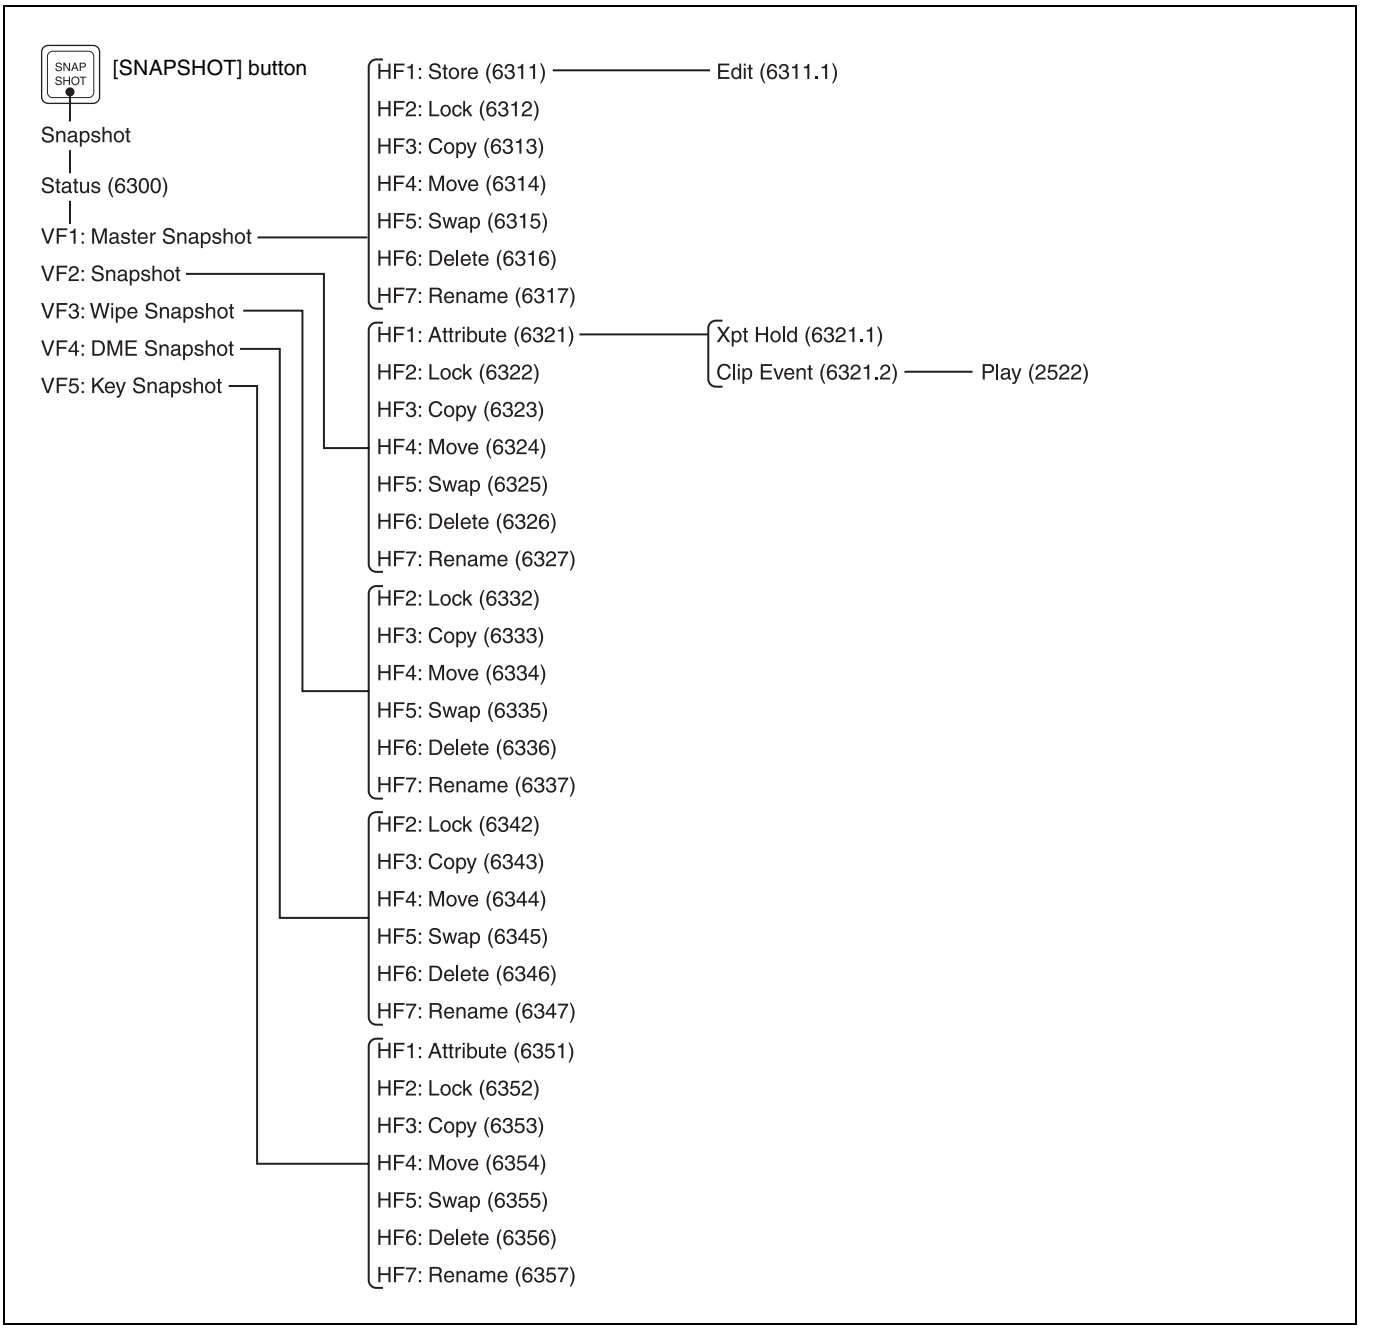


Shotbox Menu

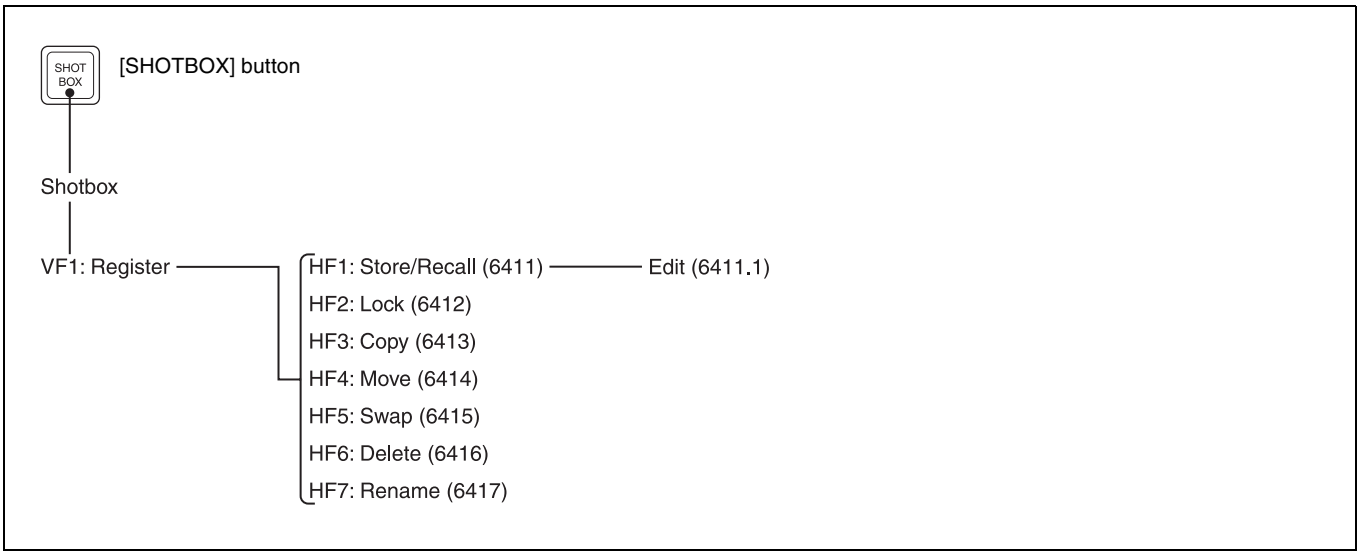


File Menu

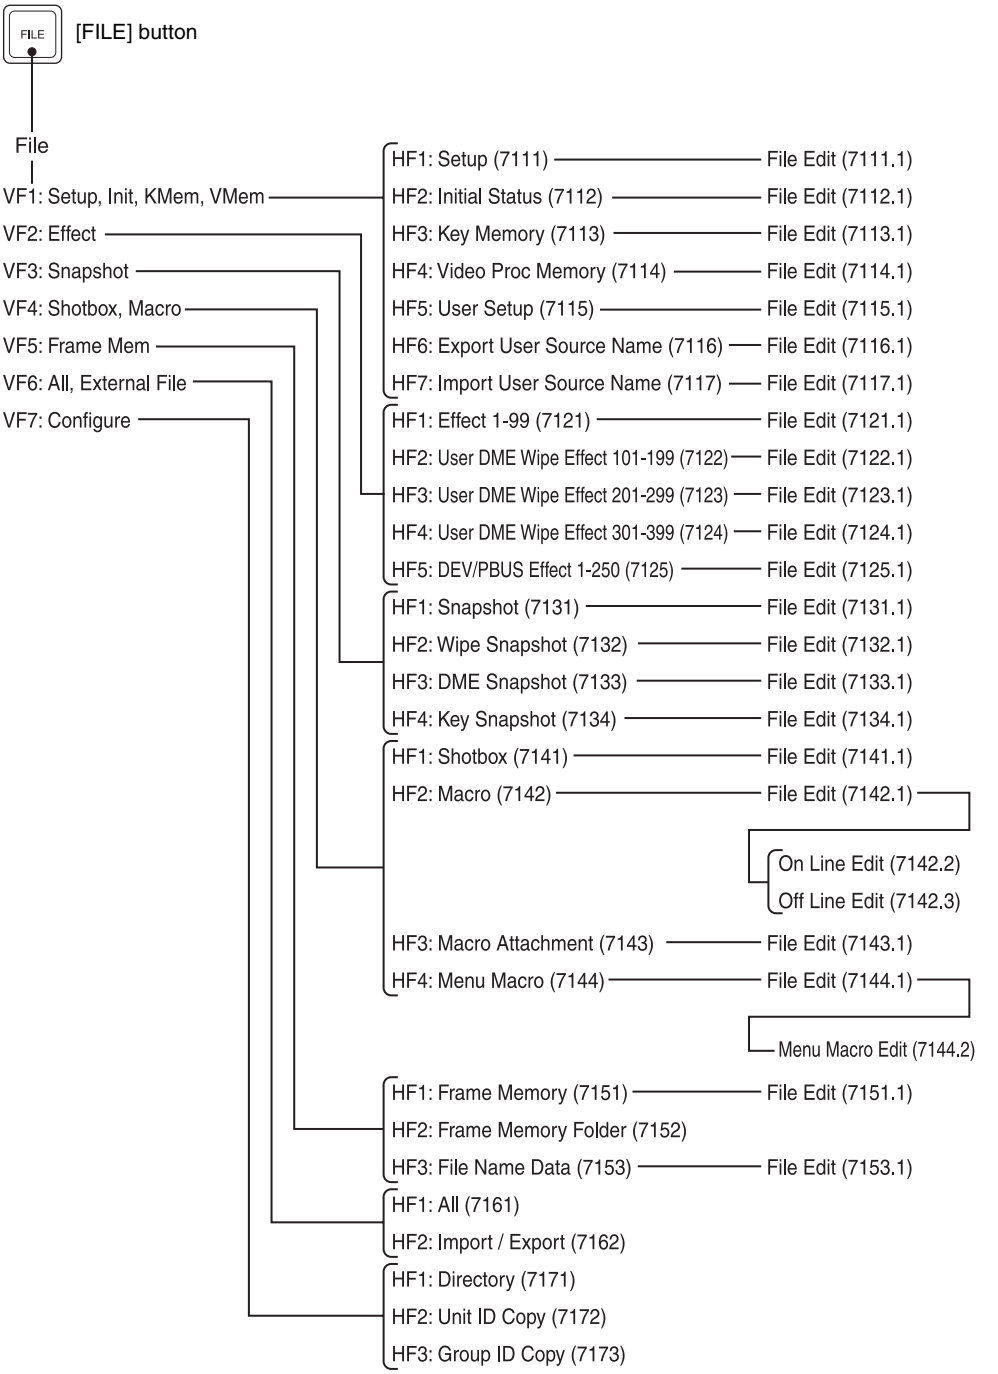

FILE
[FILE] button
File
VF1: Setup, Init, KMem, VMem
VF2: Effect
VF3: Snapshot
VF4: Shotbox, Macro
VF5: Frame Mem
VF6: All, External File
VF7: Configure
HF1: Setup (7111)
File Edit (7111.1)
HF2: Initial Status (7112)
File Edit (7112.1)
HF3: Key Memory (7113)
File Edit (7113.1)
HF4: Video Proc Memory (7114)
File Edit (7114.1)
HF5: User Setup (7115)
File Edit (7115.1)
HF6: Export User Source Name (7116)
File Edit (7116.1)
HF7: Import User Source Name (7117)
File Edit (7117.1)
HF1: Effect 1-99 (7121)
File Edit (7121.1)
HF2: User DME Wipe Effect 101-199 (7122)
File Edit (7122.1)
HF3: User DME Wipe Effect 201-299 (7123)
File Edit (7123.1)
HF4: User DME Wipe Effect 301-399 (7124)
File Edit (7124.1)
HF5: DEV/PBUS Effect 1-250 (7125)
File Edit (7125.1)
HF1: Snapshot (7131)
File Edit (7131.1)
HF2: Wipe Snapshot (7132)
File Edit (7132.1)
HF3: DME Snapshot (7133)
File Edit (7133.1)
HF4: Key Snapshot (7134)
File Edit (7134.1)
HF1: Shotbox (7141)
File Edit (7141.1)
HF2: Macro (7142)
File Edit (7142.1)
On Line Edit (7142.2)
Off Line Edit (7142.3)
HF3: Macro Attachment (7143)
File Edit (7143.1)
HF4: Menu Macro (7144)
File Edit (7144.1)
Menu Macro Edit (7144.2)
HF1: Frame Memory (7151)
File Edit (7151.1)
HF2: Frame Memory Folder (7152)
HF3: File Name Data (7153)
File Edit (7153.1)
HF1: All (7161)
HF2: Import / Export (7162)
HF1: Directory (7171)
HF2: Unit ID Copy (7172)
HF3: Group ID Copy (7173)


Engineering Setup Menu

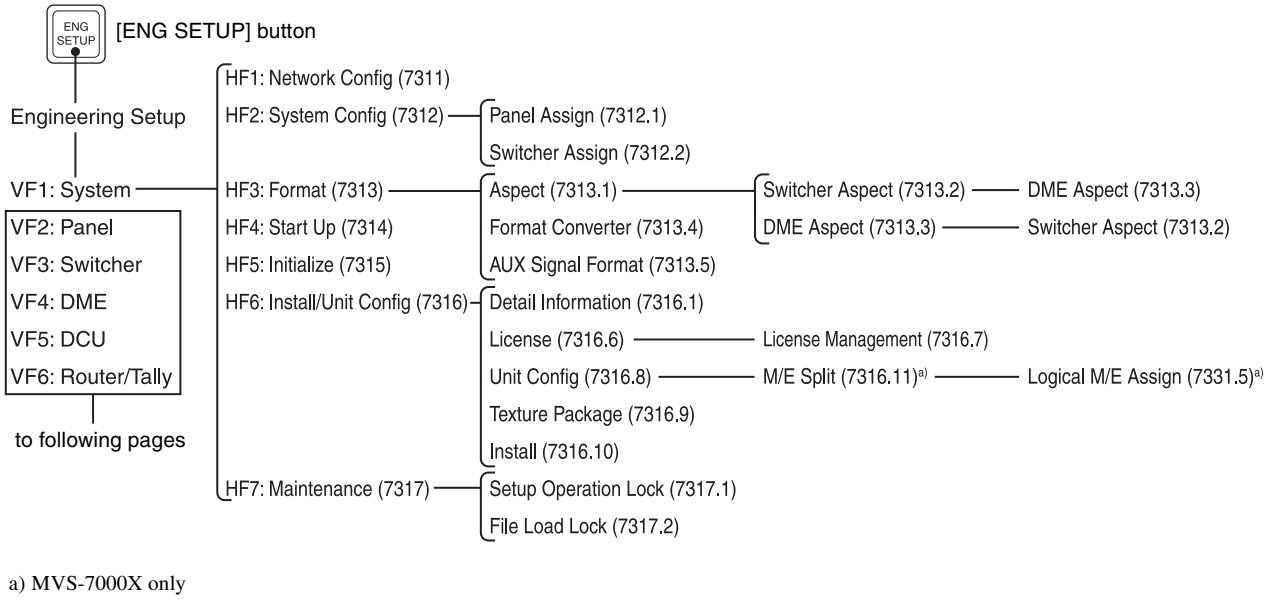


a) MVS-7000X only

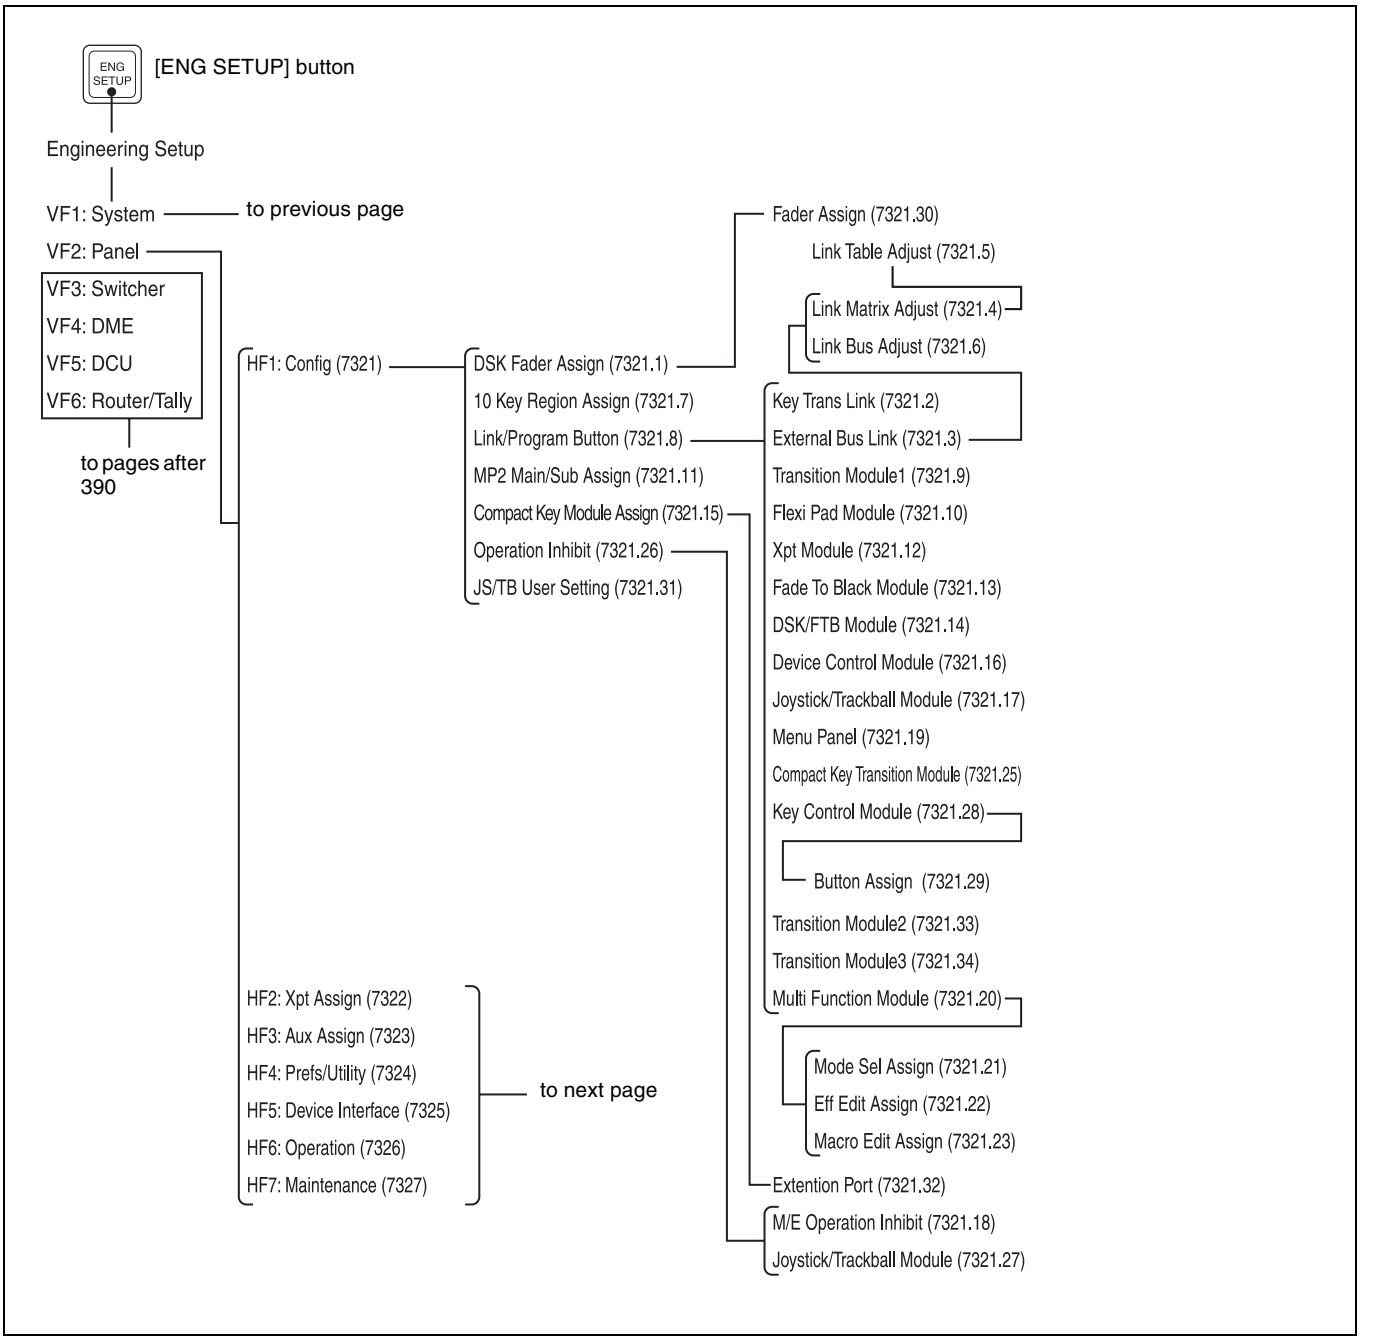
ENG SETUP
[ENG SETUP] button
Engineering Setup
VF1: System
to previous page
VF2: Panel
VF3: Switcher
VF4: DME
VF5: DCU
VF6: Router/Tally
to pages after 390
HF1: Config (7321)
DSK Fader Assign (7321.1)
10 Key Region Assign (7321.7)
Link/Program Button (7321.8)
MP2 Main/Sub Assign (7321.11)
Compact Key Module Assign (7321.15)
Operation Inhibit (7321.26)
JS/TB User Setting (7321.31)
Fader Assign (7321.30)
Link Table Adjust (7321.5)
Link Matrix Adjust (7321.4)
Link Bus Adjust (7321.6)
Key Trans Link (7321.2)
External Bus Link (7321.3)
Transition Module1 (7321.9)
Flexi Pad Module (7321.10)
Xpt Module (7321.12)
Fade To Black Module (7321.13)
DSK/FTB Module (7321.14)
Device Control Module (7321.16)
Joystick/Trackball Module (7321.17)
Menu Panel (7321.19)
Compact Key Transition Module (7321.25)
Key Control Module (7321.28)
Button Assign (7321.29)
Transition Module2 (7321.33)
Transition Module3 (7321.34)
Multi Function Module (7321.20)
Mode Sel Assign (7321.21)
Eff Edit Assign (7321.22)
Macro Edit Assign (7321.23)
Extention Port (7321.32)
M/E Operation Inhibit (7321.18)
Joystick/Trackball Module (7321.27)
HF2: Xpt Assign (7322)
HF3: Aux Assign (7323)
HF4: Prefs/Utility (7324)
HF5: Device Interface (7325)
HF6: Operation (7326)
HF7: Maintenance (7327)
to next page

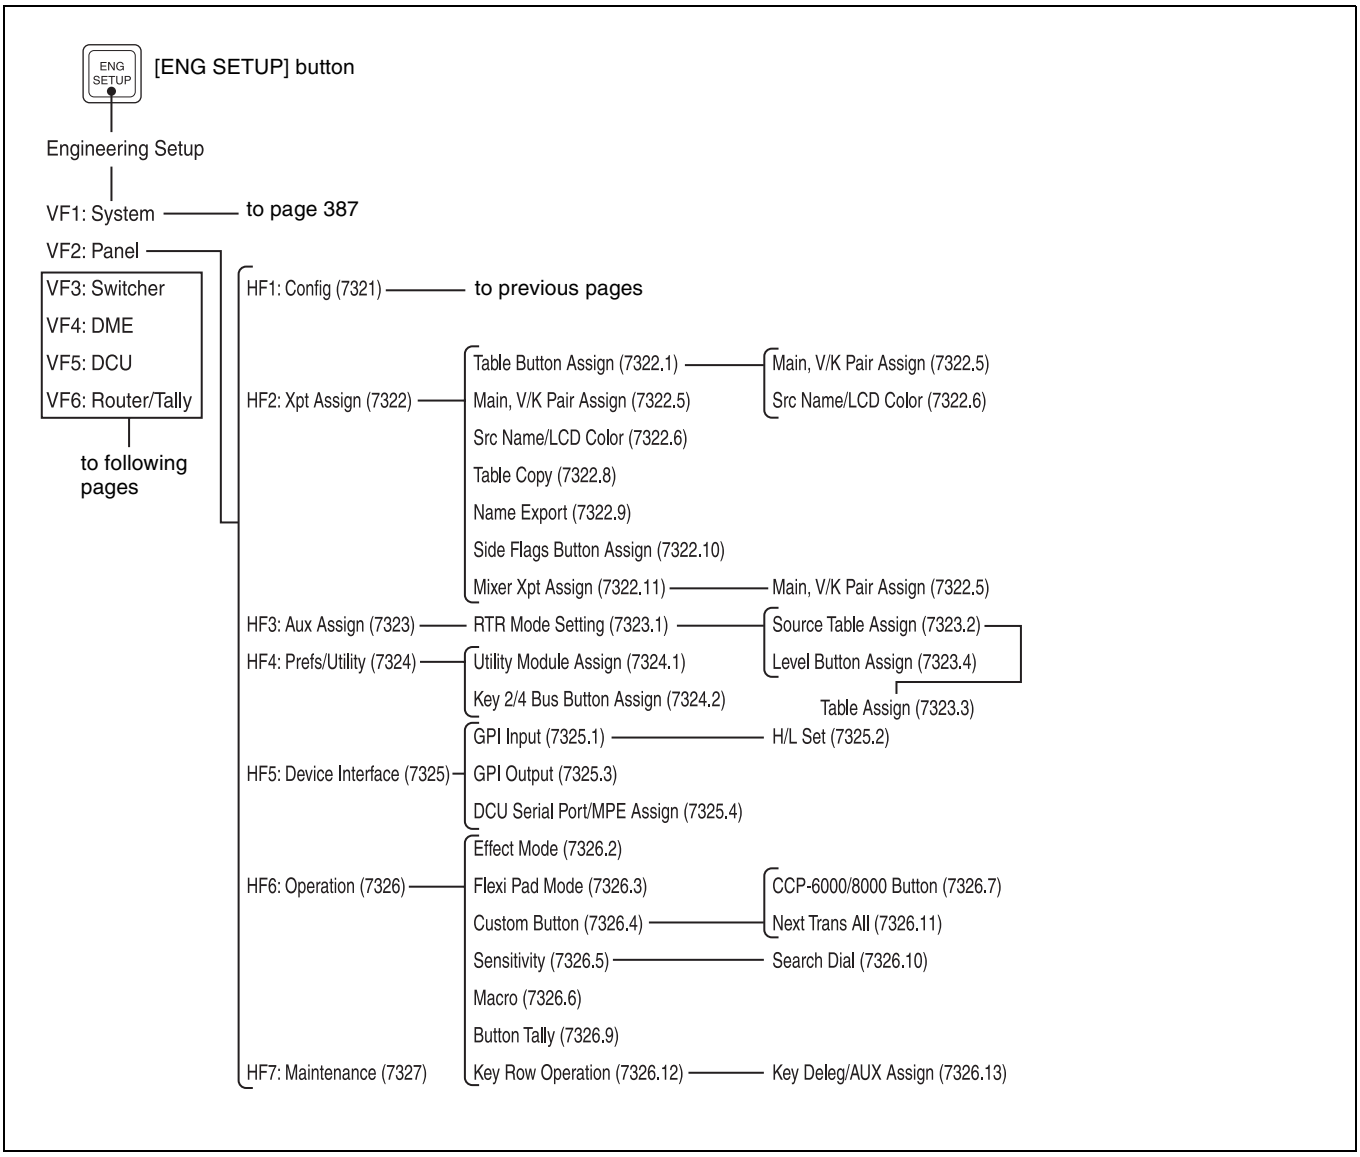

ENG SETUP
[ENG SETUP] button
Engineering Setup
VF1: System
to page 387
VF2: Panel
VF3: Switcher
VF4: DME
VF5: DCU
VF6: Router/Tally
to following pages
HF1: Config (7321)
to previous pages
HF2: Xpt Assign (7322)
Table Button Assign (7322.1)
Main, V/K Pair Assign (7322.5)
Src Name/LCD Color (7322.6)
Table Copy (7322.8)
Name Export (7322.9)
Side Flags Button Assign (7322.10)
Mixer Xpt Assign (7322.11)
HF3: Aux Assign (7323)
RTR Mode Setting (7323.1)
Source Table Assign (7323.2)
Level Button Assign (7323.4)
Table Assign (7323.3)
HF4: Prefs/Utility (7324)
Utility Module Assign (7324.1)
Key 2/4 Bus Button Assign (7324.2)
HF5: Device Interface (7325)
GPI Input (7325.1)
H/L Set (7325.2)
GPI Output (7325.3)
DCU Serial Port/MPE Assign (7325.4)
HF6: Operation (7326)
Effect Mode (7326.2)
Flexi Pad Mode (7326.3)
CCP-6000/8000 Button (7326.7)
Custom Button (7326.4)
Next Trans All (7326.11)
Sensitivity (7326.5)
Search Dial (7326.10)
Macro (7326.6)
Button Tally (7326.9)
HF7: Maintenance (7327)
Key Row Operation (7326.12)
Key Deleg/AUX Assign (7326.13)

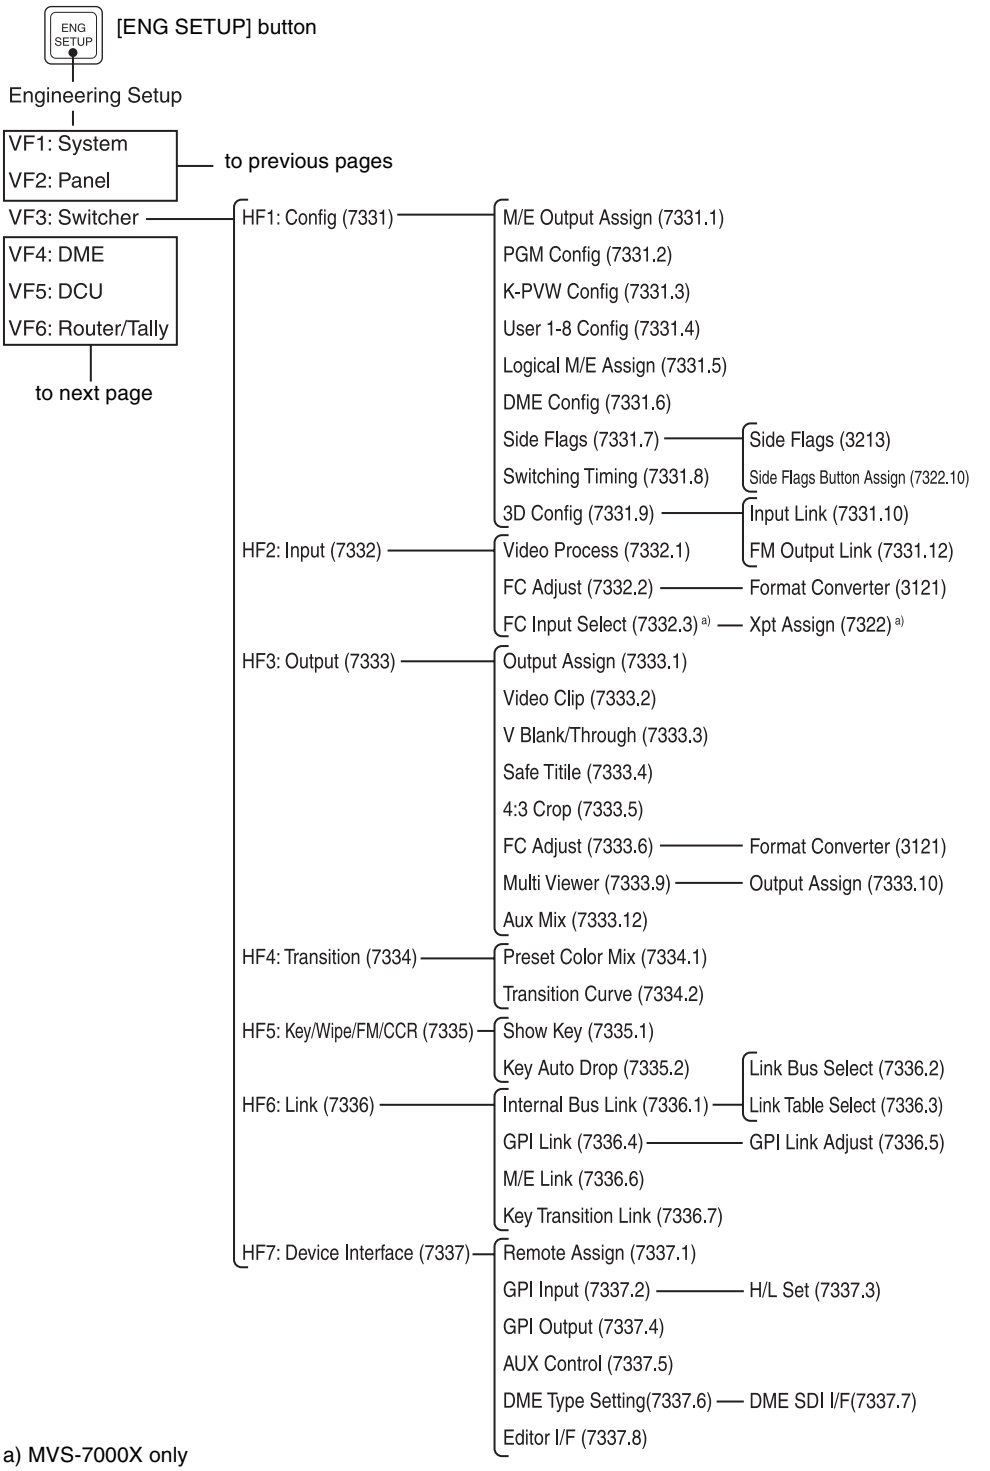


a) MVS-7000X only

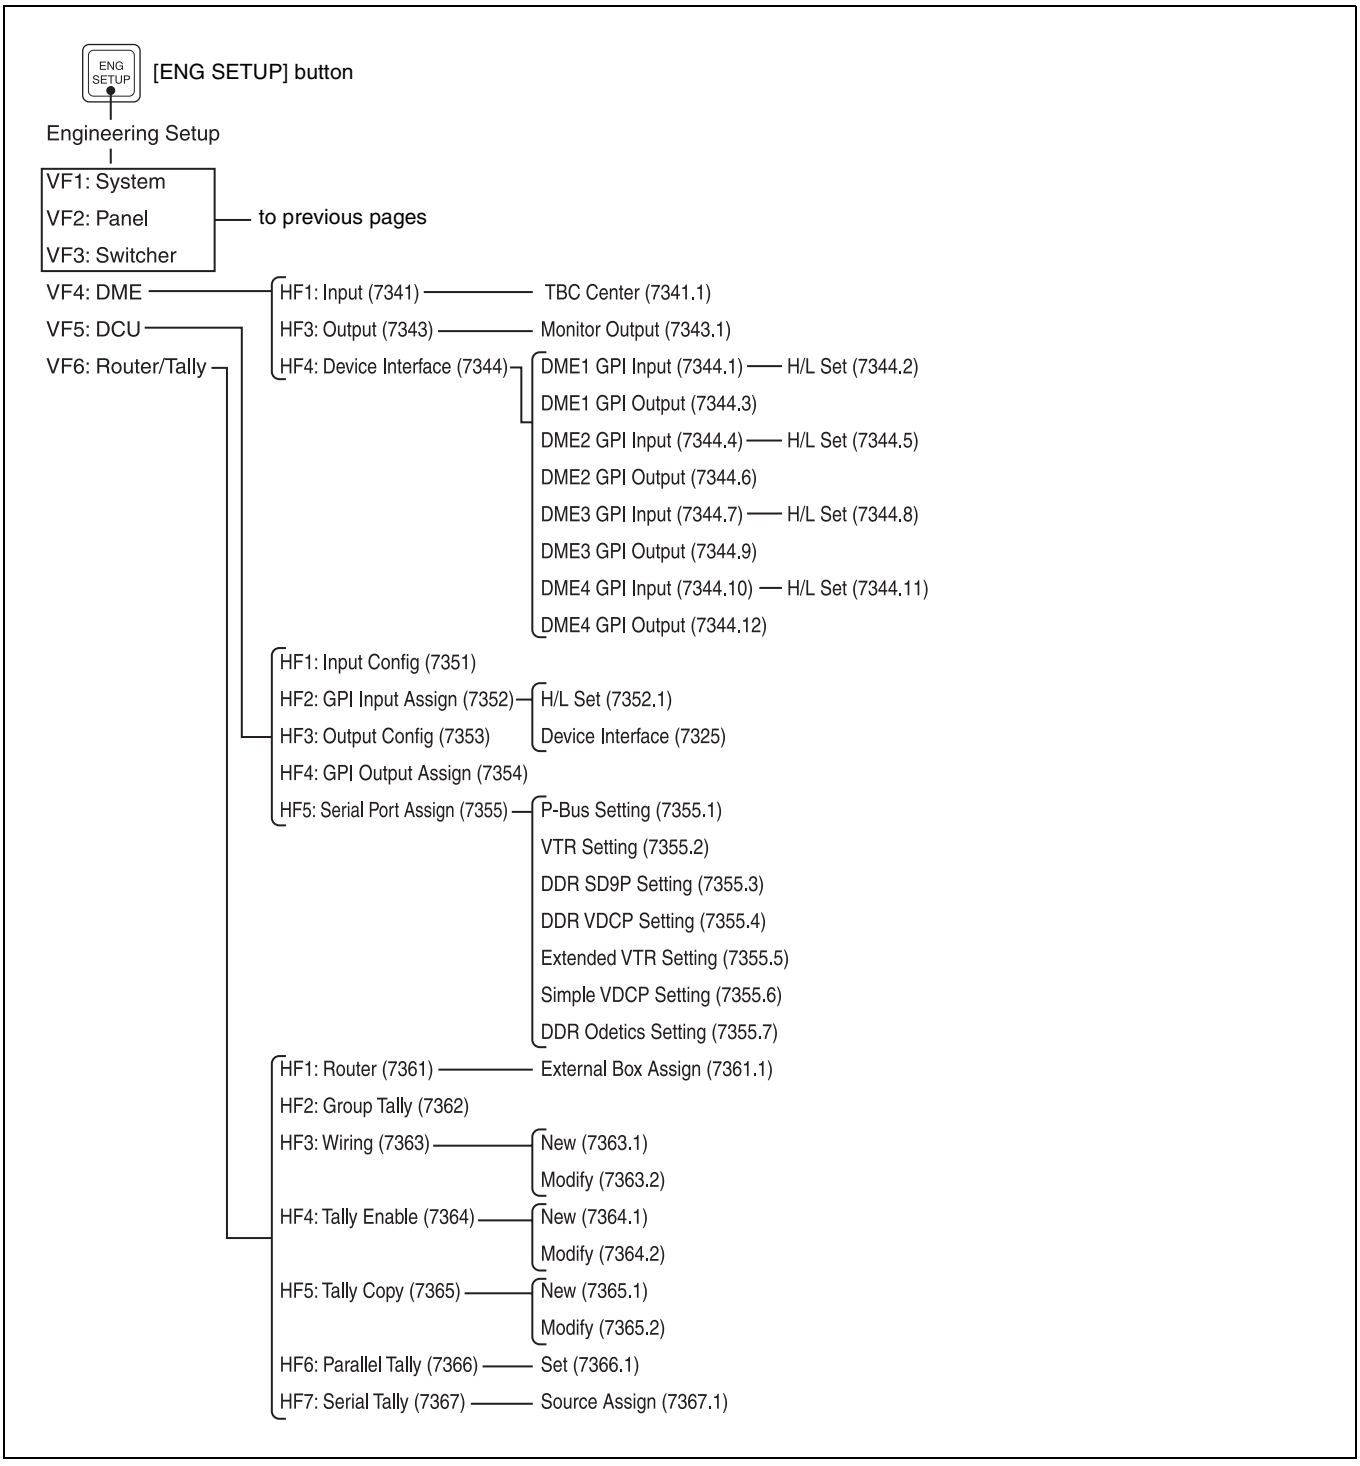
ENG SETUP
[ENG SETUP] button
Engineering Setup
VF1: System
VF2: Panel
VF3: Switcher
to previous pages
VF4: DME
VF5: DCU
VF6: Router/Tally
HF1: Input (7341)
TBC Center (7341.1)
HF3: Output (7343)
Monitor Output (7343.1)
HF4: Device Interface (7344)
DME1 GPI Input (7344.1)
H/L Set (7344.2)
DME1 GPI Output (7344.3)
DME2 GPI Input (7344.4)
H/L Set (7344.5)
DME2 GPI Output (7344.6)
DME3 GPI Input (7344.7)
H/L Set (7344.8)
DME3 GPI Output (7344.9)
DME4 GPI Input (7344.10)
H/L Set (7344.11)
DME4 GPI Output (7344.12)
HF1: Input Config (7351)
HF2: GPI Input Assign (7352)
H/L Set (7352.1)
HF3: Output Config (7353)
Device Interface (7325)
HF4: GPI Output Assign (7354)
HF5: Serial Port Assign (7355)
P-Bus Setting (7355.1)
VTR Setting (7355.2)
DDR SD9P Setting (7355.3)
DDR VDCP Setting (7355.4)
Extended VTR Setting (7355.5)
Simple VDCP Setting (7355.6)
DDR Odetics Setting (7355.7)
HF1: Router (7361)
External Box Assign (7361.1)
HF2: Group Tally (7362)
HF3: Wiring (7363)
New (7363.1)
Modify (7363.2)
HF4: Tally Enable (7364)
New (7364.1)
Modify (7364.2)
HF5: Tally Copy (7365)
New (7365.1)
Modify (7365.2)
HF6: Parallel Tally (7366)
Set (7366.1)
HF7: Serial Tally (7367)
Source Assign (7367.1)

User Setup Menu

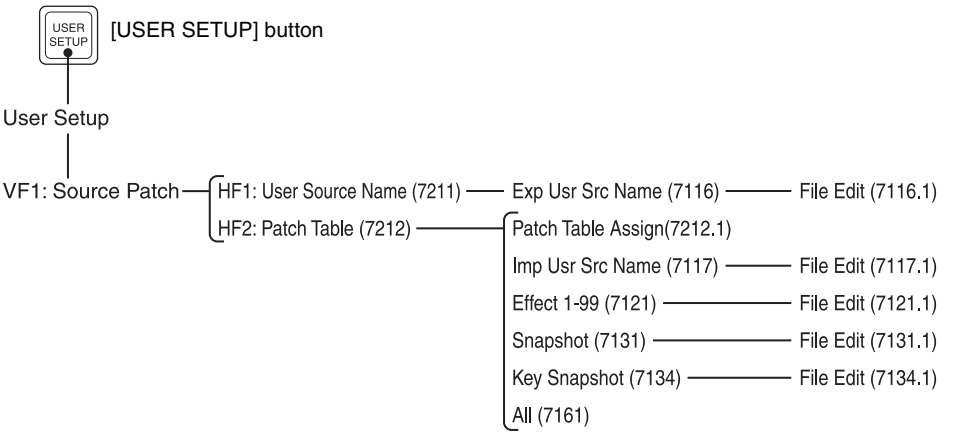

Diagnostic Menu

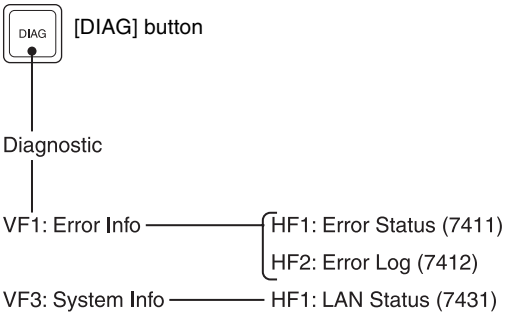

Disabled Operation and Settings Menus

On the MVS-8000X, the following operations and settings relating to M/E-5 are disabled.

Menu number	Menu
3111	Copy/Swap >Copy/Swap >M/E
3112	Copy/Swap >Copy/Swap >Key
3113	Copy/Swap >Copy/Swap >Wipe
3114	Copy/Swap >Copy/Swap >DME Wipe
3115	Copy/Swap >Copy/Swap >Matte
3116	Copy/Swap >Copy/Swap >Color
3213	Misc >Enable >Side Flags
3231	Misc >Transition >Key/ME/FTB
6113.23	Key Frame >Path >M/E-5
6113.24	Key Frame >Path >M/E-5 Sub
6211.1	Effect >Master Timeline >Store >Edit
6221	Effect >Effect 1-99 >Attribute
6222	Effect >Effect 1-99 >Lock
6223	Effect >Effect 1-99 >Copy/Merge
6224	Effect >Effect 1-99 >Move
6225	Effect >Effect 1-99 >Swap
6226	Effect >Effect 1-99 >Delete
6227	Effect >Effect 1-99 >Rename
6311.1	Snapshot >Master Snapshot >Store >Edit
6321	Snapshot >Snapshot >Attribute
6321.1	Snapshot >Snapshot >Attribute >Xpt Hold
6322	Snapshot >Snapshot >Lock
6323	Snapshot >Snapshot >Copy
6324	Snapshot >Snapshot >Move
6325	Snapshot >Snapshot >Swap
6326	Snapshot >Snapshot >Delete
6327	Snapshot >Snapshot >Rename
6332	Snapshot >Wipe Snapshot >Lock
6333	Snapshot >Wipe Snapshot >Copy
6334	Snapshot >Wipe Snapshot >Move
6335	Snapshot >Wipe Snapshot >Swap
6336	Snapshot >Wipe Snapshot >Delete
6337	Snapshot >Wipe Snapshot >Rename
6342	Snapshot >DME Snapshot >Lock
6343	Snapshot >DME Snapshot >Copy
6344	Snapshot >DME Snapshot >Move
6345	Snapshot >DME Snapshot >Swap
6346	Snapshot >DME Snapshot >Delete
6347	Snapshot >DME Snapshot >Rename

Menu number	Menu
6351	Snapshot >Key Snapshot >Attribute
6352	Snapshot >Key Snapshot >Lock
6353	Snapshot >Key Snapshot >Copy
6354	Snapshot >Key Snapshot >Move
6355	Snapshot >Key Snapshot >Swap
6356	Snapshot >Key Snapshot >Delete
6357	Snapshot >Key Snapshot >Rename
6411.1	Shotbox >Register >Store/Recall >Edit
7121	File >Effect >Effect 1-99
7121.1	File >Effect >Effect 1-99 >File Edit
7131	File >Snapshot >Snapshot
7131.1	File >Snapshot >Snapshot >File Edit
7132	File >Snapshot >Wipe Snapshot
7132.1	File >Snapshot >Wipe Snapshot >File Edit
7133	File >Snapshot >DME Snapshot
7133.1	File >Snapshot >DME Snapshot >File Edit
7134	File >Snapshot >Key Snapshot
7134.1	File >Snapshot >Key Snapshot >File Edit
7313.2	Engineering Setup >System >Format >Aspect >Switcher Aspect
7321	Engineering Setup >Panel >Config
7321.1	Engineering Setup >Panel >Config >DSK Fader Assign
7321.2	Engineering Setup >Panel >Config >Link/Program Button >Key Trans Link
7321.3	Engineering Setup >Panel >Config >Link/Program Button >External Bus Link
7321.6	Engineering Setup >Panel >Config >Link/Program Button >External Bus Link >Link Bus Adjust
7321.7	Engineering Setup >Panel >Config >10 Key Region Assign
7321.11	Engineering Setup >Panel >Config >MP2 Main/Sub Assign
7321.13	Engineering Setup >Panel >Config >Link/Program Button >Fade To Black Module
7321.14	Engineering Setup >Panel >Config >Link/Program Button >DSK/FTB Module
7321.17	Engineering Setup >Panel >Config >Link/Program Button >Joystick/Trackball Module
7321.18	Engineering Setup >Panel >Config >Operation Inhibit >M/E Operation Inhibit
7321.19	Engineering Setup >Panel >Config >Link/Program Button >Menu Panel
7321.29	Engineering Setup >Panel >Config >Link/Program Button >Key Control Module >Button Assign
7321.32	Engineering Setup >Panel >Config >Compact Key Module Assign >Extension Port
7322	Engineering Setup >Panel >Xpt Assign
7322.5	Engineering Setup >Panel >Xpt Assign >Main, V/K Pair Assign
7322.6	Engineering Setup >Panel >Xpt Assign >Src Name/LCD Color
7323	Engineering Setup >Panel >Aux Assign
7325.1	Engineering Setup >Panel >Device Interface >GPI Input
7325.3	Engineering Setup >Panel >Device Interface >GPI Output
7331	Engineering Setup >Switcher >Config
7331.1	Engineering Setup >Switcher >Config >M/E Output Assign
7331.2	Engineering Setup >Switcher >Config >PGM Config
7331.3	Engineering Setup >Switcher >Config >K-PVW Config
7331.6	Engineering Setup >Switcher >Config >DME Config
7333.1	Engineering Setup >Switcher >Output >Output Assign

Menu number	Menu
7334	Engineering Setup >Switcher >Transition
7334.1	Engineering Setup >Switcher >Transition >Preset Color Mix
7335	Engineering Setup >Switcher >Key/Wipe/FM/CCR
7335.1	Engineering Setup >Switcher >Key/Wipe/FM/CCR >Show Key
7335.2	Engineering Setup >Switcher >Key/Wipe/FM/CCR >Key Auto Drop
7336.2	Engineering Setup >Switcher >Link >Internal Bus Link >Link Bus Select
7336.5	Engineering Setup >Switcher >Link >GPI Link >GPI Link Adjust
7336.6	Engineering Setup >Switcher >Link >M/E Link
7336.7	Engineering Setup >Switcher >Link >Key Transition Link
7337.2	Engineering Setup >Switcher >Device Interface >GPI Input
7337.4	Engineering Setup >Switcher >Device Interface >GPI Output
7352	Engineering Setup >DCU >GPI Input Assign
7354	Engineering Setup >DCU >GPI Output Assign

Using the M/E-4 or M/E-5 Bank

Assigning a Button for M/E-4 or M/E-5 Selection in the Setup Menu

- In the factory defaults for this system, M/E-4 and M/E-5 are not assigned to buttons on the control panel.
- To select M/E-4 or M/E-5, assign buttons in the Setup menu according to the following table.

Notes

On the MVS-8000X, M/E-5 cannot be used. M/E-5 operation and settings are disabled, even if they appear in the menu.

Control block	Button	Menu number	Reference in User Guide "Control Panel Setup (Panel)" and "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume 2)
Cross-point control block	Reentry buttons	7322.1 7322.5	"Creating Cross-Point Assign Tables" Engineering Setup >Panel >Xpt Assign >Table Button Assign menu Engineering Setup >Panel >Xpt Assign >Main, V/K Pair Assign menu
Entire switcher bank	-	7321	"Interchanging the Bank Order or Disabling Operation" Engineering Setup >Panel >Config menu
Key control block	Delegation buttons	7321.29	"Assigning Functions to Key Control Block Buttons" Engineering Setup >Panel >Config >Link/Program Button >Key Control Module >Button Assign menu
Device control block	Region selection buttons	7321.17	"Assigning Functions to the Device Control Block" Engineering Setup >Panel >Config >Link/Program Button >Joystick/Trackball Module menu
Numeric keypad control block	Region selection buttons	7321.7	"Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block" Engineering Setup >Panel >Config >10 Key Region Assign menu
Fade to black control block	Preview selection buttons	7321.13	"Assigning Preview Output to Preview Selection Buttons" Engineering Setup >Panel >Config >Link/Program Button >Fade To Black Module menu
Menu control block	Top menu selection buttons	7321.19	"Assigning Functions to the Menu Control Block Top Menu and User Preference Buttons" Engineering Setup >Panel >Config >Link/Program Button >Menu Panel menu
Multifunction Flexi Pad control block	Region selection buttons	7321.7	"Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block" Engineering Setup >Panel >Config >10 Key Region Assign menu

Using Keys 5 to 8

Notes

Keys 5 to 8 cannot be used when the signal format is 1080P.


Assigning Buttons for Selection of Keys 5 to 8 in the Setup Menu

In the factory defaults for this system, keys 5 to 8 are not assigned to buttons on the control panel.

To select keys 5 to 8, assign buttons in the Setup menu according to the following table.

Control block	Button	Menu number	Reference in User Guide "Control Panel Setup (Panel)" and "Cross-Point Settings (Xpt Assign Menu)" in Chapter 19 (Volume 2)
Transition control block	Next transition selection buttons	7321.9	"Setting Transition Control Block Button Assignments" Engineering Setup >Panel >Config >Link/Program Button >Transition Module1 menu
Cross-point control block	SHIFT button	7322.1	"Creating Cross-Point Assign Tables" "Setting the action of the [SHIFT] button in the cross-point control block" Engineering Setup >Panel >Xpt Assign >Table Button Assign menu
Key Control Block	Delegation button	7321.29	"Assigning Functions to Key Control Block Buttons" Engineering Setup >Panel >Config >Link/Program Button >Key Control Module >Button Assign menu
Transition control block (standard type)	Key delegation buttons	7321.33	"Setting Transition Control Block Button Assignments" Engineering Setup >Panel >Config >Link/Program Button >Transition Module2 menu
	Independent key transition execution section	7321.34	"Setting Transition Control Block Button Assignments" Engineering Setup >Panel >Config >Link/Program Button >Transition Module3 menu
Independent key transition control block	Entire block	7321.15	"Assigning Keys to the Independent Key Transition Control Block (Simple Type)" Engineering Setup >Panel >Config >Compact Key Module Assign menu
Downstream key control block	Key delegation buttons	7321.1	"Assigning the Key Delegation in the Downstream Key Control Block" Engineering Setup >Panel >Config >DSK Fader Assign menu
Downstream key/ fade-to-black control block	Key delegation buttons	7321.14	"Assigning Keys to the DSK1 and DSK2 Buttons in the Downstream Key/Fade-to-Black Control Block" Engineering Setup >Panel >Config >Link/Program Button >DSK/FTB Module menu
Device control block (joystick)	Operating buttons	7321.31	"Selecting the Module to be the Reference for Device Control Block" Menu Engineering Setup >Panel >Config >JS/TB User Setting menu
Device control block (trackball)			
Cross-point control block	Key 1 row	7326.13	"Assigning the key/AUX bus delegation function to the key 1 row" Engineering Setup >Panel >Operation >Key Row Operation >Key Deleg/AUX Assign menu

Selecting Keys 5 to 8 for Next Transition

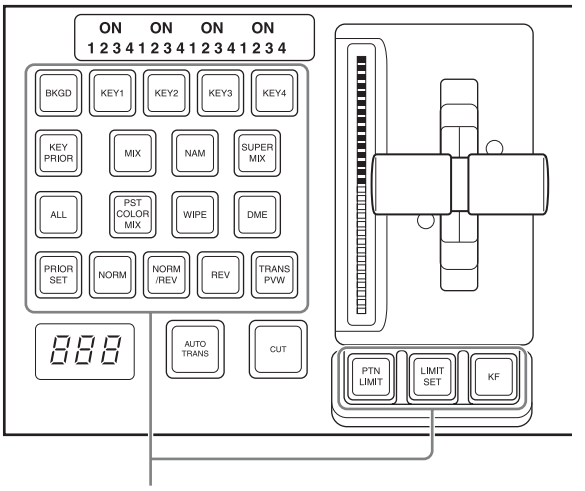

Buttons to which keys can be assigned

To select keys 5 to 8 for the next transition, in addition to assigning [KEY5] to [KEY8] for the operation, it is also possible to make the selection with [KEY1/5], [KEY2/6], [KEY3/7], [KEY4/8], [SHIFT], and [ADD].
The following describes this method of operation.
First in the Setup menu, assign the following to any buttons:

[KEY1/5], [KEY2/6], [KEY3/7], [KEY4/8], [SHIFT], and [ADD]

By way of example, this is the procedure for [KEY1/5].

To select key 5

Press [SHIFT], turning it on, then press the [KEY1/5] button.

To select keys 1 and 5 simultaneously

1 Press the [KEY1/5] button alone.

This selects key 1.

2 Press [SHIFT], turning it on.

3 Holding down [ADD], press the [KEY1/5] button.

This selects keys 1 and 5 simultaneously.

Selecting Input Signals for Keys 5 to 8 in the Cross-Point Control Block

Buttons used for selection of keys 5 to 8

For the positions of the following buttons in the cross-point control block, see page 33.

Key	Key row	Dedicated [SHIFT] button [a)]	[KEY3]/[KEY4] button
5	Key 1 row	Lit	[KEY3] button off
6	Key 2 row		[KEY4] button off
7	Key 1 row		[KEY3] button lit
8	Key 2 row		[KEY4] button lit

a) Button previously assigned in the Setup menu to selection of keys 5 to 8

To select the key 5 fill signal

1 Turn on the dedicated [SHIFT] button.

2 Turn off the [KEY3] button.

3 Select the signal in the key 1 row.

When a key delegation function is assigned to the key 1 row

1 In the key 1 row, press the button assigned to the desired key 5.

2 In the key 2 row, select the signal.

For details, see "Cross-Point Control Block in Key/AUX Bus Delegation Mode" (page 36).

Menus Accessed by Pressing a Button Twice

For relevant buttons other than the top menu selection buttons, pressing twice in rapid succession directly recalls a related menu page. The following table lists these buttons of each control block, together with the menus they recall.

"XX" represents the last recalled page in each menu.

Cross-point control block

Buttons	Menus	See
FM1 to 8 signals assigned buttons	Frame Memory >Still >Recall	*page 209*
Color Bkgd1 signal assigned button	Color Bkgd >Color Bkgd1	*page 228*
Color Bkgd2 signal assigned button	Color Bkgd >Color Bkgd2	
CCR1 signal assigned button	CCR >CCR1 >XX	*page 241*
CCR2 signal assigned button	CCR >CCR2 >XX	
FMS1	Frame Memory >Still >Recall	*page 209*
FMS2	Frame Memory >Still >Recall	

Transition control block (standard type, compact type)

Buttons	Menus	See
KEY1 (DSK1) [a]	• M/E-1, 2, 3, 4, 5 >Key1 >XX • PGM/PST >DSK1 >XX	*page 126*
KEY2 (DSK2) [a]	• M/E-1, 2, 3, 4, 5 >Key2 >XX • PGM/PST >DSK2 >XX	
KEY3 (DSK3) [a]	• M/E-1, 2, 3, 4, 5 >Key3 >XX • PGM/PST >DSK3 >XX	
KEY4 (DSK4) [a]	• M/E-1, 2, 3, 4, 5 >Key4 >XX • PGM/PST >DSK4 >XX	
KEY5 (DSK5) [a]	• M/E-1, 2, 3, 4, 5 >Key5 >XX • PGM/PST >DSK5 >XX	
KEY6 (DSK6) [a]	• M/E-1, 2, 3, 4, 5 >Key6 >XX • PGM/PST >DSK6 >XX	
KEY7 (DSK7) [a]	• M/E-1, 2, 3, 4, 5 >Key7 >XX • PGM/PST >DSK7 >XX	
KEY8 (DSK8) [a]	• M/E-1, 2, 3, 4, 5 >Key8 >XX • PGM/PST >DSK8 >XX	
WIPE	M/E-1, 2, 3, 4, 5, PGM/PST >Wipe >Main Pattern	*page 163*
DME	M/E-1, 2, 3, 4, 5, PGM/PST >DME Wipe >XX	*page 187*
SUPER MIX	M/E-1, 2, 3, 4, 5, PGM/PST >Misc >Transition	*page 102*
PST COLOR MIX	M/E-1, 2, 3, 4, 5, PGM/PST >Misc >Transition	*page 103*
FM1&2 CLIP, FM3&4 CLIP, FM5&6 CLIP, FM7&8 CLIP	M/E-1, 2, 3, 4, 5, PGM/PST >Misc >Clip Transition	*page 219*
PRIOR SET	M/E-1, 2, 3, 4, 5, PGM/PST >Misc >Key Priority	*page 100*
KEY PRIOR	M/E-1, 2, 3, 4, 5, PGM/PST >Misc >Next Key Priority	*page 100*
WIPE (Independent key transition type selection button (standard type))	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select	*page 175*

Transition control block (standard type, compact type)

Buttons	Menus	See
DME (Independent key transition type selection button (standard type))	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select	*page 193*
K-SS STORE	Snapshot >Key Snapshot >XX	Chapter 14 (Volume 2)

a) Including the key delegation buttons of the transition control block (standard type).

Independent key transition control block (simple type) [a)]

Buttons	Menus	See
WIPE	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select	*page 175*
DME	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >1ch Pattern Select	*page 193*
SHIFT	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >XX • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >XX	*page 126*

a) The menu to be recalled depends on the setup of the key assignment.

Flexi Pad control block (standard type)

Buttons	Menus	See
WIPE	M/E-1, 2, 3, 4, 5, PGM/PST >Wipe >Main Pattern	*page 163*
DME	M/E-1, 2, 3, 4, 5, PGM/PST >DME Wipe >XX	*page 187*
SNAPSHOT	Snapshot >Snapshot >XX	Chapter 14 (Volume 2)
EFF	Effect >Effect 1-99 >XX	Chapter 13 (Volume 2)
SHOTBOX	Shotbox >Register >Store/Recall	Chapter 15 (Volume 2)
MCRO	Macro >Register >XX	Chapter 16 (Volume 2)

Key control block [a]

Buttons	Menus	See
KEY1	• M/E-1, 2, 3, 4, 5 >Key1 >XX • PGM/PST >DSK1 >XX	*page 126*
KEY2	• M/E-1, 2, 3, 4, 5 >Key2 >XX • PGM/PST >DSK2 >XX	
KEY3	• M/E-1, 2, 3, 4, 5 >Key3 >XX • PGM/PST >DSK3 >XX	
KEY4	• M/E-1, 2, 3, 4, 5 >Key4 >XX • PGM/PST >DSK4 >XX	
KEY5	• M/E-1, 2, 3, 4, 5 >Key5 >XX • PGM/PST >DSK5 >XX	
KEY6	• M/E-1, 2, 3, 4, 5 >Key6 >XX • PGM/PST >DSK6 >XX	
KEY7	• M/E-1, 2, 3, 4, 5 >Key7 >XX • PGM/PST >DSK7 >XX	
KEY8	• M/E-1, 2, 3, 4, 5 >Key8 >XX • PGM/PST >DSK8 >XX	
LUM	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type	*page 127*
LIN		
CVK		
PTN		
CRK	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	*page 132*

a) The menu recalled depends on which of the M/E delegation buttons and key delegation buttons are selected in the key control block.

Numeric keypad control block

Buttons	Menus	See
EFF	• Effect >Effect 1-99 >XX [a] • Effect >Master Timeline >Store [b]	Chapter 13 (Volume 2)
SNAPSHOT	• Snapshot >Snapshot >XX [a] • Snapshot >Master Snapshot >Store [b]	Chapter 14 (Volume 2)
SHOTBOX	Shotbox >Register >Store/Recall	Chapter 15 (Volume 2)
MCRO	Macro >Register >XX	Chapter 16 (Volume 2)
TRANS RATE	Misc >Transition >Key/ME/FTB	*page 234*
STORE RCALL	Key Frame >Region Select [c]	Chapter 13 (Volume 2)

a) When other than [MASTR] is selected with the region selection buttons.
b) When [MASTR] is selected with the region selection buttons.
c) When the [SNAPSHOT] button or [EFF] button is set to On, or lit green.

Downstream key control block [a]

Buttons	Menus	See
DSK1	• M/E-1, 2, 3, 4, 5 >Key1 >XX • PGM/PST >DSK1 >XX	*page 126*
DSK2	• M/E-1, 2, 3, 4, 5 >Key2 >XX • PGM/PST >DSK2 >XX	
DSK3	• M/E-1, 2, 3, 4, 5 >Key3 >XX • PGM/PST >DSK3 >XX	
DSK4	• M/E-1, 2, 3, 4, 5 >Key4 >XX • PGM/PST >DSK4 >XX	
WIPE	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select	*page 175*
DME	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Transition >Wipe Adjust >Pattern Select • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Transition >DME Wipe Adjust >Pattern Select	*page 193*
K-SS STORE [b]	Snapshot >Key Snapshot >XX	Chapter 14 (Volume 2)

a) The menu recalled depends on which of keyers 1 to 8 the downstream key control block is delegated to.

b) Recalling is possible only when the [K-SS] button is On.

Auxiliary bus control block

Buttons	Menus	See
FMS1, FMS2	Frame Memory >Still >Recall	*page 209*
FM1 to 8 signals assigned buttons	Frame Memory >Still >Recall	*page 209*
Color Bkgd1 signal assigned button	Color Bkgd >Color Bkgd1	*page 228*
Color Bkgd2 signal assigned button	Color Bkgd >Color Bkgd2	
CCR1 signal assigned button	CCR >CCR1 >XX	*page 241*
CCR2 signal assigned button	CCR >CCR2 >XX	

Device control block (trackball or joystick)

Buttons	Menus	See
DME1 to DME8 [a]	DME >XX	*page 288*
DEV1 to DEV12 assigned buttons	• Device >DDR/VTR >Cueup & Play [b] • Device >DDR/VTR >Timeline [c]	Chapter 12 (Volume 2)
FM1CLIP to FM8CLIP assigned buttons	Frame Memory >Clip >Recall	*page 214*
K1RSZ to K8RSZ [d]	• M/E-1, 2, 3, 4, 5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Processed Key/Resizer • PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Processed Key/Resizer	*page 152*

a) When the three-dimensional transformation operation mode is enabled.

b) When the [MENU] button is Off.

c) When the [MENU] button is On.

d) When the resizer control mode is enabled.

Device control block (search dial)

Buttons	Menus	See
DEV1 to DEV12	• Device >DDR/VTR >Cueup & Play [a] • Device >DDR/VTR >Timeline [b]	Chapter 12 (Volume 2)
FM1CLIP to FM8CLIP assigned buttons	Frame Memory >Clip >Recall	–

a) When the [TIMELINE] button is Off.

b) When the [TIMELINE] button is On.

Downstream key/fade-to-black control block

Buttons	Menus	See
DSK1, DSK2	PGM/PST >DSK1, 2 >XX [a)]	*page 126*

a) When a key other than DSK1 or DSK2 is assigned, the menu for the corresponding key appears.

Transition control block and Flexi Pad control block (simple type)

Buttons	Menus	See
KEY1 (DSK1)	• M/E-1, 2, 3, 4, 5 >Key1 >XX • PGM/PST >DSK1 >XX	*page 126*
KEY2 (DSK2)	• M/E-1, 2, 3, 4, 5 >Key2 >XX • PGM/PST >DSK2 >XX	
WIPE	• M/E-1, 2, 3, 4, 5 >Wipe >Main Pattern • PGM/PST >Wipe >Main Pattern	*page 163*
DME	• M/E-1, 2, 3, 4, 5 >DME Wipe >XX • PGM/PST >DME Wipe >XX	*page 187*
FM1CLIP to FM8CLIP assigned buttons	• M/E-1, 2, 3, 4, 5 >Misc >Clip Transition • PGM/PST >Misc >Clip Transition	–
SNAPSHOT	Snapshot >Snapshot >XX	Chapter 14 (Volume 2)
MCRO [a)]	Macro >Register >XX	Chapter 16 (Volume 2)

a) When the button is assigned to macro function in the Setup menu.

Multifunction Flexi Pad control block

Buttons	Menus	See
WIPE	M/E-1, 2, 3, 4, 5, PGM/PST >Wipe >Main Pattern	*page 163*
DME WIPE	M/E-1, 2, 3, 4, 5, PGM/PST >DME Wipe >XX	*page 187*
SNAPSHOT	Snapshot >Master Snapshot >Store [a)] Snapshot >Snapshot >XX [b)]	Chapter 14 (Volume 2)
EFF	Effect >Master Timeline >Store [a)] Effect >Effect 1-99 >XX [b)]	Chapter 13 (Volume 2)
SHOTBOX	Shotbox >Register >Store/Recall	Chapter 15 (Volume 2)
MCRO	Macro >Register >XX	Chapter 16 (Volume 2)
TRANS RATE	Misc >Transition >Key/ME/FTB	*page 234*
KEY SS	Snapshot >Key Snapshot >XX	Chapter 14 (Volume 2)
STOR [c)]	Key Frame >Region Select	Chapter 13 (Volume 2)
RCLL [c)]	Key Frame >Region Select	Chapter 13 (Volume 2)

Multifunction Flexi Pad control block

Buttons		Menus	See
KEY ADJ >	KEY1	• M/E1, 2, 3, 4, 5 >Key1 >XX • PGM/PST >DSK1 >XX	*page 126*
	KEY2	• M/E1, 2, 3, 4, 5 >Key2 >XX • PGM/PST >DSK2 >XX	
	KEY3	• M/E1, 2, 3, 4, 5 >Key3 >XX • PGM/PST >DSK3 >XX	
	KEY4	• M/E1, 2, 3, 4, 5 >Key4 >XX • PGM/PST >DSK4 >XX	
	KEY5	• M/E1, 2, 3, 4, 5 >Key5 >XX • PGM/PST >DSK5 >XX	
	KEY6	• M/E1, 2, 3, 4, 5 >Key6 >XX • PGM/PST >DSK6 >XX	
	KEY7	• M/E1, 2, 3, 4, 5 >Key7 >XX • PGM/PST >DSK7 >XX	
	KEY8	• M/E1, 2, 3, 4, 5 >Key8 >XX • PGM/PST >DSK8 >XX	
	LUM LIN WIPE PTN	M/E-1 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	*page 127*
		M/E-2 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
		M/E-3 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
		M/E-4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
		M/E-5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type	
		PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type	
	CRK	M/E-1 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	*page 130*
		M/E-2 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
		M/E-3 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
		M/E-4 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
		M/E-5 >Key1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
		PGM/PST >DSK1, 2, 3, 4, 5, 6, 7, 8 >Type >Chroma Adjust	
KEY SS	KEY1	• M/E1, 2, 3, 4, 5 >Key1 >XX • PGM/PST >DSK1 >XX	*page 126*
	KEY2	• M/E1, 2, 3, 4, 5 >Key2 >XX • PGM/PST >DSK2 >XX	
	KEY3	• M/E1, 2, 3, 4, 5 >Key3 >XX • PGM/PST >DSK3 >XX	
	KEY4	• M/E1, 2, 3, 4, 5 >Key4 >XX • PGM/PST >DSK4 >XX	
	KEY5	• M/E1, 2, 3, 4, 5 >Key5 >XX • PGM/PST >DSK5 >XX	
	KEY6	• M/E1, 2, 3, 4, 5 >Key6 >XX • PGM/PST >DSK6 >XX	
	KEY7	• M/E1, 2, 3, 4, 5 >Key7 >XX • PGM/PST >DSK7 >XX	
	KEY8	• M/E1, 2, 3, 4, 5 >Key8 >XX • PGM/PST >DSK8 >XX	

a) When [MSTR] button is on.
b) When [MSTR] button is off.
c) When [SNAPSHOT] button is on.

Menus Allowing a Return to Default Settings

Top menu selection button name	VF number (HF number)	Menu number	Menu name
M/E1	VF1 [a]	1110-series/1510-series	Key1/Key5 [b]
	VF2 [a]	1120-series/1520-series	Key2/Key6 [b]
	VF3 [a]	1130-series/1530-series	Key3/Key7 [b]
	VF4 [a]	1140-series/1540-series	Key4/Key8 [b]
	VF5	1150-series	Wipe [b]
	VF6	1160-series	DME Wipe [b]
	VF7	1170-series	Misc [b]
M/E2	VF1 [a]	1210-series/1610-series	Key1/Key5 [b]
	VF2 [a]	1220-series/1620-series	Key2/Key6 [b]
	VF3 [a]	1230-series/1630-series	Key3/Key7 [b]
	VF4 [a]	1240-series/1640-series	Key4/Key8 [b]
	VF5	1250-series	Wipe [b]
	VF6	1260-series	DME Wipe [b]
	VF7	1270-series	Misc [b]
M/E3	VF1 [a]	1310-series/1710-series	Key1/Key5 [b]
	VF2 [a]	1320-series/1720-series	Key2/Key6 [b]
	VF3 [a]	1330-series/1730-series	Key3/Key7 [b]
	VF4 [a]	1340-series/1740-series	Key4/Key8 [b]
	VF5	1350-series	Wipe [b]
	VF6	1360-series	DME Wipe [b]
	VF7	1370-series	Misc [b]
M/E4	VF1 [a]	8110-series/8510-series	Key1/Key5 [b]
	VF2 [a]	8120-series/8520-series	Key2/Key6 [b]
	VF3 [a]	8130-series/8530-series	Key3/Key7 [b]
	VF4 [a]	8140-series/8540-series	Key4/Key8 [b]
	VF5	8150-series	Wipe [b]
	VF6	8160-series	DME Wipe [b]
	VF7	8170-series	Misc [b]
M/E5	VF1 [a]	8210-series/8610-series	Key1/Key5 [b]
	VF2 [a]	8220-series/8620-series	Key2/Key6 [b]
	VF3 [a]	8230-series/8630-series	Key3/Key7 [b]
	VF4 [a]	8240-series/8640-series	Key4/Key8 [b]
	VF5	8250-series	Wipe [b]
	VF6	8260-series	DME Wipe [b]
	VF7	8270-series	Misc [b]

Top menu selection button name	VF number (HF number)	Menu number	Menu name
P/P	VF1 [a]	1410-series/1810-series	DSK1/DSK5 [b]
	VF2 [a]	1420-series/1820-series	DSK2/DSK6 [b]
	VF3 [a]	1430-series/1830-series	DSK3/DSK7 [b]
	VF4 [a]	1440-series/1840-series	DSK4/DSK8 [b]
	VF5	1450-series	Wipe [b]
	VF6	1460-series	DME Wipe [b]
	VF7	1470-series	Misc [b]
COLOR BKGD	VF1	2210	Color Bkgd 1 [b]
	VF2	2220	Color Bkgd 2 [b]
CCR	VF1	2410-series	CCR1 [b]
	VF2	2420-series	CCR2 [b]
FRAME MEM	VF1	2510-series	Still [c]
	VF2	2520-series	Clip [c]
	VF3	2530-series	Reposition/Lock [c]
	VF4	2540-series	File [c]
	VF5	2550-series	Folder [c]
AUX	VF1	2311	Aux Bus [c]
DME	VF1	4110-series	Edge [c]
	VF2	4120-series	Video Modify [c]
	VF3	4131	Freeze [c]
	VF4	4141	Non-Linear [c]
	VF5	4150-series	Light/Trail [c]
	VF6	4160-series	Input/Output [c]
	VF7	4170-series	Enhanced Video Modify [b]
GLB EFF	VF1	4210-series	Ch1–Ch4 [c]
	VF2	4220-series	Ch5–Ch8 [c]
KEY FRAME	(HF3)	6113	Path [c]

a) VF1 to VF4 are shared between Key1 (DSK1) to Key4 (DSK4) and Key5 (DSK5) to Key8 (DSK8).

b) Menu to return to the default settings for particular functions or for particular knob parameters *(for the relevant knob parameters, see page 406)*

c) Menu to return to the default settings for particular knob parameters *(for the relevant knob parameters, see page 406)*

Knob parameters to which default recall does not apply

Menu number [a]	Menu name	Button name	Knob	Parameter
1111	Type	[Luminance] and [Linear] in <Key Type> group	4	Filter
		[Color Vector] in <Key Type> group	1 2 (Parameter group [2/2])	Y Filter, C Filter
1111.1	Type >Chroma Adjust	[Key Active]	5	Filter
		[Color Cancel] in <Color Cancel> group	5	Filter
1112.1	Edge >Matte Adjust	[Mix Color] in <Edge Matte> group	5	Pattern
		[Multi]	3	Invert Type
1113	Main Mask	[Pattern]	5	Pattern
		[Multi]	3	Invert Type

Knob parameters to which default recall does not apply

Menu number [a]	Menu name	Button name	Knob	Parameter
1116	Transition	[Wipe] in <ON Transition Type> group	1 5	Transition Rate Pattern
		[Wipe] in <OFF Transition Type> group	1 5	Transition Rate Pattern
		[Key Blink] and [Edge Blink] in <Blink> group	1	Blink Rate
		[Mix] in <Transition Type> group	1	Transition Type
		[Wipe] in <Transition Type> group	1 5	Transition Rate Pattern
1116.1	Transition >Wipe Adjust	[Multi]	3	Invert Type
		[H] and [V] in <Pairing> group	1	Width
		[H], [V], and [Fringe] in <Modulation> group	4	Shape
1154	Edge/Direction	[Split] in <Edge> group	1	Split No
1154.1	Edge/Direction >Matte Adjust	[Mix Color] in <Edge Matte> group	3	Pattern
		[Multi]	3	Invert Type
1155	Main Modify	[H] and [V] in <Pairing> group	1	Width
		[H], [V], and [Fringe] in <Modulation> group	4	Shape
1164	Edge/Direction	[Independent Trans Rate] in <Pattern Limit Release> group	1	Transition Rate
1171	Transition	[Mix], [Nam], [Super Mix], [Preset Color Mix], [Wipe], [DME Wipe], and [FTB] in <Transition Type> group	1	Transition Rate

a) The menu numbers shown by way of example are those for M/E-1: the same applies for M/E-2, M/E-3, M/E-4, M/E-5, and P/P. Also, content applying to Key1 applies equally to Key2 to Key8.

Knob parameters subject to restriction on default recall

Menu number	Menu name	Button name	Knob	Parameter
1111.1 [a]	Type >CRK Adjust	[Sample Mark] in the <Auto> group	1 2	Position H Position V
1112.1 [a]	Edge >Matte Adjust	[Position]		
1113 [a]	Main Mask	[Position]		
1116.1 [a]	Transition >Wipe Adjust	[Position]		
1116.3 [a]	Transition >DME Wipe Adjust	[Position]	1 2	H V
1154.1 [a]	Edge Direction >Matte Adjust	[Position]	1 2	Position H Position V
1155 [a]	Main Modify	[Position] in the <Position> group		
1155.1 [a]	Main Modify >Multi Adjust	[Position]		
1156 [a]	Sub Modify	[Position] in the <Position> group		
1156.1 [a]	Sub Modify >Multi Adjust	[Position]		






Knob parameters subject to restriction on default recall

Menu number	Menu name	Button name	Knob	Parameter
2122.2	Composite >Pattern Adjust	[Position]	1 2	Position H Position V
2131	Reposition	[Normal]		
		[Black&White]		
2210	Color Bkgd1 [b]	[Position]		
2412.1 [c]	Primary CCR >Mask1 Adjust [d]	[Position]		
4116	DME >Edge >Wipe Crop	[Position/Size]	5	Pattern
4127	DME >Video Modify >Mask	[Position/Size]		

a) The menu numbers shown by way of example are those for M/E-1: the same applies to M/E-2, M/E-3, M/E-4, M/E-5, and P/P. Equally, content applying to Key1 applies equally to Key2 to Key8.
b) The same applies to Color Bkgd2.
c) The menu numbers shown by way of example are those for CCR1: the same applies to CCR2.
d) The sample applies to Mask2 Adjust.

Spotlighting

Texture Patterns

1		2		3		4		5		6	
7		8		9		10		11		12	
13		14		15		16		17		18	
19		20		21		22		23		24	
25		26		27		28		29		30	

Material provided by Digital Archive Japan, INC.

Shape Patterns

1		2	

Functional Differences With Models of DME

Function	Menu number	MVE-8000A	MVE-9000	MKS-7470X/7471X	See
Selection of signal to insert in the border	4111	Flat Color only	Flat Color Ext Video Mix Color	Flat Color Ext Video Mix Color	*page 289*
Key Border	4113	No	Cannot be turned on when Glow is on.	Cannot be turned on when Glow is on.	*page 292*
Art Edge	4114	No	Yes	Yes	*page 292*
Flex Shadow	4115	No	Yes	Yes [a)]	*page 296*
Wipe Crop	4116	No	Yes	Yes	*page 300*
Color Mix	4117	No	Yes	Yes	*page 302*
Defocus/Blur	4121	Cannot be turned on when Glow is on.	Yes	Yes	*page 303*
Mask	4127	Yes [b)]	Yes	Yes	*page 310*
Adjustment of entire image brightness in Lighting/Spotlighting (parameter [Total Ambient])	4151 4156	No	Yes	Yes	*page 329* *page 339*
Setting the bar mode of the highlight area	4151	No	Yes	Yes	*page 330*
Adjustment of color of the diffuse light area (parameter [Bar Diffuse Color])	4151	No	Yes	Yes	*page 331*
Selection of signal to insert in the trail afterimage portion	4152	Freeze Video Flat Color Hue Rotate	Without limitation	Without limitation	*page 331*
Combine process for Trail	4152	No	Yes	Yes	*page 332*
Defocus function for Trail	4152	No	Yes	Yes	*page 332*
Combine process for Keyframe Strobe	4154	No	Yes	Yes	*page 334*
Wind	4155	No	Yes	Yes	*page 335*
Spotlighting	4156	No	Yes	Yes	*page 336*
Selection of signal to insert in the background	4161	Flat Color only	Flat Color Ext Video Mix Color	Flat Color Ext Video Mix Color	*page 344*
Interpolation settings	4163	Yes (SD only)	Yes (both SD/HD)	Yes (both SD/HD)	*page 346*
Anti-moiré filter	4163	Yes (HD only)	No	No	*page 347*
Flex shadow axis settings	4164	No	Yes	Yes	*page 287*
Dim and Fade	4173	No	Yes	Yes	*page 309*
Glow	4174	Cannot be turned on when Defocus/ Blur is on.	Cannot be turned on when Key Border is on.	Cannot be turned on when Key Border is on.	*page 310*
Combiner depth settings (three-dimensional crossing function) (parameter [Depth])	4211	No	Yes	Yes	*page 352*

Function	Menu number	MVE-8000A	MVE-9000	MKS-7470X/7471X	See
Adding user texture patterns (for Spotlighting)	7316.9	No	Yes	Yes	“Adding User Texture Patterns” in Chapter 18 (Volume 2)
Setting AUX bus output/ reentry input	7337.7	It is not possible to make settings for DME 1 to 8 Ext In.	It is not possible to make settings for DME 1 to 8 Ext In.	It is not possible to make settings for DME 1 to 8 Ext In.	“Setting the AUX Bus Output and Reentry Input” in Chapter 20 (Volume 2)
TBC window center position (Video/Key)	7341.1	Yes only when SDI interface is used.	Yes only when SDI interface is used.	No	“Setting the TBC Window Center Position” in Chapter 21 (Volume 2)
TBC window center position (Ext In)		No	Yes	Yes	“Setting the TBC Window Center Position” in Chapter 21 (Volume 2)
Adjustment of monitor output video clip level	7343	Yes only when SDI interface is used.	Yes only when SDI interface is used.	No	“Adjusting the DME1 and DME2 Output Video Clip Levels” in Chapter 21 (Volume 2)
Settings relating to usage of editor port	7344	Yes	Yes	No	“Interfacing With External Devices (Device Interface Menu)” in Chapter 19 (Volume 2)
1080P supported	7313.1	Yes	No	Yes	“Setting the Signal Format (Format Menu)” in Chapter 18 (Volume 2)

a) [External] cannot be selected in the <Flex Shadow Source> group or [Ext Video] cannot be selected in the <Flex Shadow Fill> group.
b) Effect groups 1 and 2 cannot be selected at the same time. Pattern 304 (Round Corner) is not supported.

The material contained in this manual consists of information that is the property of Sony Corporation and is intended solely for use by the purchasers of the equipment described in this manual.
Sony Corporation expressly prohibits the duplication of any portion of this manual or the use thereof for any purpose other than the operation or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

MVS-8000X System
MVS-7000X System
(SY)
4-470-637-**01** (1)

Sony Corporation

http://www.sony.net/

© 2013

SONY

Multi Format Switcher System

MVS-8000X System
MVS-7000X System

(With CCP-8000 Series Center Control Panel)

User's Guide Volume 2 English

Software Version 12.10 and Later

1st Edition (Revised 2)

NOTICE TO USERS

© 2011, 2013 Sony Corporation. All rights reserved.
This manual or the software described herein, in whole or in part, may not be reproduced, translated or reduced to any machine readable form without prior written approval from Sony Corporation.

SONY CORPORATION PROVIDES NO WARRANTY WITH REGARD TO THIS MANUAL, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN AND HEREBY EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE WITH REGARD TO THIS MANUAL, THE SOFTWARE OR SUCH OTHER INFORMATION. IN NO EVENT SHALL SONY CORPORATION BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, WHETHER BASED ON TORT, CONTRACT, OR OTHERWISE, ARISING OUT OF OR IN CONNECTION WITH THIS MANUAL, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN OR THE USE THEREOF.

Sony Corporation reserves the right to make any modification to this manual or the information contained herein at any time without notice.
The software described herein may also be governed by the terms of a separate user license agreement.

External Devices

Chapter 12

Control of External Devices

In this system, you can operate while controlling the following types of external device:

- Devices supporting P-Bus (Peripheral II protocol) (referred to as "P-Bus devices" in the manual)
- Devices supporting GPI
- VTRs
- Disk recorder (Sony disk 9-pin protocol, video disk communications protocol, Odetics protocol)
- Extended VTR (Abekas A53 protocol)

For details on the devices that can be connected, consult your Sony representative.

Use the Device menu to carry out operations for controlling above external devices.

To access the Device menu

In the menu control block, press the top menu selection button [DEV].
For VTRs, Extended VTRs, and disk recorders, you can also carry out operations using the device control block.

Notes

- To operate P-Bus devices, VTRs, Extended VTRs, and disk recorders in this system, the following settings are required on the DCU 9-pin serial port.
  - Device type setting
  - Device name
  - Setting of control panel (SCU) to be used

  For details of the settings, see "Making Serial Port Settings" (page 645).
- When using a disk recorder or Extended VTR, be sure to go to the Device >DDR/VTR >File List menu, and recall the file *(see page 433)*.

Shared Functions for External Device Control

Keyframe functions

There are 250 registers, numbered 1 to 250, holding external device control data as keyframe data *(see page 436)* (only 99 registers for the GPI timeline).
The following are the keyframe functions that can be used.

- RECALL (1-250), STORE (1-250), RECALL UNDO, STORE UNDO, empty register search, AUTO SAVE, RECALL MODE (RECALL, RECALL & REWIND)
- EDIT ENABLE, EDIT UNDO
- CONST DUR, EFF DUR, KF DUR, DELAY, PAUSE, INSERT BEFORE, INSERT AFTER, MODIFY, DELETE, COPY, PASTE BEFORE, PASTE AFTER, FROM TO, ALL
- PREV KF, NEXT KF, GOTO TC, GOTO KF, RUN, REWIND, FF, STOP NEXT KF, NORMAL, JOG, KF FADER

Notes

- Actions set in a keyframe are executed only when the keyframe effect is executed in the normal direction. Take care when executing simultaneously with a switcher or DME keyframe effect, since the actions are not executed in the reverse direction.
- The following keyframe functions cannot be used.
  - KF LOOP, EFFECT LOOP, REVERSE, NORMAL/REVERSE
  - PATH

Saving to registers

Set the data for controlling external devices in the Device menu. You can save the set data in keyframe, snapshot, or shotbox registers *(see page 435)*. You can recall the register in which the data is saved, and carry out operations on it with the keyframe control block.

Editing registers

You can carry out the following operations on the registers in which the data for controlling external devices is saved.

- Copy
- Move
- Swap
- Merge (this cannot be carried out for registers holding VTR, disk recorder, or Extended VTR control data.)
- Lock
- Name

File related functions

As effect data, you can save and recall, using the File menu.

Control of P-Bus Devices

You can control P-Bus devices from this system through the 9-pin serial port of a DCU.

P-Bus device control modes

There are two modes of P-Bus device control, as follows.

Trigger: Operating a previously specified button outputs the command for an action assigned to that button.

Timeline: Carrying out a keyframe effect under the control of the center control panel controls external devices.

In the setup, select which of Trigger mode and Timeline mode to use.

You can set the following actions (set what action command is output to which device) in both modes.

- Store
- Recall
- Trigger

Creating and Editing the P-Bus Timeline

At a keyframe point on the P-Bus timeline, you can set an action. At any single keyframe point you can set actions for a maximum of 24 devices.

For details of keyframe creation and editing operations, see "Creating and Editing Keyframes" (page 450).

For the action setting (or P-Bus timeline editing), use the Device menu.

You can save the data set in the Device menu in keyframe effect registers. Recalling the register starts execution of the keyframe effect, and when this reaches the keyframe point at which actions are set, action commands are output to external devices through the 9-pin serial port assigned to P-Bus.

Notes

Using the P-Bus timeline function requires the P-Bus control mode to be set to [Timeline]. Carry out this setting in the Engineering Setup >Panel >Device Interface menu *(see page 600)*.

Setting an action

1 In the Device menu, press VF2 'P-Bus Timeline.'

The Device >P-Bus Timeline menu appears.
The status area shows two lists. The left list is for setting combinations of devices and actions. The

settings in this list will be saved as keyframe point data. The right list is for selecting the action.

2 Select the P-Bus device for which you want to set an action, by using any of the following methods to specify the device ID.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	ID	Device number	0 to 23

3 Using either of the following methods, select the action.

- Press directly on the list on the right of the status area.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Action No	Action	1 to 4 a)

a) 1: Off (no specification)
2: Store
3: Recall
4: Trigger

4 If in step **3** you selected 2 (Store), 3 (Recall), or 4 (Trigger), turn knob 3 to select the register number or trigger number.

The indication for knob 3 changes to reflect the selection of Store, Recall, or Trigger.

Knob	Parameter	Adjustment	Setting values
3	Store No	Register number for Store	1 to 250
3	Recall No	Register number for Recall	1 to 250
3	Trigger No	Trigger number	0 to 15

The setting is reflected in the list on the right of the status area.

5 Press [Set].

For the device selected in the list on the left of the status area, this sets the action specified in step **4**.

Repeat steps **2** to **5** as required for other devices.

Testing an action command

To produce a test output of the action command, press [Test Fire].
The action command is output from the 9-pin serial port of the DCU according to the setting in the list on the left of the status area.

Clearing an action setting

To clear the setting for separate devices

1 In the list on the left of the status area, select the device for which you want to clear the action setting.

2 In the list on the right, select "Off."

3 Press [Set].

To clear the action settings for all devices in a single operation

Press [All Off].

Setting the action for a rewind operation

On the P-Bus timeline, when the [REWIND] button in the keyframe control block is pressed the action set for the first keyframe is not executed; when the [RUN] button is pressed, then the first keyframe action is executed.
To execute an action when the [REWIND] button is pressed, it is necessary to set this action (Rewind Action). To carry out this setting, in the Device >P-Bus Timeline menu, press [Rewind Action] to recall the Rewind Action menu. In this setting screen, use the same setting method as in the screen for setting an action on the P-Bus timeline. Alternatively, you can select the reverse arrangement, whereby when the [REWIND] button is pressed, this executes the action set for the first keyframe, and when the [RUN] button is pressed the first keyframe action is not executed. In this case, the Rewind Action setting is still valid.

For details, see "Setting the First Keyframe When a Rewind is Executed" (page 603).

Carrying out a Direct Store

You can carry out a Learn with the register number specified for the device selected in the menu.

1 Using any of the following methods, select the device.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Setting	Setting values
1	ID	Device ID	0 to 23

2 In the Device >P-Bus Timeline menu, press [Direct Store].

The numeric keypad window appears.

3 Enter the register number for which you want to carry out the Learn.
The setting range is from 1 to 250.

4 Press [Enter].

P-Bus Trigger

"P-Bus trigger" is a function whereby a button operation in the numeric keypad control block or keyframe control block outputs an action command to a P-Bus device.

Notes

To use the P-Bus trigger function, the P-Bus control mode must be set to [Trigger]. Make this setting in the Engineering Setup >Panel >Device Interface menu.

For details, see "Setting the Control Mode for P-Bus Devices" (page 600).

The relation between the operation in each of the control blocks and the action command output is as follows.

Action command for an operation in the numeric keypad control block or Multifunction Flexi Pad control block

- RECALL: Recall
- STORE: Store

This recalls the register specified in the numeric keypad control block, and a Recall or Store is carried out, according to the setting.

Action command for an operation in the keyframe control block or Multifunction Flexi Pad control block

- RUN: Trigger 1
- REWIND: Trigger 4
- NEXT KF: Trigger 7
- PREV KF: Trigger 8

Outputting an action command

As an example, to output a Recall, use the following procedure.

1 In the numeric keypad control block, press the [EFF] button, turning it on.

The [RCALL] button in the numeric keypad control block lights.

2 Press the [P-BUS] button in the numeric keypad control block, turning it on, to select the P-Bus region.

3 Enter the number of the register (1 to 250) to be recalled with the numeric keypad buttons.

4 Press the [ENTER] button in the numeric keypad control block.

Control of GPI Devices

You can control GPI devices from the control panel of this system, or through the GPI output port of a DCU.

GPI timeline

For a keyframe effect controlled from the center control panel, the GPI timeline allows you to set an action (setting a trigger output from a particular GPI output port) at a keyframe point on the GPI timeline. At any keyframe point, you can make a maximum of eight GPI output port settings.

GPI timeline actions

The actions that can be used on the GPI timeline are as follows.

- Control panel GPI output port
- DCU GPI output port

For the GPI output settings (keyframe editing), use the Device menu.

The data set in the Device menu is saved in a keyframe effect register. When you recall this register and start execution of the keyframe effect, and advance the effect to the keyframe point for which the GPI output is set, a trigger pulse is output to the external device from the specified GPI output port.

GPI Timeline Creation and Editing

This section describes how to set GPI output ports to be registered at a keyframe point, and how to carry out creation and editing of the GPI timeline.

For details of keyframe creation and editing operations, see "Creating and Editing Keyframes" (page 450).

GPI output port settings

Set the GPI output port number of the control panel or DCU which outputs GPI pulses at a keyframe point on the GPI timeline.

Use the following procedure. Use the same procedure to subsequently change the settings.

1 In the Device menu, press VF1 'GPI Timeline.'

The Device >GPI Timeline menu appears.

The status area shows the "GPI Output" list on the left and the "GPI Port" list on the right.

The "GPI Output" list (on the left) shows the relation between ports 1 to 8 for the GPI timeline and the trigger pulse output destination ports. The content of this list is saved as keyframe data.

The "GPI Port" list (on the right) is for selecting the GPI trigger pulse output destination.

2 Using either of the following methods, select the GPI timeline port you want to set on the GPI Timeline.

- Press directly on the list on the left of the status area.
- Turn the knob.

Knob	Parameter	Setting	Setting values
1	GPI Output No	GPI timeline port number	1 to 8

3 Using either of the following methods, trigger output destination.

- Press directly on the list on the right of the status area.
- Turn the knob.

Knob	Parameter	Setting	Setting values
2	GPI Port No	SCU/DCU GPI port to be the trigger output destination	1 to 3 a)

a) 1: Off (no specification)
2: Control panel (SCU) GPI port
3: DCU GPI port

4 If in step **3** you selected 2 (SCU) or 3 (DCU), then use the knob to select the port number.

The indication for knob 3 depends on whether SCU or DCU is selected.

Knob	Parameter	Setting	Setting values
3	SCU Port No	SCU GPI port number	1 to 8
3	DCU Port No	DCU GPI port number	1 to 50 a)

a) The number of DCU GPI ports depends on the settings in Engineering Setup.

The setting is reflected in the list on the right of the status area.

Notes

For the output port you have set here, be sure to set the trigger type to "Rising Edge," "Falling Edge" or "Any Edge."

For details of the trigger type settings, see "Making Control Panel GPI Output Settings" (page 599) and "Making DCU GPI Output Settings" (page 644).

5 Press [Set].

This specifies the SCU/DCU GPI port whose number you specified in step **4** as the pulse output destination

for the GPI timeline port selected in the list on the left of the status area.

Repeat steps **1** to **5** for other GPI timeline ports as required.

Testing trigger output

To test the trigger output, press [Test Fire].
According to the list settings on the left of the status area, a pulse is output from the selected output port.

Clearing output port settings

To clear the settings for each port

1 In the list on the left of the status area, select the GPI timeline port whose settings you want to clear.

2 In the list on the right, select "Off."

3 Press [Set].

To clear the settings for all ports

Press [All Off].

Setting the action for a rewind operation

On the GPI timeline, when the [REWIND] button in the keyframe control block (or Flexi Pad control block, or Multifunction Flexi Pad control block) is pressed the action set for the first keyframe is not executed; when the [RUN] button is pressed, then the first keyframe action is executed.
To execute an action when the [REWIND] button is pressed, it is necessary to set this action (Rewind Action). To carry out this setting, in the Device >GPI Timeline menu, press [Rewind Action] to recall the Rewind Action menu. In this setting screen, use the same setting method as in the screen for setting an action on the GPI timeline. Alternatively, you can select the reverse arrangement, whereby when the [REWIND] button is pressed, this executes the action set for the first keyframe, and when the [RUN] button is pressed the first keyframe action is not executed. In this case, the Rewind Action setting is still valid.

For details of the setting, see "Setting the First Keyframe When a Rewind is Executed" (page 603).

Control of VTRs, Extended VTRs, and Disk Recorders

In this system, for up to 12 VTRs, disk recorders or Extended VTRs connected to a DCU, you can carry out the following manual operations and timeline settings.
- Controlling manually from the device control block (trackball or search dial)
- Saving a start point, stop point, start delay time, variable speed and so on in a data register, then recalling the register to control automatically from the keyframe control block (Cueup & Play and VTR/disk recorder/ Extended VTR timeline).
- In the Device menu, you can check the following VTR, disk recorder and Extended VTR information:
  - Device name
  - Register number
  - VTR/disk recorder/Extended VTR status
  - Current time
  - Start point
  - Stop point
  - Variable speed
  - Start delay time
  - Loop setting
  - Recue setting

To control a VTR, Extended VTR, or disk recorder in this system, the following settings are required.
- **Button assignment:** For a VTR, Extended VTR, or disk recorder connected to the DCU 9-pin serial port, assign a device selection button in the device control block.
- **Timecode source:** When using a VTR, specify a reference signal used for determining the tape position.

For details, see "Making DCU Serial Port Settings" (page 600) and "Making Detailed Settings on the External Device Connected to the Serial Port" (page 646).

Manual Operation

In the device control block, you can carry out the following operations manually.
- **VTR, disk recorder or Extended VTR selection**
- **Tape transport and disk drive control:** You can use the following tape transport and disk drive control buttons:
  REC, REW, PLAY, FF, CUE, VAR, SHTL, JOG, STB OFF, STOP, and ALL STOP.
  Depending on the settings made in the Setup menu, the CUE, PLAY and STOP operations can be carried out from the transition control block.

For details of the operation of the buttons, see "Transition Control Block" in Chapter 2 (Volume 1).

- **Setting a start point:** For each selected VTR/disk recorder/Extended VTR you can set the start point timecode value as keyframe data.
- **Setting a stop point:** For each selected VTR/disk recorder/Extended VTR you can set the stop point timecode value as keyframe data.
- **Setting a start delay time:** For each selected VTR/disk recorder/Extended VTR you can set the start delay as key frame data.
- **Recording to VTR or disk recorder:** Record video to the selected VTR/disk recorder.
- **Loop/recue setting:** You can select loop or recue as the playback mode. These operate as follows.
  - **When loop is selected:** Playback repeats from the start to the end of the currently recalled file.
  - **When recue is selected:** When playback reaches the stop point, automatically cue up to the start point.


To use the loop or recue function, it is necessary to enable the function in setup.

For details, see "Serial Port Settings (Serial Port Assign Menu)" (page 645).

Controlling the Tape/Disk Transport

To switch to VTR/disk recorder/frame memory operation mode

To control a VTR/Extended VTR/disk recorder with the device control block (trackball) or device control block (joystick), press the [DEV] button in the device control block, turning it on, to switch the device control block to the VTR/disk recorder/frame memory operation mode. The button assignment changes as follows (the [SHFT] button is disabled in VTR/disk recorder/frame memory operation mode).

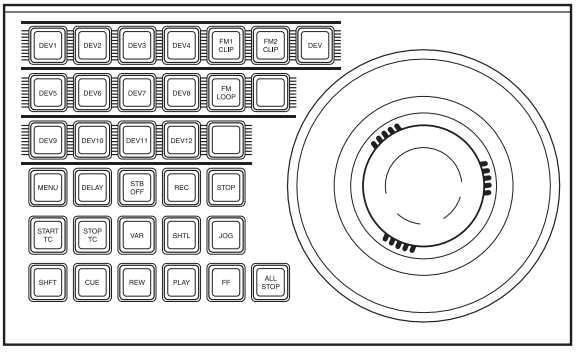

Device control block in the VTR/disk recorder/frame memory operation mode (trackball module)

In the device control block (search dial module), there is no such a mode selection button and you can directly select a device.

Buttons used when the VTR/disk recorder/ frame memory operation mode is enabled

DELAY: Press this button, turning it on, to enter a delay value from the numeric keypad control block.

STB OFF (standby off): Press this button to switch to standby off mode. This button cannot be used for frame memory clip operations.

REC (record): Press this button at the same time as the [PLAY] button to start recording. This button cannot be used for frame memory clip operations.

STOP: Press this button to stop the tape, disk or frame memory clip.

START TC (start timecode): Press this button to set the timecode of the start point at that time. The timecode of the start point is updated to the current time each time this button is pressed.

When the device the operation applies to is a VTR/disk recorder, the start point updated by the setting of the [MENU] button is as follows.

- **When the [MENU] button is On:** start point of the timeline
- **When the [MENU] button is Off:** start point of Cueup & Play

STOP TC (stop timecode): Press this button to set the timecode of the stop point at that time. The timecode of the stop point is updated to the current time each time this button is pressed.

When the device the operation applies to is a VTR/disk recorder, the stop point updated by the setting of the [MENU] button is as follows.

- **When the [MENU] button is On:** stop point of the timeline
- **When the [MENU] button is Off:** stop point of Cueup & Play

VAR (variable speed playback): Pressing this button and turning the Z-ring plays back the tape, disk or frame memory clip at a variable speed and direction proportional to the rotation angle of the Z-ring. The variable speed range is –1 to +3 times normal playback speed.

SHTL (shuttle): Pressing this button and turning the Z-ring plays back the tape, disk or frame memory clip at a speed and direction proportional to the rotation angle of the Z-ring.

JOG: Pressing this button and turning the Z-ring plays back the tape, disk or frame memory clip at a speed and direction proportional to the rotation of the Z-ring. You can set the Z-ring operation sensitivity to any of six levels, in the setup menus.

You can also change the sensitivity by holding down this button during an operation. You can select the sensitivity in this case from six levels.

For details of the settings, see "Setting Trackball, Joystick, Search Dial, and Double-Click Sensitivity" (page 605).

CUE: Pressing this button cues the tape, disk or frame memory clip automatically to the start point.
REW (rewind): Press this button to rewind the tape, disk or frame memory clip.
PLAY: Press this button to play the tape, disk or frame memory clip.
FF (fast forward): Press this button to fast forward the tape, disk or frame memory clip.
ALL STOP: Press this button to stop all tape transport/ disk drive/frame memory operations.

Selecting a VTR/Extended VTR/disk recorder

To select the VTR/Extended VTR/disk recorder to be controlled, in the device selection buttons of the device control block, press a selection of those buttons turning them on.

For details on frame memory clip operations, see "Frame Memory Clip Operations" in Chapter 7 (Volume 1).

Controlling the tape/disk transport

Using the buttons in the device control block, you can control the tape transport or the disk transport.

For more details of the effect of buttons in VTR/disk recorder operation mode, see "Device Control Block (Trackball)," "Device Control Block (Joystick)" and "Device Control Block (Search Dial)" in Chapter 2 (Volume 1).

If an appropriate setup setting has been made, VTR, Extended VTR, or disk recorder can also be operated with the transition control block (standard type or compact type).

For more details of the effect of buttons in VTR/disk recorder operation mode, see "Transition Control Block (Standard Type)" and "Transition Control Block (Compact Type)" in Chapter 2 (Volume 1).

For details of settings in setup, see "Setting Transition Control Block Button Assignments" (page 572).


Controlling the tape/disk transport with the search dial

With the device control block, you can play back the material on an external device in variable speed.
This section describes the three playback modes, taking the device control block (search dial) as an example.
If you turn this dial during video playback, the direction and speed of playback depend on the direction and angle of rotation. To use this dial, press the [ENBL] button to the upper right of the dial, lighting it amber. This dial has three operation modes: jog, shuttle, and variable.

To prevent overheating, if the search dial is on continuously for 10 seconds, it is automatically turned off. However, in this state, if a movement of the dial is detected, it switches on again.


Jog mode

Press the [JOG] button, lighting the button amber, to switch the dial to jog mode. In this mode, you can advance material frame by frame at a speed proportional to the rotation angle of the dial. To show a still image, stop turning the search dial.

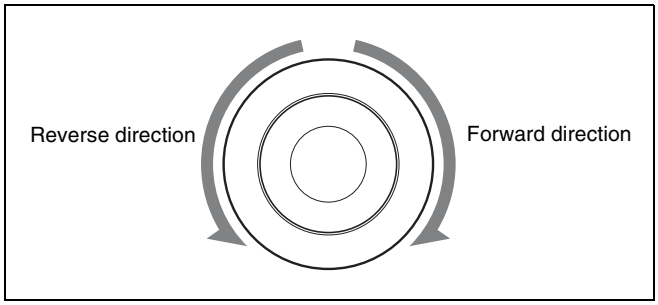


Shuttle mode

Press the [SHTL] button, lighting the button amber, to switch the dial to shuttle mode. In this mode, the playback speed varies in steps according to the rotation angle of the dial, to a maximum of 50 times normal. If the valid angle is exceeded, the dial makes a clicking sound. To show a still image, return the dial to the home position, where it stops with a clicking sound.

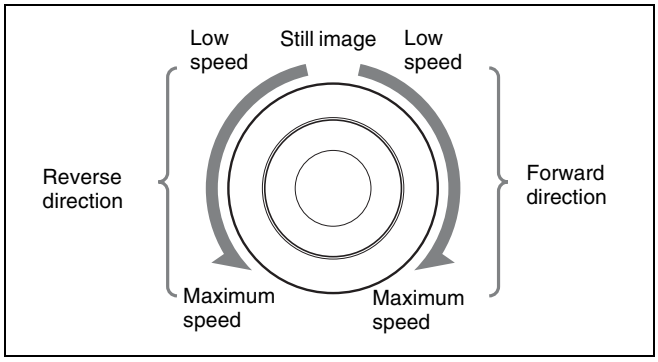

Variable mode

Press the [VAR] button, lighting the button amber, to switch the dial to variable mode. In this mode, the playback speed varies according to the rotation angle of the dial from –1 to +3 times normal speed. The dial indicates the positions where the playback speed is –1 times normal speed, +1 times normal speed, and +3 times normal speed by making a clicking sound at those positions. To show a still image (playback speed 0%), return the dial to its home position, where it stops with a clicking sound.

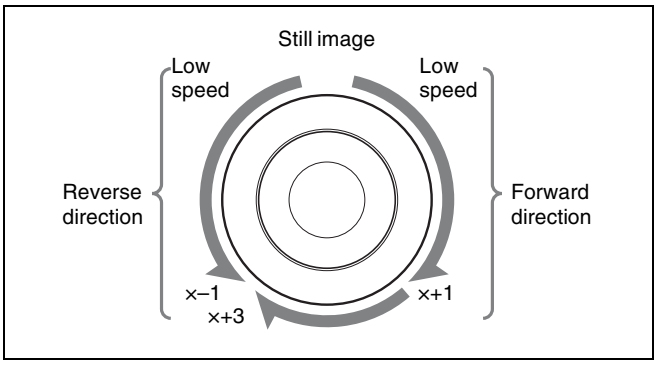

×–1: –1 times normal speed
×+3: +3 times normal speed
×+1: +1 times normal speed

To disable the search dial and end variable mode, press the [STOP] button. Additionally, pressing any of the [REW], [PLAY], [FF], [STB OFF], and [ALL STOP] editing buttons ends the variable mode. For shuttle mode and variable mode, you can set the valid range of the operating angle in the Engineering Setup >Panel >Operation >Sensitivity >Search Dial menu to either of the following.

Narrow operating angle

- Shuttle mode: approx. –150 to +150°
- Variable mode: approx. –120 to +210° (+1 times normal speed is +120°)

Wide operating angle

- Shuttle mode: approx. –180 to +180°
- Variable mode: approx. –200 to +348° (+1 times normal speed is +200°)

Recording to VTRs and disk recorders

You can record to the VTR or disk recorder selected in the device control block. Proceed as follows.

Notes

- Recording is not possible if the VTR or disk recorder is not set to Recorder.
- The disk recorder type must be specified to use the video disk communications protocol *(see page 646)*.
- When using a disk recorder, recording is not possible unless a new file name is specified.
  For details, see "Creating new files" (page 433).
- Recording is not possible when using the Odetics protocol.

1 Using the buttons of the device control block, select the VTR or disk recorder to which you want to record. You can select more than one button.

The first button pressed lights green to indicate the reference device, and the subsequent buttons light amber.

2 While holding down the [REC] button in the device control block, press the [PLAY] button.

Recording starts. During recording, the [REC] button lights red and the [PLAY] button lights amber.

Notes

Note the following points about recording to a disk recorder.

- The maximum length of time that can be recorded in one operation is 30 minutes.
- If you want to record to a different file than the file used in the previous recording, use the Device >DDR/VTR >File List menu to create a new file.
- If you resume recording without executing [Unload] from the Device >DDR/VTR >File List menu, recording starts at the position in the same file where recording was interrupted.

To stop recording

Press the [STOP] button or the [ALL STOP] button in the device control block.

Checking VTR/Disk Recorder/ Extended VTR Information

You can check the VTR/disk recorder/Extended VTR information (timecode information and operating status) set in the device control block, in the Device menu display. To check the VTR/disk recorder/Extended VTR information, press VF3 'DDR/VTR' and HF1 'Cueup & Play' or HF2 'Timeline' in the Device menu.
The Device >DDR/VTR >Cueup & Play menu or Device >DDR/VTR >Timeline menu appears, and a list shows the timecode information and operating status for each device. The columns of the list show the following information.

DEV (device name): DEV1 to DEV12 represent respectively device 1 to device 12.

Reg (register): Number of the register to which settings apply.

Status: Status of each device. The meaning of the indications is as follows.

Operating status display	When VTR is used	When video disk communications protocol, Extended VTR, Sony disk 9-pin protocol, or Odetics protocol is used
XXXX	Communications with the device are being carried out normally, but status information is not received.	Not communicating, or communicating but the device type cannot be read.

Operating status display	When VTR is used	When video disk communications protocol, Extended VTR, Sony disk 9-pin protocol, or Odetics protocol is used
Local	The REMOTE/LOCAL switch of the device is set to LOCAL.	Port is not open.
Tape Out	No tape is loaded.	No file loaded. b)
Rec	Recording.	Recording. a) b)
Cue>	Cueing up in the forward direction.	—
Cue<	Cueing up in the reverse direction.	—
Eject	Ejecting cassette.	—
Stb Off	Stopped in standby off mode.	—
Stop	Stopped in standby on mode.	Stopped.
Play	Playing.	Playing.
FF	Fast forwarding.	—
Rewind	Rewinding.	—
Shtl>	Playing in the forward direction in shuttle mode.	—
Shtl<	Playing in the reverse direction in shuttle mode.	—
Var>	Playing in the forward direction in variable mode.	Playing in the forward direction in variable mode.
Var<	Playing in the reverse direction in variable mode.	Playing in the reverse direction in variable mode.
Jog>	Playing in the forward direction in jog mode.	Playing in the forward direction in jog mode.
Jog<	Playing in the reverse direction in jog mode.	Playing in the reverse direction in jog mode.
Still	Playing still image.	—

a) Not supported for Extended VTR.
b) Not supported for the Odetics protocol.

Current: Shows timecode for current device position.
Start TC: Shows timecode for start point set on device.
Stop TC: Shows timecode for stop point set on device.
Variable: Shows the variable speed set for each device.
Delay: Shows start delay time set on device.
Mode: Shows operation mode (Loop or Recue) set for the device.

Cueup & Play

You can use the device control block or Device menu to save Cueup & Play settings (start point timecode, stop point timecode, start delay time, and so on) for a VTR, disk recorder or Extended VTR in an effect register. By recalling this register, you can operate the following buttons in the keyframe control block to automatically control the VTR, disk recorder or Extended VTR.
[REWIND] button: Cue up to the start point timecode
[RUN] button: Play
With this function you can also stop the VTR, disk recorder or Extended VTR used for playback at the stop point timecode recalled from the same register.

Disk recorder (video disk communications protocol) operation when loop /recue is set

When loop is set: playback repeatedly between the start point and stop point.
When recue is set: when playback reaches the stop point, automatically cue up to the start point.

Notes

- In an effect register set on the VTR/disk recorder timeline, Cueup & Play settings are not possible. To add Cueup & Play settings to such a register, first clear the VTR/disk recorder timeline setting before carrying out the operation.
- When using a disk recorder with Cueup & Play, if you carry out the following sequence of operations, the system may freeze on the frame of the start point.
  1. Press the [RUN] button to play to a point close to the end of a file.
  2. Stop playback.
  3. Press the [RUN] button once more.

  In such cases, first recall a different register, then carry out the following sequence:
  1. Recall the original register again.
  2. Press the [REWIND] button.
  3. Press the [RUN] button.

Making and saving settings relating to Cueup & Play

1 Press the [EFF] button in the numeric keypad control block, turning it on.

This assigns the numeric keypad control block to keyframe operations, and the [RCALL] button lights.

2 Press the region selection button for the region for which you want to make the setting, turning it on.

You can select more than one button.

3 Enter the number of the register to be recalled with the numeric keypad buttons.
To search for an empty register, instead of entering a number, press the [.] (period) button.

The display shows the register number. A letter "e" or "E" after the number indicates the register status, as follows:
e: This register is empty in the selected region.
E: This register is empty in all selectable regions.

4 Press the [ENTER] button.

This recalls the register you selected in step **3**.

5 When using the device control block (trackball) or device control block (joystick), press the [DEV] button in the device control block, turning it on.

Notes

Check that the [MENU] button is not lit. If it is lit, press to turn it off.

6 With the device selection buttons in the device control block, select the VTR, Extended VTR, or disk recorder for which you want to make the setting.

You can select more than one button.
The first button pressed lights green to indicate the reference region, and the subsequent buttons light amber.

7 Set the start point.

- Using the [START TC] button:
  Play the VTR, Extended VTR or disk recorder by control from the device control block. Find the desired start point, and press the [START TC] button at that position.
  If using the [START TC] button, each time you press the button the start point timecode is overwritten.
- Using the [SET START TC]:
  Press the [SET START TC] button in the device control block (search dial).
  The display in the numeric keypad control block shows "START TC." Enter the desired timecode from the numeric keypad control block, and press [ENTER].
  For details of timecode entry, see "Setting the start point and stop point with the [SET XX] buttons" (page 427).
- Setting with the Cueup & Play menu:
  Set the start point, stop point, and start delay duration *(see page 427)*.

8 Set the stop point or duration.

When two of the start point, stop point and duration are set, the remaining one is automatically determined. For example, if you set the stop point in the following procedure, you do not need to enter the value of the duration.

- Using the [STOP TC] button:
  Play the VTR, Extended VTR or disk recorder by control from the device control block. Find the desired stop point, and press the [STOP TC] button at that point.
  If using the [STOP TC] button, each time you press the button the stop point timecode is overwritten.
- Using the [SET STOP TC] button of the device control block (search dial):
  Press the [SET STOP TC] button in the device control block (search dial). The display in the numeric keypad control block shows "STOP TC." Enter the desired timecode from the numeric keypad control block, and press [ENTER].
- Using the [SET DUR] button of the device control block (search dial):
  Press the [SET DUR] button in the device control block (search dial). The display in the numeric keypad control block shows "DUR" and the current setting. Enter the desired duration from the numeric keypad control block, and press [ENTER].
  For details of timecode entry, see "Setting the start point and stop point with the [SET XX] buttons" (page 427).
- Setting with the Cueup & Play menu:
  Set the start point, stop point, and start delay duration *(see page 427)*.

9 To set a start delay time, press the [DELAY] button in the device control block, and enter a value in the numeric keypad control block. Alternatively, make the setting in the Device >DDR/VTR >Cueup & Play menu.
If no setting is required, continue to step **10**.

10 Press the [STORE] button, turning it on, in the numeric keypad control block.

11 Enter the number of the register in which to save the settings.

When overwriting the settings in the register recalled in step **3**, continue to step **12** without changing the displayed register number.

12 Press the [ENTER] button.

Automatically cueing up and playing VTR/ Extended VTR/disk recorder

By recalling a register in which you have saved setting data for Cueup & Play, you can control the VTR/Extended

VTR/disk recorder automatically in the same way as when automatically executing a keyframe effect.

1 In the numeric keypad control block, press the [EFF] button, turning it on.

The [RCALL] button in the numeric keypad control block lights.

2 With the region selection buttons in the numeric keypad control block, select the region.
You can select more than one button.

3 Enter the number of the register to be recalled with the numeric keypad buttons.

4 Press the [REWIND] button in the keyframe control block.

The VTR/Extended VTR/disk recorder automatically advances to the timecode value set as the start point. While the VTR/Extended VTR/disk recorder is operating, the [ALL STOP] button in the device control block flashes amber, and when the start point is reached lights green.
If the operating VTR/Extended VTR/disk recorder is selected as the reference region in the device control block, the [CUE] button also flashes and lights in the same way as the [ALL STOP] button. Also, when the start point is reached, the [STOP] button lights amber.

5 Press the [RUN] button in the keyframe control block.

The VTR/Extended VTR/disk recorder is now controlled according to the keyframe data.

Setting the start point and stop point with the [SET XX] buttons

When you enter a timecode and make a setting with the [SET START TC], [SET STOP TC], or [SET DUR] button in the device control block (search dial), the timecode display changes as follows. With these buttons you can set the start point and stop point timecodes, and the duration (the duration is not displayed). When two of these values are set, the remaining one is automatically determined.

Example 1

1 Press the [SET START TC] button, and enter "00000000" from the numeric keypad control block.

START TC	00:00:00:00
STOP TC	--:--:--:--
(DUR (not displayed)	)

2 Press the [SET STOP TC] button, and enter "200" from the numeric keypad control block. This automatically sets DUR.

START TC	00:00:00:00
STOP TC	00:00:02:00
(DUR	0:02:00)

3 Press the [SET DUR] button, and enter "–100" from the numeric keypad control block.
START TC remains the same, and STOP TC changes.[a)]

START TC	00:00:00:00
STOP TC	00:00:01:00
(DUR	0:01:00)

Example 2

1 Press the [SET DUR] button, and enter "200" from the numeric keypad control block.

START TC	--:--:--:--
STOP TC	--:--:--:--
(DUR	0:02:00)

2 Press the [SET STOP TC] button, and enter "01000000" from the numeric keypad control block. This automatically sets START TC.

START TC	00:59:58:00
STOP TC	01:00:00:00
(DUR	0:02:00)

3 Press the [SET STOP TC] button, and without entering anything from the numeric keypad control block, press [ENTER].

The STOP TC display, and the START TC display automatically calculated in step **2** disappear, and the setting of the DUR does not change.

START TC	--:--:--:--
STOP TC	--:--:--:--
(DUR	0:02:00)

a) If after pressing the [SET XX] button you press the [+ / –] button in the numeric keypad control block, you can enter offsets from the existing setting values. Each time you press this button, the sign of the offset cycles through the settings " "(absolute value) → "+" → "–"…, and the sign appears in the numeric keypad control block display. If there is no existing setting value, then it is only possible to enter an absolute value, and not an offset value.

Setting the start point, stop point, and start delay time in a menu

In the Device menu, you can set the start point, stop point, and start delay time.

1 In the Device menu, press VF3 'DDR/VTR' and HF1 'Cueup & Play.'

The Device >DDR/VTR >Cueup & Play menu appears.
The status area shows the device number, register number, status information, current time, start point, stop point, and start delay time.

2 Using any of the following methods, select the device.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Dev	Device number	1 to 12

3 Carry out any of the following operations as required.

- To set the start point, press [Set] in the <Start TC> group.
- To set the stop point, press [Set] in the <Stop TC> group.
- To set the start delay time, press [Set] in the <Delay> group.

A timecode window appears.

4 Set the timecode value for the start point, stop point, or start delay time.

Notes

You can enter a start delay time in the range that depends on the signal format as follows:
00:00 to 59:nn,
where nn = (number of frames per second) – 1 frame.

5 Press [Enter].

Clearing the start point, stop point, and start delay time settings in a menu

In the Device menu, use the following procedure.

1 Press VF3 ‘DDR/VTR’ and HF1 ‘Cueup & Play.’

2 Using any of the following methods, select the device for which you want to clear the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Setting	Setting values
1	Dev	Device number	1 to 12

3 Carry out any of the following operations as required.

- To clear the start point, press [Clear] in the <Start TC> group.
- To clear the stop point, press [Clear] in the <Stop TC> group.
- To clear the start delay time, press [Clear] in the <Delay> group.

This clears the setting of the start point, stop point, or start delay time.

Selecting Loop or Recue as the playback mode

You can set the device operation mode to loop or recue.

Loop: Carry out playback from the start point of a file to the stop point, then indefinitely repeat playback from the start point.

Recue: Carry out playback from the start point of a file to the stop point, then return to the start point and stop.

Notes

Loop and recue functions are only available when using the video disk communications protocol. Note that these functions may not operate, depending on the connected device.

In the Device menu, use the following procedure.

1 Press VF3 ‘DDR/VTR’ and HF1 ‘Cueup & Play.’

The Device >DDR/VTR >Cueup & Play menu appears.
The status area shows the device number, register number, status information, current time, start point, stop point, start delay time, and playback mode.

2 Using any of the following methods, select the device.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Dev	Device number	1 to 12

3 In the <Mode> group, press [Loop] or [Recue], turning it on.

VTR/Disk Recorder/Extended VTR Timeline

For a keyframe effect controlled from the center control panel, the timeline allows you to set a VTR, disk recorder or Extended VTR action at a keyframe point on the timeline.

Timeline actions

The actions that can be used on the timeline are as follows.


- Start
- Stop
- Cueup
- Variable speed

For the action settings (VTR/disk recorder/Extended VTR timeline editing), use the Device menu.
The data set in the Device menu is saved in a keyframe effect register. When you recall this register and start execution of the keyframe effect, and advance the effect to the keyframe point for which the action is set, an action command is output to the external device through the 9-pin serial port assigned to the VTR, disk recorder or Extended VTR.

Notes

When executing a timeline using a disk recorder or Extended VTR, note the following points.

- It is not possible to use loop and recue on the timeline.
- For a disk recorder, the maximum number of files for a single register is eight.
- When carrying out keyframe settings, be sure to recall the file for operation first.
- If the duration of the recorded video clip is less than the keyframe duration, after playback to the end of the clip, the remainder of the keyframe duration is filled with a still of the last frame of the clip *(see figure below).*

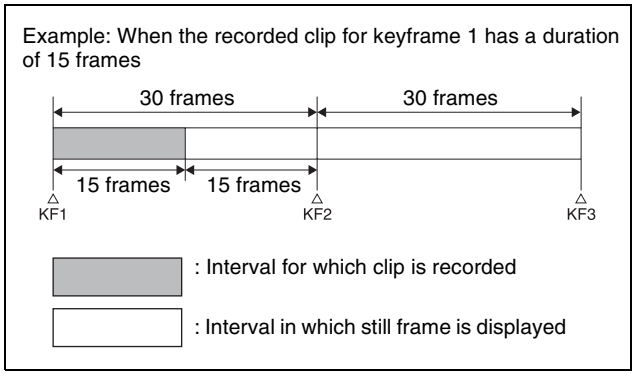


In this example, when keyframe 1 is executed, the first 15 frames consist of clip playback and the remaining 15 frames show the 15th frame as a still image.
When executing the timeline using a disk recorder, also take note of the following points.

- Set the keyframe duration to at least 30 frames.
- From pressing the [RUN] button to the time when the effect actually starts execution may take around one second.
  In order that pressing the [RUN] button after [REWIND] make the effect start execution as soon as possible, set cueing up of the file for operation as rewind operation [1)].
  In the first keyframe [2)] to be executed with [RUN], for the cued-up file, do not set the start point, but set only the start command.

1) If the setting when the [REWIND] button is pressed is for the first keyframe to be executed, then the first keyframe is executed, and otherwise the setting for the Rewind Action is carried out.
2) If the setting when the [REWIND] button is pressed is for the first keyframe to be executed, then the second keyframe is executed, and otherwise the first keyframe is executed.


- To execute an effect, be sure to carry out a Rewind. For example, when the start command only is set for a keyframe, playback starts from the current position, in the same way as with a VTR (no automatic cue-up).
- During file playback, to play the next keyframe at variable speed, for the next keyframe set variable speed only, and do not set the start point *(see figure below).*

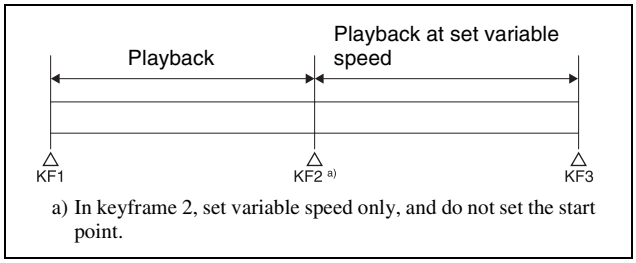

a) In keyframe 2, set variable speed only, and do not set the start point.

- When using a disk recorder with the VTR/disk recorder timeline, if you carry out the following sequence of operations, the system may freeze on the frame of the start point.
  1. Press the [RUN] button to play to a point close to the end of a file.
  2. Stop playback.
  3. Press the [RUN] button once more.

  In such cases, first recall a different register, then carry out the following sequence:
  1. Recall the original register again.
  2. Press the [REWIND] button.
  3. Press the [RUN] button.
- Some operating limitations apply when the video disk communications protocol is used. These are explained with reference to the following figure, which illustrates creation of a timeline that plays from the video of file A to the video of file B.

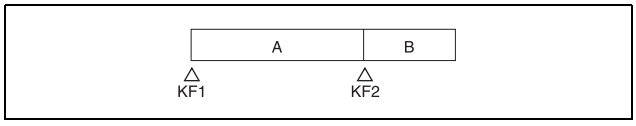

- Black video or still image appears momentarily when play switches from file A to file B:

KF1 action setting	Operating status of file A	KF2 action setting
Start	Playing	Start
Start	Playing	Cueup
Variable Speed set	Playing at variable speed	Cueup
Cueup	Cueup	Cueup

- Partial operating limitation:

KF1 action setting	Operating status of file A	KF2 action setting
Start	Playing	Variable Speed set [a]
Variable Speed set	Playing at variable speed	Variable Speed set [a]
Cueup	Cueup	Variable Speed set [a]

a) Failure to operate when variable speed is set to minus value. However, operates when the file B action is set to Start, and then variable speed is set to minus after file B starts playing.

- Play does not switch from file A to file B:

KF1 action setting	Operating status of file A	KF2 action setting
Variable Speed set	Playing at variable speed	Start
Cueup	Cueup	Start

If play continues to show video of file A without switching to file B, a Stop action is required in file A in order to switch to file B.

- When using the Odetics protocol, the variable speed action may not operate, depending on the connected device.

VTR/disk recorder/Extended VTR timeline editing

This section describes how to set an action at a keyframe point, and how to edit the timeline.

For details of the operations for keyframe creation and editing, see "Creating and Editing Keyframes" (page 450).

To set an action in the menu

1 In the Device menu, press VF3 'DDR/VTR' and HF2 'Timeline.'

The Device >DDR/VTR >Timeline menu appears.
The status area shows two lists.
The upper list shows the device number, register number, keyframe number, and action type (start point, stop point, and variable speed) set for the keyframe.
The lower list is used for setting the action for the device selected above, and shows the port name, current file, current time, status information, start point, stop point, variable speed, and file name (for a disk recorder or Extended VTR).

2 Using any of the following methods, select the device for which you want to set the action.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Setting	Setting values
1	Dev	Device number	1 to 12

3 To set the name of a file when using an Extended VTR or disk recorder, recall the file using the Device >DDR/VTR >File List menu.

Notes

- There is a limit of eight disk recorder files that can set on a single timeline.
- If you have not set the file name when using an Extended VTR, the file recalled in the Extended VTR when the keyframe point is passed is the subject of the action.

When not using an Extended VTR or disk recorder, or when the file name has not been set for an Extended VTR, skip to step **4**.

4 In the <Action> group, select the action.

Cueup: Output a command to cue up to the currently displayed start point.
Start: Output a Play command.

Notes

When the stop point and variable speed are both set, the variable speed setting takes priority.

Stop: Output a Stop command.

Notes

Before executing the Stop command, if the timecode for the set stop point has been reached, or on an Extended VTR or disk recorder if the end of the file has been reached, then at that point the device stops.

5 To set a start point, in the <Start TC> group, press [Set].

A timecode window appears.
If you do not want to set the start point, skip to step **8**.

Notes

For a disk recorder on which the start point is not set, the file recalled in the disk recorder when the keyframe point is passed is the subject of the action.

6 Set the start point as a timecode value.

7 Press [Enter].

The new start point setting is reflected in the status area.

8 To set the stop point, in the <Stop TC> group press [Set].

A timecode window appears.
If you do not want to set the stop point, skip to step **11**.

9 Set the stop point as a timecode value.

10 Press [Enter].

The new stop point setting is reflected in the status area.

11 To set the variable speed, in the <Variable Speed> group, carry out either of the following.

- Press [Fit].
  Without setting a speed value, this automatically carries out playback according to automatically calculated values for the duration and keyframe duration to fit the set start point and stop point.
- Press [Set], and adjust the parameter with the knob.

Knob	Parameter	Setting	Setting values
2	Variable	Variable speed	–100 to +200 a)

a) The setting range of the variable speed depends on the type of connected device.

The new variable speed setting is reflected in the status area.

Repeat steps **2** to **11** as required for other devices.

To carry out start point and stop point settings and cueing up operations in the device control block

With the following buttons in the device control block, you can set the start point or stop point of a keyframe point on the timeline, or carry out a cueing up operation.

Notes

- When using the device control block (trackball or joystick), check that the [MENU] button in the block is lit amber. If it is not lit, press it, turning it on.
- When using the device control block (search dial), check that [TIMELINE] is lit amber.

[START TC] button: Set the start point of the keyframe point to the current time.
[STOP TC] button: Set the stop point of the keyframe point to the current time.
[SET START TC] button (of the device control block (search dial)): Enable to input the timecode of the start point of the keyframe point with the numeric keypad control block.
[SET STOP TC] button (of the device control block (search dial)): Enable to input the timecode of the stop point of the keyframe point with the numeric keypad control block.
[SET DUR] button (of the device control block (search dial)): Enable to input the duration between the start point and stop point of a keyframe point with the numeric keypad control block.
[CUE] button: Cue up to the start point set for the keyframe point.
To display or check the settings, use the Device >DDR/VTR >Timeline menu.

To test an action command output

To test an action command output, select the desired device from the upper list in the status area, and press [Test Fire].
An action command is output from the DCU 9-pin serial port, according to the settings in the list.

To clear the start point, stop point, and variable speed settings

1 In the upper list in the status area, select the device for which you want to clear the settings.

2 Carry out any of the following operations as required.

- To clear the start point setting, press [Clear] in the <Start TC> group.
- To clear the stop point setting, press [Clear] in the <Stop TC> group.
- To clear the variable speed setting, press [Clear] in the <Variable Speed> group.

To set the action for a rewind operation

On the VTR/disk recorder/Extended VTR timeline, when the [REWIND] button in the keyframe control block is pressed the action set for the first keyframe is not executed; when the [RUN] button is pressed, then the first keyframe action is executed.
To execute an action when the [REWIND] button is pressed, it is necessary to set this action (Rewind Action). To carry out this setting, in the Device >DDR/VTR >Timeline menu, press [Rewind Action] to recall the Rewind Action menu. In this setting screen, use the same setting method as in the screen for setting an action on the VTR/disk recorder timeline.
Alternatively, you can select the reverse arrangement, whereby when the [REWIND] button is pressed, this executes the action set for the first keyframe, and when the [RUN] button is pressed the first keyframe action is not executed. In this case, the Rewind Action setting is still valid.

For details of the setting, see "Setting the First Keyframe When a Rewind is Executed" (page 603).

Disk Recorder/Extended VTR File Operations

Material held on a disk recorder/Extended VTR is managed in units of files. You can recall a file to play it back. In the case of an Extended VTR, the register number is recalled.
To carry out disk recorder/Extended VTR file operations, use the Device menu.

Accessing the file list

Before playback and suchlike operations on a disk recorder/Extended VTR, it is first necessary to display a list of the disk recorder files on the DCU. The file list includes the following information.

- File name
- Date of last update
- Duration of recorded material

To recall the file list, use the Device menu.

Recalling a file

In the recalled list of files, select the file you want to play back, and open the file.

File list sharing

You can connect multiple DCU serial ports to a single disk recorder/Extended VTR.
You can share the recalled list of files between serial ports connected to the same disk recorder/Extended VTR.

For settings relating to file list sharing, see "Sharing Disk Recorder/Extended VTR File Lists" (page 601).

File creation

To record a new file on the disk recorder, use the Device menu to create a new file.

Refreshing (recalling) the disk recorder/ Extended VTR file list

1 In the Device menu, press VF3 'DDR/VTR' and HF3 'File List.'

The Device >DDR/VTR > File List menu appears.
In the status area, two lists appear.
The upper list shows the selected device name, and the currently selected file name (register number), and set file name.
The lower list shows a list of files for the selected device (the device appearing in the upper list). In this list is shown the file name (register number) set when the material was recorded, the length of the file data (timecode value), and the file update information.

Notes

- File update information is not shown when using the video disk communications protocol. When "Simple VDCP" is selected as the protocol, the file data length is also not displayed.
- For Extended VTR, the length of file data and file update information are not shown, and the register number is shown as the file name.
- When using the Odetics protocol, the length of file data and file update information are not shown.

2 Select the device for which you want to recall the file list, using the knob.

Knob	Parameter	Setting	Setting values
1	Dev	Device number	1 to 12

3 Press [File List Update].

This starts the process of recalling the file list, and a message box appears.
When the file list recall is completed, the message box disappears.

To cancel recalling the file list
During the recall, press [Cancel] in the message box.

File list sharing

You can share the recalled file list across serial ports connected to the same disk recorder *(see page 601).*

Sorting files in the list

You can sort the files in the list by name, number, or update date.

1 In the Device menu, press VF3 'DDR/VTR' and HF3 'File List.'

The Device >DDR/VTR >File List menu appears.

2 Select the device for which you want to recall the file list, using the knob.

Knob	Parameter	Setting	Setting values
1	Dev	Device number	1 to 12

3 In the <Sort> group, press one of [File Name], [File No], and [Update].

File Name: Sort in alphabetical order of file name.
File No: Sort in ascending file number order.
Update: Sort in file update date order, newest first.

Notes

- Files cannot be sorted by the file update date and time when using the video disk communications protocol or Odetics protocol.
- For Extended VTR, it is not possible to sort files.

This sorts the files in the selected order.

Recalling a file

To recall a file from the file list, use the following procedure.

Notes

Files cannot be recalled when the disk recorder is set to Recorder.

1 In the Device menu, press VF3 'DDR/VTR' and HF3 'File List.'

The Device >DDR/VTR >File List menu appears.

2 Select the device from which you want to recall a file, using the knob.

Knob	Parameter	Setting	Setting values
1	Dev	Device number	1 to 12

3 Using any of the following methods, select the file you want to recall.

- Press directly on the lower list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Setting	Setting values
2	No	File selection	1 to 5000 a) 0 to 99 b)

a) For disk recorders. The range of setting values depends on the total number of files.

b) For Extended VTRs. The range of setting values depends on the total number of files.

4 Press [Load].

This recalls the selected file, and the file name appears at the top of the status area.

Creating new files

A file name must be specified to record to a new file on a disk recorder.

Notes

- New files cannot be created when the disk recorder is set to Player or Recorder/Player.
- For Extended VTR or when using the Odetics protocol, new files cannot be created.

1 In the Device menu, press VF3 'DDR/VTR' and HF3 'File List.'

The Device >DDR/VTR >File List menu appears.

2 Press [New File].

The keyboard window appears.

3 Enter a file name and press [Enter].

When using the Sony disk recorder 9-pin protocol: Up to 23 characters.

When using the video disk communications protocol: Up to 8 characters (in Fixed 8 Character mode) or 23 characters (in Variable Length mode)

For details of how to select the file name character count mode in the video disk communications protocol, see "Making Detailed Settings on the External Device Connected to the Serial Port" (page 646).

The name appears as the current file name at the top of the status area.

When the loaded file is not a target for recording

When a file that is not a target for recording is loaded in the disk recorder, proceed as follows.

1 In the Device menu, press VF3 'DDR/VTR' and HF3 'File List.'

The Device >DDR/VTR >File List menu appears.

2 Press [Unload].

The current file name at the top of the status area is cleared.

Chapter 13 Keyframe Effects

Regions

The term “region” refers to some sort of functional block of the system.
When saving or recalling snapshot registers and effect registers, or creating or editing effects, you first select the region to which the operation applies. You can also select multiple regions simultaneously.

Classification of the regions

The regions are classified as follows.

- Master region
- The following regions
  - Switcher: M/E1 to M/E5, PGM/PST, User1 to User8
  - DME: DME ch1 to DME ch8 (inclusive of Global)
  - External devices: P-Bus, Router, Device 1 to Device 12, GPI, Macro

Only the regions assigned to the region selection buttons of the numeric keypad control block or Multifunction Flexi Pad control block can be used simultaneously *(see page 570)*.

Regions applicable to keyframe operations

The above regions less the Router region.

Regions applicable to snapshot operations

The above regions less the external devices’ regions (P-Bus, Device 1 to Device 12, and GPI) and the Macro region.

“User” regions

You can optionally assign the following regions to the regions User1 to User8 *(see page 611)*. The User regions shown in parenthesis are the default assignments.

- Color backgrounds 1 and 2 (User1)
- AUX1 to AUX48 (User2)
- Frame Memory 1 to 8 (User4)
- Color correctors 1 and 2

Notes on saving or recalling a frame memory still image for or by a snapshot/keyframe

- The saving and recalling of frame memory images for snapshots and keyframes is restricted to the still images or clips on the eight frame memory outputs. The settings made for frame memory images in the Freeze menu or other menus do not apply to snapshots or keyframes.
- To reproduce a frame memory still image or a clip of them by recalling a snapshot or keyframe, you must have the same images that were present in the frame memory when you saved the snapshot or keyframe. Therefore, when saving a snapshot or keyframe using frame memory, you must also save the images to a storage media such as the hard disk.

Reference region

When multiple regions are selected, only one region appears in the displays for menu and numeric keypad operations. This is called the “reference region.”
The reference region is determined according to the following precedence.

M/E1 >M/E2 >M/E3 >M/E4 >M/E5 >P/P >User1 >User2 >User3 >User4 >User5 >User6 >User7 >User8 >DME ch1>DME ch2 >DME ch3 >DME ch4 >DME ch5 >DME ch6 >DME ch7 >DME ch8 >Device1 >Device2 >Device3 >Device4 >Device5 >Device6 >Device7 >Device8 >Device9 >Device10 >Device11 >Device12 >P-Bus >GPI >Router >Macro

Master region

The regions saved in a master snapshot register or master timeline register and the register numbers saved in such regions can be recalled at a time as the master region.
The master region can be saved or recalled using the numeric keypad control block or Multifunction Flexi Pad control block.

Registers

A register is an area of memory in a device which holds a snapshot *(see chapter 16)*, keyframe, macro *(see chapter 13)*, and so on.

Keyframe effect registers

Dedicated effect registers

There are 99 dedicated registers for keyframe effects in each region, numbered 1 to 99.

Shared user-programmable DME registers

In addition to the 99 DME registers for each region (i.e. each channel), there are also shared registers for each processor as shown in the following table. These are used for user-programmable DME.

Register number	Register allocation
101 to 199	Shared register for one-channel effects
201 to 299	Shared register for two-channel effects
301 to 399	Shared register for three-channel effects

Notes

When operating with these shared registers, be sure to select the appropriate regions depending on the number of channels.

When recalling registers in the 200 range, select two consecutive channels for the regions, as for example [DME1] and [DME2]. Similarly, for registers in the 300 range, select three consecutive registers.

Registers for P-Bus Device regions

There are 250 registers for P-Bus and Device1 to Device12 in each region, numbered 1 to 250.

Work register

This is a temporary register used when editing keyframes. When you recall an effect, it is read from the effect register into the work register, and when you save, the contents of the work register are written to the effect register.

Master timeline registers

There are 99 master timeline registers, numbered 1 to 99, for each control panel. They store keyframe effect regions and the register numbers saved in the regions.

Snapshot registers

These are registers for snapshots, and there are 99, numbered 1 to 99 for each region.

Master snapshot registers

There are 99 master snapshot registers, numbered 1 to 99, for each control panel. They store snapshot regions and the register numbers saved in the regions.

Keyframes

A keyframe represents an instantaneous state of an image; it can be saved and recalled for reuse.

Effects

By arranging a number of keyframes on the time axis, and interpolating between successive keyframes, you can create an effect in which there is a continuous change from each keyframe to the next.
You can save the sequence of keyframes representing a single effect in a register. Then by recalling this register, you can replay the same effect *(See page 435)*.

Saving and Recalling Effects

To create a new effect, first recall an empty register, then create the keyframes one at a time in this register. To run an effect, it is also necessary to set the time and the path.
To edit an existing effect, recall the register holding the effect, then make the changes.
When you have finished creating or editing the effect, save it in the recalled register or another specified register.

Auto save function

When you recall an effect, the currently recalled effect is automatically saved in a register. This is called the auto save function. You can disable this function in the Setup menu.

Effect Attributes

An individual effect may also have attached special conditions relating to switcher or DME operation when the effect is recalled.
These conditions are called “attributes” of the effect, and can be added when the keyframe effect is saved or recalled.

Type of attribute

The attribute that can be attached to an effect is as follows.

Effect dissolve: The transition from the state before the effect recall to the state at the effect start point is carried out smoothly, by a dissolve. The dissolve duration can be set in the Effect menu.

Temporary attributes

When a keyframe is recalled, independently of the attributes held in the register, you can also enable or disable temporary attributes. These temporary attributes are set when the keyframe effect is recalled.

Effect Editing

For editing operations such as to insert, delete, or modify a keyframe, it is necessary to stop the effect at the corresponding point on the time axis. This is termed an “edit point.”
You can edit either on a keyframe within the effect, or at any point between keyframes.

Insert: Insert the current image as a keyframe. Inserting a keyframe in an existing effect may change the duration of the effect *(see page 437)*.

Modify: Modify a keyframe. You can modify a single keyframe or a range of keyframes in the effect together.

Delete: Delete a keyframe. You can delete a single keyframe or a range of keyframes in the effect together. Deleting keyframes from an effect reduces the duration of the effect *(see page 437)*.
After deleting a keyframe, you can reinsert the keyframe with a paste operation.

Copy: Copy a keyframe. You can copy a single keyframe or a range of keyframes in the effect together.

Paste: Paste the keyframe last copied or deleted anywhere within the effect.

Pause: You can set a pause on a particular keyframe, so that when the effect is run it pauses on this keyframe. You can make this setting on any number of keyframes. To restart the paused effect, repeat the operation to run the effect.

KF Loop: Execute the effect the specified number of times through the keyframes in the specified range.

Undo an edit operation: Undo the effect of the last operation to insert, modify, delete, or paste a keyframe.

Duration modes

In keyframe editing, there are two duration modes; switch between them in the keyframe operation section *(see page 450)*.

Variable duration mode: In this mode, inserting or deleting a keyframe increases or reduces the duration.

Constant duration mode: In this mode, inserting or deleting a keyframe does not change the duration. This is useful for keyframe editing of an effect with a fixed duration.

In the variable and constant duration modes, the keyframes to which a modify operation applies, and the effect of a paste operation are different.

Difference in keyframes to which a modify operation applies

Effect position	Variable duration mode	Constant duration mode
On a keyframe	Applies to currently selected keyframe	Applies to currently selected keyframe
Between two keyframes	Applies to previous keyframe	Modify operation not possible [a)]

a) A new keyframe is inserted at the effect position.

Difference in the effect of a paste operation

Variable duration mode: The copied keyframe is inserted at the specified position.

Constant duration mode: The copied keyframe is written over the specified position.

Transition mode

You can use an effect created with keyframes as a DME wipe pattern on the switcher. In this case, it is necessary to set the transition mode (the way in which the effect behaves) *(see page 454)*.


Time Settings

Keyframe duration and effect duration

You can determine the execution time of an effect by setting either the keyframe durations or the effect duration.

Keyframe duration: This is the time from the keyframe to the next keyframe. You can set this time in the keyframe control block *(see page 458)*.
In constant duration mode *(see page 436)*, it is not possible to change the keyframe duration setting.

Effect duration: This is the total execution time of the effect, from the first keyframe to the last. You can set this time in the keyframe control block *(see page 459)*. When you change the effect duration, the keyframe duration for each keyframe in the effect is automatically recalculated proportionally.

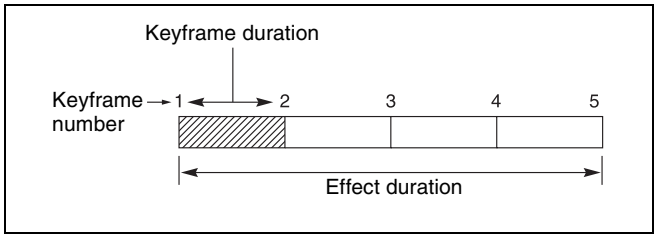

Keyframe duration and effect duration





The effect duration may also be changed by inserting or deleting keyframes.

Changes in the effect duration caused by inserting a keyframe

- When the effect is stopped on a keyframe, inserting a keyframe increases the effect duration by the duration of the inserted keyframe.
- When the effect is stopped between two keyframes, inserting a keyframe does not change the effect duration.

Notes

In constant duration mode *(see page 436)*, the duration of the current keyframe is reduced to zero, and the new keyframe is inserted with the previous duration of the current keyframe. Thus the effect duration does not change.

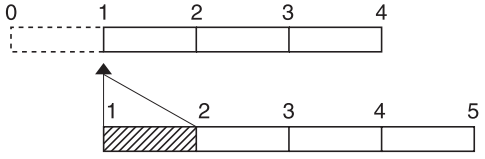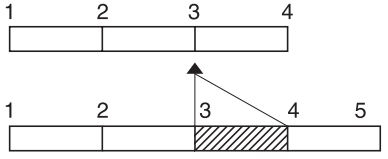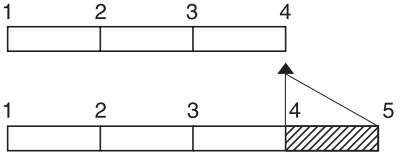Insertion position	Change in effect duration
Insertion before the first keyframe	
Insertion between two keyframes	
Insertion at an existing keyframe	
Insertion at the last keyframe	

Keyframe insertion position and the change in effect duration





Changes in the effect duration caused by deleting a keyframe

- When the effect is stopped on a keyframe, a delete operation deletes the keyframe, and reduces the effect duration by the duration of the deleted keyframe.
- When the effect is stopped between two keyframes, a delete operation deletes the preceding keyframe, and reduces the effect duration by the duration of the deleted keyframe.

Notes

In constant duration mode *(see page 436)*, the duration of the keyframe before the deleted keyframe is increased by

the duration of the deleted keyframe. Thus the effect duration does not change.

Deletion position	Change in effect duration
Deletion of the first keyframe	
Deletion of an intermediate keyframe	
Deletion between two keyframes	
Deletion of the last keyframe	

Keyframe deletion position and the change in effect duration

Delay setting

You can set the delay from the time of executing an operation to run the effect, and the effect actually starting (that is, the delay until the first keyframe). You can make this setting in the keyframe control block.
Note that changing the delay does not alter the duration of the effect.

Paths

The term “path” refers to the specification of how interpolation is carried out from one keyframe to the next. Images are interpolated from an edit point to the next one according to the path setting.

For details of the path setting procedure, see “Path Settings” (page 460).

Switcher path settings

Carry out path settings in the Key Frame menu.
For each menu, the following settings are available.

M/E-1 to M/E-5, and P/P menus

Item		Paths that can be set
M/E1 to M/E5, P/P All		For each M/E and PGM/PST, path settings for the following items are made simultaneously.
Key1 to Key8		Overall path settings for items relating to keys 1 to 8 are made simultaneously.
	Key1 All to Key8 All	
	Source	Key source path for keys 1 to 8
	Fill	Key fill path for keys 1 to 8
	Proc	Proc path for keys 1 to 8
	Trans	Transition path for keys 1 to 8
Bkgd/Util		Overall path settings for items relating to the background and utility buses are made simultaneously.
	Bkgd/Util All	
	Bkgd A	Path for background A
	Bkgd B	Path for background B
	Util 1	Path for utility 1
	Util 2	Path for utility 2
	DME 2nd Video	Path for video to be used for second DME channel
Wipe/DME Wipe		Overall path settings for items relating to wipes and DME wipes are made simultaneously.
	Wipe/DME Wipe All	
	Wipe	Path for wipes
	DME Wipe	Path for DME wipes
Trans	–	Transition path for each M/E and P/P bank

User1 to User8 menus

The items that can be adjusted depend on the settings in the Setup menu.

For details, see “Setting User Regions” (page 611).

Item		Paths that can be set
User1 All to User8 All		Overall path settings for the following items for each “User” are made simultaneously.
FM All		Overall path settings for frame memory items are made simultaneously.
FM Still Store		Overall path settings for frame memory freeze image output are made simultaneously.
	FM Still Store All	
	FM Still Store 1 to 8	Paths for frame memory freeze image outputs 1 to 8
Aux		Overall path settings for AUX buses are made simultaneously.
	Aux All	
	Aux 1 to 48	Paths for AUX 1 to 48

Item		Paths that can be set
Color Bkgd		Overall path settings for color backgrounds are made simultaneously.
	Color Bkgd All	
	Color Bkgd 1	Paths for color background 1
	Color Bkgd 2	Paths for color background 2
CCR		Overall path settings for color corrector
	CCR All	
	CCR 1	Path for color corrector 1
	CCR 2	Path for color corrector 2

Paths relating to DME

DME 3D Trans Local menu

Item		Paths that can be set
3D Trans Local All		Overall path settings for local channel three-dimensional transform items are made simultaneously.
Loc Size		Overall path settings for items relating to image size changes and movement are made simultaneously.
	Loc Size All	
	Size	Path for image size
	Post Loc X, Post Loc Y	Paths for movement in the X- and Y-axes
	Post Size	Path for size
Loc XYZ		Overall path settings for items relating to image movement are made simultaneously.
	Loc XYZ All	
	Loc X, Loc Y, Loc Z	Paths for the X-, Y- and Z-axes
Rot		Overall path settings for items relating to image rotation are made simultaneously.
	Rot All	
	Rot X, Rot Y, Rot Z	Paths for the X-, Y- and Z-axes
Spin		Overall path settings for items relating to spin are made simultaneously.
	Spin All	
	Spin Src X, Spin Src Y, Spin Src Z	Paths for the X-, Y- and Z-axes
	Spin X, Spin Y, Spin Z	Paths for the X-, Y- and Z-axes
Asp		Overall path settings for items relating to aspect ratio are made simultaneously.
	Asp All	
	Rate X, Rate Y	Paths for the X- and Y-axes
Skew		Overall path settings for items relating to skew are made simultaneously.
	Skew All	
	Skew X, Skew Y	Paths for the X- and Y-axes
	Aspect	Path for aspect ratio
Pers		Overall path settings for items relating to perspective are made simultaneously.
	Pers All	
	Pers X, Pers Y, Pers Z	Paths for the X-, Y- and Z-axes
Axis Loc		Overall path settings for items relating to image rotation axis are made simultaneously.
	Axis All	
	Axis X, Axis Y, Axis Z	Paths for the X-, Y- and Z-axes

DME 3D Trans Global menu

Item		Paths that can be set
3D Trans Global All		Overall path settings for three-dimensional transform items in the global channel are made simultaneously.
Loc Size		Overall path settings for items relating to image size changes and movement are made simultaneously.
	Loc Size All	
	Size	Path for image size
	Post Loc X, Post Loc Y	Paths for movement in the X- and Y-axes
	Post Size	Path for size
Loc XYZ		Overall path settings for items relating to image movement are made simultaneously.
	Loc XYZ All	
	Loc X, Loc Y, Loc Z	Paths for the X-, Y- and Z-axes
Rot		Overall path settings for items relating to image rotation are made simultaneously.
	Rot All	
	Rot X, Rot Y, Rot Z	Paths for the X-, Y- and Z-axes
Spin		Overall path settings for items relating to spin are made simultaneously.
	Spin All	
	Spin Src X, Spin Src Y, Spin Src Z	Paths for the X-, Y- and Z-axes
	Spin X, Spin Y, Spin Z	Paths for the X-, Y- and Z-axes
Pers		Overall path settings for items relating to perspective are made simultaneously.
	Pers All	
	Pers X, Pers Y, Pers Z	Paths for the X-, Y- and Z-axes

Item		Paths that can be set
Axis Loc		Overall path settings for items relating to image rotation axis are made simultaneously.
	Axis All	
	Axis X, Axis Y, Axis Z	Paths for the X-, Y- and Z-axes

DME Effect menu

Item		Paths that can be set
Effect All		Overall path settings for DME effect items are made simultaneously.
Edge		Overall path settings for edge items are made simultaneously.
	Edge All	
	Border	Path for border
	Crop/Edge Soft	Path for crop/edge softness
	Beveled Edge	Path for beveled edge
	Key Border	Path for key border [a]
	Art Edge	Path for art edge [a]
	Flex Shadow	Path for flex shadow [a]
	Wipe Crop	Path for wipe crop [a]
	Color Mix	Path for color mix [a]
Video Modify		Overall path settings for video modify items are made simultaneously.
	Video Modify All	
	Defocus/Blur	Path for defocus/blur
	Multi Move	Path for multi-move
	Color Modify	Path for color modify
	Mosaic	Path for mosaic
	Mask	Path for mask
	Sketch	Path for sketch
	Metal	Path for metal
	Dim/Fade	Path for dim/fade [a]
	Glow	Path for glow
Freeze		Path for freeze
Non-Linear		Path for nonlinear effects
Corner Pin		Path for corner pinning
Light		Overall path settings for lighting items are made simultaneously.
	Light All	
	Lighting	Path for lighting
	Spot Lighting	Path for spotlighting [a]
Trail		Path for trails
In/Out		Overall path settings for items relating to input/output are made simultaneously.
	In/Out All	
	Bkgd	Path for background
	Video/Key	Path for video/key

a) This cannot be used on the MVE-8000A.

DME Global Effect menu

Item	Paths that can be set
Global Effect All	Overall path settings for DME global effect items are made simultaneously.
Combine	Path for combiner
Shadow	Path for shadow
Brick	Path for brick

Types of path

Path types for Curve

There are five types, as follows.



OFF: Executing the effect causes no change.



Step: There is no interpolation between keyframes, so that the effect parameters are updated each time a keyframe is passed.



Linear: Linear interpolation between keyframes, resulting in constant speed movement.



S-Curve: The rate of change accelerates and decelerates before and after a keyframe, so that the rate of change is maximum midway between two keyframes.



Spline: The effect follows a smooth curved path from each keyframe to the next.

Path types for Hue

There are four types, as follows.



CW: The hue changes in a clockwise direction as seen on a Vectorscope.



CCW: The hue changes in a counterclockwise direction as seen on a Vectorscope.



Short: The hue changes in whichever of the clockwise and counterclockwise directions is shorter.



Long: The hue changes in whichever of the clockwise and counterclockwise directions is longer.

Path types for Xpt

There are two types, as follows.



Xpt Hold off: When replaying a keyframe, change the inputs to the settings saved in memory.



Xpt Hold on: When replaying a keyframe, do not change the inputs.

Effect Execution

By using the [RUN] button in the keyframe control block, you can replay the effect as a continuous sequence of images. This is referred to as effect execution.

Range of execution

Each time the [RUN] button is pressed, the range of execution of the effect is from timecode 01:00:00:00 or the current time (the position at which the current effect is stopped) to the end point of the effect. However, if there is a pause set on a keyframe, the execution range is up to that point. Pressing the [RUN] button again resumes the effect, which then runs to the next pause point or the end of the effect.

Run mode setting

You can select from the following run modes for when the effect is executed.

DIRECTION: Specify the effect execution direction.

STOP NEXT KF: Run the effect, and stop at the next keyframe.

EFFECT LOOP: Repeat the effect in an endless loop.

Make these settings in the keyframe control block.

For details, see "Setting the Run Mode" (page 462).

Master Timelines

You can save the regions selected for a keyframe effect and the register numbers saved in the regions in a master timeline register so that operation can be applied to two or more regions at a time.

To save master timeline registers, use the numeric keypad control block, Multifunction Flexi Pad control block or menu; to recall them you can use the numeric keypad control block, menu, the Flexi Pad control block or the Multifunction Flexi Pad control block.

For details, see "Creating and Saving a Master Timeline" (page 464).

Sequence of Keyframe Operations

The following table shows the principal operations involved in the sequence from creating keyframes to executing an effect. For details of each operation, see the page number in parenthesis.

For the overview of keyframes, see "Keyframes" in Chapter 1 (Volume 1).

Recalling a register *(see page 444)*
To create a new effect, recall an empty register; to edit an effect, open the register containing it.

⬇

Specifying the region and edit points *(see page 448)*
Select the region in which editing applies, and set the edit points.

⬇

Creating and editing keyframes *(see page 450)*
Create the keyframes that make up the effect, using operations to create, insert, modify, or delete keyframes.

⬇

Time settings *(see page 458)*
Set the overall duration of the effect or the duration of each keyframe.

⬇

Path setting *(see page 460)*
Set the type of interpolation used between successive keyframes.

⬇

Executing effects *(see page 461)*
This provides a smooth effect, based on the time and path settings.

⬇

Saving effects *(see page 463)*
Save a completed effect in a register.

Displaying the Timeline Menu

By displaying the Timeline menu, you can view keyframe effects on the timeline for each region, and the associated information.

Recalling the timeline menu


1 In the menu control block, press the top menu selection button [KEY FRAME].

2 Select HF1 ‘Time Line.’

The Time Line menu appears.

Interpreting the Timeline Menu

The following are the main parts of the menu display.

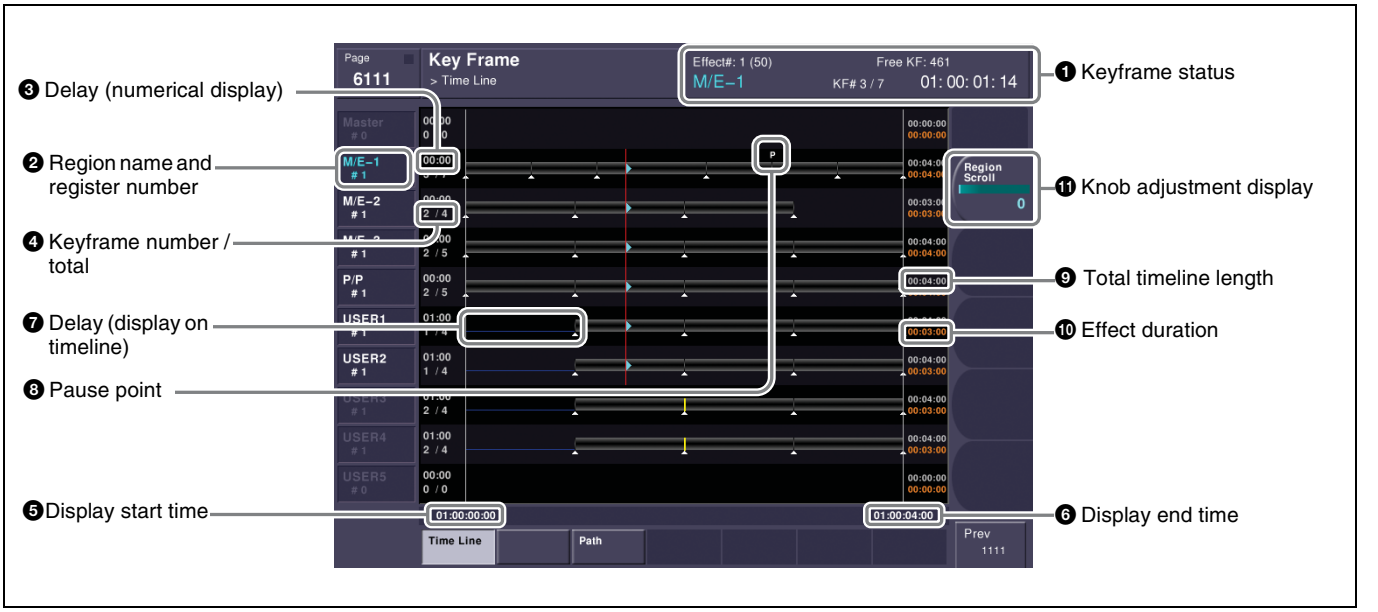

Key Frame >Time Line menu

❶ Keyframe status
This shows the region name, register number, register name, number of remaining keyframes, current position and timecode with regard to the reference region.

❷ Region name and register number
This shows the region name and the number of the register recalled in this region.
The display color indicates the region selection as follows.
Blue: reference region
White: selected region
Gray: not selected region

❸ Delay (numerical display)
This shows the delay between carrying out an effect operation, and the start of the actual effect.

❹ Keyframe number / total
This shows the number of the keyframe at the cursor position, and the total number of keyframes in the register.

❺ Display start time
This shows the timecode value for the timeline display start point.

❻ Display end time
This shows the timecode value for the timeline display end point.

❼ Delay (display on timeline)
When a delay is set, the interval is shown by a blue line.

❽ Pause point
A “P” appears where a pause is set.

❾ Total timeline length
The total time of delays and effect duration appears in white.

❿ Effect duration
The total duration of the effect appears in orange.

⓫ Knob adjustment display
Turning the corresponding knob scrolls the timeline display, allowing you to see the timeline for regions that were previously hidden.

Settings in the Timeline Menu

Selecting the region to be displayed

The Timeline menu shows a timeline for each region, but you can also restrict the regions to be shown.

Recalling the Timeline Assign menu

1 In the menu control block, press the top menu selection button [KEY FRAME].

2 Select HF5 'Timeline Assign.'

The Key Frame >Timeline Assign menu appears. The right of the status area shows a list of the regions (including the global region) assigned to the region selection buttons in the numeric keypad control block. The left shows the regions in order of precedence, and whether each region is shown on the Timeline menu.

Deciding which regions appear on the timeline

In the Timeline Assign menu, press [Active Region], toggling it on or off.

On: The regions for which the region selection buttons in the numeric keypad control block are lit are shown in the precedence order *(see next item)* set in this menu, followed by the regions for which the buttons are off, in the same order.

Off: The regions appear according to the precedence order *(see next item)* and display on/off setting *(see page 443)* set in this menu.

Deciding the precedence order for timeline display

To change the precedence order, insert and delete regions in the list, in the desired order.

1 In the Timeline Assign menu, use any of the following methods to select the desired precedence order position and the region you want to insert.

- Press directly on the precedence order position in the list on the left and the region you want to insert in the list on the right.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs to make the setting.

Knob	Parameter	Adjustment	Setting values
1	Priority	Precedence order of insertion position	1 to maximum value
2	Region	Region to be inserted	1 to maximum value

2 In the <Priority> group, press [Insert].

This inserts the selected region before the specified precedence order.
If the inserted region is already present in a different precedence order, it is deleted from that precedence order.

3 To delete a region from a precedence order, use any of the following methods to select the region.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Priority	Precedence order assigned to the region to be deleted	1 to maximum value

4 To carry out the deletion, press [Delete] in the <Priority> group.

This deletes the selected region from the precedence order list.

Setting the display of regions in the Timeline menu on or off

When [Active Region] is off, to select which regions are displayed in the Timeline menu, use the following procedure.

1 In the Timeline Assign menu, use any of the following methods to select the region.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Priority	Region selection	1 to maximum value

2 For no display, press [Display], turning it off. To display, press once more, turning it on.

When [Active Region] is off, regions with the "Display Off" setting are not displayed in the Timeline menu.

To return to the default precedence order and timeline menu display settings

Press [Default] in the <Priority> group.


Recalling a Register

Use the numeric keypad control block or Multifunction Flexi Pad control block to recall a register. For each region there are 99 registers dedicated to keyframes, numbered from 1 to 99.
When creating an effect as a user programmable DME, use a 3-digit register number which is commonly used for all DME regions (channels).

For a description of the concept of regions and registers, see "Regions" (page 434) and "Registers" (page 435).

The master timeline can also be recalled from the standard-type Flexi Pad control block.

Recalling a register from the numeric keypad control block

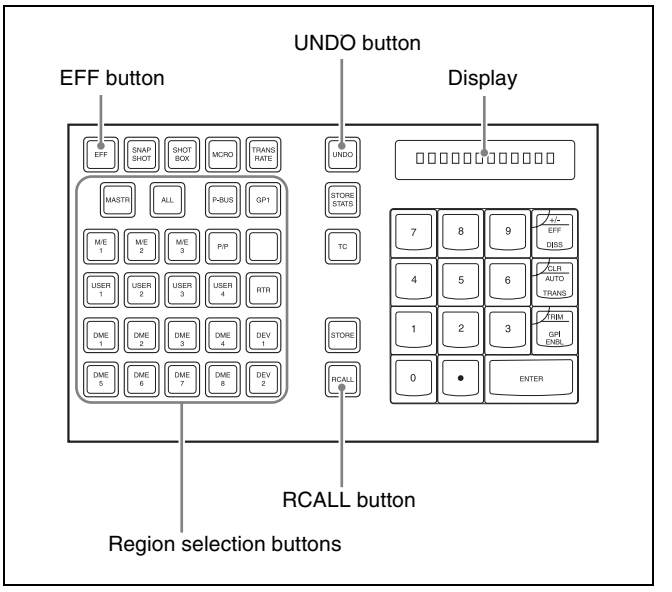

Numeric keypad control block

1 Press the [EFF] button, turning it on.

This allocates the numeric keypad control block to keyframe operations, and the [RCALL] button lights.

2 Press the button corresponding to the region you want to select, turning it on.
You can also press more than one button.

[M/E 1], [M/E 2], [M/E 3], [M/E 4], [M/E 5], [P/P]:
These select the corresponding M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST regions.

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 570)*.

[USER 1] to [USER 8]: These select the User regions.
[DME 1] to [DME 8]: These select the DME channels.
[DEV 1] to [DEV 12]: These select the regions Device 1 to Device 12, respectively.
[P-BUS]: This selects P-Bus.
[GPI]: This selects GPI.
[MCRO]: This selects Macro.
[ALL]: This selects all valid regions.
[MASTR]: This selects the master timeline *(see page 464)*

Notes

The regions that can be selected simultaneously are those assigned to the region selection buttons in the numeric keypad control block *(see page 570)*.
It is not possible to select [MASTR] and other regions simultaneously. If selected simultaneously, the master timeline takes precedence.

The first button pressed lights green as the reference region, and any subsequently pressed buttons light amber.
Pressing one of the amber-lit buttons, while holding down [EFF], turns the button green to indicate its corresponding region as the new reference region.

For details of the precedence order for becoming the reference region, see "Reference region" (page 434).

The display shows the name of the reference region, and the number of the last register recalled for this region.

3 Enter the number of the register you want to recall, using the numeric keypad.

To find an empty register, instead of entering a number, press the [.] (period) button. To search for an empty register common to all currently selectable regions, press the [.] button again.
To search for an empty register in the 100 range, press [1], [0], [0], [.] (period) in that order. Similarly, to search for an empty register in the 200 range, press [2], [0], [0], [.] (period), and to search for an empty register in the 300 range, press [3], [0], [0], [.] (period).
The register number appears in the display. If the number is followed by a letter "e" or "E," this indicates the following.
e: The selected register is empty for the regions selected in step **2**.
E: The selected register is empty for all currently selectable regions.

4 To apply a temporary attribute (effect dissolve), press the [+/–/EFF DISS] button.

Notes

It is not possible to apply temporary attributes to the master timeline.

5 Press the [ENTER] button.

This recalls the specified register.
When the master timeline is recalled, the region selection buttons light according to the saved region information.

To undo the recall of a register


Immediately after recalling the register, press the [UNDO] button to undo the operation.

Notes

After recalling the master timeline, you cannot undo the recall.

Recalling the master timeline in the Flexi Pad control block

Whichever block you recall the master timeline from, the region set when it was saved is recalled.

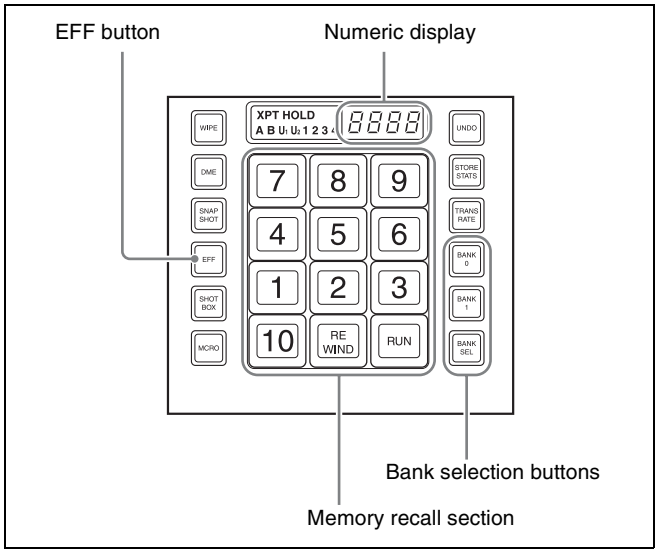


Flexi Pad control block (standard type)

1 In the Flexi Pad control block, press the [EFF] button.

This assigns the Flexi Pad control block to master timeline operation.
The previously selected bank number and last recalled register number appear in the numeric display.

2 Using any of the following methods, select the bank to be recalled.

To select bank 0: press the [BANK0] button.
To select bank 1: press the [BANK1] button.
To select any of banks 0 to 9: press the [BANK SEL] button; the memory recall section display changes as shown in the following figure; press one of 0 to 9.




The selected bank number appears in the numeric display.
The memory recall section buttons show the register names corresponding to the selected bank, and the register status.
Note that by a setting in the Setup menu, you can select either register names or register numbers to be displayed.
Lit orange: register holding the master timeline
Lit yellow: last recalled register
Off: empty register

3 Press the button in the memory recall section which shows the desired register name.

The button you pressed lights yellow, and the master timeline is recalled. The numeric display shows the bank number, followed by the selected register number.

Recalling a register from the Multifunction Flexi Pad control block

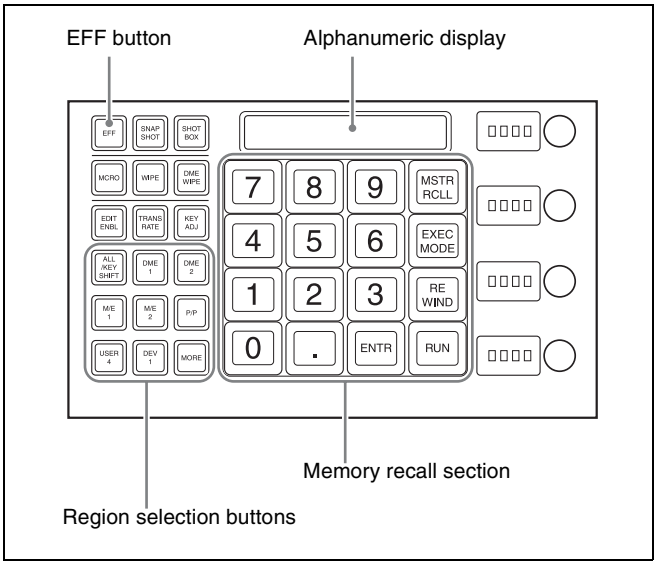

1 Press the [EFF] button, turning it on.

2 Press the button corresponding to the region you want to select, turning it on.
You can also press more than one button.

[M/E 1], [M/E 2], [M/E 3], [M/E 4], [M/E 5], [P/P]: These select the corresponding M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST regions.

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 570)*.

[USER 1] to [USER 8]: These select the User regions.
[DME 1] to [DME 8]: These select the DME channels.
[PBUS]: This selects P-Bus.
[GPI]: This selects GPI.
[MCRO]: This selects Macro.
[DEV 1] to [DEV 12]: This selects device.
[ALL]: This selects all valid regions.
[MSTR]: This selects the master timeline.

For details, see "Creating and Saving a Master Timeline Using the Buttons in the Multifunction Flexi Pad Control Block" (page 465).

Notes

The regions that can be selected simultaneously are those assigned to the region selection buttons in the Multifunction Flexi Pad control block, and those displayed on the memory recall section buttons when the [MORE] button is pressed *(see page 570)*.
When [MSTR] and other regions are selected simultaneously, the master timeline takes precedence.

The first button pressed lights green as the reference region. Subsequently pressed buttons turn amber for the region select buttons and yellow for the memory recall section buttons.
Pressing one of the amber or yellow buttons, while holding down [EFF], turns the button green to indicate its corresponding region as the new reference region.

For details of the precedence order for becoming the reference region, see "Reference region" (page 434).

The display shows the name of the reference region, and the number of the last register recalled for this region.

3 Enter the number of the register you want to recall, using the numeric keypad.

To find an empty register, instead of entering a number, press the [.] (period) button. To search for an

empty register common to all currently selectable regions, press the [.] button again.
To search for an empty register in the 100 range, press [1], [0], [0], [.] (period) in that order. Similarly, to search for an empty register in the 200 range, press [2], [0], [0], [.] (period), and to search for an empty register in the 300 range, press [3], [0], [0], [.] (period).
The register number appears in the display. If the number is followed by a letter "e" or "E," this indicates the following.

e: The selected register is empty for the regions selected in step **2**.

E: The selected register is empty for all currently selectable regions.


4 Press the [ENTER] button.

This recalls the specified register.
When the master timeline is recalled, the region selection buttons light according to the saved region information.

To recall the master timeline


1 In the Multifunction Flexi Pad control block, press the [EFF] button.

This switches the Multifunction Flexi Pad control block to the effect operation mode.

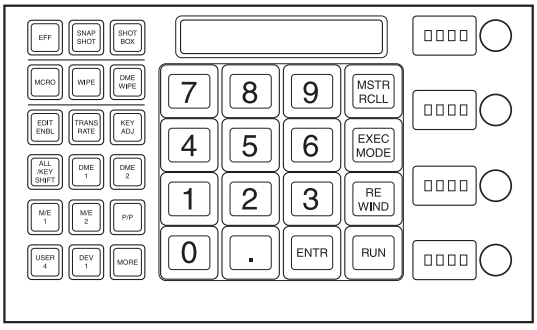


2 Press the [MSTR RCLL] button.

This switches the memory recall section to the master timeline recall mode.

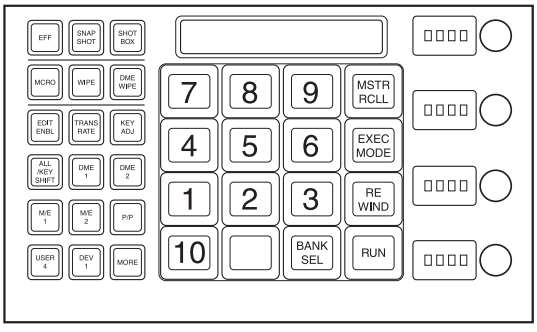

3 Press the [BANK SEL] button.

This switches the memory recall section to the bank selection mode.

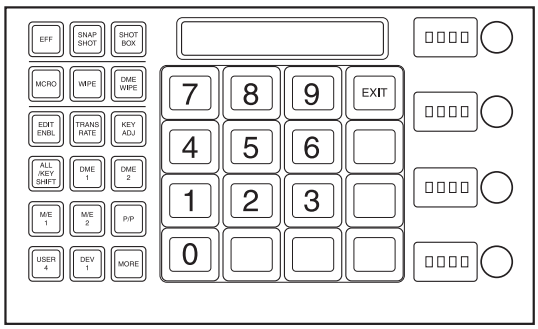

4 Press the number of the desired bank.

This selects the bank, and the buttons in the memory recall section show the register states as follows.
Lit yellow: Last recalled register
Lit orange: Register holding data
Off: Empty register

5 Press the number of the desired register.

The button you pressed lights yellow, and this recalls the master timeline.
The alphanumeric display shows the selected register number.

Specifying the Region and Edit Points

Selecting the Region in Which Editing Applies

Selecting by control panel

Select the region in which the editing is applied by the effect consisting of keyframes, using the region selection buttons in the numeric keypad control block or Multifunction Flexi Pad control block.

*See step **2** of "Recalling a register from the numeric keypad control block" (page 444).*

Selecting by menus


This is convenient for selecting some of the regions assigned to the numeric keypad control block or changing the reference region.

Notes

The function of region selection buttons in the numeric keypad control block or Multifunction Flexi Pad control block is linked to the menu. If you carry out region selection by pressing a region selection button, then all the regions assigned to that button are selected.


1 In the Key Frame menu, press HF7 'Region Select.'

The Key Frame >Region Select menu appears.
On the left of the status area, region selection buttons appear.
Depending on the region selection state, the following indications appear.
Green text: the assigned regions include the reference region.
Orange text: one of the assigned regions is selected.
White text: no assigned region is selected.
When any one or more of the regions assigned to the region selection buttons is not selected, a red bar appears within the button indication. The [STORE] and [RCALL] buttons in the numeric keypad control block flash amber.

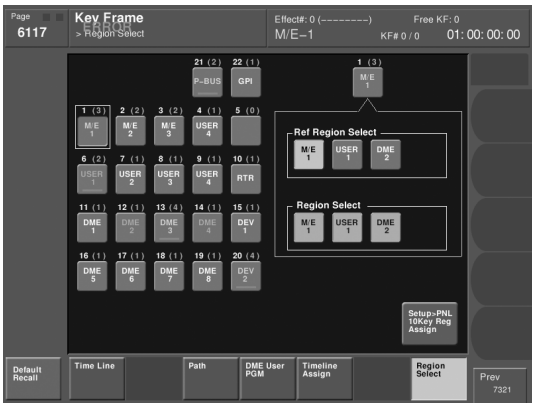


When using the CCP-6224/6324 Control Panel, the buttons in the <Flexi Pad Module> group appear at the lower left of the status area, and if you press either [Region Sel Btn Area] or [Mem Rcl Btn Area], you can select a region assigned to a region selection button in the Multifunction Flexi Pad control block or a button in the memory recall section.

Selection screen for regions assigned to region selection buttons

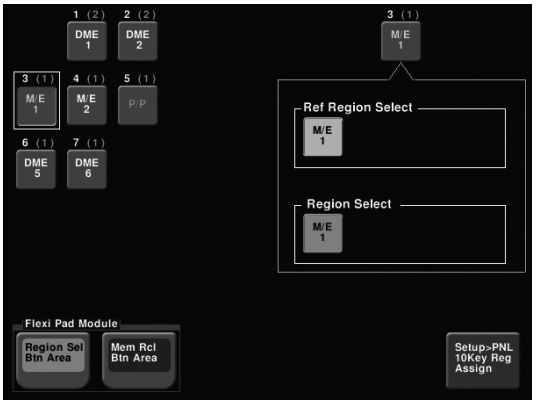

Selection screen for regions assigned to buttons in the memory recall section

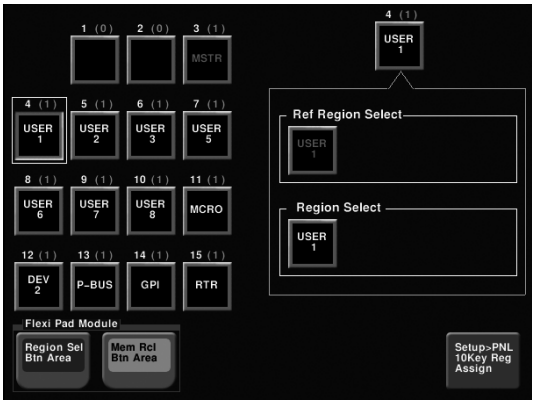

2 Press a button indication on the left of the status area, to select the button you want to assign.


The regions currently assigned to the button you pressed appear on the right side of the status area.

3 In the <Region Select> group, press the button for the region you want to select, turning it on.

4 In the <Ref Region Select> group, press the button indication you want to make the reference region.

The button you pressed lights green.

Setting the Edit Points

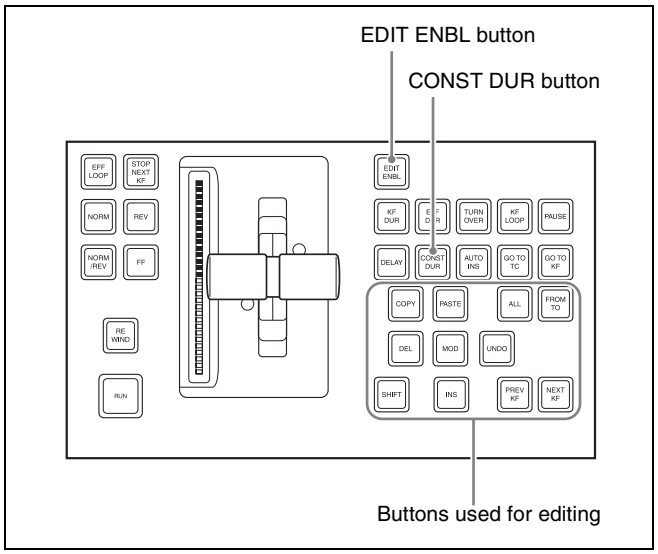

Keyframe control block

To set the edit points, use any of the following operations in the keyframe control block.

- To move the edit point to the keyframe immediately after the current time (the position at which the effect is currently stopped), press the [NEXT KF] button.
- To move the edit point to the keyframe immediately before the current time, press the [PREV KF] button.
- To move the edit point to a keyframe specified by number, press the [GO TO KF] button, then enter the keyframe number with the numeric keypad in the numeric keypad control block or Multifunction Flexi Pad control block, and press the [ENTER] button to confirm.
- To move the edit point to a specified timecode, press the [GO TO TC] button, then enter the timecode value with the numeric keypad in the numeric keypad control block or Multifunction Flexi Pad control block and press the [ENTER] button to confirm.

To enter a difference value

When moving to a point specified with the [GO TO KF] button or [GO TO TC] button, you can also enter the difference from the current keyframe number or timecode value.

Press the numeric keypad [+/–] button, and enter the difference, then press the [TRIM] button. Each time you press the [+/–] button, it toggles between plus (+) and minus (–).

Notes

You can also specify edit points in the Multifunction Flexi Pad control block *(see page 457)*.

Creating and Editing Keyframes

For this operation you can use the numeric keypad control block and keyframe control block, or the Multifunction Flexi Pad control block. In the following, the case of using the numeric keypad control block and keyframe control block is described as an example.

For details of Multifunction Flexi Pad control block, see "Keyframe Creation and Editing in the Multifunction Flexi Pad Control Block" (page 457).

Creation

Creating new keyframes

To create new keyframes, after recalling an empty register, use the following procedure to create and insert each new keyframe. Use the keyframe control block for carrying out the operation.

1 Press the [EDIT ENBL] button, turning it on.

This enables effect editing in the keyframe control block.

2 Create the image you want to be the first keyframe.

3 Press the [INS] button.

This takes the current image as the first keyframe. You can make a setting in the Setup menu so that when you recall an empty register, the system state at that point is automatically captured as the first keyframe.

4 Create the image you want to be the next keyframe.

5 Press the [INS] button.

This inserts the current image as the second keyframe after the first keyframe.

Repeat steps **4** and **5** to create the required number of keyframes.

To insert a new keyframe before an existing keyframe

Hold down the [SHIFT] button and press the [INS] button, to insert a new keyframe before the current keyframe.

Insertion

Inserting keyframes

To insert a keyframe in an existing effect, use the following procedure in the keyframe control block.

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect at the desired edit point.

3 Create the image for the keyframe you want to insert.

4 Press the [INS] button.
When the edit point is on a keyframe, to insert the new keyframe before the existing keyframe, hold down the [SHIFT] button and press the [INS] button.

This inserts the current image as the new keyframe. Inserting a keyframe may change the total duration of the effect.

For details, see "Time Settings" (page 437).

Modification

Modifying keyframes

Use the following procedure in the keyframe control block.

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect at the desired edit point.

When the edit point is on a keyframe, this is what you modify. If the edit point is between two keyframes, the previous keyframe is what you modify.

Notes

In constant duration mode *(see page 436)* modification is only possible when the edit point is on a keyframe.

3 Using image transformations or adding special effects, modify the keyframe.

4 Press the [MOD] button.

Modifying more than one keyframe simultaneously

You can modify a number of keyframes simultaneously. There are three different cases for this operation.

- Modifying from the edit point to a particular keyframe
- Modifying all keyframes in the effect
- Modifying the keyframes in a specified range

The different procedures for these cases are now described.

To modify from the edit point to a particular keyframe

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect at the first keyframe of the range to be modified.

3 Carry out the necessary modifications.

4 Press the [FROM TO] button, turning it on.

The display in the numeric keypad control block shows the current keyframe number, followed by "TO."

5 Enter the number of the last keyframe to be modified from the numeric keypad control block and press the [ENTER] button to confirm.

6 Press the [MOD] button. Alternatively, hold down the [SHIFT] button and press the [MOD] button.

For the difference in the result, see "Differences in the changes when a number of keyframes are modified" (page 451).

To modify all keyframes in the effect

1 Press the [EDIT ENBL] button, turning it on.

2 Carry out the necessary modifications on any keyframe.

3 Press the [ALL] button, turning it on.

4 Press the [MOD] button. Alternatively, hold down the [SHIFT] button and press the [MOD] button.

For the difference in the result, see "Differences in the changes when a number of keyframes are modified" (page 451).

To modify the keyframes in a specified range

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect at any keyframe within the range to be modified.

3 Carry out the necessary modifications.

4 Press the [FROM TO] button, turning it on.

The display in the numeric keypad control block shows the current keyframe number, followed by "TO."

5 Using the numeric keypad in the numeric keypad control block, carry out the following operations.

- To set the first keyframe in the range to be modified, press the [CLR] button, then enter the keyframe number, and press the [ENTER] button to confirm.
- To set the last keyframe in the range to be modified, enter the keyframe number from the numeric keypad, and press the [ENTER] button to confirm.

6 Press the [MOD] button. Alternatively, hold down the [SHIFT] button and press the [MOD] button.


For the difference in the result, see "Differences in the changes when a number of keyframes are modified" (page 451).

Differences in the changes when a number of keyframes are modified

When you select a number of keyframes to modify, and press the [MOD] button alone or in combination with the [SHIFT] button, the result of the operation differs as shown below.

Modifying the keyframes by pressing the [MOD] button alone


The modified parameter values are taken as absolute values, and applied to all of the selected keyframes.

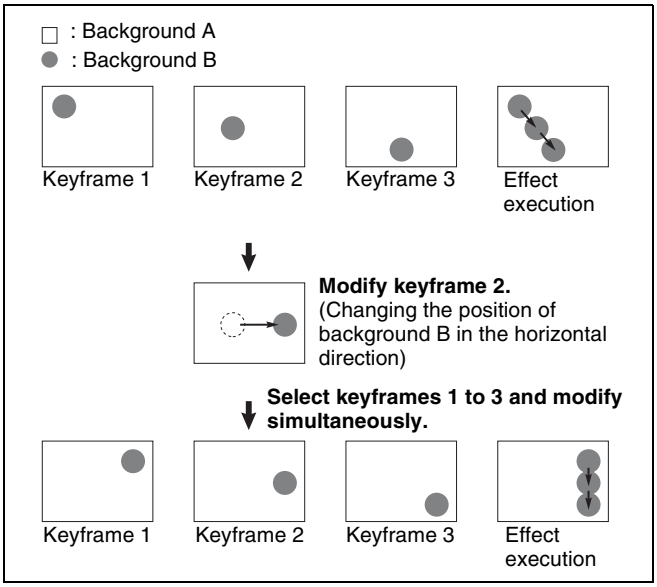

Result:
The horizontal position of background B in keyframes 1 and 3 is now the same as that in keyframe 2.
In all keyframes, the vertical position remains unchanged as the parameter is not changed.

Modifying the keyframes by holding down the [SHIFT] button and pressing the [MOD] button

The modified parameter values are taken as relative values, which modify all of the selected keyframes.

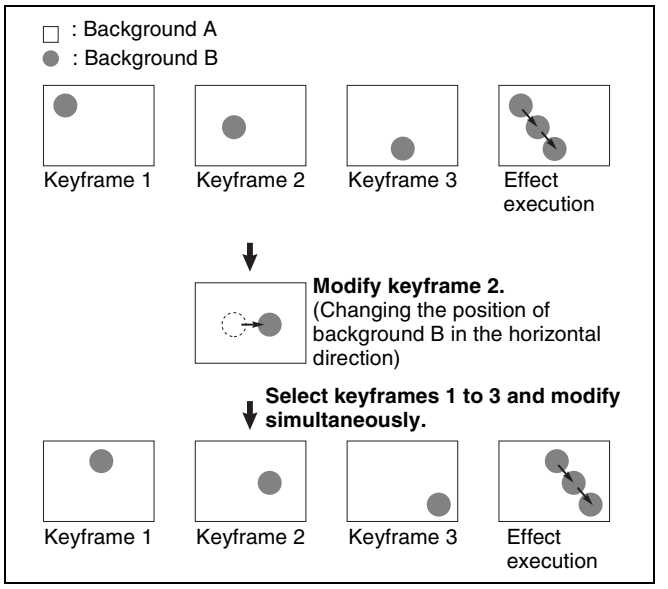

Result:
Background B of keyframes 1 and 3 is moved in the horizontal direction by the same amount as in keyframe 2.

Deletion

Deleting keyframes

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect at the desired edit point.

When the edit point is on a keyframe, this is what you delete. If the edit point is between two keyframes, the previous keyframe is what you delete.

3 To delete a number of keyframes in a single operation, press the [FROM TO] button or the [ALL] button, turning it on.

For how to specify a range of keyframes, see "Modifying more than one keyframe simultaneously" (page 450).

4 Press the [DEL] button.

This deletes the keyframe.
Deleting a keyframe reduces the total duration of the effect.
In constant duration mode *(see page 454)*, however, the duration does not change.

For details, see "Changes in the effect duration caused by deleting a keyframe" (page 437).

Movement

Moving keyframes

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect at the edit point you want to move.

3 To move a number of keyframes in a single operation, press the [FROM TO] button, turning it on, to specify the keyframes.

For how to specify a range of keyframes, see "Modifying more than one keyframe simultaneously" (page 450).

4 Press the [DEL] button.

This deletes the keyframe, and saves it in the paste buffer.

5 Move the edit point to the position to which you want to move the keyframe.

6 Press the [PASTE] button.

This inserts the keyframe you have moved after the current keyframe. In constant duration mode, the moved keyframe overwrites the edit point.

To insert the moved keyframe before a keyframe
Hold down the [SHIFT] button, and press the [PASTE] button to insert the moved keyframe before the current keyframe.

Copying

Copying keyframes

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect at the edit point you want to copy.

3 To copy a number of keyframes in a single operation, press the [FROM TO] button or the [ALL] button, turning it on.

For how to specify a range of keyframes, see "Modifying more than one keyframe simultaneously" (page 450).

4 Press the [COPY] button.

This copies the specified keyframe, and saves it to the paste buffer.

5 Move the edit point to the position where you want to insert the copied keyframe.

6 Press the [PASTE] button.

This inserts the keyframe you have copied after the current keyframe. In constant duration mode, the copied keyframe overwrites the edit point.

To insert the copied keyframe before a keyframe
Hold down the [SHIFT] button, and press the [PASTE] button to insert the copied keyframe before the current keyframe.

Pause

To apply a pause to a keyframe, use the following procedure.

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect on the keyframe to which you want to apply a pause.

3 Press the [PAUSE] button.

Keyframe Loop (Repeated Execution of a Specified Range)

By setting the range of the loop within the effect, and the number of loop executions, you can execute the loop range repeatedly.

Notes

It is only possible to set one keyframe loop for each region.

Creating a new keyframe loop

To specify the loop range and loop count, carry out the following procedure.

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect on the keyframe you want to make the first of the loop range (start point). (Here, by way of example, keyframe 2 is taken as the start point.)

3 Press the [KF LOOP] button in the keyframe control block, turning it on.

The numeric keypad control block display shows the start point keyframe number as follows.

FM 2 TO

The example shown means "from (keyframe) 2 to…," where the end keyframe is to follow.

4 With the numeric keypad buttons of the numeric keypad control block, enter the number of the last keyframe in the loop range (end point). (Here, by way of example, keyframe 5 is the end point.)

FM 2 TO 5

5 Press the [ENTER] button to confirm the entry.

The display changes as follows, prompting you to enter the loop count.

COUNT

6 Enter the loop count. (Here, by way of example, "15" is entered.)

- To specify a loop count, enter a number in the range 1 to 99.
- To specify an endless loop, enter "0" (zero).

COUNT 15

7 Press the [ENTER] button to confirm the entry.

The start point, end point, and loop count that you have set are reflected in the Timeline menu.
If you enter the loop count as "0" (endless loop), the count is shown as "inf" (infinity).
The numeric keypad control block display changes back to the state shown in step **4**.

Changing the keyframe loop settings

To change the loop range or count for the currently recalled effect, carry out the following procedure.

1 When the [KF LOOP] button in the keyframe control block is lit amber, press it, turning it green.

The numeric keypad control block display shows the current loop range.
If, for example, the start point is keyframe 2 and the end point is keyframe 5, this appears as follows.

FM 2 TO 5

2 To change the loop range, press the [CLEAR] button in the numeric keypad control block.
To change the loop count only, press the [ENTER] button, then skip to step **6**.

When you press the [CLEAR] button, this appears as follows.

FM TO

3 Enter the keyframe number for the new start point, and press the [ENTER] button.

4 Enter the keyframe number for the new end point, and press the [ENTER] button.

The display shows the currently set loop count.

5 To change the setting, press the [CLEAR] button.

This clears the set loop count.

COUNT

6 Enter the new loop count, and press the [ENTER] button.

Executing a keyframe loop

In the keyframe control block, press the [RUN] button. The set loop range is executed repeatedly for the set loop count number of times.
The Timeline menu shows the total loop count and the number of loops remaining. If the loop count is infinite (inf), the remaining number is not shown.
If the [REV] button is lit, the loop is played in the reverse order.


Canceling keyframe loop execution

Press the [REWIND] button in the keyframe control block.


Changes to the loop range caused by keyframe insertion/deletion

When a keyframe is inserted or deleted within the loop range, the loop range also changes. The following are examples.


Example 1: If keyframe 3 is deleted, the loop end point moves forward as follows.

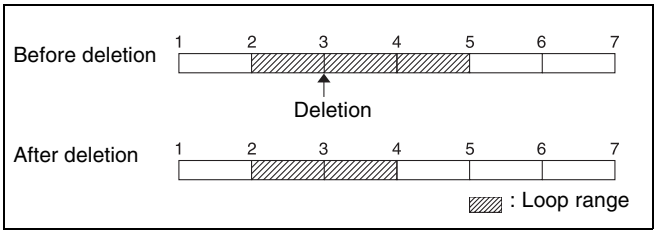

Example 2: If keyframe 3 is added, the end point keyframe number moves back.

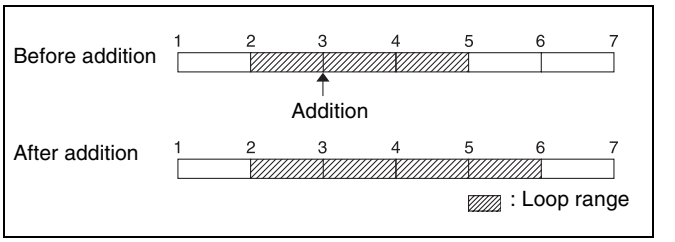

Example 3: If the keyframe at the end of the loop range (the end point) is deleted, the keyframe loop settings are all cleared, as follows, and the [KF LOOP] button goes off. The same occurs if the first keyframe in the loop range (the start point) is deleted.

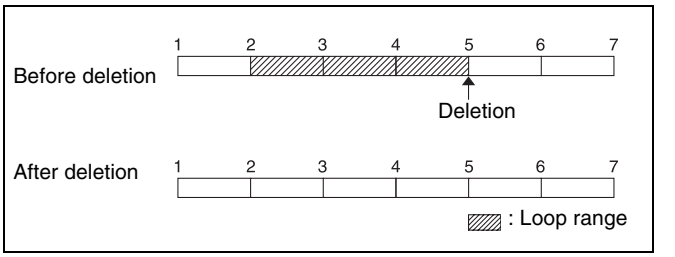

Undoing an Edit Operation

To undo a keyframe insert, modify, delete, or paste operation immediately after execution, press the [UNDO] button.

Duration Mode Setting

There are two keyframe duration modes: variable duration mode, and constant duration mode in which the effect duration is fixed *(see page 436)*.

- To select variable duration mode, turn the [CONST DUR] button off.
- To select constant duration mode, press the [CONST DUR] button, turning it on.

Transition Mode Settings for User Programmable DME

To create an effect for user programmable DME, it is necessary to set the transition mode.

User programmable DME in transition mode

For the transition mode set when creating a keyframe effect for a user programmable DME pattern, the following can be used.
Single: single transition mode
Flip tumble (Flip Tumble): flip tumble transition mode
Dual: dual transition mode

Picture-in-picture (PinP): one-channel or two-channel, picture-in-picture transition mode

Compress: a type of picture-in-picture, in which the new image is the background, and the currently visible image shrinks, and then expands to its original size (see example in the next item).

Frame in-out (Frame I/O): one-channel or two-channel, frame in-out transition mode. When the first transition completes, if you move the position of the image, you can move it both horizontally and vertically.

Frame in-out H (Frame I/O H): a type of frame in-out mode, which is specified when creating a transition effect in the horizontal direction.

The image movement is reflected at both the transition start point and end point *(see page 455)*.



The operation is carried out according to DME wipe patterns 1202, 1203, or 1204.

Frame in-out V (Frame I/O V): a type of frame in-out mode, which is specified when creating a transition effect in the vertical direction.

The image movement is reflected at both the transition start point and end point *(see page 456)*.

Transition mode “Compress”


The change in the image when the transition mode is set to “Compress” is as follows, in comparison to the case of “Picture-in-picture.”

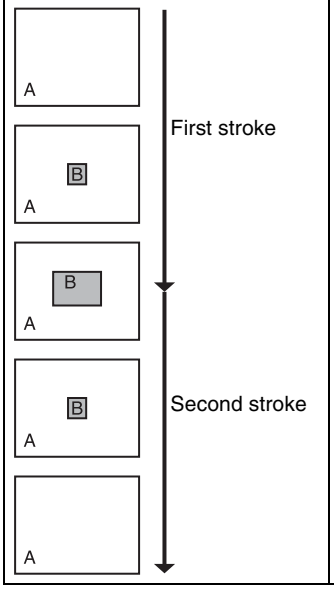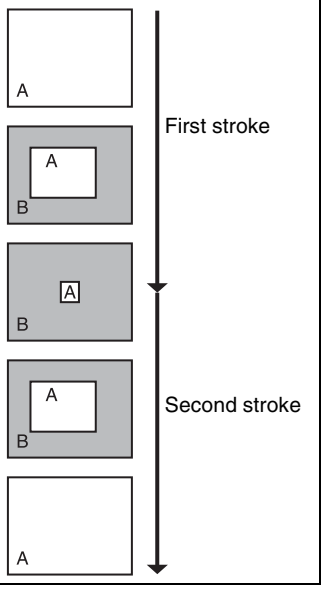Example of the image change in the transition mode “Picture-in-picture” (one-channel mode)	Example of the image change in the transition mode “Compress”
	


Transition mode “Frame in-out”

In this mode, when the first transition has completed, you can move the image with the positioner in both horizontal and vertical directions, but the image position at the transition start point and end point does not change.

The description is of an example of creating an effect such as the following.

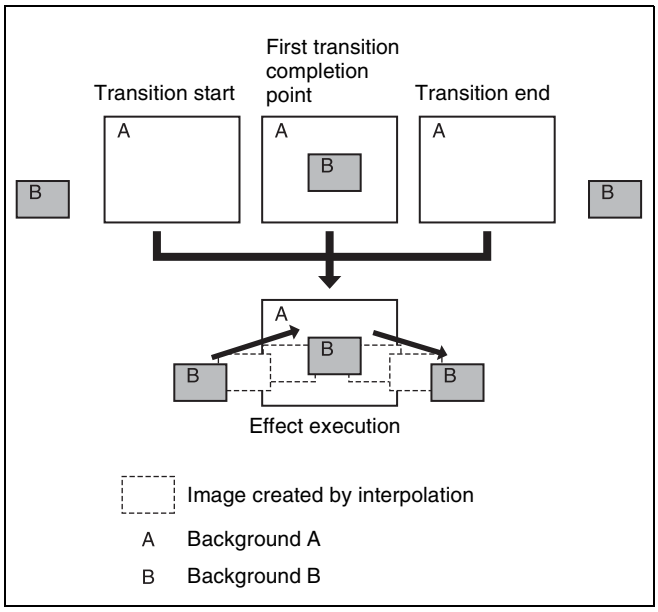

At the first transition completion point, if you move the image with the positioner, the transition appears as in the following figure.

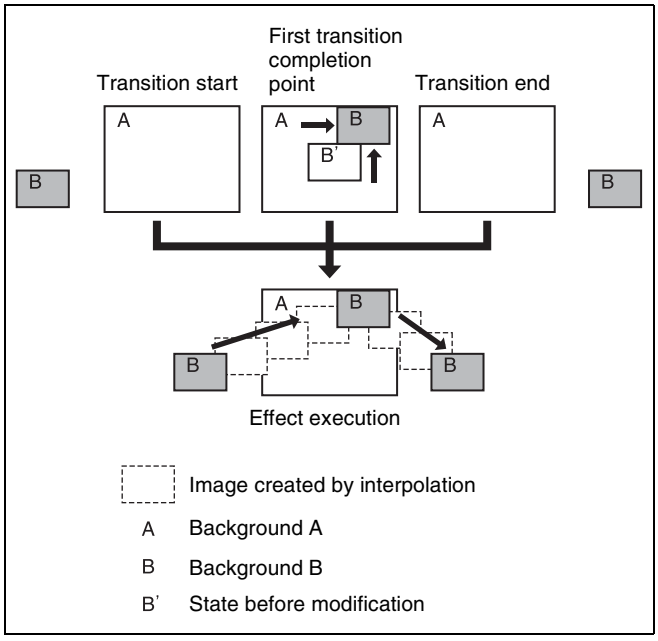


Transition mode “Frame in-out H”


This mode is specified when creating a transition effect in the horizontal direction.

In this mode, when the first transition has completed, you can move the image with the positioner in both horizontal and vertical directions. The image at the transition start point and end point also moves.

The description is of an example of creating an effect such as the following.

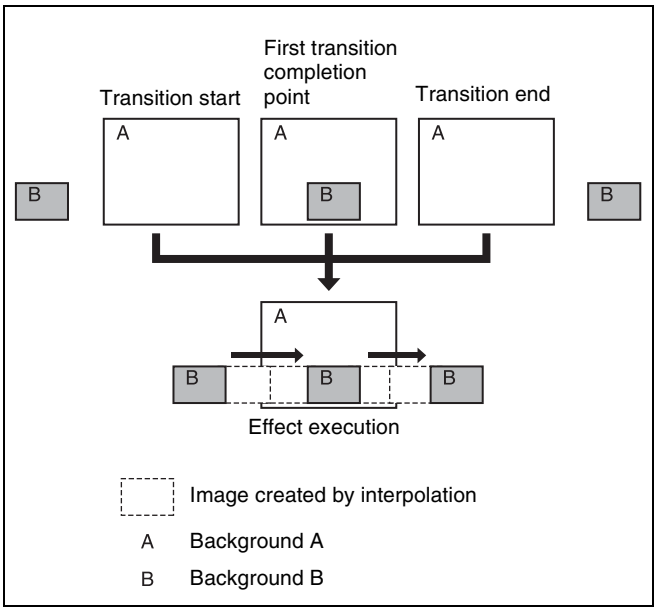

At the first transition completion point, if you move the image with the positioner, the transition appears as in the following figure.

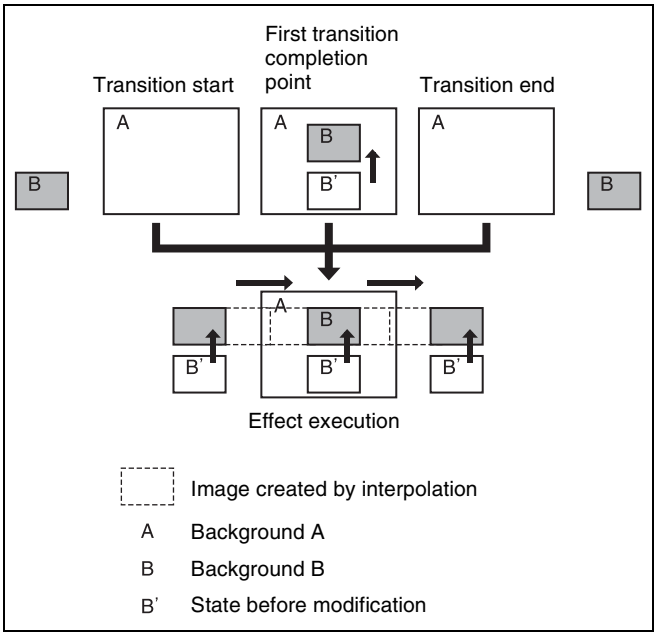


Transition mode “Frame in-out V”


This mode is specified when creating a transition effect in the vertical direction.

In this mode, in the state at completion of the first transition, you can move the image with the positioner in both horizontal and vertical directions. The image at the transition start point and end point also moves.

The description is of an example of creating an effect such as the following.

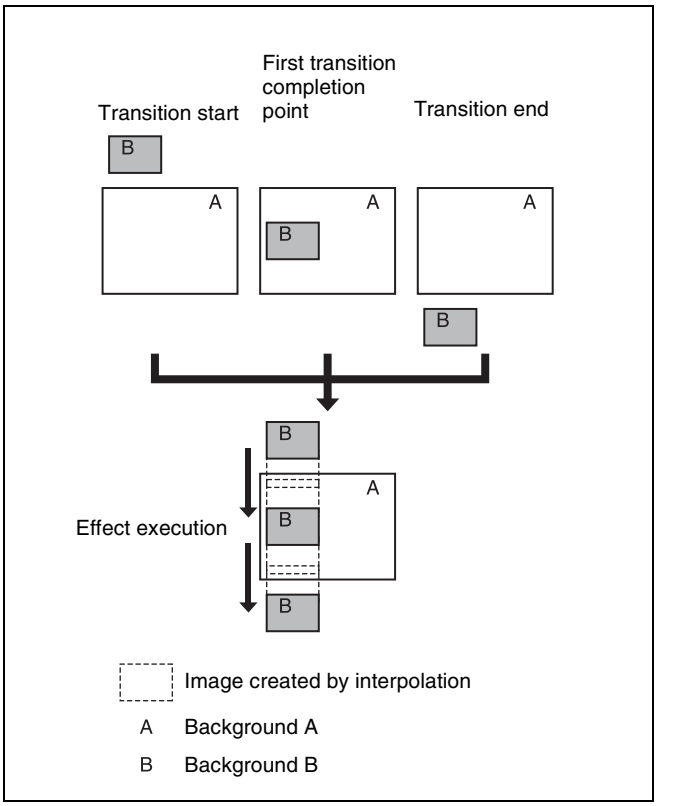

At the first transition completion point, if you move the image with the positioner, the transition appears as in the following figure.

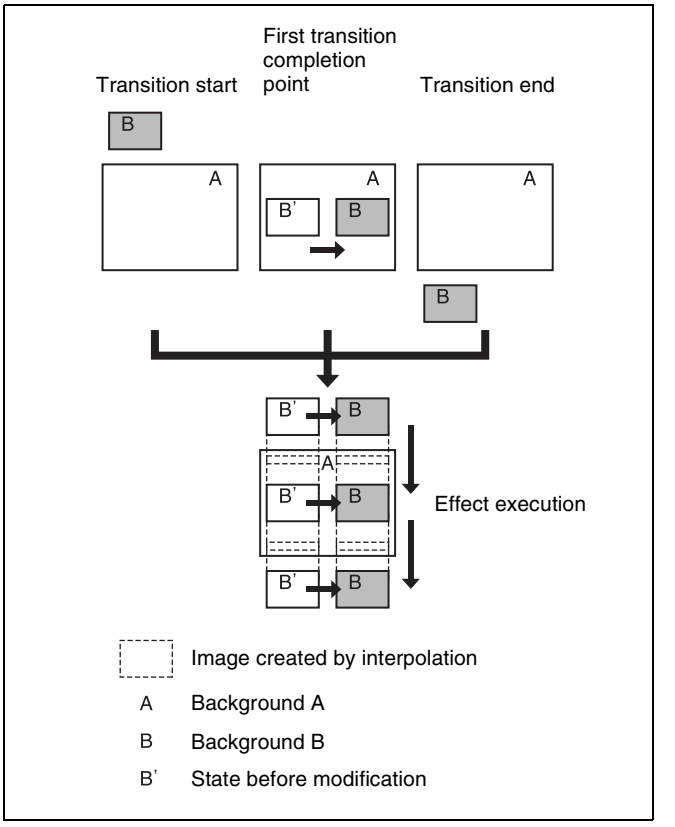

Signals forming part of the background for a DME wipe

For a two-channel mode page turn, page roll, brick, frame in-out, and so on, the part of the pattern shown in gray is filled with the signal selected on the DME external video bus.
For three-channel mode brick, the part of the pattern shown in dark gray is filled with the DME external video signal, and the light gray portion with the signal selected as follows.

For details on the pattern, see "DME Wipe Pattern List" in Appendix (Volume 1).

For a DME dedicated interface

- When the DME channel used is 3 or 4, the signal selected on the DME utility 1 bus.
- For channel 7 or 8, the signal selected on the DME utility 2 bus.

For a DME SDI interface

Signal selected on the AUX bus assigned in the Engineering Setup >Switcher >Device Interface >DME Type Setting >DME SDI interface menu. The AUX bus is determined by which DME channel is being used.

Notes

For the SDI interface on the DME, in some cases the AUX bus is used in place of the DME external bus *(see page 634)*.

Setting the transition mode

1 In the Key Frame menu, select HF4 'DME User PGM.'

The DME User PGM menu appears.

2 In the <Transition Mode> group, select the transition mode according to the DME wipe action.

Single: select single transition mode.
Flip Tumble: select the flip tumble transition mode.
Dual: select dual transition mode.
P in P: select picture-in-picture mode.
Compress: select compress mode.
Frame I/O: select frame in-out transition mode.
Frame I/O H: select frame in-out transition mode in the horizontal direction.
Frame I/O V: select frame in-out transition mode in the vertical direction.

For details of creating an effect for user programmable DME, see "Creating User Programmable DME Patterns" in Chapter 6 (Volume 1).


Notes

The DME channel selected as the reference region (lit green) in the numeric keypad control block is reflected in the <Transition Mode> group display.


Keyframe Creation and Editing in the Multifunction Flexi Pad Control Block

To create and edit a keyframe in the Multifunction Flexi Pad control block, press the [EFF] button to switch to effect operation mode, then press the [EDIT ENBL] button.
The [EDIT ENBL] button lights red, and the memory recall section switches to the effect editing mode as shown in the following illustration.

- Buttons in the memory recall section in effect editing mode (first page)
  Press the [PAGE 1/2] button to switch to the next button display.

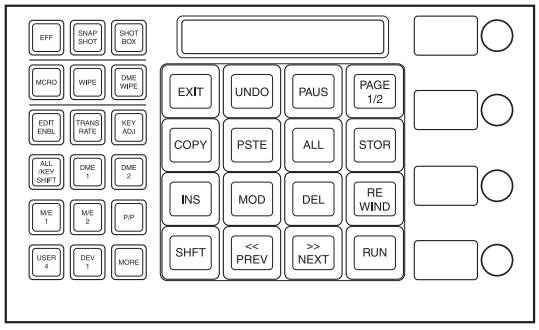

- Buttons in the memory recall section in effect editing mode (second page)
  Press the [PAGE 2/2] button to switch to the previous button display.

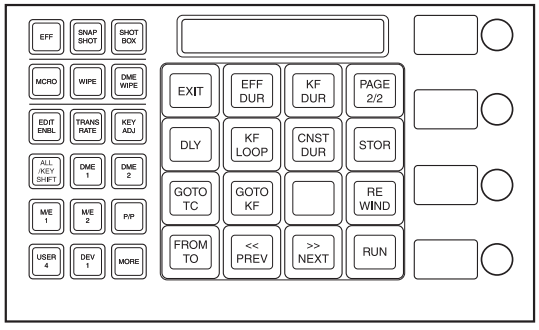


In this mode, you can carry out keyframe creation and editing, using the following buttons.
[EXIT] button: Forcibly exit editing mode.
[UNDO] button: Undo the last keyframe insertion, modification, deletion, paste or other operation.
[PAUS] button: Add a pause setting to a keyframe *(see page 453)*.
[COPY] button: Copy a keyframe *(see page 452)*.

[PSTE] button: Paste a keyframe *(see page 452)*.
[ALL] button: Select all keyframes in an effect *(see page 450)*.
[STOR] button: Save the effect *(see page 464)*.
[INS] button: Insert a keyframe *(see page 450)*
[MOD] button: Modify a keyframe *(see page 450)*.
[DEL] button: Delete a keyframe *(see page 452)*.
[REWIND] button: Move to the first keyframe in the effect *(see page 462)*.
[SHFT] button: Enable the shift function of the button pressed together with this one.
[<< PREV] button: Move the edit point to the previous keyframe *(see page 449)*.
[>> NEXT] button: Move the edit point to the next keyframe *(see page 449)*.
[RUN] button: Run the effect *(see page 462)*.
[EFF DUR] button: Set the effect duration *(see page 459)*.
[KF DUR] button: Set the keyframe duration *(see page 458)*.
[DLY] button: Set a delay *(see page 459)*.
[KF LOOP] button: Set a keyframe loop *(see page 453)*.
[CNST DUR] button: Switch the duration mode *(see page 454)*.
[GOTO TC] button: Move the edit point to the specified timecode position *(see page 449)*.
[GOTO KF] button: Move the edit point to the specified keyframe position *(see page 449)*.
[FROM TO] button: Switch to the mode for inputting ranges with the numeric keypad *(see page 450)*.

Time Settings

You can determine the execution time of an effect by setting either the keyframe durations or the effect duration *(see page 437)*.

Setting the Keyframe Duration

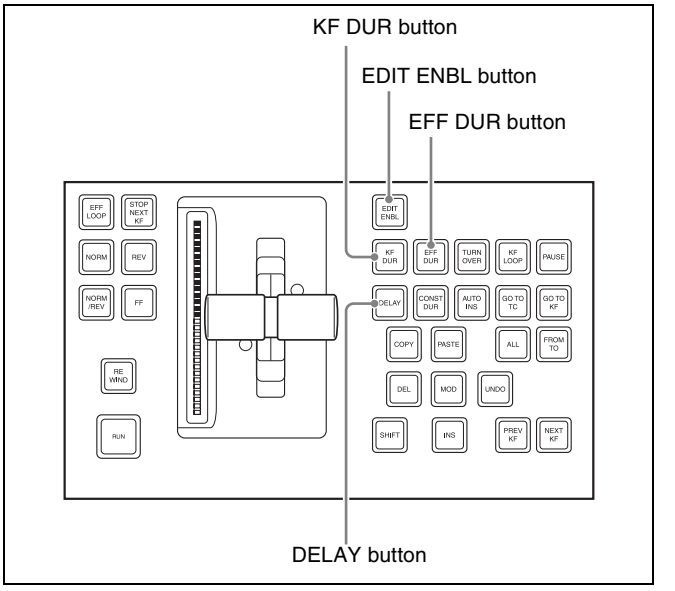

Keyframe control block

Setting the keyframe duration

You can set the value of the keyframe duration independently for each keyframe, by the following method.

1 Press the [EDIT ENBL] button, turning it on.

2 Stop the effect on the keyframe for which you want to set the duration.

The time from this keyframe to the following keyframe is what you set.

3 Press the [KF DUR] button, turning it on.

The display in the numeric keypad control block shows “KF DUR” followed by the duration of the current keyframe (seconds:frames).

4 Using the numeric keypad in the numeric keypad control block, enter the timecode value for the keyframe duration, as a maximum of four digits.

For example, to set 9 seconds and 20 frames, enter 920. You can also use the [TRIM] button to enter a difference value *(see page 449)*.

5 Press the [ENTER] button to confirm the entry.

This changes the keyframe duration to the new setting.

Notes

In addition to the above operation, the keyframe duration may also be automatically changed as a result of changing the effect duration *(see the next section)*.

Setting the Effect Duration

To set the effect duration, use the following procedure.

1 Press the [EDIT ENBL] button, turning it on.

2 Press the [EFF DUR] button, turning it on.

The display in the numeric keypad control block shows "DUR" followed by the effect duration (minutes:seconds:frames).

3 Using the numeric keypad in the numeric keypad control block, enter the timecode value for the effect duration, as a maximum of six digits.

For example, to set 3 minutes 7 seconds and 15 frames, enter 30715. You can also use the [TRIM] button to enter a difference value *(see page 449)*.

4 Press the [ENTER] button.

Notes

In addition to the above operation, the effect duration may also be changed as a result of inserting or deleting keyframes.

For details, see "Time Settings" (page 437).

Setting the Delay

To set the delay *(see "Delay setting" (page 438))*, use the following procedure.

1 Press the [EDIT ENBL] button, turning it on.

2 Press the [DELAY] button, turning it on.

The display in the numeric keypad control block shows "DELAY" followed by the delay time (seconds:frames).

3 Using the numeric keypad in the numeric keypad control block, enter the timecode value for the delay, as a maximum of four digits.

You can also use the [TRIM] button to enter a difference value *(see page 449)*.

4 Press the [ENTER] button to confirm the entry.

Path Settings

The term “path” *(see page 438)* refers to the specification of how interpolation is carried out from one keyframe to the next.
Set keyframe paths in the Key Frame >Path menu.

To access the Key Frame >Path menu

In the menu control block, press the top menu selection button [KEY FRAME], then select HF3 ‘Path.’

Basic Procedure for Path Settings

Selecting the category


From the buttons in the function button area, select the category for which you want to make the setting.
First row: path settings for the switcher M/E-1 to M/E-5, and PGM/PST banks
Second and third rows: path settings for User1 to User8
Fourth row: path settings for DME local channel and global channel 3D transforms and effects

Making switcher path settings

This section describes settings for M/E-1 Key1 as an example.
The area for the VF buttons shows the names of items. A ▶ sign by a button indicates that pressing it opens a more detailed setting menu.
The status area shows the settings for Xpt, Hue, and Curve. However, depending on the item, these parameters may or may not be present.

Notes

Whenever you set a path or modify its setting, be sure to press the [MOD] button in the keyframe control block. The setting does not become effective unless the [MOD] button is pressed.

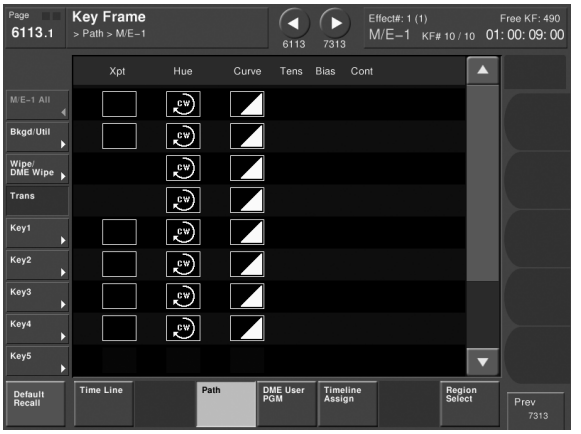

Changing the path type for Curve

1 In the Path menu, press [M/E-1].

The M/E-1 menu appears.

2 Press the Curve path type indication for the Key1 item that you want to change.

A path selection window appears.

3 Press the indication for the desired path type, to select it.

OFF **OFF:** Executing the effect causes no change.

Step: There is no interpolation between keyframes, so that the effect parameters are updated each time a keyframe is passed.

Linear: Linear interpolation between keyframes, resulting in constant speed movement.

S-Curve: The rate of change accelerates and decelerates before and after a keyframe, so that the rate of change is maximum midway between two keyframes.

Spline: The effect follows a smooth curved path from each keyframe to the next.

The status area reflects the selected path type.
At this point, depending on the setting for Curve, the effect for Hue and Xpt is also affected as shown in the following table. In the menu, the Hue and Xpt settings do not change, but the path type indication is dimmed out.

Curve setting	Hue change	Xpt change
OFF	Does not change	Hold
Step	Changes as with the Step setting	Is not affected

4 If you selected Spline as the path type, set the following parameters, using the knobs.

Knob	Parameter	Adjustment	Setting values
1	Tens	Spline interpolation tension	–4.00 to +4.00
2	Bias	Spline interpolation bias	–4.00 to +4.00
3	Cont	Spline interpolation continuity	–4.00 to +4.00

Changing the path type for Hue

1 Press the Hue path type indication for the item that you want to change.

A path selection window appears.

2 Press the indication for the desired path type, to select it.

CW: Rotate clockwise.

CCW: Rotate counterclockwise.

Short: The hue changes in whichever of the clockwise and counterclockwise directions is shorter.

Long: The hue changes in whichever of the clockwise and counterclockwise directions is longer.

Changing the path type for Xpt

1 Press the Xpt path type indication for the item that you want to change.

A path selection window appears.

2 Press the indication for the desired path type, to select it.

Xpt Hold off: When replaying a keyframe, change the inputs to the settings saved in memory.


Xpt Hold on: When replaying a keyframe, do not change the inputs.

Executing Effects

By means of the [RUN] button in the keyframe control block, you can play an effect as a continuously varying image. This is referred to as effect execution *(see page 440)*.
It is also possible to execute an effect from the device control block, the standard type Flexi Pad control block or the Multifunction Flexi Pad control block.

For details, see "Names and Functions of Parts of the Control Panel" in Chapter 2 (Volume 1).

Executing Effects in the Keyframe Control Block

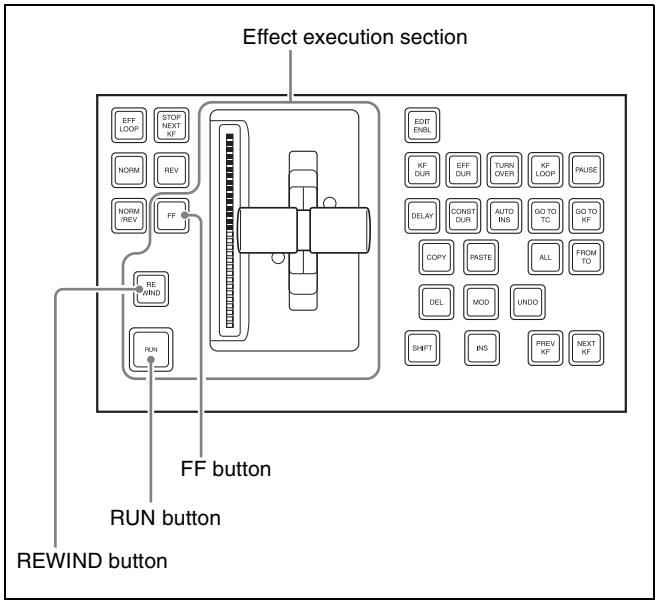

Keyframe control block

Executing an effect automatically

1 Select the region in which you want to execute the effect, using the region selection buttons in the numeric keypad control block *(see page 444)*.

2 With the numeric keypad, enter the number of the register in which the effect you want to execute is saved, and press the [ENTER] button to confirm.

This recalls the effect saved in the register.

3 In the keyframe control block, press the [RUN] button.

The [RUN] button lights amber and the effect is executed automatically.

Executing an effect manually

In step **3** above, operate the fader lever.

To use the transition control block fader lever as a keyframe fader

Press the [KF] button in the transition control block, turning it on, to execute a keyframe effect with the fader lever in the same control block.
You can also assign the [KF] button to a transition type selection button in the transition control block *(see page 572)*.

Notes

- It is not possible for the [KF] button to be on for multiple banks (M/E or PGM/PST) at the same time. If you press the [KF] button in more than one bank, only the last button pressed remains on.
- If a macro is assigned to the transition control block fader lever, then while in use as a keyframe fader the macro is not executed.

Moving to the first keyframe of the effect

To move to the first keyframe of the effect, press the [REWIND] button.

Moving to the last keyframe of the effect

To move to the last keyframe of the effect, press the [FF] button.

Setting the Run Mode

You can set the run mode in which an effect is executed when you press the [RUN] button.

Specifying the effect execution direction

To specify the effect execution direction, press the [NORM] button or the [REV] button, turning it on. When you press one, turning it on, the other automatically goes off.
To execute the effect so as to obtain the effects of the [NORM] and [REV] buttons alternately, press the [NORM/REV] button, turning it on.

When the [NORM] button is lit: The effect is executed in the direction from the first keyframe to the last keyframe.

When the [REV] button is lit: The effect is executed in the direction from the last keyframe to the first keyframe.

When the [NORM/REV] button is lit: Each time the effect is executed, the direction reverses.

Executing an effect up to the next keyframe

1 Press the [STOP NEXT KF] button, turning it on.

2 Press the [RUN] button.

This executes the effect as far as the next keyframe. When the [REV] button is lit, it is executed as far as the previous keyframe.

Repeating an effect

1 Press the [EFF LOOP] button, turning it on.

2 Press the [RUN] button.

This executes the effect repeatedly, from the first keyframe to the last keyframe.
When the [REV] button is lit, the effect is executed in the reverse direction.

3 To stop the repeating effect, press the [EFF LOOP] button, turning it off, or press the [REWIND] button.

Executing an Effect in the Flexi Pad Control Block

Executing an effect

To execute an effect recalled from the numeric keypad control block in the Flexi Pad control block, use the following procedure.

1 In the Flexi Pad control block, press the [EFF] button.

This assigns the Flexi Pad control block to effect operation, and the [REWIND] button and [RUN] button appear in the memory recall section.
The previously selected bank number and last recalled register number appear in the numeric display.

2 Press the following buttons to execute the effect.


REWIND: Press this button to move to the first keyframe of the currently recalled effect.

RUN: Press this button to run the currently recalled effect.

Executing an Effect in the Multifunction Flexi Pad Control Block

1 In the Multifunction Flexi Pad control block, press the [EFF] button.

This changes the Multifunction Flexi Pad control block to effect operation, and the [REWIND] button and [RUN] button appear in the memory recall section. In addition, the number of the last recalled register appears in the alphanumeric display.

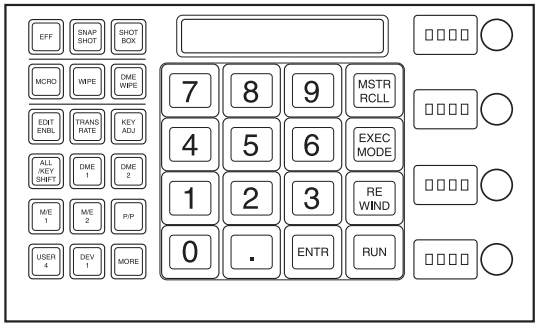

2 Press the following buttons to execute the effect.

[REWIND] button: Press this button to move to the first keyframe of the currently recalled effect.
[RUN] button: Press this button to run the currently recalled effect.

Setting the execution mode
Press the [EXEC MODE] button to switch the memory recall section to the execution mode setting mode, and set the execution mode with the following buttons, then execute the effect.
[EFF LOOP] button: Execute the effect repeatedly.
[STOP NEXT] button: Execute the effect and stop at the next keyframe.
[NORM] button: Execute the effect from the first keyframe to the last keyframe.
[NORM/REV] button: Execute the effect as far as the first or last keyframe, then reverse direction.
[REV] button: Execute the effect from the last keyframe to the first keyframe.

Saving Effects

When you recall an effect, the currently recalled effect is automatically saved in a register. This is referred to as the auto save function.
You can disable the auto save function in the Setup menu. By means of the following operation, you can also specify a register and save an effect in it.

Saving an effect in a specified register

Specify the register using the numeric keypad control block.

1 Press the [EFF] button, turning it on.

This assigns the numeric keypad control block to keyframe operations.

2 Press the region selection button corresponding to the region for which you want to save the register, turning it on *(see page 444)*.

3 Press the [STORE] button, turning it on.

4 With the numeric keypad, enter the number of the register in which you want to save the effect.

To find an empty register, instead of entering a number, press the [.] (period) button. To search for an empty register common to all currently selectable regions, press the [.] button again.
To search for an empty register in the 100 range, press [1], [0], [0], [.] (period) in that order. Similarly, to search for an empty register in the 200 range, press [2], [0], [0], [.] (period), and to search for an empty register in the 300 range, press [3], [0], [0], [.] (period).
The register number appears in the display. If the number is followed by a letter "e" or "E," this indicates the following.
e: The selected register is empty for the regions selected in step **2**.
E: The selected register is empty for all selectable regions.

5 To add an attribute (effect dissolve) *(see page 436)*, press the [+/–/EFF DISS] button, turning it on.

6 Press the [ENTER] button.

This saves the current effect in the specified register, and turns off the [STORE] button. The [RCALL] button and [STORE STATS] button both light.

To undo the saving of an effect

Hold down the [STORE STATS] button and press the [UNDO] button.

Saving an effect with the Multifunction Flexi Pad control block

1 Press the [EFF] button, turning it on.

This assigns the memory recall section to effect operations.

2 Press the region selection button corresponding to the region for which you want to save the register, turning it on *(see page 446)*.

3 Press the [EDIT ENBL] button.

This assigns the memory recall section to effect editing operations.

4 Press the [STOR] button, turning it on.

5 With the numeric keypad, enter the number of the register in which you want to save the effect.

To find an empty register, instead of entering a number, press the [.] (period) button. To search for an empty register common to all currently selectable regions, press the [.] button again.
To search for an empty register in the 100 range, press [1], [0], [0], [.] (period) in that order. Similarly, to search for an empty register in the 200 range, press [2], [0], [0], [.] (period), and to search for an empty register in the 300 range, press [3], [0], [0], [.] (period).
The register number appears in the display. If the number is followed by a letter "e" or "E," this indicates the following.
e: The selected register is empty for the regions selected in step **2**.
E: The selected register is empty for all selectable regions.

6 Press the [ENTR] button.

This saves the current effect in the specified register, and turns off the [EDIT ENBL] button.

Creating and Saving a Master Timeline

Creating and Saving a Master Timeline Using the Buttons in the Numeric Keypad Control Block

Creating and saving a master timeline

You can save region information (information on any regions, including the register numbers associated with the regions) referred to as a master timeline in a dedicated register. By recalling that register, you can manipulate the regions and registers together.

1 Press the [EFF] button, turning it on.

This assigns the numeric keypad control block to keyframe effect operations.

2 Recall the register number of the effect you want to save on the master timeline for each region *(see page 444)*.

3 Of the region selection buttons, press those buttons for the regions you want to save on the master timeline, turning them on.

4 Press the region selection button [MASTR], turning it on.

The display shows the number of the register last used for master timeline register operation.

5 Press the [STORE] button, turning it on.

6 With the numeric keypad buttons, enter the number of the register in which you want to save the master timeline.

To find an empty register, instead of entering a number, press the [.] (period) button.
The display shows the register number. If the number is followed by a letter "E," the register is empty.

7 Press the [ENTER] button.

The regions selected in step **3** and the register numbers recalled in those regions are saved in the master timeline register, and the [STORE] button goes off. At the same time, the [RCALL] button lights.

Notes

- It is not possible to undo a master timeline save.
- Saving the master timeline does not carry out a save of effects. Save the effects for each region first, then carry out the master timeline save.

Changing a master timeline

You can change information already saved in a master timeline.
As an example, to change the M/E-1 register from Effect 5 to Effect 10, use the following procedure.

Information in master timeline register 1 before change

Region	Register
M/E-1	Effect 5
P/P	Effect 5

⬇

Information in master timeline register 1 after change

Region	Register
M/E-1	Effect 10
P/P	Effect 5

1 Recall the master timeline register you want to change *(see page 444)*.

This simultaneously recalls M/E-1 register 5 and P/P register 5, and the [M/E 1] and [P/P] region selection buttons light.

2 Press the region selection button [MASTR], turning it off.

3 Turn on only the button for the region you want to change (here, [M/E 1]), and recall the desired register (here, Effect 10).

This recalls M/E-1 register 10, while on P/P register 5 remains selected.

4 Press the buttons for the regions you want to save on the master timeline (here, [M/E 1] and [P/P]), turning them on.

5 Press the region selection button [MASTR], turning it on.

The display shows the register number last used for master timeline operation.

6 Press the [STORE] button, turning it on.

7 With the numeric keypad buttons, enter the number of the register (here "1") in which you want to save the master timeline, and press the [ENTER] button.

This saves M/E-1 register 10 and P/P register 5 in master timeline register 1.

Checking the regions saved on a master timeline

For example in the course of changing a master timeline, you can check which regions are saved in the register. With the [MASTR] button in the numeric keypad control block lit, hold down the [STORE] button. While it is held down, the buttons for the saved regions light. When the button is released, the state before it was held down is restored.

Creating and Saving a Master Timeline Using the Buttons in the Multifunction Flexi Pad Control Block

Creating and saving a master timeline

1 Press the [EFF] button, turning it on.

This assigns the memory recall section to keyframe effect operations.

2 Recall the register number of the effect you want to save on the master timeline for each region *(see page 444)*.

3 Of the region selection buttons, press those buttons for the regions you want to save on the master timeline, turning them on.

4 Press the region selection button [MSTR], turning it on.

The display shows the number of the register last used for master timeline register operation.

5 Press the [EDIT ENBL] button.

This assigns the memory recall section to keyframe effect editing operations.

6 Press the [STOR] button, turning it on.

7 With the numeric keypad buttons, enter the number of the register in which you want to save the master timeline.

To find an empty register, instead of entering a number, press the [.] (period) button.
The display shows the register number. If the number is followed by a letter "E," the register is empty.

8 Press the [ENTR] button.

The regions selected in step **3** and the register numbers recalled in those regions are saved in the master timeline register.

Notes

- It is not possible to undo a master timeline save.
- Saving the master timeline does not carry out a save of effects. Save the effects for each region first, then carry out the master timeline save.

Changing a master timeline

You can change information already saved in a master timeline.
As an example, to change the M/E-2 register from Effect 11 to Effect 15, use the following procedure.

1 Recall the master timeline register you want to change *(see page 444)*.

This simultaneously recalls M/E-2 register 11 and P/P register 11, and the [M/E 2] and [P/P] region selection buttons light.

2 Press the region selection button [MSTR], turning it off.

3 Turn on only the button for the region you want to change (here, [M/E 2]), and recall the desired register (here, Effect 15).

This recalls M/E-2 register 15, while on P/P register 11 remains selected.

4 Press the buttons for the regions you want to save on the master timeline (here, [M/E 2] and [P/P]), turning them on.

5 Press the region selection button [MSTR], turning it on.

The display shows the register number last used for master timeline operation.

6 Press the [EDIT ENBL] button.

This assigns the memory recall section to keyframe effect editing operations.

7 Press the [STOR] button, turning it on.

8 With the numeric keypad buttons, enter the number of the register (here "1") in which you want to save the master timeline, and press the [ENTR] button.

This saves M/E-2 register 15 and P/P register 11 in master timeline register 1.

Creating and Saving a Master Timeline With the Menu

You can save a master timeline using the Effect >Master Timeline >Store menu.

Recalling the Store menu

1 Do either of the following.

- In the menu control block, press the top menu selection button [EFF].
- In the numeric keypad control block, press the [EFF] button twice in rapid succession.

The Effect menu appears.

2 Press VF1 'Master Timeline' and HF1 'Store.'

The Master Timeline >Store menu appears.
The status area shows the master timeline register names, register lock status, register number for each region, and so on.

3 If required, press the following buttons in the status area to change the region display.

M/E, P/P: indicate assignment of M/E-1 ("M/E1"), M/E-2 ("M/E2"), M/E-3 ("M/E3"), M/E-4 ("M/E4"), M/E-5 ("M/E5"), and P/P ("P/P").
User: indicate assignment of User1 ("USR1"), User2 ("USR2"), User3 ("USR3"), User4 ("USR4"), User5 ("USR5"), User6 ("USR6"), User7 ("USR7"), and User8 ("USR8").
DME: indicate assignment of DME ch1 ("DME1"), ch2 ("DME2"), ch3 ("DME3"), ch4 ("DME4"), ch5 ("DME5"), ch6 ("DME6"), ch7 ("DME7"), and ch8 ("DME8").
DEV1-8: indicate assignment of Device1 ("DEV1"), Device2 ("DEV2"), Device3 ("DEV3"), Device4 ("DEV4"), Device5 ("DEV5"), Device6 ("DEV6"), Device7 ("DEV7"), and Device8 ("DEV8").
DEV9-12: indicate assignment of Device9 ("DEV9"), Device10 ("DEV10"), Device11 ("DEV11"), and Device12 ("DEV12").
Misc: indicate assignment of P-Bus ("PBUS"), GPI ("GPI"), and Macro ("MCRO").

Creating and saving a master timeline

To save a master timeline register with the menu, use the following procedure.

1 In the Store menu, using any of the following methods, select the register in which you want to save the master timeline.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Master Reg	Master timeline register number	1 to 99 a)

a) For P-Bus and Device1 to Device12, register numbers 1 to 250 can be set.

2 Press [Edit].

The Edit menu appears, and you can now save the master timeline in the specified register. In this menu again, you can turn the knob to select the master timeline register.
The status area shows the status of each region in this master timeline.

3 Using any of the following methods, select the region. Multiple selections are also possible.

- Press directly on the display in the status area.
- To cancel the selection, press once more to return to the normal display.
- To select all regions, press [ALL].
  To select all switcher-related regions (M/E, P/P, User), press [SWR ALL].

4 Press [Assign], turning it on.

- If the selected register is locked, a confirmation message appears asking whether or not to cancel the operation. Press [OK] to return to the previous menu display without carrying out the registration.
- If the operation is carried out, the region selected in step **3** is registered on the master timeline, and the parameters are now valid.

5 Turn the knob to select the number of the effect register.

Knob	Parameter	Adjustment	Setting values
3	Effect Reg	Effect register number	1 to 399

6 Repeat steps **3** to **5** as required to set all regions and register numbers to be saved on the master timeline.

7 In the <Store> group, press [Store].

To return to the state before saving the master timeline content

In the <Store> group, press [Undo].

Register Operations in the Menus

Using the Effect menu, you can carry out the following effect register operations.
- Effect Attribute Settings *(page 467)*
- Effect Status Display *(page 468)*
- Effect Register Editing *(page 468)*

To display the Effect menu

Press the top menu selection button [EFF] in the menu control block.
The menus for editing registers are divided up by registers. Here the menu for registers 1 to 99 is described as an example, but you can carry out operations in the same way on registers 101 to 199, 201 to 299, and 301 to 399, using VF3 to VF5.
Also for registers for P-Bus and Device1 to Device12, carry out similar operations using VF6 'DEV/PBUS Effect 1-250.'

Effect Attribute Settings

Applying effect dissolve

To apply the "effect dissolve" attribute to a keyframe effect, use the following procedure.

1 In the Effect menu, press VF2 'Effect 1-99' and HF1 'Attribute.'

The Attribute menu appears.
The status area shows the region names, register numbers and status, and attribute settings.

2 Press the region display in the upper part of the list, and in the selection window select the region.
Selecting multiple regions is also possible.
To select all regions, press [ALL].

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the register.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Register	Register number	1 to 99
3	Num	Select number of registers	1 to 99

- To select all registers, press [ALL].

5 Press [Effect Dissolve], turning it on.

6 Turn the knob to set the duration.

Knob	Parameter	Adjustment	Setting values
4	Eff Diss Duration	Dissolve duration	1 to 999 (frames)

Setting the duration for a temporary attribute

To set the duration for a temporary attribute set in the numeric keypad control block, turn knob 5.

Knob	Parameter	Adjustment	Setting values
5	Temp Dur	Temporary attribute dissolve duration	0 to 999 (frames)

Effect Status Display

The Effect >Effect 1-99 menu displays the following information.

Region name: The selected region name appears in the upper part of the list.

Register number

Register name

Write-protected status: When the register is write-protected, a letter “L” appears.

Empty status: When the register is empty, a letter “E” appears.

Effect Register Editing

You can carry out the following editing on effect registers and master timeline registers.

- **Lock:** Write-protect the contents of the register.
- **Copy:** Copy the contents of one register to another register.
- **Merge:** Merge the data of two registers. It is not possible to merge master timeline registers.
- **Move:** Move the contents of one register to another register.
- **Swap:** Swap the contents of two registers.
- **Delete:** Delete the contents of a register.
- **Name:** Attach a name to a register.

Write-protecting the contents of the effect register

Notes

It is not possible to write-protect an empty register.

1 In the Effect menu, press VF2 ‘Effect 1-99’ and HF2 ‘Lock.’

The Lock menu appears.

2 Press the region display in the upper part of the list to display a selection window, then select the region in the selection window. Selecting multiple regions is also possible.
To select all regions, press [ALL].

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the register.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Register	Register number	1 to 99
3	Num	Select number of registers	1 to 99

- To select all registers, press [ALL].

5 Press [Lock], turning it on.

To unlock the register

Select the register you want to unlock, and press [Lock], turning it off.

Copying, moving, and swapping effect register data

This section describes the procedure for copying. You can move or swap registers using a similar procedure.

1 In the Effect menu, press VF2 ‘Effect 1-99’ and HF3 ‘Copy/Merge.’

The Copy/Merge menu appears.
The left side of the status area shows the register number of the copy source, and the right side shows the register number of the copy destination.

2 Press the region display in the upper part of the list to display a selection window, then select the region in the selection window. Selecting multiple regions is also possible.
To select all regions, press [ALL].

Operation between regions
Operation between regions is possible in the following cases.
- Two of the M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and P/P regions
- Two of the User1 to 8 regions of the same configuration
- Two of the DME ch1 to 8 (including Global) regions

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the desired registers.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	From Reg	Copy source register number	1 to 99
2	To Reg	Copy destination register number	1 to 99
3	Num	Select number of registers	1 to 99

- To select all registers, press [ALL].

5 To copy without transferring the name, in the <Copy> group, press [W/o Name], turning it on.

6 In the <Copy> group, press [Copy].

This carries out the copy.

Merging effect registers

1 In the Effect menu, select VF2 'Effect 1-99' and HF3 'Copy/Merge.'

The Copy/Merge menu appears.
The left side of the status area shows a list for the register coming afterward when merged. The right side shows a list for the register coming before when merged.

2 Press the region display in the upper part of the list, and in the selection window select the region.
Selecting multiple regions is also possible.
To select all regions, press [ALL].

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the register.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	From Reg	The register coming afterwards when merged	1 to 99
2	To Reg	The register coming before when merged	1 to 99

5 Press [Merge].

Deleting data from effect registers

1 In the Effect menu, press VF2 'Effect 1-99' and HF6 'Delete.'

The Delete menu appears.

2 Press the region display in the upper part of the list to display a selection window, then select the region in the selection window. Selecting multiple regions is also possible.
To select all regions, press [ALL].

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the desired registers.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Register	Register number	1 to 99
3	Num	Select number of registers	1 to 99

- To select all registers, press [ALL].

5 Press [Delete].

Attaching a name to an effect register

1 In the Effect menu, press VF2 'Effect 1-99' and HF7 'Rename.'

The Rename menu appears.

2 Press the region display in the upper part of the list to display a selection window, then select the region in the selection window. Selecting multiple regions is also possible.
To select all regions, press [ALL].

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the register you want to name.

- Press directly on the list in status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Register	Register number	1 to 99

The selected register appears in reverse video.

5 Press [Rename].

A keyboard window appears.

6 Enter the name, of not more than eight characters, and press [Enter].

The set name is reflected in the status area.

Notes

The following names cannot be used.
CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

Displaying a List of Effect Registers for Editing

You can display a list of effect registers including status information (whether data is present and so on), then carry out lock, copy, delete, and rename operations.

Displaying the list of effect registers with status information

Press the menu title button at the top left of the Effect menu.
The Effect >Status menu appears. The status area shows a list of effect registers (1 to 99).

Register name displays

For the same number, the register name for the M/E-1 region takes precedence.
If there is no data for the M/E-1 region, then the register name appears in the sequence M/E-2 >M/E-3 >M/E-4 >M/E-5 >P/P >User1 to User8 >DME ch1 to DME ch8 >Device1 to Device12 >P-Bus >GPI >Macro.

Indication colors

Each register has a color-coded border, indicating its status.
Selected register: pale blue border
Register containing data: shown amber within the border. If, however, there are one or more locked regions, the display is in red.

Write-protecting the contents of the register (lock function)

(This applies to all regions.)
In the Effect >Status menu, use the following procedure.

1 Using any of the following methods, select the register you want to lock.

- Press directly on the corresponding register indication in the status area.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Register	Register selection	1 to 99

2 Press [Lock].

The register is locked, and the background of the register indication appears in red.

To release the lock

Press [Lock] once more, turning the contents of the frame to amber.

Copying the contents of a register

(This applies to all regions.)
In the Effect >Status menu, use the following procedure.

1 Using any of the following methods, select the copy source register.

- Press directly on the corresponding register indication in the status area.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Register	Register selection	1 to 99

2 In the <Copy> group, press [From __].

3 Select the copy destination register.

4 In the <Copy> group, press [To __].

Deleting the contents of a register

(This applies to all regions.)
In the Effect >Status menu, use the following procedure.

1 Using any of the following methods, select the register you want to delete.

- Press directly on the corresponding register indication in the status area.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Register	Register selection	1 to 99

2 Press [Delete].

Renaming a register

(This applies to all regions.)
In the Effect >Status menu, use the following procedure.

1 Using any of the following methods, select the register you want to rename.

- Press directly on the corresponding register indication in the status area.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Register	Register selection	1 to 99

2 Press [Rename].

A keyboard window appears.

3 Enter a name of up to eight characters, and press [Enter].

Chapter 14 Snapshots

Overview

The term “snapshot” refers to a function whereby the various settings required to apply a particular effect to an image are saved in memory as a set of data, for recall as required, to recover the original state.
Use the following to operate the snapshot.
- Numeric keypad block *(see page 474)*
- Flexi Pad control block *(see page 476)*
- Multifunction Flexi Pad control block *(see page 479)*
- Snapshot menu *(see page 482)*

Notes

If the M/E bank has the Inhibit setting *(see page 566)*, it is not possible to recall a snapshot on that M/E bank.

Snapshot Types

Snapshots are divided as follows.

Snapshots applying to a particular region (functional block of the switcher or DME)

The term “snapshot” alone usually refers to this type of snapshot. This only applies to regions assigned to region selection buttons in the numeric keypad control block and Multifunction Flexi Pad control block.

For details about a region, see “Regions” (page 434).

Master snapshot: This applies to the selected regions and the register numbers saved in the regions.
A master snapshot can be saved and recalled using the numeric keypad control block and the Multifunction Flexi Pad control block.

Snapshots applying only to particular functions

This type of snapshot includes the following.

Key snapshot: This includes the key on/off state and all key settings other than key priority for each keyer.

For details, see “Key Snapshots” in Chapter 4 (Volume 1).

Wipe snapshot: This includes the wipe settings of each of the M/E and PGM/PST banks.

For details, see “Wipe Snapshots” in Chapter 5 (Volume 1).

DME wipe snapshot: This includes the DME wipe settings of each of the M/E and PGM/PST banks.

The rest of this section describes the snapshots that apply to a particular region or regions.

Snapshot Attributes

An individual snapshot may also have attached special conditions relating to switcher or DME operation when the snapshot is recalled.
These conditions are called “attributes” of the snapshot, and can be added when the snapshot is saved or recalled.

Types of attribute

There are seven snapshot attributes, as follows.

Cross-point hold: When the snapshot is recalled, the cross-point button selection remains unchanged. This can be set independently for each bus.

Key disable: When the snapshot is recalled, the key settings remain unchanged. This can be set independently for each keyer. A Setup menu allows you to select whether or not the key on/off state should also remain unchanged.

For details of the setting operation, see “Setting the operation mode of the key bus [XPT HOLD] button” (page 625).

Effect dissolve: The transition from the state before the snapshot recall to the snapshot settings is carried out smoothly, by a dissolve. The dissolve duration can be set in the Snapshot menu.

Auto transition: An auto transition starts the instant the snapshot is recalled. The auto transition setting is valid

only for M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST.

Notes

If both effect dissolve and auto transition are selected as attributes, the auto transition takes precedence.

GPI output: A GPI output is sent to the allocated GPI port the instant the snapshot is recalled.
The trigger type depends on the switcher GPI output settings made in the Setup menu.

For details, see "Interfacing With External Devices (Device Interface Menu)" (page 630).

Clip event: Recall a frame memory clip immediately after the snapshot is recalled.

Auto play: Play a frame memory clip immediately after the snapshot is recalled.

Table of available attributes

The attributes that can be used depend on the region, as follows.

Yes: Can be used No: Cannot be used

Attribute	Region		
	M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST	User 1 to User 8	DME ch 1 to DME ch 8
Cross-point hold	Yes	Yes	Yes
Key disable	Yes	No	No
Effect dissolve	Yes	Yes	Yes
Auto transition	Yes	No	No
GPI outputs	Yes	Yes	No
Clip event	No	Yes	No
Auto play	No	Yes	No

Attribute display

You can view the attributes of a snapshot in the Snapshot menu *(see page 482)*.

Temporary attributes

When recalling a snapshot, you can temporarily apply attributes distinct from the attributes set for each register. These are called "temporary attributes."
You can set temporary attributes when recalling a snapshot.


Bus override

If you recall a snapshot while holding down an A or B bus button, the selection of the signal on the A or B bus does not change when the snapshot is recalled. This function is called "bus override."
This function is effective when cross-point hold is off, and you want to temporarily maintain the cross-point setting. When cross-point hold is on, the above operation is not necessary.

Snapshot Operations From the Numeric Keypad Control Block

Saving and Recalling Snapshots

Snapshot operations with the numeric keypad control block use the following buttons.

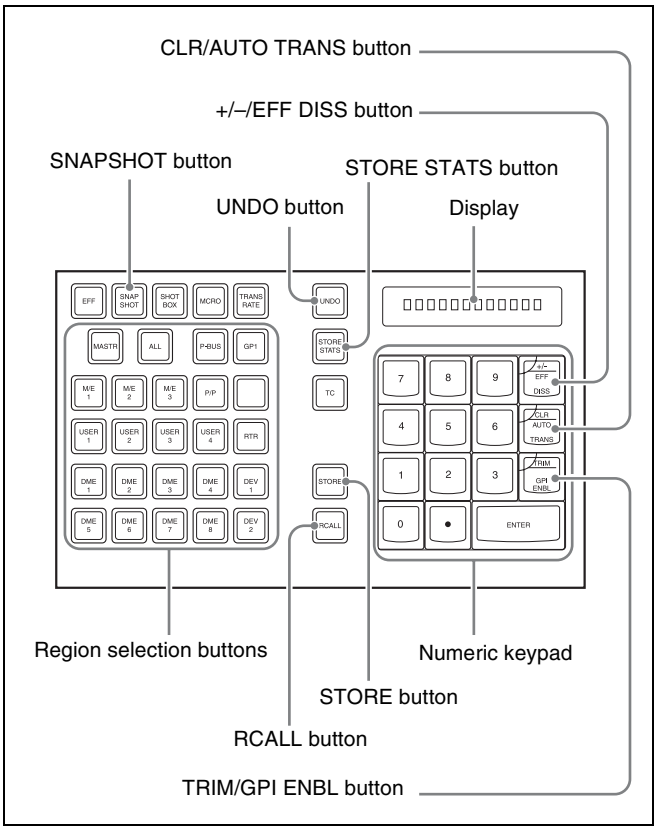

Numeric keypad control block

Saving a snapshot from the numeric keypad control block

1 Make the settings for the state you want to save as a snapshot.

2 In the numeric keypad control block, press the [SNAPSHOT] button, turning it on.

This allocates the numeric keypad control block to snapshot operations, and the [RCALL] button lights.

3 Press the region selection button corresponding to the region for which you want to save, turning it on. You can select more than one region.

[M/E 1], [M/E 2], [M/E 3], [M/E 4], [M/E 5], [P/P]: These select the corresponding M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST regions.

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 570)*.

[USER 1] to [USER 8]: These select the User regions.
[DME 1] to [DME 8]: These select the DME channels.
[RTR]: This selects the Router region.
[ALL]: This selects all regions.

Notes

The regions that can be selected simultaneously are those assigned to the region selection buttons in the numeric keypad control block *(see page 570)*.

The first button pressed lights green as the reference region, and any subsequently pressed buttons light amber.
Pressing one of the amber-lit buttons, while holding down [SNAPSHOT], turns the button green to indicate its corresponding region as the new reference region.

For details of the precedence order for becoming the reference region, see "Reference region" (page 434).

The display shows the name of the reference region and the number of the register previously recalled for that region.

4 Press the [STORE] button, turning it on.

5 Enter the desired register number from the numeric keypad.

To find an empty register, instead of entering a number, press the [.] (period) button. To search for an empty register common to all currently selectable regions, press the period button again.

Notes

If you choose a register which already contains a snapshot, and save a snapshot, then the existing register contents are overwritten.
The register number appears in the display. If the number is followed by a letter "e" or "E," this indicates the following.
e: The selected register is empty for the regions selected in step **3**.
E: The selected register is empty for all currently selectable regions.

6 To apply attributes *(see page 472)*, press the following buttons, turning them on.

Attribute to apply	Button
Effect dissolve	[+/–/EFF DISS] button
Auto transition	[CLR/AUTO TRANS] button
GPI output a)	[TRIM/GPI ENBL] button

a) The GPI port that can be set is 1 (fixed).

Notes

In the numeric keypad control block, it is not possible to apply the cross-point hold.

For details, see "Applying snapshot attributes" (page 482).

7 Press the [ENTER] button.

This saves the snapshot, and the [STORE] button goes off. The [RCALL] and [STORE STATS] buttons light.

To cancel a snapshot save operation

Hold down the [STORE STATS] button and press the [UNDO] button.

Recalling a snapshot from the numeric keypad control block

1 In the numeric keypad control block, press the [SNAPSHOT] button, turning it on.

This allocates the numeric keypad control block to snapshot operations, and the [RCALL] button lights.

2 Press the region selection button corresponding to the region you want to recall, turning it on. Multiple selections are also possible.

[M/E 1], [M/E 2], [M/E 3], [M/E 4], [M/E 5], [P/P]: These select the corresponding M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST regions.
[USER 1] to [USER 8]: These select the User regions.
[DME 1] to [DME 8]: These select the DME channels.
[RTR]: This selects the Router region.
[ALL]: This selects all regions.
[MASTR]: This selects a master snapshot.

Notes

The regions that can be selected simultaneously are those assigned to the region selection buttons in the numeric keypad control block *(see page 570)*.
It is not possible to select [MASTR] and other regions simultaneously. If selected simultaneously, the master snapshot takes precedence.

The first pressed button lights green as the reference region, and subsequently pressed buttons light amber. Pressing one of the amber-lit buttons, while holding down [SNAPSHOT], turns the button green to indicate its corresponding region as the new reference region.

For details of the precedence order for becoming the reference region, see "Reference region" (page 434).

The display shows the name of the reference region and the number of the register previously recalled for that region.

3 Enter the desired register number from the numeric keypad.

The entered register number appears in the display.

4 To apply temporary attributes *(see page 474)*, press the following buttons, turning them on.

Control block	Temporary attribute to apply	Button
Cross-point control block	A/B bus cross-point hold	[XPT HOLD] button in the background A/B bus
	Key cross-point hold	[XPT HOLD] button in the key bus a)
	Key disable	[XPT HOLD] button in the key bus b)
Numeric keypad control block	Effect dissolve	[+/–/EFF DISS] button
	Auto transition	[CLR/AUTO TRANS] button

a) When Xpt Hold mode is selected in setup.
b) When Key Disable mode is selected in setup.

For the setup setting, see "Setting the operation mode of the key bus [XPT HOLD] button" (page 625).

Notes

- The cross-point hold and key disable settings are maintained until you next press the [XPT HOLD] button.
- Applying temporary attributes does not affect the contents of the register.
- It is not possible to apply temporary attributes to a master snapshot.

5 Press the [ENTER] button.

This recalls the specified snapshot, and the reference region name and recalled register number appear in the display.
If you applied the effect dissolve or auto transition temporary attributes in step **4**, the corresponding buttons go off.

When a master snapshot is recalled, the region selection buttons light according to the saved region information.

To cancel a snapshot recall operation

To cancel the recall, press the [UNDO] button.

Notes


It is not possible to cancel recalling a master snapshot.

Creating and saving a master snapshot with the numeric keypad control block


To create and save a master snapshot with the numeric keypad control block, refer to the operations in *"Creating and Saving a Master Timeline Using the Buttons in the Numeric Keypad Control Block" (page 464)*. Note, however, that in place of the [EFF] button in the numeric keypad control block, the [SNAPSHOT] button is used.

Snapshot Operations in the Flexi Pad Control Block

In the Flexi Pad control block (standard type or simple type) on each M/E bank and PGM/PST banks, you can only carry out operations on snapshots for that bank. It is therefore not necessary to select a region.

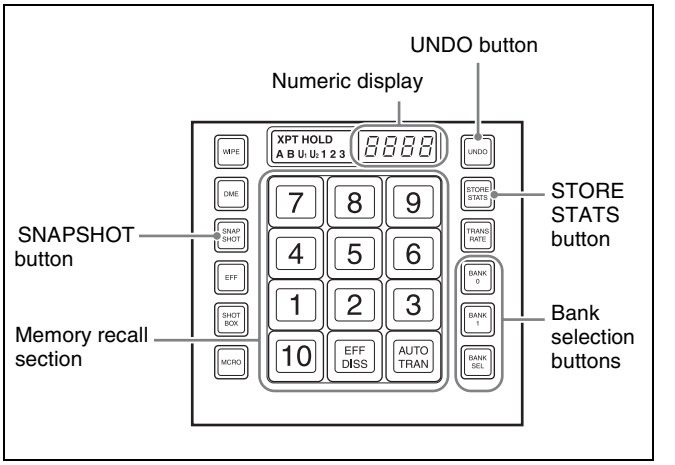

Flexi Pad control block (standard type)

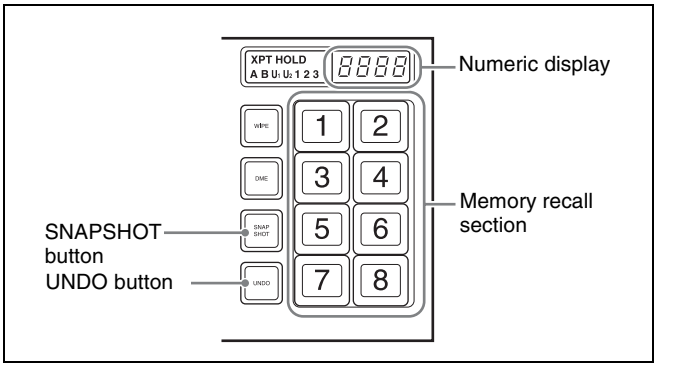

Flexi Pad control block (simple type)


Banks and Registers

In a standard type Flexi Pad control block or Multifunction Flexi Pad control block, in order to handle the 99 registers, they are considered in groups. These groups are called "banks," and there are ten banks, numbered from 0 to 9. The correspondence between banks and registers is shown in the following table.

Bank number	Register numbers
Bank 0	1 to 10
Bank 1	11 to 20
Bank 2	21 to 30

Bank number	Register numbers
Bank 3	31 to 40
Bank 4	41 to 50
Bank 5	51 to 60
Bank 6	61 to 70
Bank 7	71 to 80
Bank 8	81 to 90
Bank 9	91 to 99

Example: When you select bank 3, the register numbers allocated to the memory recall section are as follows.



Operations with a simple type Flexi Pad control block

With a simple type Flexi Pad control block, the registers that can be handled are numbers 1 to 8. Bank operations are therefore not possible. It is also not possible to apply attributes, or to cancel a snapshot save or recall operation once carried out.
To use registers 9 to 99, or to cancel a snapshot save operation, use the numeric keypad control block.

Saving and Recalling Snapshots

Saving a snapshot in the Multifunction Flexi Pad control block

As an example, to save a snapshot on the M/E-1 bank, use the following procedure.


1 In the M/E-1 bank, make the settings for the state you want to save as a snapshot.

2 In the M/E-1 bank Flexi Pad control block, press the [SNAPSHOT] button.

This assigns the Flexi Pad control block to snapshot operations. The numeric display shows the last selected bank number and the register number last recalled on the bank.

3 Use any of the following methods to select the bank for saving the snapshot.
On a simple type Flexi Pad control block, there are no banks, and this operation is not necessary.

To select bank 0: Press the [BANK0] button.
To select bank 1: Press the [BANK1] button.
To select any bank from 0 to 9: Press the [BANK SEL] button, changing the memory recall section display as in the following figure; select a number from 0 to 9.



The selected bank number appears in the numeric display.
The buttons in the memory recall section change to show the names of the registers in the selected bank, together with the register status.
Using the Setup menu, it is possible to specify which to display, the register name or register number.
Lit orange: register containing a snapshot
Lit yellow: last recalled register
Not lit: register not containing anything

4 To apply an attribute *(see page 472)*, hold down the [SNAPSHOT] button, and in the memory recall section, press a button as follows, turning it on.

Attribute to apply	Button
Effect dissolve	[EFF DISS] button
Auto transition	[AUTO TRANS] button

Notes

In the Flexi Pad control block, it is not possible to apply the cross-point hold or GPI output attributes. In a simple type Flexi Pad control block, it is not possible to apply any attributes. To add these attributes, use a menu operation *(see page 482)*.

5 Still holding down the [SNAPSHOT] button from step **4**, press the memory recall button corresponding to the register in which you want to save.

Recalling a snapshot in the Flexi Pad control block (standard type or simple type)

Notes

When an M/E bank is not assigned to any region selection button in the numeric keypad control block in a setup setting, it is not possible to recall a snapshot with the Flexi Pad control block of that M/E bank.

For details, see "Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block" (page 570).

As an example, to recall a snapshot on the M/E-1 bank, use the following procedure.

1 In the M/E-1 bank Flexi Pad control block, press the [SNAPSHOT] button.

This assigns the Flexi Pad control block to snapshot operations. The numeric display shows the last selected bank number and the register number last recalled on the bank.

2 Select the bank for recall.

*See step **3** (page 477) in "Saving a snapshot in the Multifunction Flexi Pad control block."*

3 To apply temporary attributes *(see page 472)*, press the following buttons, turning them on.

Control block	Temporary attribute to apply	Button
Cross-point control block	A/B bus cross-point hold	[XPT HOLD] button in the background A/B bus
	Key cross-point hold	[XPT HOLD] button in the key bus a)
	Key disable	[XPT HOLD] button in the key bus b)
Flexi Pad control block	Effect dissolve	[EFF DISS] button
	Auto transition	[AUTO TRANS] button

a) When Xpt Hold mode is selected in setup.
b) When Key Disable mode is selected in setup.

For details of the operation mode of the [XPT HOLD] button, see "Setting the operation mode of the key bus [XPT HOLD] button" (page 625).

Notes

- The cross-point hold and key disable settings are maintained until you next press the [XPT HOLD] button.
- Applying temporary attributes does not affect the contents of the register.

4 Press the button in the memory recall section which shows the desired register name.

The button you pressed lights yellow, and this recalls the snapshot.
The numeric display shows the selected register number after the bank number.

Deleting a snapshot in the Flexi Pad control block (standard type or simple type)

As an example, to delete a snapshot on the M/E-1 bank, use the following procedure.

1 In the M/E-1 bank Flexi Pad control block, press the [SNAPSHOT] button.

This assigns the Flexi Pad control block to snapshot operations. The numeric display shows the last selected bank number and the last recalled register number on the corresponding bank.

2 Select the bank for the register containing the snapshot you want to delete.

*See step **3** (page 477) in "Saving a snapshot in the Multifunction Flexi Pad control block."*


3 Hold down the [STORE STATS] button, then hold down the button in the memory recall section displaying the number of the corresponding register.

The button you pressed goes off, and this deletes the snapshot. The [STORE STATS] button lights amber.

Notes

On a simple type Flexi Pad control block, it is not possible to delete a snapshot.

Snapshot Operations in the Multifunction Flexi Pad Control Block

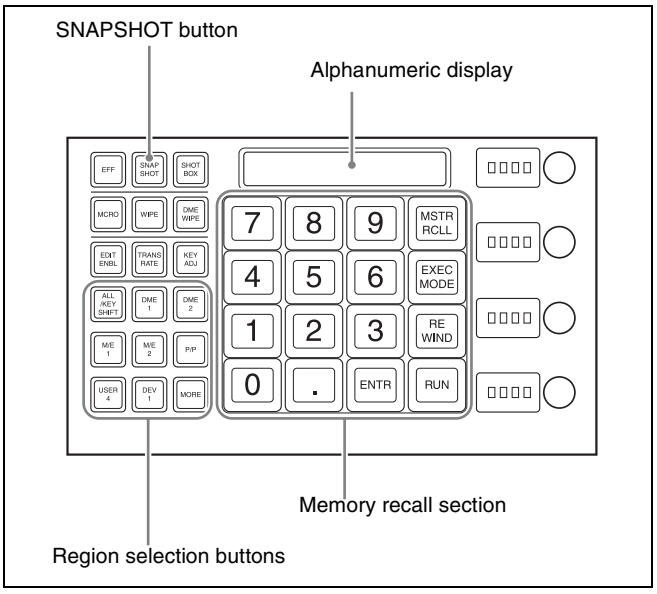

Carry out snapshot operations on the Multifunction Flexi Pad control block of the CCP-6224 or CCP-6324 Control Panel as follows.

Saving and Recalling Snapshots

Saving a snapshot in the Multifunction Flexi Pad control block

As an example, to save a snapshot on the M/E-1 bank, use the following procedure.

1 In the M/E-1 bank, make the settings for the state you want to save as a snapshot.

2 In the Multifunction Flexi Pad control block, press the [SNAPSHOT] button.

This assigns the Multifunction Flexi Pad control block to snapshot operations.
The alphanumeric display shows the register number last recalled on the bank.

3 Press the region selection button corresponding to the region for which you want to save, turning it on. You can select more than one region.

[M/E 1], [M/E 2], [M/E 3], [M/E 4], [M/E 5], [P/P]: These select the corresponding M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST regions.

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(see page 570)*.

[USER 1] to [USER 8]: These select the User regions.
[DME 1] to [DME 8]: These select the DME channels.
[RTR]: This selects the Router region.
[ALL]: This selects all regions.

Notes

The regions that can be selected simultaneously are those assigned to the region selection buttons in the memory recall section *(see page 570)*.

The first pressed button lights green as the reference region. Subsequently pressed buttons turn amber for the region select buttons and yellow for the memory recall section buttons.
Pressing one of the amber or yellow buttons, while holding down [SNAPSHOT], turns the button green to indicate its corresponding region as the new reference region.

For details of the precedence order for becoming the reference region, see "Reference region" (page 434).

The display shows the name of the reference region and the number of the register previously recalled for that region.

4 Press the [BANK SEL] button, and select the desired bank with the numeric keypad buttons in the memory recall section.

5 Hold down the [SNAPSHOT] button, and press the button in the memory recall section corresponding to the register in which you want to save.

Notes

If you press a button which is lit orange or yellow, this overwrites the contents of the corresponding register. The button you pressed lights yellow, and this completes saving.

To enter the number of the desired snapshot save destination register using the numeric keypad

After step **3** above, press the [10 KEY] button in the memory recall section. This switches the memory recall section to the numeric keypad input mode, and after pressing the [STOR] button, lighting it yellow, you can

enter the desired register number from the numeric keypad. The number you entered appears in the alphanumeric display.
To find an empty register, press the [.] (period) button without entering a number, and the number of an empty register appears in the alphanumeric display.
Confirm the displayed number by pressing the [ENTR] button. This saves the data in the specified register.

To cancel a snapshot save operation


Hold down the [STOR STAT] button and press the [UNDO] button.
The light of [STOR STAT] button changes from yellow to green.

Adding attributes in the Multifunction Flexi Pad control block


1 Press the [EDIT ENBL] button.

The button indications in the memory recall section change as shown in the following illustration.
To cancel adding attributes, press the [EDIT ENBL] button once more, or press the [EXIT] button.


- When the reference region is M/E-x (x is a number) or P/P

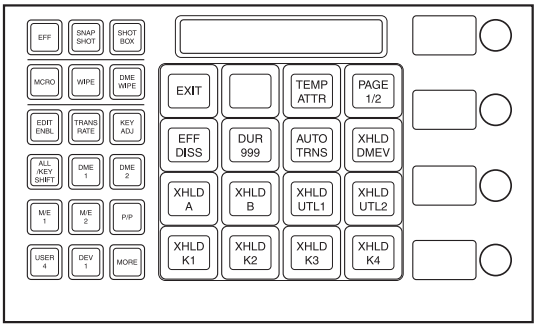

- When the [PAGE 1/2] button is pressed to display the second page

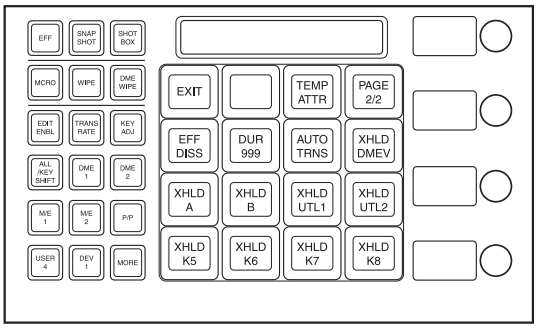

- When the reference region is other than M/E-x or P/P, and effect dissolve settings are possible

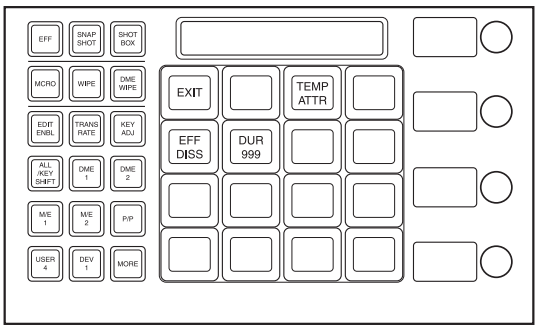

2 Add attributes *(see page 472)* with the following buttons.

[TEMP ATTR] button: Set a temporary attribute. Set this to Off to add an attribute.
[EFF DISS] button: Add the effect dissolve attribute.
[DUR xxx] button: Set the effect dissolve duration. The current setting is shown by "xxx." When you press this button, the memory recall section switches to numeric keypad input mode, and you can enter the setting value.
[AUTO TRNS] button: Add the auto transition attribute.
[XHLD xxx] button: Add the bus cross-point hold attribute.
The affected bus is shown by "xxx."

Recalling a snapshot in the Multifunction Flexi Pad control block

As an example, to recall a snapshot on the M/E-1 bank, use the following procedure.

1 In the Multifunction bank Flexi Pad control block, press the [SNAPSHOT] button.

This assigns the Multifunction Flexi Pad control block to snapshot operations.
The alphanumeric display shows the register number last recalled on the bank.

2 Press the region selection button corresponding to the region you want to recall, turning it on. Multiple selections are also possible.

[M/E 1], [M/E 2], [M/E 3], [M/E 4], [M/E 5], [P/P]: These select the corresponding M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, and PGM/PST regions.

Notes

To select [M/E 4] or [M/E 5], a previous button assignment in the Setup menu is required *(See page 570)*.

[USER 1] to [USER 8]: These select the User regions.
[DME 1] to [DME 8]: These select the DME channels.
[RTR]: This selects the Router region.
[ALL]: This selects all regions.
[MASTR]: This selects a master snapshot.

Notes

The regions that can be selected simultaneously are those assigned to the region selection buttons and memory recall section *(see page 570)*.

It is not possible to select [MASTR] and other regions simultaneously. If selected simultaneously, the master snapshot takes precedence.

The first pressed button lights green as the reference region. Subsequently pressed buttons turn amber for the region select buttons and yellow for the memory recall section buttons.
Pressing one of the amber or yellow buttons, while holding down [SNAPSHOT], turns the button green to indicate its corresponding region as the new reference region.

For details of the precedence order for becoming the reference region, see "Reference region" (page 434).

The display shows the name of the reference region and the number of the register previously recalled for that region.

3 Select the bank for recall.

*See step **4** (page 479) in "Saving a snapshot in the Multifunction Flexi Pad control block."*

4 To add a temporary attribute *(see page 473)*, press the [EDIT ENBL] button to switch to editing mode, then press the [TEMP ATTR] button; you can now select the temporary attribute with the following buttons.

[EFF DISS] button: Effect dissolve.
[DUR xxx] button: Effect dissolve duration. The current setting is shown by "xxx."
[AUTO TRNS] button: Auto transition.
[XHLD xxx] button: Bus cross-point hold. The affected bus is shown by "xxx."

For details of the operation of mode of the [XPT HOLD] buttons, see "Selecting the Bank to Make the Settings" (page 622).

Notes

Adding a temporary attribute does not affect the attribute settings saved in registers.

To add a temporary attribute with the cross-point control block buttons, press the following buttons, turning them on.

Temporary attribute to be added	Button to press
A/B bus cross-point hold	[XPT HOLD] button in background A/B bus
Key cross-point hold	Key bus [XPT HOLD] button [a]
Key disable	Key bus [XPT HOLD] button [b]

a) When setup setting is Xpt Hold mode
b) When setup setting is Key Disable mode

Notes

This setting is maintained until the next time the [XPT HOLD] button is pressed.

5 Press the button in the memory recall section which shows the desired register name.

The button you pressed lights yellow, and this recalls the snapshot.
The alphanumeric display shows the selected register number.

To cancel a snapshot recall operation

Press the [UNDO] button.

To enter the number of the register to be recalled using the numeric keypad

After step **1** above, press the [10 KEY] button in the memory recall section. This switches the memory recall section to the numeric keypad input mode, and after pressing the [RCLL] button, lighting it yellow, you can enter the desired register number from the numeric keypad. Confirm the displayed number by pressing the [ENTR] button.

Deleting a snapshot in the Multifunction Flexi Pad control block

As an example, to delete a snapshot on the M/E-1 bank, use the following procedure.

1 In the Multifunction Flexi Pad control block, press the [SNAPSHOT] button, press region selection button to select [M/E 1] only.

This assigns the Multifunction Flexi Pad control block to snapshot operations.
The alphanumeric display shows the last recalled register number on the corresponding bank.

2 Select the bank for the register containing the snapshot you want to delete.

*See step **4** (page 479) in "Saving a snapshot in the Multifunction Flexi Pad control block."*

3 Hold down the [DEL] button, then hold down the button in the memory recall section displaying the number of the corresponding register.

The button you pressed goes off, and this deletes the snapshot.

Snapshot Operations in the Menus

Operations in the Snapshot menu

You can also set snapshot or key snapshot attributes in the Snapshot menu, which also displays the status of the registers.
To access the Snapshot menu, press the top menu selection button [SNAPSHOT] in the menu control block.
In the Snapshot menu, as well as setting snapshot attributes, you can carry out editing operations on snapshots, including copy and delete *(see page 485)*.

Operations in the Misc >Snapshot menu

For M/E and PGM/PST snapshots only, you can carry out saving, recalling, applying attributes, and so on using the same menu (see page 485).

Selecting a Region or Reference Region in a Menu

During snapshot operations, you can select a region in the menu. This is convenient for selecting some of the regions assigned to the numeric keypad control block or changing the reference region.

For details of the operations, see "Selecting by menus" (page 448).

Setting Snapshot Attributes

Applying snapshot attributes

1 In the Snapshot menu, press VF2 'Snapshot' and HF1 'Attribute.'

The Snapshot >Attribute menu appears.
The status area shows the region names, register numbers, and the status and attributes set.

2 Press the region display in the upper part of the list to display a selection window, then select the region in the selection window. Selecting multiple regions is also possible. To select all regions, press [ALL].

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the register.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Register	Register number	1 to 99
2	Num	Select number of registers	1 to 99

- To select all registers, press [ALL].

5 In the <Attribute> group, press the buttons for the attributes you want to apply, turning them on.

Carry out the following procedures for each of the attributes.

For details of attributes and available attributes, see "Snapshot Attributes" (page 472).

To apply the cross-point hold attributes

Notes

Applying the key disable attribute (so the key state is not reflected) to cross-point hold requires a setting in setup.

For details, see "Snapshot Attributes" (page 472).

1 Press [Xpt Hold].

The Snapshot >Attribute >Xpt Hold menu appears. The status area shows a list of the currently selected regions and bus names.

2 Using any of the following methods, select the register.

- Press directly on the list in the status area. To select one or more buses, press [Plural] and then select buses.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Destination [a]	Destination selection	1 to 128
3	Bus [b]	Bus name selection	1 to maximum value

a) Appears when the region is RTR.
b) Appears when the region is other than RTR.

- To select all registers, press [ALL].

3 When the region is set to RTR (Router) only, press [RTR Level].

A window appears for selecting the router level.

4 Press the level for which you want to set the cross-point hold, turning it on, and press [OK]. To select all levels, press [ALL].

5 Press [On].

This enables cross-point hold on the selected bus or buses.
To switch cross-point hold off, press [Off].

To apply the effect dissolve attribute

1 Press [Effect Dissolve], turning it on.

2 Turn the knob to set the effect dissolve duration.

Knob	Parameter	Adjustment	Setting values
3	Eff Diss Duration	Dissolve duration	0 to 999 (frames)

To set the duration for a dissolve set as a temporary attribute effect

To set the duration for a dissolve set as a temporary attribute effect in the numeric keypad or Flexi Pad control block, turn the knob.

Knob	Parameter	Adjustment	Setting values
5	Temp Dur	Temporary attribute dissolve duration	0 to 999 (frames)

To apply the auto transition attribute

Press [Auto Transition], turning it on.

To apply the GPI output attribute

1 Press [GPI Output], turning it on.

2 Turn the knob to set the port number.

Knob	Parameter	Adjustment	Setting values
4	GPI Out Port	GPI output port number	1 to 8

To apply the clip event attribute

Notes

The following operating procedure can be used only for the frame memory channels assigned to a user region.

For details of frame memory assignment, see "Setting User Regions" (page 611).

1 Press [Clip Event].

The Snapshot >Attribute >Clip Event menu appears.

2 In the <Frame Memory Select> group, press the desired button.

On the left of the status area, the name and content of the selected region (for example, USER1) are shown. On the right, the content of the clip of the current frame memory is shown.

3 Press [Clip Event], turning it on.

The clip event attribute is applied.

4 To select the clip of the current frame memory, press [Set].

5 To play the clip as soon as it is recalled, press [Auto Play], turning it on.

Snapshot Status Display

The Snapshot >Attribute menu displays the following information.

Region name: The selected region name appears in the upper part of the list.

Register number

Register name

Write-protected status: When the register is write-protected, an “L” (for “lock”) appears.

Empty status: When the register is empty, an “E” (for “empty”) appears.

Attribute settings: The attributes set for a register are shown by the following character codes.

• When the cross-point hold is set

Displayed character codes	Attributes set
A, B	Cross-point hold is set for the A or B background bus.
1, 2, 3, 4, 5, 6, 7, 8	Cross-point hold is set for key bus 1, 2, 3, 4, 5, 6, 7 or 8.
U1, U2	Cross-point hold is set for the utility 1 or utility 2 bus.
D2	Cross-point hold is set for video bus selected for 2nd DME channel.
FvFkBvBk	Cross-point hold is set for all of the DME front video bus, DME front key bus, DME back video bus, and DME back key bus.
Aux	Cross-point hold is set for one of the AUX buses.
Fm1, Fm2	Cross-point hold is set for one of the frame memory 1 and 2 buses.
Ccr1, Ccr2	Cross-point hold is set for one of the CCR 1 and 2 buses.
RTR	Cross-point hold is set for the Router region.

• When an effect dissolve is set

Displayed character codes	Attributes set
Duration value	The effect dissolve attribute is set, with the displayed duration.

• When an auto transition is set

Displayed character codes	Attributes set
T	Auto transition is set.

• When a GPI output is set

Displayed character codes	Attributes set
Port number	GPI output is set for the port of the displayed number.

• When a clip event is set

Displayed character codes	Attributes set
On	Clip event is set.

Setting Key Snapshot Attributes

Applying key snapshot attributes

1 In the Snapshot menu, press VF5 ‘Key Snapshot’ and HF1 ‘Attribute.’

The Snapshot >Key Snapshot >Attribute menu appears.
The status area shows the region names, register numbers, and whether the registers are locked or not.

2 Press the region display in the upper part of the list to display a selection window, then select the region in the selection window. Selecting multiple regions is also possible.

3 Press [OK].

The selected region name appears in the upper part of the list.

4 Using any of the following methods, select the register.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Register	Register number	1 to 4

5 In the <Recall Mode> group, select one of the following modes for save and recall operations.

XPT: Only the key material selection data is saved or recalled.
Modifier: Only the key modifier settings are saved or recalled.
Transition: Only the independent key transition settings are saved or recalled.

Creating and Saving a Master Snapshot

To save a master snapshot in the Snapshot menu, after recalling the Snapshot >Master Snapshot >Store menu, refer to the operations in *"Creating and Saving a Master Timeline With the Menu" (page 466).*

Recalling the Store menu

1 Do either of the following.

- In the menu control block, press the top menu selection button [SNAPSHOT].
- In the numeric keypad control block, press the [SNAPSHOT] button twice in rapid succession.

The Snapshot menu appears.

2 Press VF1 'Master Snapshot' and HF1 'Store.'

The Master Snapshot >Store menu appears.
The status area shows the master snapshot register names, register lock status, register number for each region, and so on.

3 If required, press the following buttons in the status area to change the region display.

M/E, P/P: indicate assignment of M/E-1 ("M/E1"), M/E-2 ("M/E2"), M/E-3 ("M/E3"), M/E-4 ("M/E4"), M/E-5 ("M/E5"), and P/P ("P/P").
User: User1 ("USR1") to User8 ("USR8")
DME: indicate assignment of DME ch1 ("DME1"), ch2 ("DME2"), ch3 ("DME3"), ch4 ("DME4"), ch5 ("DME5"), ch6 ("DME6"), ch7 ("DME7"), and ch8 ("DME8").
Misc: RTR ("Router")

Snapshot Register Editing

You can carry out the following editing on snapshot registers.
You can use similar procedures also on master snapshot, wipe snapshot, DME wipe snapshot and key snapshot registers.

- **Lock:** Write-protect the contents of the register.
- **Copy:** Copy the contents of one register to another register.
- **Move:** Move the contents of one register to another register.
- **Swap:** Swap the contents of two registers.
- **Delete:** Delete the contents of a register.
- **Name:** Attach a name to a register.

For details of snapshot register operations, see "Effect Register Editing" (page 468).

Displaying a List of Snapshot Registers for Editing

You can display a list of snapshot registers including status information (whether data is present and so on), then carry out lock, copy, delete, and rename operations.

Displaying the list of snapshot registers with status information

Press the menu title button at the top left of the Snapshot menu.
The Snapshot >Status menu appears. The status area shows a list of snapshot registers (1 to 99).

For details of lock, copy, delete, and rename operations, see "Displaying a List of Effect Registers for Editing" (page 470).

Register name displays

For the same number, the register name for the M/E-1 region takes precedence.
If there is no data for the M/E-1 region, then the register name appears in the sequence M/E-2 >M/E-3 >M/E-4 >M/E-5 >P/P >User1 to User8 >DME ch1 to DME ch8 >RTR.


Operations in the Misc >Snapshot Menu

To limit snapshot settings to the M/E or PGM/PST banks, use the Misc menu on each bank.
This section describes the operation on the M/E-1 bank as an example.

Recalling a snapshot

1 In the M/E-1 >Misc menu, press [Snapshot].

The Snapshot menu appears.

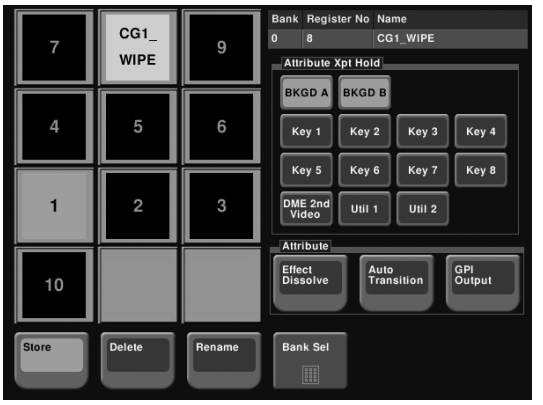

2 As required, change the bank *(see page 486)*.

3 Press the button for the number or name you want to recall.

This recalls the snapshot, and the button you pressed lights green.

Saving a snapshot

1 Display the M/E-1 >Misc >Snapshot menu.

2 Set the state you want to save as a snapshot.

3 Press [Store].

The button lights amber.

4 As required, change the bank *(see page 486)*.

5 Press the button for the number or name you want to save.

This saves the snapshot, and the button goes off.

Changing the bank

Change the combination shown on the memory recall buttons (the bank).

1 Press [Bank Sel].

2 Select the bank in the numeric keypad window. For example, to show the numbers or names corresponding to registers 11 to 20, select "1" in the numeric keypad window.

Applying attributes

To apply an attribute to the snapshot represented by a lit-green memory recall button, use the following procedure.

1 To apply the cross-point hold attribute, in the <Attribute Xpt Hold> group select the appropriate bus.

Notes

A setting in the Setup menu determines whether key disable is applied to cross-point hold or not.

For details, see "Selecting the Bank to Make the Settings" (page 622).

2 Select the following attributes in the <Attribute> group as required.

Effect Dissolve: Apply effect dissolve.
Auto Transition: Apply auto transition.
GPI Output: Apply GPI output. When this is selected, select the GPI number with the knob.

Deleting a snapshot

1 In the M/E-1 >Misc >Snapshot menu, press [Delete].

The button lights amber.

2 As required, change the bank.

3 Press the button for the number or name you want to delete.

This deletes the snapshot, and the button you pressed goes off.

Renaming a snapshot register

1 In the M/E-1 >Misc >Snapshot menu, press [Rename].

The button lights amber.

2 As required, change the bank.

3 Press the button for the number you want to rename.

A keyboard window appears.

4 Enter the register name, and press [Enter].

The new name appears on the memory recall button.

Utility/Shotbox

Chapter 15

Utility Execution

The utility function refers to a function whereby you can assign an arbitrary action or a shortcut for frequently used menu to a particular button, then instantly recall the action or menu by pressing the button.
The functions you can assign include menu shortcuts, enabling/disabling functions (recalling utility commands), and recalling (shotbox registers or macro registers).
Carry out the button assignment in the Setup menu.

For details of the operation, see "Setting Button Assignments (Prefs/Utility Menu)" (page 589).

You can execute the utility functions from the following blocks.
- Utility/shotbox control block *(page 487)*
- Cross-point control block *(page 488)*
- User preference buttons in the menu control block *(page 487)*

For details of the settings for assigning functions to buttons, see "Setting Button Assignments (Prefs/Utility Menu)" (page 589).


Executing a Utility With the User Preference Buttons (Menu Control Block)

In the setup menu, you can assign any 16 actions to the user preference buttons in the menu control block.

To execute an assigned action

Press the corresponding user preference button ([PREFS 1] to [PREFS 16]).
- In the case of a function on/off action, the button you pressed lights amber, and this enables the function. To disable the function, press the button once more.
- For other actions, the button you pressed momentarily lights amber, and then the function is executed.

Executing a Utility in the Utility/Shotbox Control Block

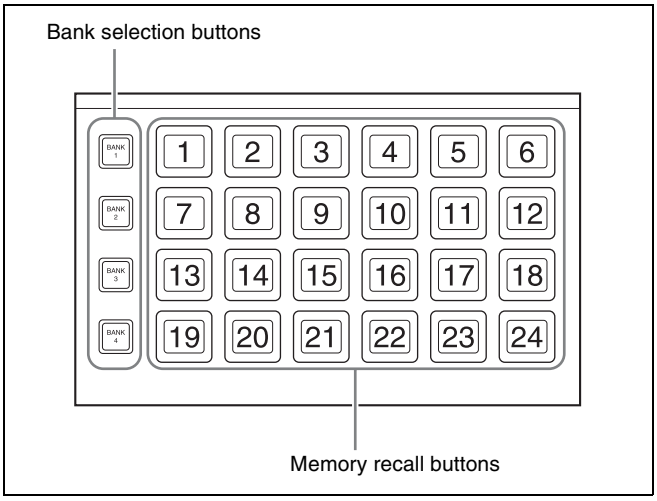

Utility/shotbox control block

By default, the memory recall buttons in the utility/shotbox control block are assigned to shotbox registers 1 to 96, in banks 1 to 4 *(see page 494)*, but in the setup menu, you can assign these to any 96 actions.

To execute an assigned action

When the action is to execute a shotbox register, follow the procedure in "Shotbox Execution in the Utility/Shotbox Control Block" (page 494).

1 Press one of the bank selection buttons [BANK1] to [BANK4] to select a bank.

- The bank selection button you pressed lights amber.
- For the selected bank, the memory recall buttons show the button numbers and corresponding button states. If a button has been given a name in the setup menu, this name appears.

Not lighted: buttons with nothing saved
Lit orange: buttons saving a utility command or menu shortcut

2 Press the memory recall button for which the action you want to execute has been registered.

- In the case of a function on/off action, the button you pressed lights green, and this enables the function. To disable the function, press the button once more.
- For other actions, the button you pressed momentarily lights green, and then the function is executed.


Executing Utilities With the Cross-Point Buttons in the Key 2 Row

You can use the key 2 row of each of the M/E-1 to M/E-5, and PGM/PST banks in the same way as the buttons in the utility/shotbox control block.

Notes

To use this function, it is first necessary to assign the utility/shotbox mode switching function to the control panel [PRE MCRO] button.

For details of the assignment operation, see "Assigning the Utility/Shotbox Mode Switching Function" (page 573).

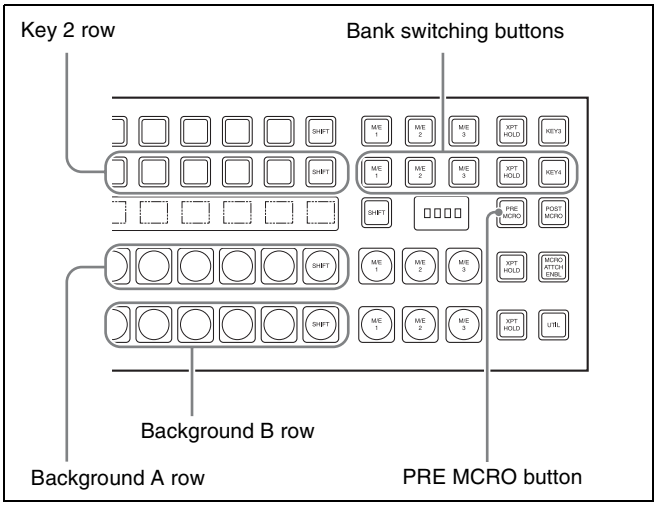

Cross-point control block in the PGM/PST block

You can assign any action to the cross-point buttons *(see page 597)*.

To execute the assigned action

When the action is executing a shotbox register, follow the procedure "Executing a Shotbox Function With the Key 2 Row Cross-Point Buttons" (page 494).

1 Press the [PRE MCRO] button, turning it on.


2 Press one of the bank switching buttons *(see previous figure)*, to select the bank.

These buttons correspond to banks 1 to 5 in sequence from the left.

3 Press the cross-point button to which the desired action is assigned.

Shotbox

The term “shotbox” refers to a function whereby for each specified region any snapshot or keyframe effect can be recalled simultaneously.
The simultaneous recall setting data such as region names, snapshot numbers and keyframe effect numbers are stored in “registers.” There are 99 registers for each control panel.

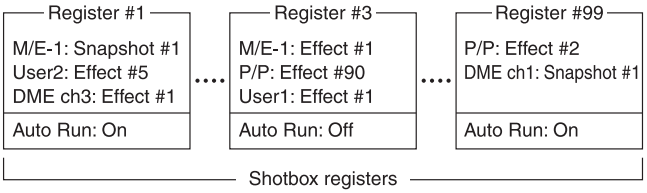

The previous figure shows schematically the settings in the 99 shotbox registers.
Each register may contain any combination of the regions to which the register applies, with the snapshots or effects to be recalled.
The Auto Run function is an attribute which can be set for each register. When this is set to On, an effect recalled by a shotbox operation is automatically run.

- When register 1 is executed, this recalls M/E-1 snapshot 1, User2 effect 5, and DME ch3 effect 1. For register 1, auto run is On, and therefore the User2 and DME ch3 effects are run as soon as they have been recalled.
- When register 3 is executed, M/E-1 effect 1, P/P effect 90, and User1 effect 1 are recalled. For register 3, auto run is off, and therefore to run the recalled effects, press the [RUN] button in the keyframe control block.

Shotbox Register Creation

You can create (save) shotbox registers in the following control blocks.

- Numeric keypad control block *(see “Numeric Keypad Control Block” in Chapter 2 (Volume 1).)*
- Menu control block *(see “Menu Control Block” in Chapter 2 (Volume 1).)*
- Multifunction Flexi Pad control block *(see “Multifunction Flexi Pad Control Block” in Chapter 2 (Volume 1).)*

Creating a Shotbox Register in the Numeric Keypad Control Block

When you create a shotbox register in the numeric keypad control block, you carry out separate operations in respect of the snapshot setting data and the effect setting data, and save in the register. The procedure described here makes the snapshot settings first, followed by the effect settings.

Creating a shotbox register

1 In the numeric keypad control block, press the [SNAPSHOT] button, turning it on.

This assigns the numeric keypad control block to snapshot operations.

2 Specify the register number of the snapshot you want to save in a shotbox register, and then recall it for each region.

For details of the procedure for recalling a register, see “Recalling a snapshot from the numeric keypad control block” (page 475).

3 Press the [SHOTBOX] button, turning it on.

This assigns the numeric keypad control block to shotbox operations.

4 Press the [STORE] button, turning it on.

The [SNAPSHOT] button lights green.
If not lighted, press the [SNAPSHOT] button to turn it on.

Notes

Only in [SHOTBOX] operation mode with the [STORE] button lit, the [SNAPSHOT] button or

[EFF] button lights green to indicate that a setting operation is in progress for the purpose of saving snapshot data or effect data in a shotbox register.

5 Press the region button for the snapshot you want to save, turning it on.

6 Enter the desired shotbox register number with the numeric keypad buttons.
To find an empty register, instead of entering a number, press the [.] (period) button.

The display shows the relevant register numbers. When a register number is postfixed with an "E," the register is empty.

7 Press [ENTER].

This saves the region you turned on in step **5**, and the register number you recalled for that region as a snapshot setting in a shotbox register, and the [STORE] button goes off. At the same time, the [RCALL] button lights.

8 In the numeric keypad control block, press the [EFF] button, turning it on.

9 Specify the register number of the keyframe effect you want to save in a shotbox register, and then recall it for each region.

For details of the procedure for recalling a register, see "Recalling a Register" (page 444).

10 Referring to steps **3** to **5**, carry out the setting operation for effect register saving. In step **4**, however, press the [EFF] button, lighting it green.

11 Enter the shotbox register number specified in step **6** using the numeric keypad buttons.

12 Press the [ENTER] button.

This saves the effect setting in a shotbox register, and the [STORE] button goes off. At the same time, the [RCALL] button lights.

To change the contents of a shotbox register

After recalling the shotbox register you want to change, referring to the previous item "*Creating a shotbox register,"* change the contents of the shotbox register, and save.

To check the region saved in a shotbox register

During operations to change the contents of a shotbox register, to check which region is saved in the register, use the following procedure.

1 With the [SHOTBOX] button lit, press the [STORE] button, turning it on.

2 Press the required button, as follows, turning it on.

To check the snapshot region: [SNAPSHOT] button
To check the effect region: [EFF] button

3 Hold down the [STORE] button.

While this button is held down, the button for the saved region lights.
Releasing the button returns you to the state before holding down the [STORE] button.

Notes

While the [STORE] button is lit, the mode selection buttons ([TRANS RATE] button and so on) in the numeric keypad control block do not operate. To change the mode, press the [RCALL] button or [SHOTBOX] button so that the [STORE] button goes off.

Creating a Shotbox Register in the Multifunction Flexi Pad Control Block

1 In the Multifunction Flexi Pad control block, press the [SNAPSHOT] button, turning it on.

This changes the Multifunction Flexi Pad control block to snapshot operation mode.

2 Specify the register number of the snapshot you want to save in a shotbox register, and then recall it for each region.

For details of the procedure for recalling a snapshot, see "Recalling a snapshot in the Multifunction Flexi Pad control block" (page 480).

3 Press the [SHOTBOX] button, turning it on.

This changes the Multifunction Flexi Pad control block to shotbox operations.

4 Press the [EDIT ENBL] button.

This changes the Multifunction Flexi Pad control block to shotbox editing mode.

5 Press the [STOR] button, turning it on.

The [SNAPSHOT] button lights green.
If not lighted, press the [SNAPSHOT] button to turn it on.

Notes

In shotbox editing mode, when you press the [STOR] button, the [SNAPSHOT] button or [EFF] button lights, to indicate that snapshot data will be saved in the shotbox register, or that effect data will be saved.

6 Specify the region for the snapshot to be saved, with the region selection buttons.

7 Enter the number of the shotbox register where you want to save with the memory recall section numeric keypad buttons.
To select an empty register, press the [.] button without entering a number.

The number of the selected register appears in the alphanumeric display. An "E" after the number indicates an empty register.

8 Press [ENTR].

This saves the region you turned on in step **6**, and the register number you recalled for that region as a snapshot setting in a shotbox register, and the [STOR] button indication color changes to orange. Simultaneously, the [RCLL] button lights up yellow.

9 Press the [EFF] button, turning it on.

10 Specify the register numbers to recall the keyframe effects for each region that you want to save in the shotbox register.

For the procedure for recalling keyframe effects, see "Recalling a register from the Multifunction Flexi Pad control block" (page 446).

11 Referring to steps **3** to **6**, carry out the procedure to save the recalled keyframe effect data.

In step **5**, however, press the [EFF] button instead of [SNAPSHOT] button, lighting it on.

12 Enter the shotbox register number specified in step **7** using the numeric keypad buttons in the memory recall section.

13 Press the [ENTR] button.


This saves the snapshot data, followed by the keyframe effect data, in the specified shotbox register, and the [STOR] button indication color changes to orange. Simultaneously, the [RCLL] button lights up yellow.

To change the contents of a shotbox register

After recalling the shotbox register you want to change, referring to the previous item "*Creating a Shotbox Register in the Multifunction Flexi Pad Control Block,*" change the contents of the shotbox register, and save.

To check the region saved in a shotbox register

After step **5** in the previous item, "*Creating a Shotbox Register in the Multifunction Flexi Pad Control Block,*" press and hold the following buttons.
To check the snapshot region: [SNAPSHOT] button
To check the keyframe effect region: [EFF] button
The buttons in the memory recall section change as follows. Buttons corresponding to regions with stored data are lit amber in the case of region select buttons, and yellow in the case of memory recall section buttons.

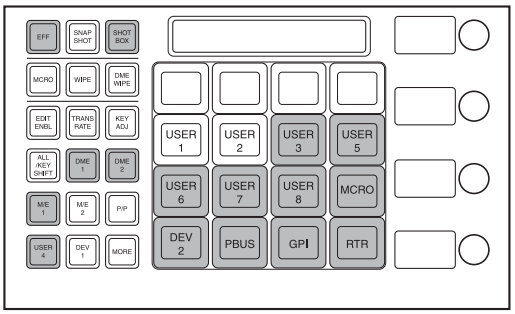

To recall an assigned effect and simultaneously execute it

Press the [AUTO RUN] button, lighting it green, then save the region data in the register.

Creating a Shotbox Register Using the Menus

Accessing the Shotbox menu

Carry out creation and editing of shotbox registers in the Shotbox menu.
To access the Shotbox menu, use either of the following methods.

- In the menu control block, press the top menu selection button [SHOTBOX].
- In the numeric keypad control block, press the [SHOTBOX] button twice in rapid succession.

Creating a shotbox register

1 In the Shotbox menu, press VF1 'Register' and HF1 'Store/Recall.'

The Store/Recall menu appears.
In the status area, the settings for each register appear as follows.
Region settings: Appear as "Sxxx" when a snapshot is allocated, and as "Exxx" when an effect is allocated (xxx is the register number). The register name also appears. If nothing is allocated, nothing appears in the display.

Register lock setting: When the register is write-protected, an "L" (for "lock") appears.
Empty status: When the register is empty, an "E" (for "empty") appears.
Auto run setting: When this is enabled, so that an effect is executed simultaneously with recall, "AR" appears.
Shotbox register name: This shows the shotbox register name.

2 If necessary, switch the region display by pressing one of the following buttons in the status area.

M/E, P/P: Shows the allocations for M/E-1 ("M/E1"), M/E-2 ("M/E2"), M/E-3 ("M/E3"), M/E-4 ("M/E4"), M/E-5 ("M/E5"), and P/P ("P/P").
User: Shows the allocations for User1 ("USR1") to User8 ("USR8").
DME: Shows the allocations for DME ch1 ("DME1"), ch2 ("DME2"), ch3 ("DME3"), ch4 ("DME4"), ch5 ("DME5"), ch6 ("DME6"), ch7 ("DME7"), and ch8 ("DME8").
DEV1-8: Shows the allocations for Device1 ("DEV1") to Device8 ("DEV8").
DEV9-12: Shows the allocations for Device9 ("DEV9") to Device12 ("DEV12").
Misc: Shows the allocations for P-Bus ("PBUS"), GPI ("GPI"), Router ("RTR"), and Macro ("MCRO").

3 Using any of the following methods, select the register you want to create (or edit).

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Shotbox Reg	Shotbox register number	1 to 99

4 Press [Edit].

The Edit menu appears, and it is now possible to make the settings for the specified register.
You can also use knob 1 to select the register in this menu.
In the status area, the shotbox register status for each region appears.

5 Using any of the following methods, select the desired region. You may select more than one region.

- Press directly on the region display in the status area, turning it to reverse video.
- Press [ALL] to select all regions.
- To select all switcher-related regions (M/E, P/P, User), press [SWR ALL].
- To cancel a selection, press once more to return to the normal display.

6 In the <Assign> group, select the snapshot or effect to be allocated to the region.

Snapshot: Allocate a snapshot register.
Effect: Allocate a keyframe effect.
- If the selected register is locked, a confirmation message appears asking whether or not to cancel the operation. Press [OK] to return to the previous menu display without carrying out the registration.
- If the operation is carried out, the region selected in step **5** is registered on the master timeline, and the parameters are now valid.

7 Depending on the selection in step **6**, set the parameters as follows.

When a snapshot is selected

Knob	Parameter	Adjustment	Setting values
3	Snapshot	Snapshot register number	1 to 99

When an effect is selected

Knob	Parameter	Adjustment	Setting values
3	Effect	Keyframe effect number	1 to 99 a)

a) For P-Bus and Device1 to Device12, you can also set register numbers 1 to 250.

8 To run the allocated effect as soon as it is recalled, press [Auto Run], turning it on.

9 Repeat steps **5** to **8** as required.

10 In the <Store> group, press [Store] to save the setting.

To return to the state before saving the setting
In the <Store> group, press [Undo].


To execute the settings to check them
Press [Recall] to execute the shotbox.

Shotbox Execution

You can recall (and run) shotbox registers from the following control blocks.
This section describes the various methods of operation.

- Numeric keypad control block *(see page 493)*
- Flexi Pad control block *(see page 493)*
- Multifunction Flexi Pad control block *(see page 493)*
- Cross-point control block *(see page 494)*
- Utility/shotbox control block *(see page 494)*

Shotbox Execution From the Numeric Keypad Control Block

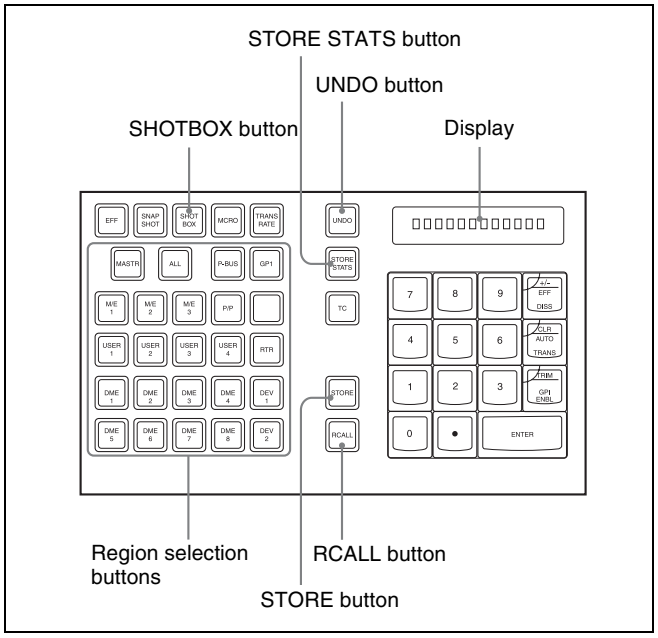

Numeric keypad control block

1 In the numeric keypad control block, press the [SHOTBOX] button, turning it on.

- This allocates the numeric keypad control block to shotbox operations.
- The [RCALL] button lights amber.
- The display shows the last recalled register number.

2 With the numeric keypad buttons, enter the desired register number.

- The display now shows the entered register number.
- If the specified register is empty, an “E” automatically appears after the register number.

3 Press the [ENTER] button.

- This runs the specified shotbox register.
- The number of the recalled register appears in the display.
- The region selection buttons corresponding to the regions for which the effect is set light.
- If auto run is set for the specified shotbox register, on recall the effect is immediately executed.
- If you recall an empty register, then shotbox execution has no effect.

When auto run is not set for the recalled register
Simply recalling the register does not run the effect. To do this, in the keyframe control block, press the [RUN] button.

Shotbox Execution in the Flexi Pad Control Block or the Multifunction Flexi Pad Control Block

Notes

In the simple type of Flexi Pad control block, shotbox operations are not possible. You can carry out shotbox operations with a standard type Flexi Pad control block or Multifunction Flexi Pad control block.


The following describes the use of the standard type Flexi Pad control block.

1 In the Flexi Pad control block, press the [SHOTBOX] button, lighting the [SHOTBOX] button amber.

- This allocates the Flexi Pad control block to shotbox operations.
- The previously selected bank number and the last recalled register number appear in the numeric display.

2 Using any of the following methods, select the bank.

- To select a register in bank 0, press the [BANK0] button.
- To select a register in bank 1, press the [BANK1] button.
- Press the [BANK SEL] button, and when the memory recall section display changes as follows, press the button from 0 to 9 corresponding to the bank you want to select.




- The numeric display shows the selected bank number.
- The buttons in the memory recall section show the names and states of the registers corresponding to the selected bank.
  - **Off:** register in which nothing is saved
  - **Lit orange:** register holding shotbox settings
  - **Lit yellow:** last executed register

3 Press the button in the memory recall section corresponding to the register you want to run.

- The selected shotbox register is executed.
- The pressed button lights yellow.
- The numeric display shows the bank number followed by the selected register number.
- If the selected shotbox register has auto run set, on recall the effect is immediately executed.

When auto run is not set for the recalled register
Simply recalling the register does not run the effect. To do this, press the [RUN] button.

Shotbox Execution in the Utility/ Shotbox Control Block

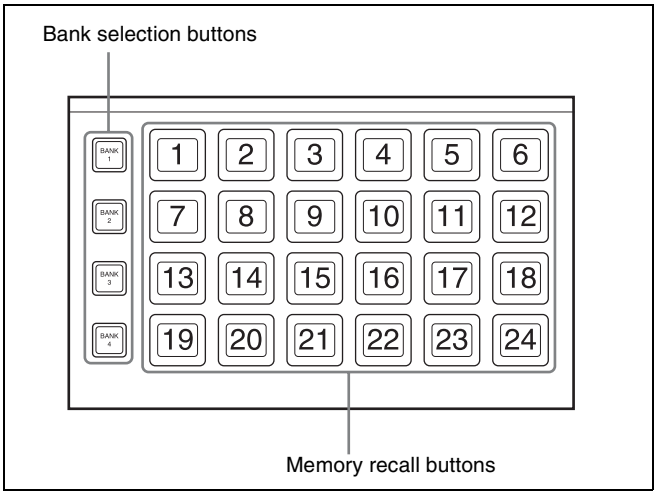

Utility/shotbox control block

In the utility/shotbox control block, as the default setting the memory recall buttons have registers 1 to 96 allocated to banks 1 to 4.

Bank	Register allocation to memory recall buttons
1	1 to 24
2	25 to 48
3	49 to 72
4	73 to 96

1 Press one of the bank selection buttons [BANK1] to [BANK4] to select the bank.

- The pressed bank selection button lights amber.
- The memory recall buttons show the names and states of the registers corresponding to the selected bank.
  - **Off:** register in which nothing is saved
  - **Lit orange:** register holding shotbox settings
  - **Lit yellow:** last recalled register

2 Press the memory recall button to which the shotbox register you want to run is allocated.

- The shotbox execution is carried out.
- The pressed button lights yellow.
- The numeric keypad control block [SHOTBOX] button lights, and the region selection button corresponding to the region for which the effect is set also lights.
- If the selected shotbox register has auto run set, on recall the effect is immediately executed.

When auto run is not set for the recalled register
Simply recalling the register does not run the effect. To do this, press the [RUN] button in the keyframe control block.

Executing a Shotbox Function With the Key 2 Row Cross-Point Buttons

You can use the key 2 row of each of the M/E-1 to M/E-5, and PGM/PST banks in the same way as the buttons in the utility/shotbox control block.

Notes

To use this function, it is first necessary to assign the utility shotbox mode switching function to the control panel [PRE MCRO] button.

For details of the assignment operation, see "Assigning the Utility/Shotbox Mode Switching Function" (page 573).

You can assign any shotbox register to the cross-point buttons.

For details of the assignment operation, see "Assigning a Function to the Key 2 Row Cross-Point Buttons" (page 597).

1 Press the [PRE MCRO] button, turning it on.

2 Press one of the bank switching buttons *(see the figure on page 488)*, to select the bank.

3 Press the cross-point button to which the desired shotbox is assigned.

Shotbox Register Editing

You can carry out the following editing on shotbox registers.

- **Lock:** Write-protect the contents of the register.
- **Copy:** Copy data from one register to another.
- **Move:** Move data from one register to another.
- **Swap:** Swap the contents of two registers.
- **Delete:** Delete the contents of a register.
- **Name:** Attach a name to a register.

The procedures for shotbox register editing are similar to the procedures described in *"Effect Register Editing" (page 468).*

Unlike in effect register editing, however, it is not necessary to specify a region in shotbox register editing.

Chapter 16 Macros

Macros

Overview

The term “macro” refers to the function whereby a sequence of signal selections and other operations on the control panel is saved as data in memory, so that it can be recalled as required to automatically execute the same sequence of operations.
To record menu operations in memory, use a menu macro *(see page 522)*.

Macro registers

The area of memory that holds a macro is termed a “macro register.” For each control panel there are 250 macro registers, numbered 1 to 250.

Events

The individual control panel operations constituting a macro are termed “events.” One macro can contain a maximum of 99 events.
The following table shows the operations for each control block of the control panel that can be saved as events in a macro.

Control block	Event
Auxiliary bus control block	• Cross-point selection • AUX mix transition on/off
	Cross-point selection in router control mode
Cross-point control block (including when the AUX panel-less function is set)	• Cross-point selection • Recalling a function assigned to a key 2 row button • AUX mix transition on/off
Transition control block (standard type)	• Auto transition and cut for the transition execution section • Auto transition and key on/off for the independent key transition execution section [a)] • Next transition setting • Transition type selection • Pattern limit on/off • Key snapshot recall • VTR/disk recorder/Extended VTR / frame memory clips playback [b)] • VTR/disk recorder/Extended VTR / frame memory clips stop [b)] • VTR/disk recorder/Extended VTR / frame memory clips cue-up [b)]
Transition control block (simple type)	• Transition execution section take • Transition type selection • Pattern limit on/off
Transition control block (compact type)	• Transition execution section auto transition and cut • Independent key transition execution section auto transition [a)] • Next transition setting • Transition type selection • Pattern limit on/off • VTR/disk recorder/Extended VTR / frame memory clips playback [b)] • VTR/disk recorder/Extended VTR / frame memory clips stop [b)] • VTR/disk recorder/Extended VTR / frame memory clips cue-up [b)]
Independent key transition control block (simple type)	• Independent key transition execution section take and key on/off [a)] • Key snapshot recall • Selection of independent key transition type
Flexi Pad control block (standard type)	Recalling the following data • Snapshots • Wipe snapshots • DME wipe snapshots

Control block	Event
Flexi Pad control block (simple type)	Recalling the following data • Snapshots • Wipe snapshots • DME wipe snapshots
Flexi Pad control block (multifunction type)	Recalling the following data • Effect • Snapshots • Shotbox • Wipe snapshots • DME wipe snapshots • Key snapshots Following operations • Effect rewind • Effect execution • Effect fast forward • Selection of effect execution direction • Independent key transition execution section auto transition and cut [a)] • Pattern limit on/off
Numeric keypad control block	Recalling the following data • Effects • Snapshots • Shotbox • Master snapshots • Master timeline
Keyframe control block	• Effect rewind • Effect execution • Effect fast forward • Selection of effect execution direction
Device control block (trackball) (joystick) (search dial) [c)]	• VTR/disk recorder/Extended VTR/ frame memory clips start point setting • VTR/disk recorder/Extended VTR/ frame memory clips playback • VTR/disk recorder/Extended VTR/ frame memory clips stop • VTR/disk recorder/Extended VTR/ frame memory clips cue-up • VTR/disk recorder/Extended VTR/ frame memory clips fast forward • VTR/disk recorder/Extended VTR/ frame memory clips rewind • VTR/disk recorder record • Frame memory clip loop setting
Downstream key control block	• Independent key transition execution section auto transition and cut [a)] • Key snapshot recall
Fade to black control block	Execution of fade to black transition
Menu control block	• Disk recorder/Extended VTR file recalling • Recalling the functions assigned to [PREFS 1] to [PREFS 16] buttons • Execution of a menu macro • Recalling frame memory clips
Utility/Shotbox control block	Recalling the functions assigned to memory recall buttons

a) In the case of an event that inserts or deletes a key, the key state at the time of event registration (inserted or not inserted) is also saved in the macro. When the macro is executed, the event is only replayed if the key state matches the saved state. (Example: For a macro with an event that deletes a key, when the macro is executed, if the key is inserted it is deleted, but otherwise nothing occurs as concerns keying.)

b) Function valid only when [PLAY], [STOP], and [CUE] have been set in the Setup menu.

c) When using the device control block (search dial), this operates as a reference module. When not used, this operates on the module selected in the Engineering Setup >Panel >Config menu.
For details of reference module selection, see "Overall Control Panel Settings (Config Menu)" (page 566).

Macro Creation and Editing

You can create or edit a macro by recalling a macro register.
To create a new macro, recall an empty macro register, and create the desired sequence of events (by executing the sequence of operations on the control panel that you want to save as events in the macro).
To add an event to an existing macro, recall the register holding the macro, and create the event you want to add.

Notes

While editing a macro, it is not possible to execute another macro.

Creating a macro

To include all information associated with an operation when registering a macro event

When registering an auto transition operation as an event, you can register the auto transition event to include the transition rate and background A/B bus selection status.
When registering an effect execution, rewind, or fast forward as an event, you can also save the region to which this applies.
To use this capability, assign the following functions to user preference buttons in the menu control block or buttons in the utility/shotbox control block *(see page 589)*, and turn the relevant button on before you start an event to register.

Macro AT with Rate (Macro Auto Trans Event with/ without Rate): When registering an auto transition macro event in the transition control block or independent key transition control block, include the transition rate.

Macro AT with A/B Bus (Macro Auto Trans Event with/without A/B Bus): When registering an auto transition macro event in the transition control block, include the background A/B bus cross-point.

Macro TL with Region (Macro Timeline with Region): When registering an effect execution, rewind, or fast


forward as a macro event, save the affected region together in the macro.

Events requiring adjustment when creating a macro

The following events require time for execution to complete, and therefore when executed within a macro sequence, a pause event must be inserted to adjust the timing.

- Rewinding effects involving external device control
- VTR/disk recorder/Extended VTR cue-up

For example, create a macro to cue up a VTR and then play back as follows.

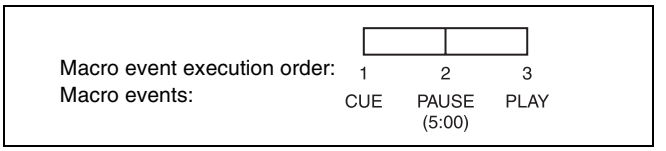

Auto insert mode on/off setting

You can switch on or off the mode (auto insert mode) in which at the same time that a control panel operation is carried out, the event is automatically saved in a macro.

Editing a macro

You can carry out the following macro editing operations.

Event insertion

Insert the control panel operation as an event in a macro.

Event modification

Modify any event. You can modify all events within a macro, or events within a specified range in a single operation.

Event deletion

Delete any one event. You can delete all events within a macro, or events within a specified range in a single operation. You can then paste the deleted event using the paste function.

Event copy

Copy any one event. You can copy all events within a macro, or events within a specified range in a single operation.

Event paste


Paste a copied or deleted event at a desired position within a macro.

Undoing an editing operation

You can undo the last event insertion, modification, deletion, or paste operation.

Macro merging

During macro editing, you can recall and copy another register to merge it with the macro being edited.
For example, while editing macro register 2 you can recall and copy register 1 to merge it as shown in the following figure.

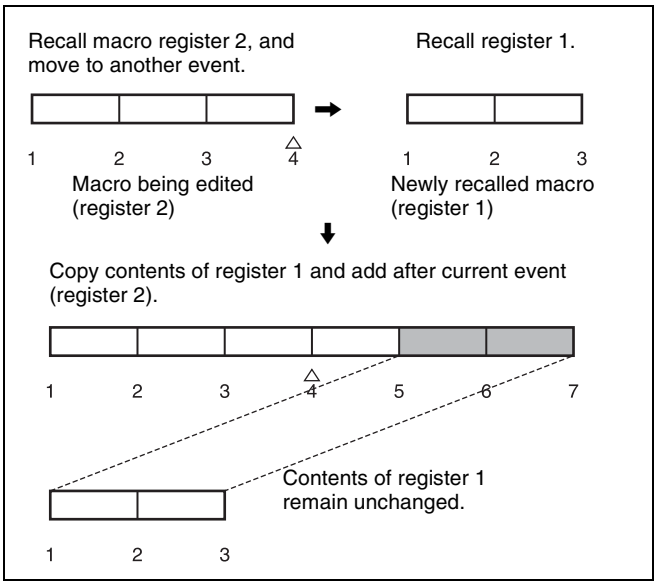

Macro Execution

To execute a macro, recall the register in which the macro is held. Simultaneous with the register recall, all events stored in the macro are played back (executed) in sequence without pause.

Pausing and restarting macro execution

It is also possible to execute a macro in the following ways.

Pause event

To adjust the execution timing of a particular event (to delay the start of execution of the event by a particular time interval), you can store a special event which pauses macro execution. This event is called a “pause event.” When you store a pause event, you can set the interval for which the macro is paused (the pause length) to any value in the range 1 to 999 frames. When the set time has elapsed, the macro is automatically executed.

Pause zero event

By including a pause event with the time set to zero, you can make macro execution pause at the pause event.

Step execution (requires a Setup menu setting)

By selecting step execution mode in the Setup menu, you can make macro execution pause every time an event is executed.

Take operation

When a paused macro is restarted, this is referred to as a “Take” operation.

Macro take operation using a GPI input

You can carry out a macro take operation using a GPI input on the control panel and DCU.

For GPI input settings, see "Making Control Panel GPI Input Settings" (page 597) and "Making DCU GPI Input Settings" (page 641).

Macro Operations in the Numeric Keypad Control Block and the Keyframe Control Block


This section describes macro operations carried out in the numeric keypad control block and the keyframe control block.

Notes


For a macro take operation *(see "Macro Execution" (page 498)),* the numeric keypad control block and keyframe control block are not used. Use the [TAKE] button in the Flexi Pad control block or the Multifunction Flexi Pad control block.

For an overview of macros, see "Macros" (page 496).

For macro operations in the numeric keypad control block, use the following buttons *(see the following figure)*.

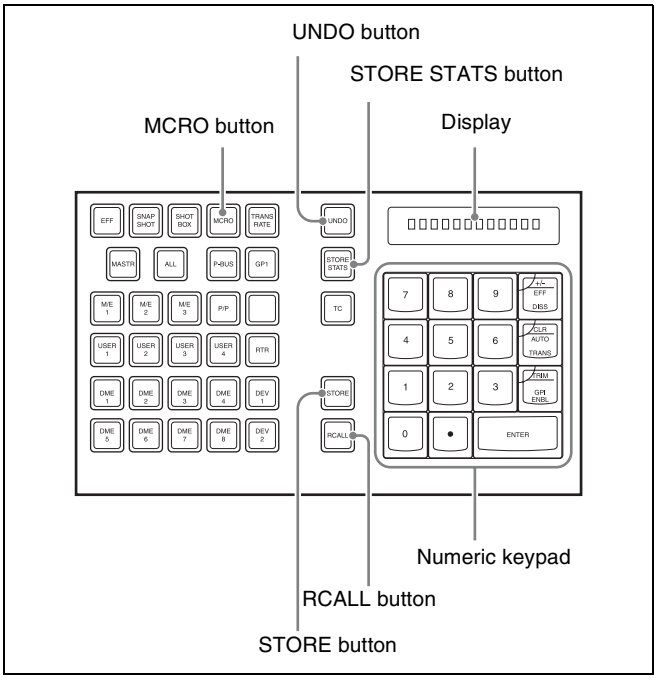

For macro operations in the keyframe control block, use the following buttons *(see the following figure)*.

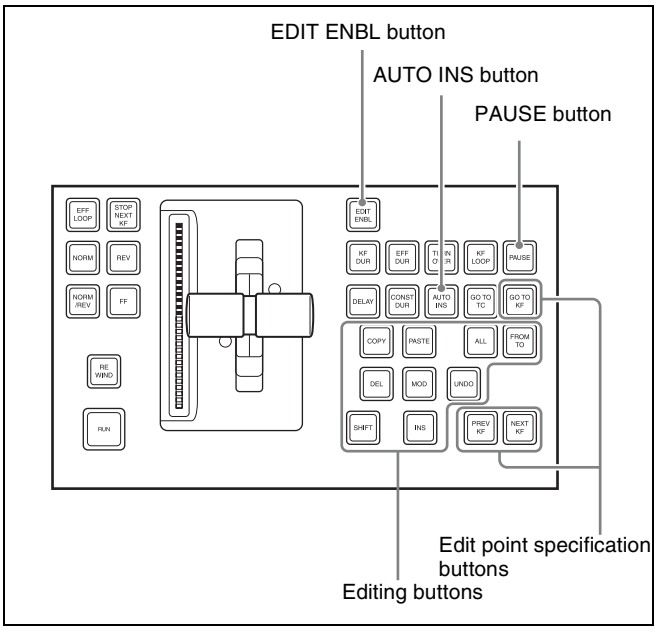

Recalling a Macro Register and Executing a Macro

To carry out a macro operation, recall a macro register. Recalling an empty register allows you to carry out macro editing operations. Recalling a register holding a macro executes the macro immediately.
To recall a macro register, use the following procedure.

1 In the numeric keypad control block, press the [MCRO] button, turning it on.

This assigns the numeric keypad control block to macro operations, and the [RCALL] button lights.

2 Enter the number of the register (1 to 250) to be recalled with the numeric keypad buttons.
To search for an empty register, instead of entering a number, press the [.] (period) button.

The display shows the corresponding register number. A letter "E" after the number indicates that the corresponding register is empty.

3 Press the [ENTER] button.

When you recall an empty register

This assigns the numeric keypad control block and keyframe control block to macro editing.

For details of macro editing, see "Creating and Editing a Macro" (see below).

When you recall a register holding a macro

This immediately executes the macro. While the macro is executed, the [RCALL] button flashes.

Notes

- It is not possible to execute more than one macro at a time.
- If the same register is recalled again during macro execution or when the macro is paused, the following operation depends on a setting in setup.
  For details of the settings, see "Setting the Macro Execution Mode" (page 606).
- Individual events stored in a macro are executed according to the settings in setup. If you change the settings in setup, a saved macro may not have the expected effect.
- During macro execution, if you switch the control panel to macro editing mode, the macro being executed stops.
- During macro editing it is not possible to execute a macro.
- While executing a macro with the Flexi Pad control block, or with a button with a macro attachment set, if you recall another macro with the numeric keypad control block, the following operation depends on a setting in setup.
  For details of the settings, see "Setting the Macro Execution Mode" (page 606).

Creating and Editing a Macro

Use the numeric keypad control block and keyframe control block to create and edit a macro.
After carrying out creation and editing, be sure to carry out a save operation *(see page 503)*, using the numeric keypad control block.

Switching auto insert mode on or off for macro creation/editing

In the auto insert mode, when creating or editing a macro, an operation carried out on the control panel is automatically registered as an event.
When this mode is off, it is necessary to press the [INS] button in the keyframe control block for each operation to register the event.
To switch auto insert mode on or off, press the [AUTO INS] button in the keyframe control block.

Notes

When you start macro editing using the numeric keypad control block with the macro execution mode set to "Normal" *(page 606)*, the auto insert mode is automatically on. When "Step" is selected as the macro execution mode, the auto insert mode is automatically off.

Creating a new macro

1 Recall an empty register (1 to 250) *(see page 500)*.

This assigns the numeric keypad control block and keyframe control block to macro editing, and the [MCRO] button in the numeric keypad control block and the [EDIT ENBL] button in the keyframe control block light red. The [STORE] button in the numeric keypad control block flashes red.

2 If required, press the [AUTO INS] button in the keyframe control block to toggle the auto insert mode on or off.

3 Create the events (carry out the control panel operations to be registered as events in the macro).

You can include pause events *(see page 503)*.

For details of events that can be registered, see "Events" (page 496).

- When auto insert mode *(see page 500)* is on, execution of a control panel operation automatically registers an event in the macro.
- When auto insert mode is off, proceed to step **4**.

Notes

- During macro editing, if you press any of the mode selection buttons in the numeric keypad control block other than the [MCRO] button ([TRANS RATE] button, and so on), the executed operation is also registered as an event. In this case, the [MCRO] button stays lit red.
- Even during macro editing, you can carry out keyframe operations using the fader lever in the keyframe control block and the following buttons: [EFF LOOP], [STOP NEXT KF], [NORM], [REV], [NORM / REV], [FF], [REWIND], [RUN]
- During macro editing, if you press a button for which a macro attachment is set, the outcome is as described in the next item.

4 When auto insert mode is off, press the [INS] button in the keyframe control block to register the event.

5 Repeat steps **2** and **3** to register the required events in the macro.

This registers the events in the macro, in the order the operations were carried out on the control panel.

6 Press the [STORE] button.

Macro editing finishes, and the [MCRO] button and [STORE] button in the numeric keypad control block light amber. The keyframe control block returns to the state before starting macro editing.

Notes

While carrying out macro editing in the numeric keypad control block and keyframe control block, no macro operation other than macro recalling is possible in the Flexi Pad control block.

Merging a macro for which a macro attachment is set

While creating/editing a macro, if you press a button for which a macro attachment is set, the macro in the register assigned to the button is recalled, and the following occurs.

- When auto insert mode is on, it is merged with the macro being edited. However, the macro assigned to the button is not executed.
- When auto insert mode is off, it is copied to the paste buffer. Pressing the [PASTE] button in the keyframe control block merges it with the macro being edited.

Specifying an edit point

To specify an edit point with the numeric keypad control block and keyframe control block, use the following procedure.

1 Recall the register of the macro (1 to 250) you want to edit *(see page 500)*.

2 In the numeric keypad control block, hold down the [MCRO] button, and press the [STORE] button.

This assigns the numeric keypad control block and keyframe control block to macro editing, and the [MCRO] button in the numeric keypad control block and the [EDIT ENBL] button in the keyframe control block light red. The [STORE] button in the numeric keypad control block flashes red.

3 Using any of the following methods, specify the edit point.

- To move the edit point to the event immediately following the current macro event, press the [NEXT KF] button in the keyframe control block.
- To move the edit point to the event immediately preceding the current macro event, press the [PREV KF] button in the keyframe control block.
- To move to an edit point by specifying an event number (the number showing the position of the event in the macro execution sequence), press the [GO TO KF] button in the keyframe control block, then in the numeric keypad control block, enter the target number and confirm with the [ENTER] button.

Inserting an event

1 Specify the edit point *(see page 501)*.

2 If required, press the [AUTO INS] button in the keyframe control block to toggle the auto insert mode on or off.

3 Create the event.

- When auto insert mode *(see page 500)* is on, the event is automatically added to the macro.
- When auto insert mode is off, proceed to step **4**.

4 When auto insert mode is off, press the [INS] button in the keyframe control block.

5 Repeat steps **2** and **3** to insert the required events in the macro.

Modifying a single event

1 Specify the edit point *(see page 501)*.

2 If the [AUTO INS] button is lit, press it to turn off the insert mode.

3 Create the event.

4 Press the [MOD] button in the keyframe control block.

Modifying a particular range of events

1 Carry out steps **1** to **3** of the procedure in *"Modifying a single event" (the previous item).*

2 Press the [FROM TO] button in the keyframe control block, turning it on.

The numeric display in the numeric keypad control block shows the current event number and the indication "TO."

3 To set the start of the range to other than the current event number, press the [CLR/AUTO TRANS] button in the numeric keypad control block, then enter the desired event number with the numeric keypad and press the [ENTER] button (this operation is not required when using the current event number).

4 Enter the event number for the end of the range and press the [ENTER] button.

5 Press the [MOD] button in the keyframe control block.

Modifying all events at the same time

1 Carry out steps **1** to **3** of the procedure in *"Modifying a single event" (page 502).*

2 Press the [ALL] button in the keyframe control block, turning it on.

3 Press the [MOD] button.

Deleting an event

1 Specify the edit point *(see page 501)*.

2 To delete multiple events simultaneously, carry out either of the following operations (this operation is not required to delete the event at the edit point only).

- To specify a range to be deleted, press the [FROM TO] button in the keyframe control block, then enter the event numbers from the numeric keypad control block.
- To delete all events within this macro, press the [ALL] button, turning it on.

3 Press the [DEL] button.

Moving events

1 Specify the edit point for the start of the range to be moved *(see page 501)*.

2 To move multiple events simultaneously, press the [FROM TO] button in the keyframe control block, then specify the range in the numeric keypad control block.

3 Press the [DEL] button.

This temporarily deletes the specified events from the macro, and copies them to the paste buffer.

4 Move to the edit point which is the destination within the macro to which you want to move the events.

5 To paste the contents of the paste buffer after the edit point, press the [PASTE] button in the keyframe control block.
To paste before the edit point, hold down the [SHIFT] button in the keyframe control block and press the [PASTE] button.

This pastes the events from the paste buffer.

Copying events

1 Specify the edit point for the start of the range to be copied.

2 To copy multiple events simultaneously, press the [FROM TO] button or [ALL] button in the keyframe

control block, then specify the range in the numeric keypad control block.

3 Press the [COPY] button.

This copies the specified events into the paste buffer.

4 Move to the edit point which is the destination within the macro to which you want to copy the events.

5 To paste the contents of the paste buffer after the edit point, press the [PASTE] button in the keyframe control block.
To paste before the edit point, hold down the [SHIFT] button in the keyframe control block and press the [PASTE] button.

This copies the events from the paste buffer.

Inserting a pause event

1 Press the [PAUSE] button in the keyframe control block, lighting it green.

The indication "PAUSE" appears in the numeric keypad control block display.

2 If required, press the [AUTO INS] button in the keyframe control block to toggle the auto insert mode on or off.

3 Enter the pause duration with the numeric keypad control block (0 or 1 to 999 (frames)).

4 Press the [ENTER] button.

- If auto insert mode is on, this sets the pause duration, and inserts the pause event.
- When auto insert mode is off, continue to step **5**.

5 When auto insert mode is off, press the [INS] button in the keyframe control block to insert the pause event.

Merging macro register data

1 Specify the edit point *(see page 501)*.

2 Press the [RCALL] button in the numeric keypad control block, lighting it amber.

3 Enter the number of the macro register you want to copy using the numeric keypad buttons.

The display shows the register number.

4 Press the [ENTER] button.

The [RCALL] button goes off, and the specified register data is copied to the paste buffer.
- When auto insert mode is on, the data from the specified register is included after the edit point.
- When auto insert mode is off, continue to step **5**.

5 When auto insert mode is off, to include after the edit point, press the [PASTE] button in the keyframe control block.
To include before the edit point, hold down the [SHIFT] button in the keyframe control block, and press the [PASTE] button.

In place of steps **2** to **4**, you can specify the register with the Flexi Pad control block.

For details, see "Recalling a Macro Register and Executing a Macro" (page 505).

The same effect is obtained if you use a button which has a macro attachment set. In this case, the data from the assigned macro register is copied into the paste buffer.

Undoing a macro editing operation with the numeric keypad control block

Immediately after inserting, modifying, deleting, or pasting an event, you can undo the operation by pressing the [UNDO] button in the numeric keypad control block.

Saving a Macro

Use the following procedure to save the register after creating or editing/modifying a macro.

1 In the numeric keypad control block, press the [MCRO] button, turning it on.

This assigns the numeric keypad control block to macro operations.

2 Press the [STORE] button, turning it on.

3 Enter the number of the register (1 to 250) in which you want to save the macro with the numeric keypad buttons.

To search for an empty register, instead of entering a number, press the [.] (period) button.
The display shows the corresponding register number. A letter "E" after the number indicates that the corresponding register is empty.

4 Press the [ENTER] button.

This saves the macro data in the specified register, and the [STORE] button goes off.

The [RCALL] and [STORE STATS] buttons light.


To cancel the saving of a macro

To cancel the saving of a macro immediately after performing it, hold down the [STORE STATS] button and press the [UNDO] button.


Macro Operations in the Standard Type Flexi Pad Control Block

This section describes how to carry out macro operations in a standard type Flexi Pad control block.
Using the <Flexi Pad Edit Mode> group buttons in the Engineering Setup >Panel >Operation >Macro menu, you can set the macro execution mode to “Pause Only” or “Full Editing” *(see page 606)*.
The display of the standard type Flexi Pad control block changes as follows, depending on the selected mode of macro execution.

When entering macro editing mode with “Pause Only” selected

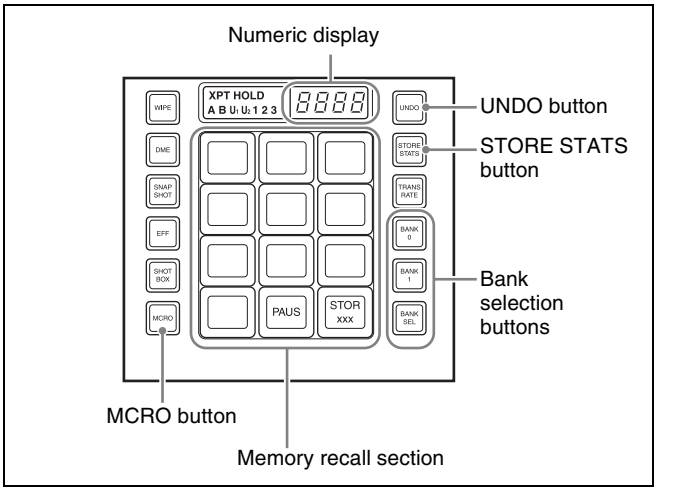

When entering macro editing mode with “Full Editing” selected

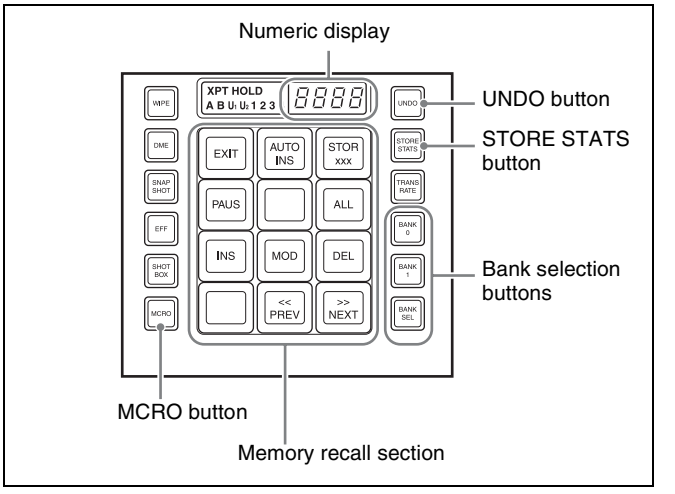

About operations in Full Editing mode, see “Setting the Macro Execution Mode” (page 606).

Banks and registers

To allow operations on the 99 registers, the standard type Flexi Pad control block treats the registers in groups. These groups are called banks, and there are 10 banks, numbered from 0 to 9.

For details of the correspondence between banks and registers, see "Banks and Registers" (page 476).

Recalling a Macro Register and Executing a Macro

Carrying out a macro operation in the normal mode


Use the following procedure to recall a macro register.

1 In the Flexi Pad control block, press the [MCRO] button, turning it on.

This assigns the Flexi Pad control block to macro operations.
The numeric display shows the previously selected bank number and the last recalled register number.

2 Use any of the following operations to select the bank for recall.

To select bank 0: Press the [BANK0] button.
To select bank 1: Press the [BANK1] button.
To select any of banks 0 to 9: Press the [BANK SEL] button, changing the memory recall section display as in the following figure; select a number from 0 to 9.



The selected bank number appears in the numeric display.
Each button in the memory recall section shows the corresponding register name and register status for the selected bank.
Note that in the Setup menu, you can select whether to display register names or register numbers.
- **Lit orange:** Register holding macro data
- **Lit yellow:** Last recalled register
- **Off:** Empty register

3 Press the button in the memory recall section showing the name of the register to be recalled.

The button you pressed lights yellow, the macro register is recalled, and the macro is executed.
During macro execution, the button you pressed remains yellow, but flashes. When macro execution completes, it returns to permanently on.
The numeric display shows the bank name followed by the selected register number.

Notes

- It is not possible to execute more than one macro at a time.
- If the same register is recalled again during macro execution or when the macro is paused, the following operation depends on a setting in setup. *For details of the settings, see "Setting the Macro Execution Mode" (page 606).*
- Individual events stored in a macro are executed according to the settings in setup. If you change the settings in setup, a saved macro may not have the expected effect.
- During macro execution, if you switch the control panel to macro editing mode, the macro being executed stops.
- During macro editing it is not possible to execute a macro.
- While executing a macro with the numeric keypad control block, Multifunction Flexi Pad control block, Flexi Pad control block for another switcher bank, or with a button with a macro attachment set, if you recall another macro with the Flexi Pad control block, the following operation depends on a setting in setup *(see page 606)*.

Executing a macro in normal execution mode (with pause events set)


When execution of a macro is paused, the [TAKE] button is assigned to the memory recall section.
To restart the macro execution, press the [TAKE] button.
You can switch the normal execution mode and step execution mode in the Setup menu *(see page 606)*.

Executing a macro in step execution mode

To recall a macro register and execute the macro in step execution mode, use the following procedure.

1 In the Flexi Pad control block, recall the macro register *(see page 505)*.

The Flexi Pad control block memory recall section is assigned to the display of the [TAKE] button and macro execution status, as in the following figure.

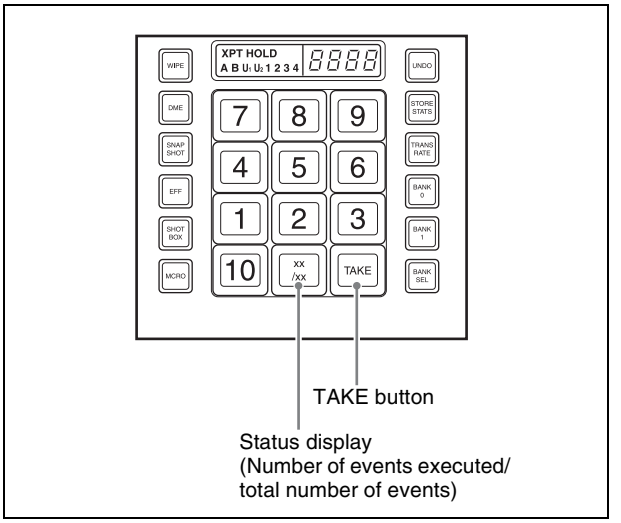

2 Press the [TAKE] button.

This executes one event within the macro, then stops. The number of events executed, as shown in the memory recall section status display, is incremented by one.

3 Repeat step **2**, executing the macro event by event.

When all events in the macro have been executed, the [TAKE] button goes off.

Creating and Saving a Macro

1 In the Flexi Pad control block, press the [MCRO] button, turning it on.


This assigns the Flexi Pad control block to macro operations.

2 Select the bank of the register in which you want to save the macro.

*For details of the method of operation, see step **2** in the previous item "Recalling a Macro Register and Executing a Macro" (page 505).*

3 Hold down the [MCRO] button in the Flexi Pad control block, and press the button in the memory recall section showing the desired register name.

This assigns the Flexi Pad control block to macro editing, and the auto insert function is enabled. The [MCRO] button lights red.

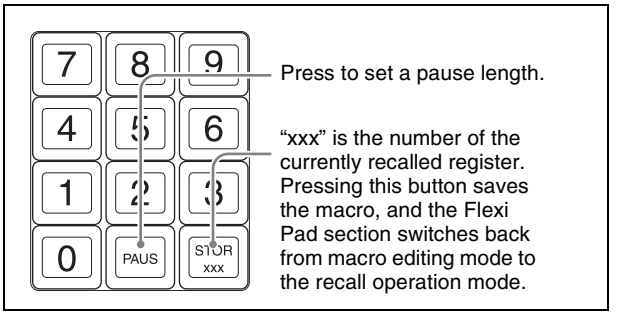


4 In the same way as in the numeric keypad control block, create the events you want to save in the macro.

*For details, see step **2** (page 500) of "Creating a new macro."*

5 Repeat step **4** to save the desired events in the macro.

The operations you carry out on the control panel are saved as a sequence of events in the macro.
The numeric display appears as follows.

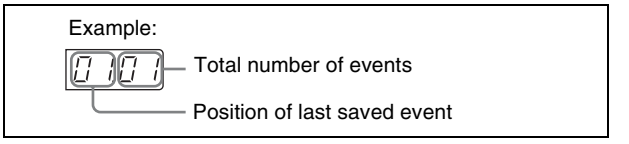

6 Press the [STOR xxx] button in the memory recall section (where xxx is the register number).

The [STORE STATS] button lights amber.
This saves the created macro in the register, and macro editing ends.
The Flexi Pad control block returns to the state before macro editing began.
The [MCRO] button lights amber.

Notes

- During macro editing, you can press a mode selection button in the Flexi Pad control block other than the [MCRO] button (for example, the [WIPE] button or [DME] button) to record the executed operation as an event. In this case, the [MCRO] button remains lit red.
- During macro editing, if you press a button for which a macro attachment is set, the macro within the register assigned to the button is merged into the macro being edited. However, the macro assigned to the button is not executed.
- While carrying out macro editing in the Flexi Pad control block, absolutely no macro operations are possible in the Flexi Pad control blocks for other M/E and PGM/PST banks. Macro operations from the numeric keypad control block or Multifunction Flexi Pad control block are also not possible.

To cancel the saving of a macro
To cancel the saving of a macro immediately after performing it, hold down the [STORE STATS] button and press the [UNDO] button.

Inserting a pause event

1 Press the [PAUS] button in the memory recall section.

The buttons in the memory recall section change as follows.



2 Enter the length of pause you want to set (0 to 999 frames).

3 Press the [PAUS ENTR] button.

This sets the pause length, and inserts the pause event. The memory recall section display returns to its former state.

Deleting a macro

1 In the Flexi Pad control block, press the [MCRO] button.

This assigns the Flexi Pad control block to macro operations.
The numeric display shows the previously selected bank number and the number of the last recalled register.

2 Select the bank of the register holding the macro you want to delete.


*For details of the method of operation, see step **2** (page 505) of "Recalling a Macro Register and Executing a Macro."*

3 Hold down the [STORE STATS] button, and then press the button in the memory recall section showing the corresponding register number.

The button you pressed in the memory recall section goes off, and this deletes the macro. The [STORE STATS] button lights amber.

Macro Operations in the Simple Type Flexi Pad Control Block

This section describes the macro operations carried out in the simple type Flexi Pad control block.
Use the following buttons.

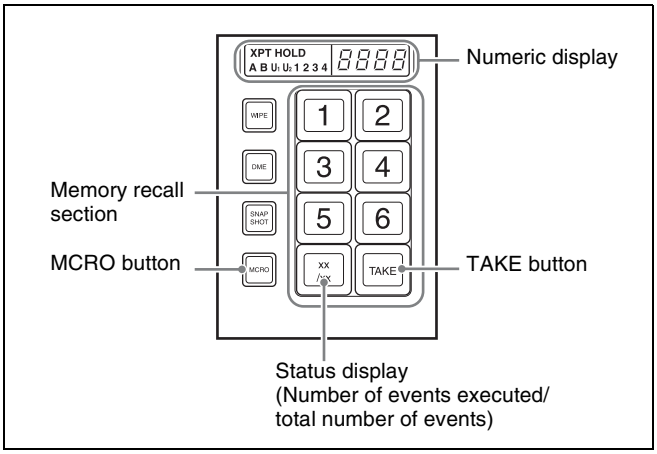

To use the [MCRO] button
To enable the [MCRO] button for use as in the above figure, it is necessary in the Setup menu to switch the [UNDO] button to the [MCRO] button *(see page 572)*.

Notes

In a simple type Flexi Pad control block, only registers 1 to 6 can be used for operations. There are no "bank" operations.
For registers 7 to 250, use the numeric keypad control block.

Recalling a Macro Register and Executing a Macro

Executing a macro in normal execution mode

1 In the simple type Flexi Pad control block, press the [MCRO] button, turning it on.

This assigns the Flexi Pad control block to macro operation.
The numeric display shows the number of the last recalled register.
The buttons of the memory recall section show the selected register status.
Lit orange: register holding macro data

Lit yellow: last recalled register
Off: empty register

2 Press the button in the memory recall section showing the register to be recalled.

The button you pressed lights yellow, the macro register is recalled, and the macro is executed. During the macro execution, the button pressed remains yellow, but flashes, and when the macro execution completes it changes to permanently lit. The numeric display shows the selected register number.

Notes

- Only one macro can be executed at a time.
- If the same register is recalled again during macro execution or when the macro is paused, the following operation depends on a setting in setup. *For details of the settings, see "Setting the Macro Execution Mode" (page 606)*
- Individual events registered in a macro are executed according to the setup settings. If you change the setup settings, the content of the macro may not be played back.
- During macro execution, if you switch the control panel to macro editing mode, the macro currently being executed stops.
- It is not possible to execute a macro during macro editing.

Executing a macro in normal execution mode (with pause events set)

When the macro execution is paused, the [TAKE] button is assigned to the simple type Flexi Pad memory recall section.
Press the button to restart macro execution.

Executing a macro in step execution mode

After recalling the macro register, to execute a macro in step execution mode *(see page 572)*, use the following procedure.

1 In the simple type Flexi Pad control block, press the [MCRO] button, turning it on.

This assigns the Flexi Pad control block to macro operation.

2 Press the button in the memory recall section showing the register to be recalled.

3 Press the [TAKE] button.

This executes one event within the macro, then stops.

The number of events executed, as shown in the memory recall section status display, is incremented by one.

4 Repeat step **3**, executing the macro event by event.

When all events in the macro have been executed, the [TAKE] button goes off.

Creating and Editing a Macro


Creating a macro

1 In the simple type Flexi Pad control block, press the [MCRO] button, turning it on.

This assigns the Flexi Pad control block to macro operation.

2 While holding down the [MCRO] button in the Flexi Pad control block, press the button in the memory recall section showing the desired register name.

This assigns the Flexi Pad control block to macro editing.
As an example, when register 1 is specified, the memory recall section buttons appear as in the following figure.

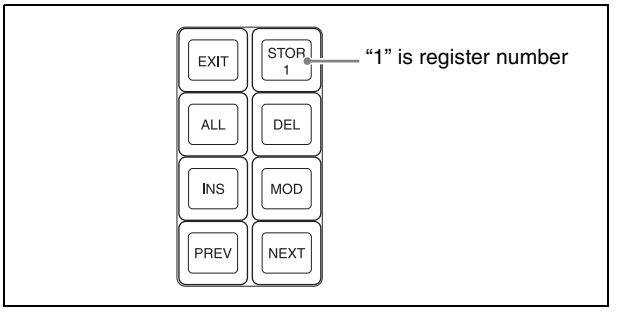

3 Carry out the control panel operation to be registered as an event in the macro.

For details of the events that can be registered, see "Events" (page 496).

Notes

In the Flexi Pad control block, it is not possible to set a pause event. To set a pause event, use the numeric keypad control block.

4 Press the [INS] button.

This registers the operation carried out in step **3** as an event within the macro.

5 Repeat steps **3** and **4** to register the required events in the macro.

The numeric display shows the last registered event position, and the total number of events.

6 Press the [STOR 1] button in the memory recall section.

This saves the created macro in the register and ends the macro editing mode; the [MCRO] button lights amber.

Notes

- During macro editing, if you press any of the mode selection buttons in the Flexi Pad control block other than [MCRO] button (the [WIPE] button, [DME] button, and so on), the executed operation is also registered as an event. In this case, the [MCRO] button stays lit red.
- While carrying out macro editing in the Flexi Pad control block, pressing a button to which a macro attachment is set does not execute the macro.
- In the simple type Flexi Pad control block, it is not possible to undo a macro save.

Specifying an edit point

1 In the Flexi Pad control block, press the [MCRO] button, turning it on.

This assigns the Flexi Pad control block to macro operation.

2 While holding down the [MCRO] button in the Flexi Pad control block, press the button in the memory recall section showing the desired register name.

3 Specify the edit point by the following operation.

- To move the edit point to the event immediately following the current macro event (the macro event specified as the current edit point), press the [NEXT] button.
- To move the edit point to the event immediately preceding the current macro event, press the [PREV] button.

Inserting an event

To add an event to an already created macro, use the following procedure.

1 Specify the edit point *(see page 509)*.

2 Carry out the event to be added on the control panel.

For details of events that can be registered, see "Events" (page 496).

3 In the memory recall section, press the [INS] button.

This adds the new event after the event specified in step **1**.

Modifying an event

1 Specify the edit point *(see page 509)*.

2 Carry out the event you want to modify on the control panel.

3 Press the [MOD] button.

This modifies the event at the specified edit point as carried out in step **2**.

Deleting an event

1 Specify the edit point *(see page 509)*.

2 Press the [DEL] button.

This deletes the event specified in step **1**.

Deleting all events within a macro register

1 Specify the edit point *(see page 509)*.

2 Press the [ALL] button, lighting it green.

3 Press the [DEL] button.

Saving a Macro


In the memory recall section, press the [STOR x] (x=register number) button to save the edited macro in a register.

To return to the state before editing, without saving the macro editing results

Press the [EXIT] button to recall the same register again. This returns to the state before editing, without saving the macro editing results.

Macro Operations in the Multifunction Flexi Pad Control Block

This section describes macro operations carried out in the Multifunction Flexi Pad control block.
Use the following buttons.

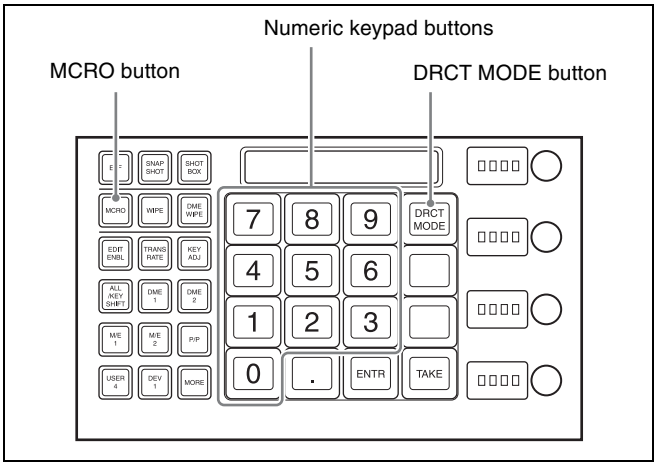

Recalling a Macro Register and Executing a Macro


1 Press the [MCRO] mode selection button, turning it on.

This switches the Multifunction Flexi Pad control block to macro operation mode.

2 Enter the register number with the numeric keypad buttons, and press the [ENTR] button to recall the register.

3 Press the [DRCT MODE] button to switch to the direct recall mode in which a macro can be recalled with the buttons in the memory recall section.

The button indications in the memory recall section change as shown in the following illustration.

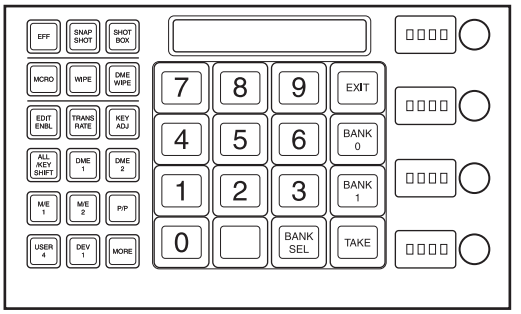

4 Use one of the following operations to select the bank.

To select bank 0: Press the [BANK0] button.
To select bank 1: Press the [BANK1] button.
To select any of banks 0 to 9: Press the [BANK SEL] button, then press the desired bank button (any of [0] to [9]).

This selects the bank, and the buttons in the memory recall section show the macro register state as follows.
Lit yellow: Last recalled register
Lit orange: Register holding macro data
Off: Empty register

5 Press the button for the number of the register to be recalled.

The button you pressed lights yellow, and the macro held in the corresponding register is recalled and executed.
The button you pressed flashes yellow as the macro execution starts, and returns to constantly lit yellow when the execution ends.
The alphanumeric display shows the number of the selected register.

Notes

- You can only execute one macro at a time.
- If the same register is recalled again during macro execution or when the macro is paused, the following operation depends on a setting in setup.
  For details of the settings, see "Setting the Macro Execution Mode" (page 606).
- The individual events registered in the macro are executed according to the setup settings. If you change the settings in setup, the registered content may not be reproduced.
- During macro execution, if you switch the control panel to macro editing mode, this stops the executing macro.
- It is not possible to execute a macro during macro editing.
- While executing a macro with the Flexi Pad control block, or with a button with a macro attachment set if you recall another macro with the Multifunction Flexi Pad control block, the following operation depends on a setting in setup *(see page 606)*.

Macro execution modes

You can execute a macro in normal execution mode or step execution mode.

Normal execution mode: In this mode the macro events are automatically executed in sequence. However, if there is a pause event set at some point, execution pauses at that point. Then pressing the [TAKE] button in the memory recall section resumes execution.


Step execution mode: The macro events are executed one at a time with pauses in between. Execute the events in sequence by repeatedly pressing the [TAKE] button.

You can select normal execution mode or step execution mode by a selection in the Setup menus *(see page 606)*.

Creating and Editing a Macro

To create or edit a macro, first recall the register in which the created macro will be saved, or the register holding the macro to be edited, then press the [EDIT ENBL] button. The [MCRO] button and [EDIT ENBL] button light red, and the memory recall section switches to the macro editing mode as shown in the following illustration.

For the method of recalling an empty register, see "Recalling a Macro Register and Executing a Macro" (page 505).

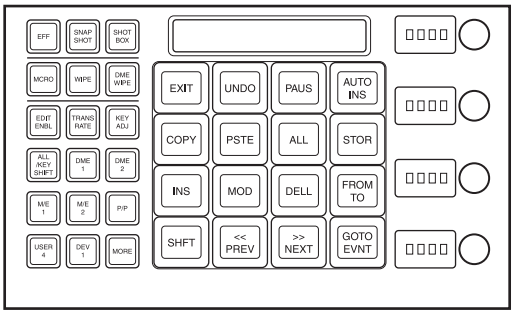

In this mode, you can use the following buttons for macro creation, editing, saving, and deletion.

[EXIT] button: Forcibly exit editing mode.

[UNDO] button: Undo the last macro event insertion, modification, deletion, paste, or other operation.

[PAUS] button: Insert a pause event *(see page 503)*.

[AUTO INS] button: Toggle auto insert mode on or off *(see page 500)*.

[COPY] button: Copy a macro event *(see page 502)*.

[PSTE] button: Paste a macro event *(see page 503)*.

[ALL] button: Select all macro events *(see page 502)*.

[STOR] button: Save the macro *(see page 503)*.

[INS] button: Insert a macro event *(see page 501)*.

[MOD] button: Modify a macro event *(see page 502)*.

[DEL] button: Delete a macro event *(see page 502)*.

[FROM TO] button: Switch to the mode for entering a value range with the numeric keypad *(see page 502)*.

[SHFT] button: Move a macro event *(see page 502)*.

[<< PREV] button: Move the edit point to the previous event *(see page 509)*.

[>> NEXT] button: Move the edit point to the next event *(see page 509)*.

[GOTO EVNT] button: Switch to the mode for specifying an event to move to with the numeric keypad *(see page 501)*.

Macro Editing Using Menus

Using any of the menus in the following table, you can edit macro registers and macro events.

Menu	Function	Operations
Register menu (macro register editing)	Carry out macro register editing.	• Locking a register • Copying a register • Deleting a register • Naming a register
On Line Edit menu (online editing of macro events)	Edit events in a macro register, using the control panel and menus.	• Inserting an event • Deleting an event • Modifying an event
Off Line Edit menu (offline editing of macro events)	Edit events in a macro register, on the hard disk, or on a memory card, using the menus.	• Inserting an event • Adding an event • Deleting an event • Creating a new macro

Macro Register Editing

You can display the current state of a macro register using the Macro >Register menu.

The items displayed are the same as under *"Effect Status Display" (page 468)*, with the exception that the region name is not displayed and that the total number of macro events saved in the register is displayed.

In the Macro >Register menu, you can do the following editing operations on macro registers.

- **Lock:** Write-protect the contents of the register.
- **Copy:** Copy the contents of one register to another register.
- **Delete:** Delete the contents of a register.
- **Name:** Attach a name to a register.

The operations for macro register editing are the same as those for effect register editing *(see page 468)* except the region selection operation, which is not necessary for macro register editing.

Online Editing of Macro Events

Using the On Line Edit menu, you carry out online editing of macro events.

In the On Line Edit menu, you can check the control panel operating sequence in the menu. You can also carry out editing using the control panel and menu.

To display the On Line Edit menu

1 Recall the macro register (1 to 250) you want to edit with the control panel, and select the macro editing mode [1].

1) With the numeric keypad control block, keyframe control block, Flexi Pad control block, or Multifunction Flexi Pad control block assigned to macro editing *(see step **2** in "Specifying an edit point" (page 501), step **3** in "Creating and Saving a Macro" (page 506), step **2** in "Creating a macro" (page 508)*, and step **1** in *"Recalling a Macro Register and Executing a Macro" (page 507)).*

2 In any of the following menus, select the same register as the register recalled in step **1**, and press [On Line Edit] in the button area.


- Macro >Register >Lock menu
- Macro >Register >Delete menu
- Macro >Register >Rename menu
- File >Shotbox, Macro >Macro >File Edit menu

The On Line Edit menu appears, and you can now carry out online editing of the events held in the recalled register. Meanwhile, the control block of the control panel operated in step **1** is assigned to control editing operations.

Notes

In the following cases, [On Line Edit] is disabled, and it is not possible to display the On Line Edit menu.
- When the recalled register and the register selected in the menu are different.
- When a device other than [Register] is selected ([HDD] or [Memory Card]) in the File >Shotbox, Macro >Macro >File Edit menu.
- If the recalled register is locked.

On Line Edit menu

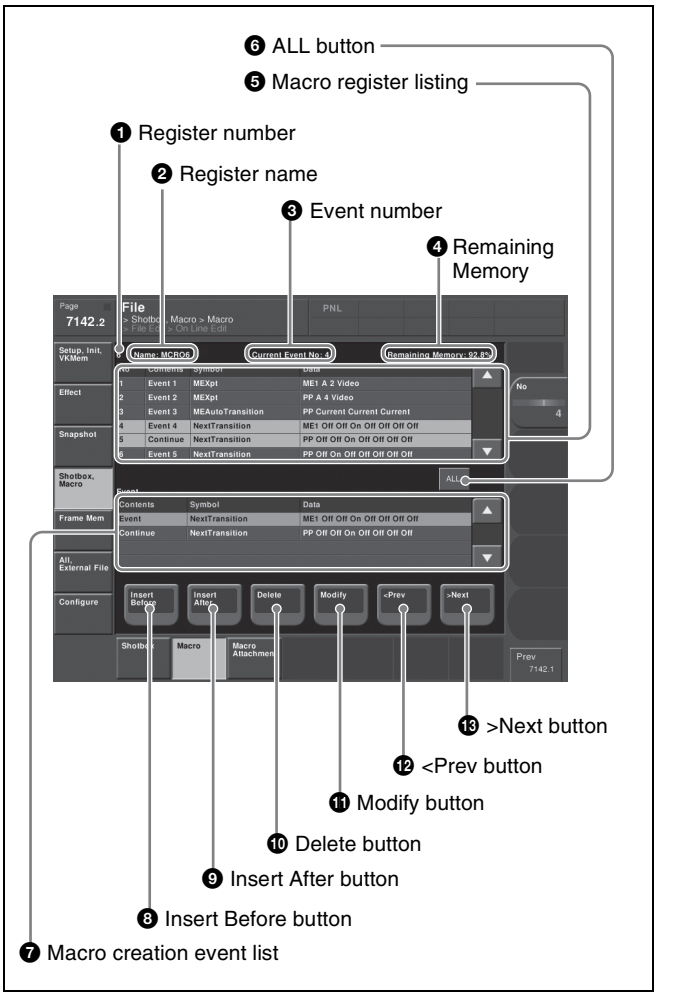

❶ Register number
Shows the number of the register (1 to 250) being edited.

❷ Register name
Shows the name of the register being edited.

❸ Event number
Shows the current event number. When the [FROM TO] button in the keyframe control block is pressed to select a range of events, this appears as a range, "From X To Y." The event number reflects the position of the cursor in the macro register listing.

❹ Remaining Memory
Shows the percentage of memory still available for recording events.

❺ Macro register listing
When a macro is stored in the register, this shows a list of the macro events. Each macro event consists of the following components, which you can check in the list.
- **Contents:** Identifies this as an Event statement, Continue statement, or event number
- **Symbol:** Type of event (ASCII character string)

• **Data:** Event details in the form of parameters and data

For details of the event components, see "Macro File Editing Rules" (page 665).

The cursor shows the current event in the list, in reverse video. You can turn knob 1 to scroll the list, but this does not change the cursor position. Depending on the switcher status, the cursor color changes as follows.
• **Yellow:** in macro editing mode
• **Gray:** when the editing mode is exited by a control panel operation
• **Blue:** during macro execution

❻ ALL button
Selects all events in the macro register listing.

❼ Macro creation event list
Shows the event being created or executed in the control panel.

❽ Insert Before button
Inserts a created event immediately before the selected event in the macro register listing.

❾ Insert After button
Inserts a created event immediately after the selected event in the macro register listing.

❿ Delete button
Deletes the selected event in the macro register listing.

⓫ Modify button
Replaces the selected event in the macro register listing with a created event.

⓬ <Prev button
Moves the cursor to the event immediately before the selected event in the macro register listing.

⓭ >Next button
Moves the cursor to the event immediately after the selected event in the macro register listing.

Carrying out online editing of macro events

In the On Line Edit menu, you can carry out the following editing operations on the events in the macro register.
• **Insert:** Insert a macro event.
• **Delete:** Delete a macro event.
• **Modify:** Modify a macro event.

Notes

It is not possible to save editing results using this menu alone. Carry out the necessary control panel operations to save the edited register.

To insert an event

1 On the control panel, if auto insert mode is on, switch it off.

2 On the control panel, create a macro event.

The created event appears in the macro creation event list.

For more details of the display, see "Macro File Editing Rules" (page 665).

3 In the macro register listing, press [<Prev] or [>Next] to select the position where you want to insert the created event.

4 Carry out either of the following.

To insert before the event selected in the list: Press [Insert Before].
To insert after the event selected in the list: Press [Insert After].
This inserts the created event either before or after the specified event.

Notes

In the following cases, [Insert Before] and [Insert After] are disabled, and it is not possible to insert the event.
• If the memory or register is full.
• The size of the created macro event is larger than the memory or register space available.
• When multiple events are selected.
• When the number of events has reached 99.
• When not in macro editing mode. [1)]

1) While a macro is being executed on the control panel, when macro saving has been executed, or when the [EXIT] button in the Flexi Pad control block or Multifunction Flexi Pad control block has been pressed

5 Operate the control panel to save the editing result.

To delete an event

1 In the macro register listing, press [<Prev] or [>Next] to select the event you want to delete.
To select all events in the register, press [All].

2 Press [Delete].

Notes

If not in macro editing mode [1)], [Delete] is disabled, and it is not possible to delete the selected event.

1) While a macro is being executed on the control panel, when macro saving has been executed, or when the [EXIT] button in the Flexi Pad control block or Multifunction Flexi Pad control block has been pressed

3 Operate the control panel to save the editing result.

To modify an event

1 On the control panel, if auto insert mode is on, switch it off.

2 In the macro register listing, press [<Prev] or [>Next] to select the event you want to modify.

3 On the control panel, modify the macro event.

The modified event appears in the macro creation event list.

For more details of the display, see "Macro File Editing Rules" (page 665).

4 Press [Modify].

Notes

If not in macro editing mode [1], [Modify] is disabled, and it is not possible to modify the event.

1) While a macro is being executed on the control panel, when macro saving has been executed, or when the [EXIT] button in the Flexi Pad control block or Multifunction Flexi Pad control block has been pressed

5 Operate the control panel to save the editing result.

Offline Editing of Macro Events

Using the Off Line Edit menu, you carry out offline editing of macro events.
In the Off Line Edit menu, you can carry out editing in the menu only, unrelated to operation of the control panel.

To display the Off Line Edit menu

In any of the following menus, select the register or device holding the macro you want to edit, and press [Off Line Edit] in the button area.


- Macro >Register >Lock menu
- Macro >Register >Delete menu
- Macro >Register >Rename menu
- File >Shotbox, Macro >Macro >File Edit menu

This recalls the selected macro register or macro file, and offline editing is now possible.

Notes

If the selected register is locked, [Off Line Edit] is disabled, and it is not possible to display the Off Line Edit menu.

Off Line Edit menu

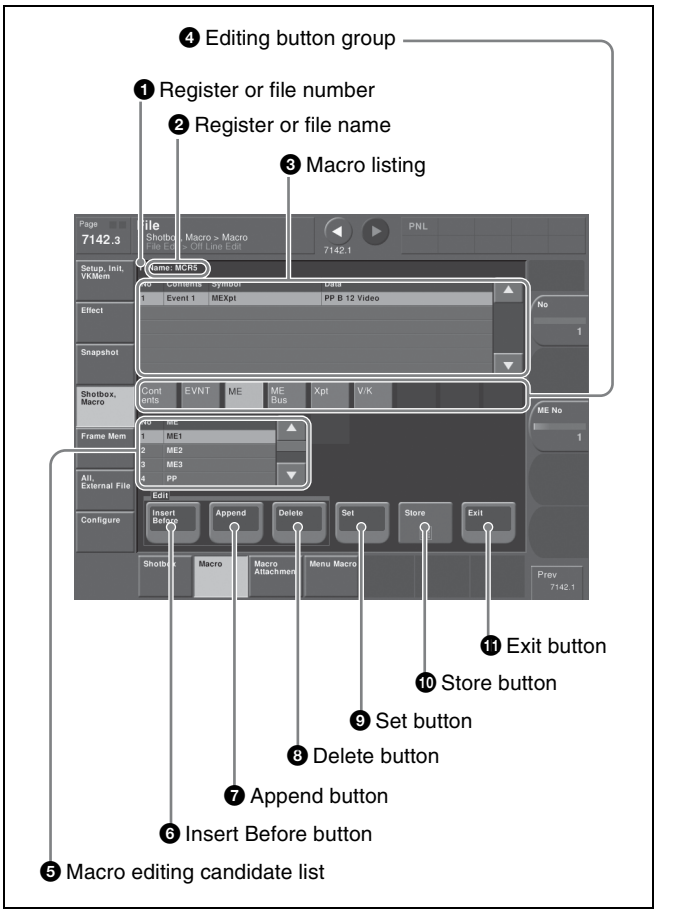

❶ Register or file number
Shows the number of the register or file being edited.

❷ Register or file name
Shows the name of the register or file being edited.

❸ Macro listing
Lists the macro events that are saved in the register or file. The cursor moves to the selected event. Each macro event consists of the following components, which you can check in the list.

- **Contents:** Event statement, Continue statement, comment (#), or event number, as selected in the editing button group [Contents]
- **Symbol:** Event type (ASCII character string), as selected in the editing button group [EVNT]
- **Data:** Parameters and data as set in the editing button group

For more details of the event components, see "Macro File Editing Rules" (page 665).

❹ Editing button group
This row of buttons shows the components of an event. To carry out event editing: (1) press an editing button, then (2) select an item from the list of macro editing candidates, and repeat this process as required.

❺ Macro editing candidate list
Shows the list of editing candidates for the selection from the editing button group.

❻ Insert Before button
Inserts immediately before the event selected in the macro listing.

❼ Append button
Adds an empty row at the end of the macro listing.

❽ Delete button
Deletes the event selected in the macro listing.

❾ Set button
Reflects the item selected in the macro editing candidate list, in the macro listing and editing buttons.

❿ Store button
Saves the results of the macro register or macro file editing.

⓫ Exit button
Closes the Off Line Edit menu without saving the results of the macro register or macro file editing, and returns to the File Edit menu.

Carrying out offline editing of macro events

In the Off Line Edit menu, you can carry out the following editing operations on the events in the macro register or macro file.
- **Insert:** Insert a macro event.
- **Add:** Add a macro event.
- **Delete:** Delete a macro event.

You can also create a new macro.

To insert an event

1 In the macro listing, select the event immediately after the position where you want to insert an event.

2 Press [Insert Before].

This inserts a blank row before the event selected in step **1**.

3 Press [Contents] in the editing button group.

The following event types appear in the macro editing candidate list.
- **Event:** Event
- **Continue:** Event continuation
- **#:** Comment

For details of the items, see "Macro File Editing Rules" (page 665).

4 Select the desired item from the macro editing candidate list, and press [Set].

The selected item appears at the event insertion position in the macro listing, as an event component. Additionally, in the leftmost blank position of the editing button group (to the right of [Contents]), a button appears, corresponding to the item in the macro editing candidate list. For example, if "Event" is selected, an [EVNT] button appears.



5 In the editing button group, press the button that has just appeared.

The item corresponding to the button appears in the macro editing candidate list.
If you press [EVNT], the symbol indicating the event contents appears *(see page 667)*.

6 Select the desired item from the macro editing candidate list, and press [Set].

At the event insertion position of the macro listing, the selected item is added as an event component. Additionally, in the next blank position of the editing button group, a button appears, corresponding to the item in the macro editing candidate list. For example, if "MEAutoTransition" is selected, a button for the parameters and data for the MEAutoTransition appears.



Notes

If you select an item from the macro editing candidate list, be sure to press [Set]. If [Set] is not pressed, the selection is not confirmed.

7 Repeat steps **5** and **6**, to edit the event components.

At the event insertion position of the macro listing, the confirmed item is added as an event component.
To further add an event, repeat steps **1** to **7**.

To close the Off Line Edit menu without saving the editing results
Press [Exit] to return to the menu that was on the screen immediately before the offline editing.

8 Press [Store].

The numeric keypad window appears.

9 Enter the register number as required, and press [Enter].

The current macro is stored in the register.

The menu screen switches to the menu that was on the screen immediately before the offline editing.

To append an event

This adds an event at the end of the macro.

1 Press [Append].

A blank row is added at the end of the macro listing.

2 Carry out steps **3** to **8** of the previous item, "To insert an event," to edit an event.

To delete an event

1 In the macro listing, select the event you want to delete.

2 Press [Delete].

This deletes the selected event.
If a deleted Event statement is followed by a Continue statement, the Continue statement is converted to an Event statement.

To close the Off Line Edit menu without saving the editing results
Press [Exit] to return to the File Edit menu.

3 Press [Store].

This saves the results of the macro register or macro file editing, and returns to the File Edit menu.

To create a new macro

1 From the list in any of the following menus, select an empty register or file, and press [Off Line Edit] in the button area.

- Macro >Register >Lock menu
- Macro >Register >Delete menu
- Macro >Register >Rename menu
- File >Shotbox, Macro >Macro >File Edit menu

The Off Line Edit menu appears.

2 Carry out steps **3** to **8** of the procedure "To insert an event" *(page 515)*, to create an the event.

Macro Attachment Assigning

Macro attachment is a function whereby a macro register is assigned to a control panel button or a particular position of a fader lever, linking the execution of the button function or a fader lever operation with a macro execution.

Setting a macro attachment to a button

Select one of the following three linking modes to make the macro attachment.

Pre-macro: Mode in which the button function is executed after macro execution has completed

Post-macro: Mode in which the macro is executed after carrying out the button function

Macro only: Mode in which the button function is not executed, and the macro only is executed

The selection of pre- or post-macro mode is carried out in the cross-point control block of the PGM/PST bank or the M/E banks. For the macro-only mode, assign the selection function to a utility/shotbox control block button or user preference button, and make the selection by pressing the button. Alternatively, without pressing the button, you can make the selection simply, by simultaneously pressing the pre-macro and post-macro selection buttons in the cross-point control block.

You can assign any one of the 250 macro registers to a button.

For a button whose function is switched by delegation, you can make a separate macro attachment for each function.

For each control panel, you can make up to 1000 macro attachment settings.

The macro attachment setting is possible for the following bus buttons.

Block	Button
Cross-point control block	• Background A row cross-point buttons • Background B row cross-point buttons • Key 1 bus cross-point buttons • Key 2 bus cross-point buttons • Key 3 bus cross-point buttons • Key 4 bus cross-point buttons • Key 5 bus cross-point buttons a) • Key 6 bus cross-point buttons a) • Key 7 bus cross-point buttons a) • Key 8 bus cross-point buttons a) • Utility 1 bus cross-point buttons • Utility 2 bus cross-point buttons • DME external video bus cross-point buttons • DME utility 1 bus cross-point buttons • DME utility 2 bus cross-point buttons • Memory recall buttons b) • Buttons set to “Inhibit” • Auxiliary bus cross-point row c)
Auxiliary bus control block	• Cross-point button1st row d) • Cross-point button 2nd row d)
Keyframe control block	• [RUN], [REWIND] and [FF] buttons • [NORM], [REV], and [NORM/REV] buttons
Device control block (trackball, joystick)	Buttons assigned the same function as the [PLAY], [CUE], [STOP], and [START TC] buttons for VTRs/disk recorders/Extended VTRs/frame memory clips
Device control block (search dial)	[PLAY], [CUE], [STOP] and [START TC] buttons
Downstream key control block	• [DSK1 ON] to [DSK8 ON] buttons e) g) • [KEY1 ON] to [KEY8 ON] buttons a) e) • [TAKE] button e) • [MIX], [WIPE], [DME], and [CUT] buttons
Transition control block	Fader and buttons assigned with the following functions. • Next transition selection • Transition type selection • Wipe direction selection • Auto transition, cut • Device operation (CUE, PLAY, STOP) • Pattern limit on/off • Independent key transition type selection • Independent key transition auto-transition, cut e)
Fade to black control block	[FTB] button
Downstream key/fade to black control block	• [DSK1 ON] and [DSK2 ON] buttons e) • [DSK3 ON] to [DSK8 ON] buttons a) e) • [KEY1 ON] to [KEY8 ON] buttons a) e) • [AUTO TRANS] button e) • [FTB] button
Utility/shotbox control block	Memory recall buttons
Menu control block	[PREFS 1] to [PREFS 16] buttons
Independent key transition control block (simple type) f)	• [KEY1 ON] to [KEY8 ON] buttons e) g) • [DSK1 ON] to [DSK8 ON] buttons e) g) • [TAKE] button e) • [MIX], [WIPE], [DME], and [CUT] buttons
Multifunction Flexi Pad control block	[AUTO TRANS] e), [KEY ON] e), [RUN], [REWIND], [NORM], [REV] and [NORM/REV] buttons

a) Assignment is required
b) Only when key row is operated in the utility/shotbox mode
c) When the auxiliary control mode or Key/AUX delegation mode is on.
d) Cross-point buttons of the bus assigned by AUX delegation setting.
e) In the case of an event that inserts or deletes a key by an independent key transition, the key state at the time of event registration (inserted or not inserted) is also saved in the macro. When the macro is executed, the event is only replayed if the key state matches the saved state. (Example: For a macro with an event that deletes a key, when the macro is executed, if the key is inserted it is deleted, but otherwise nothing occurs as concerns keying.)
f) When there are a number of control blocks on the control panel, and the keys assigned to them in setup are the same, then the macro attachment settings for the above buttons are the same.
The keys include cases such as “Key1,2” assigned to PGM/PST being the same as “DSK1,2”, “Key1,2” assigned to M/E-1 being the same as “M/E-1 Key1,2”, and so on.
g) KEY5 to KEY8 and DSK5 to DSK8 require an assignment.

Notes

- After setting a macro attachment to a cross-point button in the auxiliary bus control block, if in the Setup menu you change the assignment of buses to the AUX delegation buttons, the macro attachment setting disappears.
- After setting a macro attachment to a button for which you can perform function replacement or function assignment, if you change the function assignment to the button, the macro attachment setting disappears.
- After setting a macro attachment to a cross-point button in the cross-point control block, if you change the function assignment to the button, the macro attachment setting disappears.

Enabling and disabling macro attachment

You can temporarily disable the macro attachment settings. When a macro attachment is disabled, pressing the button does not cause execution of the assigned macro.

You can enable and disable macro attachments for the PGM/PST bank and M/E banks individually.

Setting a macro attachment to a fader lever

You can set a macro attachment to any particular position of a fader lever in the transition control block.

Notes

- In macro-only mode it is not possible to set a macro attachment.
- It is not possible to set a macro attachment to a fader lever in the keyframe control block or downstream key control block.
- For a split fader, you can set a macro attachment to the main split fader.

Clearing the macro attachments

You can clear all of the macro attachments in a single operation.

Displaying the macro attachment list

You can display the macro attachment settings in the form of a list in the menu display to check them.

Setting and Canceling a Macro Attachment


Setting a macro attachment to a button

This section describes the example of setting a macro attachment for the background A row cross-points.

For details, see "Setting a macro attachment to a button" (page 516) for the buttons for which a macro attachment can be set.

1 Recall the macro register (1 to 250) that you want to assign to the button *(see page 500)*.

2 To set in pre macro mode, hold down the [PRE MCRO] button in the cross-point control block, and to set in post macro mode, hold down the [POST MCRO] button, and then press the desired button in the background A row.

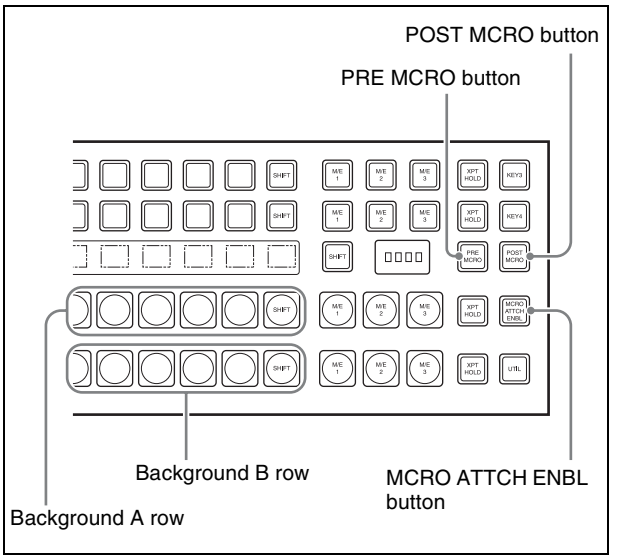

The cross-point button you pressed flashes amber, and the register you recalled in step **1** is assigned to the button.

If you make both pre macro and post macro settings for the same button

The later setting is valid.

To set a macro attachment without changing cross-points

When you set a macro attachment to a cross-point button, you can make the setting without changing the bus cross-points. Carry out this selection in the Engineering Setup >Panel >Operation menu *(see page 606)*.

To make a macro attachment setting in macro only mode

Notes

To carry out this operation, it is first necessary to assign the "Macro Only Set" function to the user preference buttons in the menu control block or the utility/shotbox control operation. Carry out this assignment in the Engineering Setup >Panel >Prefs/Utility menu *(see page 589)*.

To make a macro attachment in macro only mode, use the following procedure.

1 Recall the macro register (1 to 250) that you want to assign to the button *(see page 500)*.

2 Press the button to which [MCRO ONLY SET] is assigned, turning it on.

3 Hold down the cross-point control block [PRE MCRO] button or [POST MCRO] button, and press the desired button in the background A row.

The cross-point button you pressed flashes green, and the register you recalled in step **1** is assigned to the button. The [MCRO ONLY SET] button goes off. Without switching to macro only mode in step **2**, if you hold down the [PRE MCRO] and [POST MCRO] buttons together and press the desired button, it is possible to set a macro attachment in macro only mode for that button.

To check macro attachment settings

Hold down the [PRE MCRO] button or [POST MCRO] button. While it is held down, buttons for which macro attachments are set flash as follows.

While the [PRE MCRO] button is held down:

- Buttons set in pre macro mode: flash amber
- Buttons set in macro only mode: flash green

While the [POST MCRO] button is held down:

- Buttons set in post macro mode: flash amber
- Buttons set in macro only mode: flash green

Setting a macro attachment to a fader lever

You can set a macro attachment to any particular position of a fader lever in the transition control block.

Notes

- In macro only mode it is not possible to set a macro attachment.
- It is not possible to set a macro attachment to a fader lever in the keyframe control block or downstream key control block.
- For a split fader, you can set a macro attachment to the main split fader.

1 Recall the macro register (1 to 250) that you want to assign to the fader lever *(see page 500)*.

2 Move the fader lever to the position where you want to set the macro attachment.

3 Hold down the [PRE MCRO] or [POST MCRO] button [1)] in the cross-point control block, and press the [LIMIT SET] or [PRIOR SET] button in the control block containing the fader lever operated in step **2**.

1) Only when setting a macro attachment to the start point or end point of fader lever operation, use [PRE MCRO] and [POST MCRO] in distinction, as follows.
To set the operation start point (0%): hold down [PRE MCRO] for the operation.
To set the operation end point (100%): hold down [POST MCRO] for the operation.

This assigns the register recalled in step **1** to the fader lever position selected in step **2**.

To check a macro attachment setting

Hold down the [PRE MCRO] or [POST MCRO] button in the cross-point control block. While it is held down, the fader lever position where the macro attachment is set appears in the following places.

- **Transition indicator in the transition execution section:** The indicator lights at the position where the macro attachment is set.
- **Transition rate indication in the transition execution section:** This shows the fader lever position where the macro attachment is set, as a percentage value (fader lever start position as 0%, end position 100%).

Removing macro attachment settings

To cancel a macro attachment to a button

Hold down the [PRE MCRO] button or [POST MCRO] button, and press a button that is flashing in the background A row. The button for which the macro attachment is set stops flashing and goes off, and this removes the setting.

To cancel a macro attachment to a fader lever

Hold down the [PRE MCRO] or [POST MCRO] button in the cross-point control block, and press the [LIMIT SET] or [PRIOR SET] button in the control block containing the fader lever having the macro attachment set.

To delete individual macro attachment settings

You can delete individual settings of a macro attachment assigned to a button.

1 In the Macro menu, select VF2 ‘Attachment.’

The Attachment menu appears.

2 In the list, select the relevant data by any of the following methods.

- Press directly on the menu macro register configuration list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Number to be selected	1 to maximum value

3 Press [Delete].

A confirmation message appears.

4 To confirm the deletion, select [Yes]. To cancel, select [No].

To remove all macro attachment settings in a single operation

1 In the Macro menu, select VF2 ‘Attachment.’

2 Press [All Clear].

A confirmation message appears.

3 Select [Yes].

Switching between button number mode and pair number mode

When assigning a macro attachment to a cross-point button, you can select the mode as either by button number or by pair number (video and key).

Notes

If you change the mode using the following procedure, all macro attachment data relating to cross-point buttons is lost.

1 In the Macro menu, select VF2 'Attachment.'

The Attachment menu appears.

2 In the <Xpt Attachment Mode> group, select one of the following.

Button Mode: Button number mode. Assign an attachment combination of bus and button numbers.

Pair Mode: Pair number mode. Assign an attachment combination of bus and pair numbers.

A confirmation message appears.

3 To confirm changing the mode, select [Yes]. To cancel, select [No].

Notes

- In pair number mode, carry out operations as follows.
  - When a single pair number is assigned to multiple cross-point buttons, pressing any of them executes the macros of all cross-point buttons to which the same pair number is assigned. Further, if you delete any of these assignments, this deletes all assignments to the same pair number.
  - If you assign a pair number to a different cross-point button, the attachment settings are also transferred to the new cross-point button.
- When macro attachment data is loaded to overwrite existing data, this also changes the button number mode or pair number mode setting.

Displaying the Macro Attachment List

In the Macro >Attachment menu, you can display the macro attachment list to check the macro attachment settings.

The macro attachment list includes the following columns.

- **Block:** Shows the names of control panel blocks.
- **Button:** Shows the names of macro attachment assigned buttons (of up to 30 characters).
- **Reg:** Shows the names of assigned registers.
- **Name:** Shows the names of macro registers.
- **Mode:** Shows the names of macro modes (Pre/Post/Only/--- [1]).

Above the list is shown the names of the block and macro attachment assigned button currently selected in the list.

1) When no macro mode is set

For details of the macro modes, see "Setting a macro attachment to a button" (page 516).

For details of the macro attachment list display, see "About the Macro Attachment List Display" (page 673) in Appendix.

Moving quickly within the macro attachment list from one block to another

When you are viewing the macro attachment settings for a block in the macro attachment list, you can move quickly from the current block to another block to check the settings for that block by pressing the following buttons in the <Block Select> group.

- **P/P**: Move to a block in the PGM/PST bank.
- **M/E-1:** Move to a block in the M/E-1 bank.
- **M/E-2:** Move to a block in the M/E-2 bank.
- **M/E-3:** Move to a block in the M/E-3 bank.
- **M/E-4:** Move to a block in the M/E-4 bank.
- **M/E-5:** Move to a block in the M/E-5 bank.
- **Aux:** Move to a section in the auxiliary bus control block.
- **Others:** Move to a block/section in a location other than the PGM/PST bank, M/E-1 to M/E-5 banks, and the auxiliary bus control block.

Scrolling the list

To scroll the macro attachment list, do one of the following.

- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Macro attachment settings scrolling	1 to maximum value

Executing a Macro by Macro Attachment

Notes

For execution on any of the M/E and PGM/PST banks, use the [MCRO ATTCH ENBL] button in the cross-point control block. To execute a macro according to a macro attachment set elsewhere, assign "MCRO ATTCH ENBL" to a utility/shotbox control block or user preference button, then use that button.

Executing a macro assigned to a button

1 Depending on the location of the button you want to use, press the [MCRO ATTCH ENBL] button, turning it on.

2 Press the desired button for which a macro attachment has been set.

This recalls the macro register assigned to the button, and the macro is executed as follows, according to the operation mode.

Pre macro mode: The macro is executed first, and then the button function is executed.

Post macro mode: The button function is executed first, and then the macro is executed.

Macro only mode: The button function is not executed, and the macro only is executed.

During macro execution, the button you pressed flashes.

Notes

- It is not possible to execute more than one macro at a time. Therefore, even if you simultaneously press multiple buttons for which macro attachments are set, only one macro is executed.
- If a button is pressed twice during macro execution or when the macro is stopped, or if another macro is recalled, the following operation (stop or continue) depends on a setting in setup.
  For details of the settings, see "Setting the Macro Execution Mode" (page 606).
- Individual events stored in a macro are executed according to the settings in setup. If you change the settings in setup, a saved macro may not have the expected effect.
- During macro execution, if you switch the control panel to macro editing mode, the macro being executed stops.
- During macro editing, pressing a button for which a macro attachment is set does not execute the macro.

To disable macro attachment settings

Depending on the location of the button you want to disable, press the [MCRO ATTCH ENBL] button, turning it off.
In this state, pressing a button for which a macro attachment is set does not execute the macro.

Executing a macro assigned to a fader lever

1 In the cross-point control block for the fader lever on which you want to execute the macro, press the [MCRO ATTCH ENBL] button, turning it on.

2 Move the fader lever from the start position to the end position.

When the fader lever passes the position at which the macro attachment is set, the macro register is recalled, and the macro is executed.

Notes

- Unless you move the fader lever to the end position (completing the travel), it is not possible to execute the macro again.
- When the preset color mix stroke mode is Normal, the first lever operation executes the macro, but the second lever operation does not.
  For details, see "Setting a preset color mix" (page 623).
- If a button is pressed twice during macro execution or when the macro is stopped, or if another macro is recalled, the following operation (stop or continue) depends on a setting in setup *(see page 606)*.
- Individual events stored in a macro are executed according to the settings in setup. If you change the settings in setup, a saved macro may not have the expected effect.
- During macro execution, if you switch the control panel to macro editing mode, the macro being executed stops.
- During macro editing, even if you operate a fader lever with a macro attachment set, the macro is not executed.

To disable a macro attachment setting

In the cross-point control block for the fader lever on which you want to disable the macro, press the [MCRO ATTCH ENBL] button, turning it off.
In this state, operating a fader lever with a macro attachment set does not execute the macro.

Menu Macros

The term “menu macro” refers to the function whereby a sequence of menu operations is saved as data in memory, so that it can be recalled as required to automatically execute the same sequence of operations.
Using any of the menus in the following table, you can edit menu macro registers and menu macro events.

Menu	Function	Operations
Menu Macro Register menu (menu macro register editing)	• Carry out menu macro register editing. • Recall a menu macro register and execute a menu macro.	• Recalling a register and executing a menu macro • Locking a register • Copying a register • Deleting a register • Naming a register
Menu Macro Edit menu (editing of menu macro events)	Edit events in a menu macro register.	• Inserting an event • Deleting an event • Modifying an event

Menu macro registers

The area of memory that holds a menu macro is termed a “menu macro register.” For each control panel there are 99 menu macro registers, numbered 1 to 99. You can manipulate these in the menu macro register menu.

Menu macro events

The events that can be recorded in a menu macro are operations carried out in a menu.

For menu operations which are not recorded in menu macros, see “Menu Operations Not Recorded in a Menu Macro” (page 676).

Menu macro creation and editing

Carry out menu macro creation and editing in the menu.

Executing menu macros

You execute a menu macro after recalling a menu macro register.
You can recall and execute simultaneously. You can also recall and execute a menu macro from a macro recalled on the control panel.

Recalling a Menu Macro Register and Executing a Menu Macro

Menu macro operation is carried out by recalling a menu macro register.


Notes

- Menu macros and macros recalled with a control panel button operate independently. Therefore, to synchronize these, adjustment of the execution timing is required.
- Events saved in a menu macro are executed according to the settings in setup, and therefore if you change the setup settings, it may not be possible to replay an event.
- When two menu macros are recalled successively, the later coming macro is ignored as far as the first macro is being executed.

Recalling a menu macro register

1 In the Macro menu, select VF3 ‘Menu Macro Register’ and HF1 ‘Recall & Run.’

The Recall & Run menu appears.

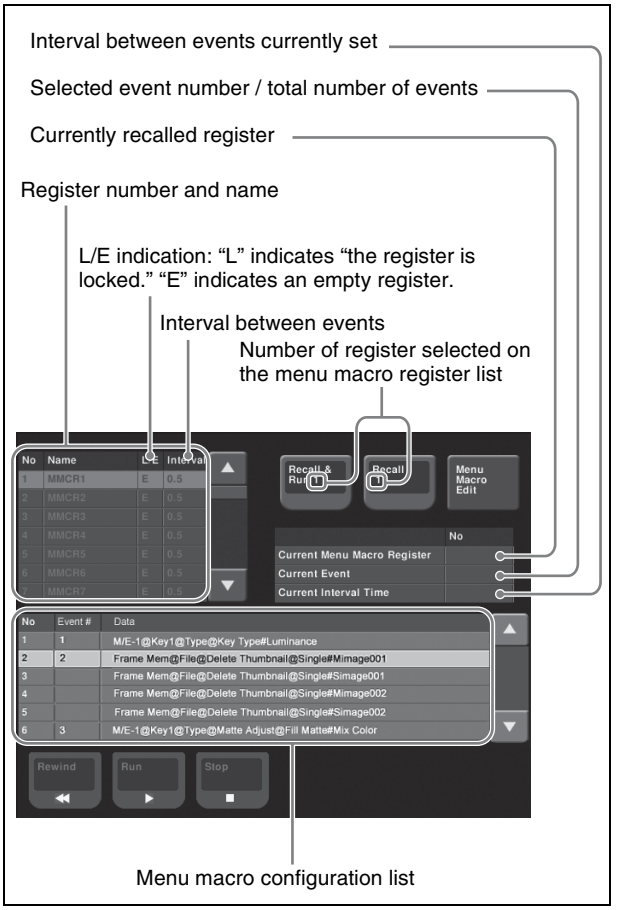

2 Using any of the following methods, select the register to be recalled.

- Press directly on the menu macro register list.
- Press the arrow keys on the right list to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Menu Macro Register	Register selection	1 to 99

3 Press [Recall & Run x] or [Recall x] (x is the number of the register selected in the menu macro register list).

- To execute the menu macro at the same time as recalling the register, press [Recall & Run x].
- To recall the register only, press [Recall x].

Executing a menu macro

In the Macro >Menu Macro Register >Recall & Run menu, check that you are not in macro editing mode, then use the following procedure.

1 Using any of the following methods, specify the event from which you want to execute.

- Press directly on the menu macro register configuration list.
- Press the arrow keys on the right list to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	No	Select start event	1 to maximum value

2 Press [Run].

To stop execution of a macro

Press [Stop].

To move to the start of a menu macro event

Press [Rewind].

Recalling a menu macro register from a macro register

Menu macro recall and execution operations can be saved as events in a control panel macro, and then recalled. If with the control panel in macro editing mode you execute a menu macro, then this operation is recorded as an event.

For details of recalling operations, use the following references, depending on the control panel or menu used.


- Using the numeric keypad control block and the keyframe control block: *page 500*
- Using the standard type Flexi Pad control block: *page 505*
- Using the simple type Flexi Pad control block: *page 507*
- Using the Multifunction Flexi Pad control block: *page 510*
- Using menus: *page 514*

Registering a menu macro in the shortcut menu

1 In the Home >Favorites >Button Edit menu, select a button to register.

2 Press [MenuMacro Set].

The Menu Macro Set menu appears.
The “L/E” indications have the following meanings.
L: The register is locked.
E: The register is empty.

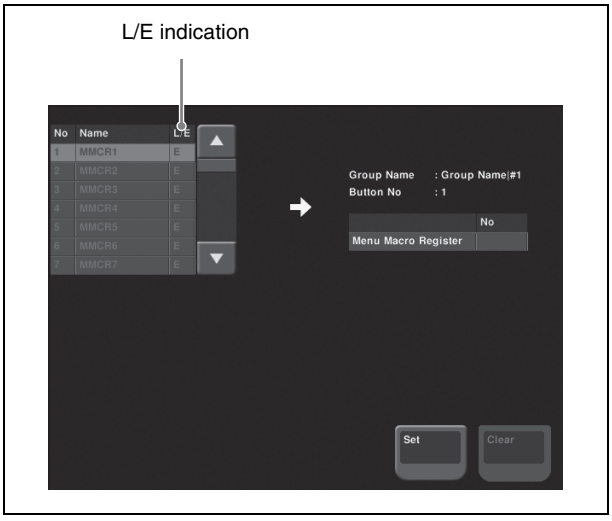

3 In the list on the left, select the button number to be assigned.

4 Press [Set].

Executing a menu macro in the shortcut menu

1 Select the Home >Favorites >Shortcut menu.

The following screen appears.



2 Press the group name button.

3 Press the button to which the menu macro is assigned.

To stop a menu macro during execution
Press [MenuMacro Stop].

Menu Macro Creation and Editing

Create or edit menu macro registers.

Notes

It is not possible to execute a menu macro during editing. To run the macro, first press [Store] to end editing.


Creating a new menu macro

1 In the Macro >Menu Macro Register >Recall & Run menu, select an empty register in the menu macro register list.

For details of the method of operation, see "Recalling a menu macro register" (page 522).

2 Press [Menu Macro Edit].

The menu macro register is recalled, and the system is now in menu macro editing mode.
The Menu Macro Edit menu appears.

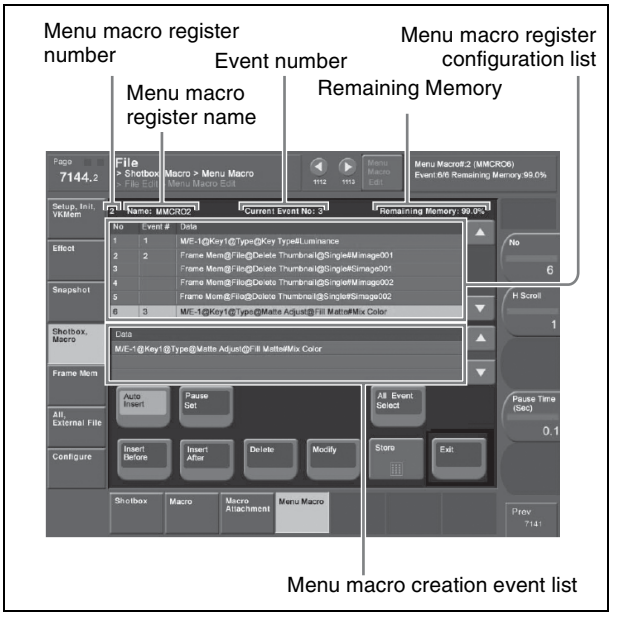

3 If required, press [Auto Insert] to switch the auto insert mode on or off.

In the auto insert mode, when you carry out a menu operation, this is automatically recorded as an event in the menu macro.

4 Create an event (carry out the menu operation you want to record as an event in the menu macro).

For details of menus that can be recorded, see page 522.

- When auto insert mode is on, carrying out a menu operation automatically saves the event in a menu macro.
- When auto insert mode is off, skip to step **5**.

5 When auto insert mode is off, press [Insert Before] or [Insert After] to save the event.

6 Repeat steps **4** and **5**, to record the required events in the menu macro.

7 Turn the knob to input the event execution interval.

Knob	Parameter	Adjustment	Setting values
5	Interval Time (Sec)	Event interval	0.0 to 0.5 (sec)

This value can be set for each menu macro register.

8 Press [Store].

The numeric keypad window appears.

9 Enter the menu macro register number as required, and press [Enter].

The menu macro is saved with the specified number. The menu returns to the state in step **1**.

To set a pause duration
During menu macro editing, use the following procedure.

1 Enter the pause duration by turning the knob.

Knob	Parameter	Adjustment	Setting values
4	Pause Time (Sec)	Pause duration	0.1 to 99.9 (sec)

2 Press [Pause Set].

- When auto insert mode is on, this sets the pause duration, and inserts the pause event.
- When auto insert mode is off, use the same operations as in step **5** of *"Creating a new menu macro" (page 524)* to save the event.

Editing a menu macro

To edit the content of a menu macro, use the following procedure.

1 In the Macro >Menu Macro Register >Recall & Run menu, select the desired register on the menu macro register list *(see page 522)*.

2 Press [Menu Macro Edit].

The Menu Macro Edit menu *(see previous figure)* appears. The menu macro register is recalled, and the system is now in menu macro editing mode.

3 Select the event you want to edit.

- Press directly on the menu macro register configuration list.
- Press the arrow keys on the right list to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Event number	1 to maximum value

4 If required, press [Auto Insert] to switch the auto insert mode on or off.

5 Carry out the editing.

When auto insert mode is on: Edit using menu operation to automatically insert after the selected event.

When auto insert mode is off: Perform one of the following.

- To overwrite the selected event, carry out the new menu operation, then press [Modify].
- To insert an event before the selected event, carry out the new menu operation, then press [Insert Before].
- To insert an event after the selected event, carry out the new menu operation, then press [Insert After].

To delete the selected event

Press [Delete].

To delete all events, select [All Event Select] and press [Delete].

6 With the same operation as step **7** of *"Creating a new menu macro" (page 524)*, change the event execution interval.

7 With the same operation as steps **8** and **9** of *"Creating a new menu macro" (page 524)* save the register.

Exiting the Menu Macro Edit menu without saving the results of editing

In the Menu Macro Edit menu, press [Exit].

Scrolling event display using the menu macro listing

1 Move the cursor to the event you want to display.

2 Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	H Scroll	Scroll the characters in the "Data" field.	1 to maximum value

About the menu macro editing mode display

If while in menu macro editing mode you switch to another menu, the display is as shown in the following figure.

Screen when the keyframe status is displayed

The keyframe status section appears as follows.

- Menu macro register number
- Menu macro register name
- Current event number / total number of events
- Remaining memory


Menu shortcut button to Menu Macro Edit menu



The Previous page button shows one of the following:

- When [Auto Insert] is on, "Menu Macro Auto Insert" appears.
- When [Auto Insert] is off, "Menu Macro Insert After" appears, but operates as [Insert After].

Screen when the keyframe status is not displayed

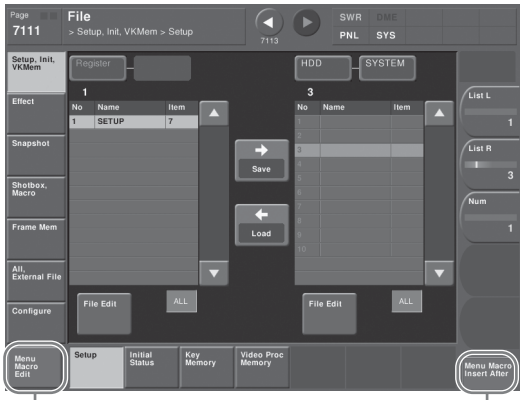

The Default Recall button shows the following.
Menu shortcut button to Menu Macro Edit menu

The Previous page button shows one of the following:
- When [Auto Insert] is on, “Menu Macro Auto Insert” appears.
- When [Auto Insert] is off, “Menu Macro Insert After” appears, but operates as [Insert After].

Menu Macro Register Editing

You can display the current state of a menu macro register using the Menu Macro Register menu.

The items displayed are the same as under “Effect Status Display” (page 468), with the exception that the region name is not displayed.

In the Menu Macro menu, you can do the following editing operations on menu macro registers.
- **Lock:** Write-protect the contents of the menu macro register.
- **Copy:** Copy the contents of one menu macro register to another menu macro register.
- **Delete:** Delete the contents of a menu macro register.
- **Name:** Attach a name to a menu macro register.

The operations for menu macro register editing are the same as those for effect register editing *(see page 468)* except the region selection operation, which is not necessary for menu macro register editing.

Macro Timeline

By recording macro recall and execute action on a timeline, in the same way as for key frames in an effect, you can automatically execute them in a sequence. This timeline is called a “macro timeline,” and one macro timeline can have up to 99 macros being executed simultaneously in parallel.
There are 99 registers in the Macro region that can be recorded on the macro timeline, numbered 1 to 99. These registers are distinct from the registers where individual macros are stored.

Notes

If you use a macro timeline to superimpose more than one macro, the macros may not be executed according to the timing information registered in the timeline.

Available key frame functions

The following lists the key frame functions that can be used on the macro timeline.
- RECALL (1 to 99), STORE (1 to 99), RECALL UNDO, STORE UNDO, search for empty register, AUTO SAVE, RECALL MODE (RECALL, RECALL & REWIND)
- EDIT ENABLE, EDIT UNDO
- CONST DUR, EFF DUR, KF DUR, DELAY, PAUSE, INSERT BEFORE, INSERT AFTER, MODIFY, DELETE, COPY, PASTE BEFORE, PASTE AFTER, FROM TO, ALL
- PREV KF, NEXT KF, GOTO TC, GOTO KF, RUN, REWIND, FF, STOP NEXT KF, NORMAL, JOG, KF FADER

The following key frame functions cannot be used
- KF LOOP, EFFECT LOOP, REVERSE, NORMAL/ REVERSE
- PATH

Saving to a register

Set the recall and execute actions for the macros to be registered in the timeline, using the Macro Timeline menu *(see page 522)*. The setting data can be saved in a register as key frame data. You can manipulate this data by recalling the register in which it is saved, and using the key frame control block.

Notes

An action set for a key frame is only executed when the key frame effect is executed in the forward direction. It is important to remember that the action is not executed in the reverse direction when executing simultaneously with switcher and DME key frame effects.

Forcibly ending a macro timeline

- If the timeline has completed but a macro is still executing, press the [REWIND] or [RUN] button in the key frame control block to forcibly end the macro timeline.
- In a macro timeline, since a take operation is not possible, if a macro included in the timeline has a pause event with a pause time of zero, the remainder of the timeline after the pause is ignored, and the macro timeline ends at that point.

Register editing functions

You can use the following editing functions on a register in which a macro timeline is stored.

- Copy
- Move
- Swap
- Merge
- Lock
- Name
- Delete

File-related functions

You can save and recall a created macro timeline as effect data, in the File menu.
Timeline operations are carried out on a macro timeline in the same way as for normal effects.

For details of timeline operations, see "Keyframe Effects" (page 434).

Notes

When using a macro timeline, note the following.

- To use a macro timeline, the Macro region must be assigned to a region selection button in the numeric keypad control block.
  For details of region assignment operations, see "Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block" (page 570).
- On a macro timeline, only macro recall and execution actions are stored. The data for a macro to be recalled on the macro timeline is not held on the timeline. It is necessary to create the macro data first.
- A macro timeline can be saved and recalled on the master timeline or a shotbox register, but cannot be saved as a snapshot.

Creating and Editing a Macro Timeline

This section describes how to set actions, and add keyframe points. Note that path settings are not needed on the macro timeline.

For details of keyframe operations, see "Creating and Editing Keyframes" (page 450).

Saving a keyframe

For the operations, use the Macro Timeline menu and the [INS] button in the keyframe control block.

1 Press the [EDIT ENBL] button, turning it on.

This enables timeline editing in the keyframe control block.

2 In the Macro menu, select VF4 'Timeline' and HF1 'Timeline.'

The Macro Timeline menu appears.

3 Select one of the actions (Recall, Take, Take All, No Action) that appear on the right.

When you have selected Recall or Take, turn the knob to select the number of the macro register.

Knob	Parameter	Adjustment	Setting values
3	Reg No	Selection of macro register	1 to 250

4 Press [Set].

The selected action appears in the Action column on the left.

5 Press the [INS] button in the keyframe control block.

This creates the keyframe 1 on the macro timeline.

To set the action for a rewind operation

On the macro timeline, when the [REWIND] button in the keyframe control block is pressed the action set for the first keyframe is not executed; when the [RUN] button is pressed, then the first keyframe action is executed.
To execute an action when the [REWIND] button is pressed, it is necessary to set this action (Rewind Action). To carry out this setting, in the Macro >Timeline >Timeline menu, press [Rewind Action] to recall the Rewind Action menu. In this setting screen, use the same setting method as in the screen for setting an action on the macro timeline.
Alternatively, you can select the reverse arrangement, whereby when the
[REWIND] button is pressed, this executes the action set for the first keyframe, and when the [RUN] button is

pressed the first keyframe action is not executed. In this case, the Rewind Action setting is still valid.

For details of the setting, see "Setting the First Keyframe When a Rewind is Executed" (page 603).

Chapter 17 Files

Overview of File Operations

You can save register data, including setup information and snapshot information, as a file on a hard disk or memory card, and recall it as required.
You can operate on individual files or registers, or together in a batch.
Regarding frame memory, it is possible to capture image data stored in an external device into frame memory. You can also convert the format of image data in frame memory into a different format and save it in an external device.

Files that can be manipulated

The following files can be saved and recalled.

- Operation mode setup data for system as a whole and individual devices
- Device status data for system startup
- Key memory setting data
- Video process memory setting data
- Keyframe effect setting data
- Snapshot setting data
- Wipe snapshot setting data
- DME wipe snapshot setting data
- Key snapshot setting data
- Shotbox setting data
- Macro setting data
- Macro attachment data
- Menu macro setting data
- Frame memory image data
- List of files automatically created in a frame memory file backup to DDR/VTR (single data set)
- User setup setting data
- User source name setting data

File operations

You can carry out the following file operations.

When operating on individual files or registers

Save: Save the data in a register to the hard disk or memory card.
Load: Load a file from the hard disk or memory card.
Copy: Copy a file within a directory or from one directory to another. When a remote panel is used, this function applies to it, too.
Rename: Rename a file on the hard disk or memory card.
Delete: Delete a file from the hard disk or memory card.

When operating on files or registers in a batch

The Save, Load, Copy and Delete operations are performable.

Notes on transferring multiple frame memory files together to a memory card

- Transferring all of the files within frame memory together fails if the capacity of the memory card is too small to hold all of the images. In this case, replace with a larger capacity memory card, or delete files until saving is possible.
  The following table roughly shows the relation between memory card capacity and number of files that can be saved.

Memory card capacity	Number of files that can be saved	
	SD system	HD system (except 720P)
256 MB	214	46

  Note that when transferring to the hard disk, there is ample capacity, so that problems such as this do not occur.
- If you cancel the operation during a data transfer between frame memory and hard disk or memory card, then any image which was not completely transferred will not be reproducible. Avoid canceling such operations.
- When loading a file from hard disk or memory card, if [Freeze Enable] in the Freeze menu is on, the loaded file may sometimes be overwritten by the frame memory input image.
  To avoid this when loading a file, ensure that [Freeze Enable] is turned off.

Importing or exporting files to or from frame memory

Import: Import a file in a different format from hard disk or memory card into frame memory after changing its format.

Export: Export a file in a register to hard disk or memory card after changing its format.

You can import the following files.

File type	Format	File name	Notes
TIFF file	RGB uncompressed format	Maximum eight characters, plus extension .tif required	• Layers cannot be used. • If an alpha channel is present, two files are created as a pair.
BMP file	Windows [a] 24-bit format	Maximum eight characters, plus extension .bmp required	–
TARGA file	RGB uncompressed/ compressed format	Maximum eight characters, plus extension .tga required	• Layers cannot be used. • If an alpha channel is present, two files are created as a pair.
PNG file	RGB compressed format	Maximum eight characters, plus extension .png required	• Layers cannot be used. • If an alpha channel is present, two files are created as a pair.

a) Windows is a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

Notes

This functionality has been tested and confirmed to work with TIFF files created by Photoshop, but it may not be possible to use TIFF files created with some other software (Photoshop is a trademark of Adobe Systems Incorporated).

About import image size

Pay attention to the following, depending on the signal format which you use.


SDTV (480i)

Images 720 × 487 pixels in size are exactly the size which fills the full screen.

The following figure shows how an import image is processed when the 480i/59.94 format is used.

Images are placed with the upper left of the screen as the origin.

When an image is smaller than the screen, the remainder of the screen is filled with black. When it is larger, parts which extend beyond the screen are discarded.

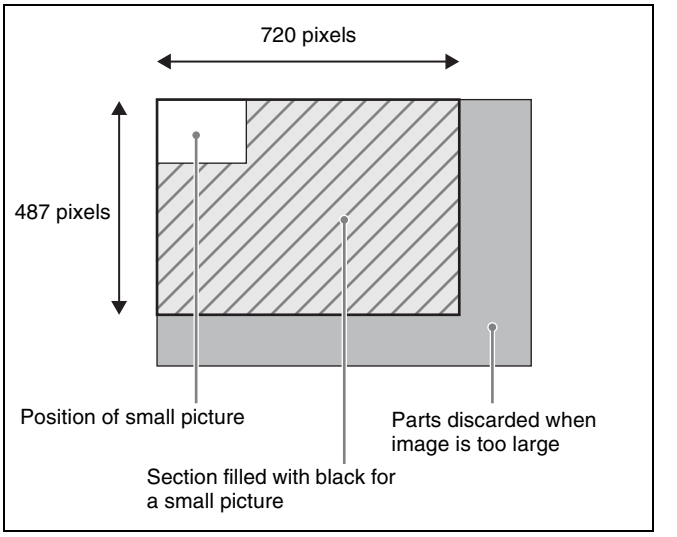

No pixel ratio conversion is performed when images are imported for the SDTV format.

When the signal format is 480i/59.94, if you create an image with a size of 720 × 540 on a computer and then import it just as it is, the image will be too tall. To maintain the shape of the image, first create it as a 720 × 540 image and then use computer software tools to compress the vertical dimension to 487 pixels before importing it.

HDTV (1080i)

Images of 1920 × 1080 pixels in size are exactly the size which fills the full screen.

Like SDTV, images are placed with the upper left of the screen as the origin.

When an image is smaller or larger than the screen, processing is the same as for SDTV.

Since the pixel ratio of the HDTV format is 1:1, files created on computers are imported in their original shapes.

The following table shows the image sizes which exactly fill the full screen for the various signal formats.

Signal format	Image size (H × V)
480i/59.94	720 × 487
576i/50	720 × 576
1080i/50	1920 × 1080
1080i/59.94	
1080PsF/23.976	
1080PsF/24	
1080PsF/25	
1080PsF/29.97	
1080P/50, 1080P/59.94	

Signal format	Image size (H × V)
720P/50	1280 × 720
720P/59.94	

Importing 720P and 1080P movie material

- To import movie material in 720P or 1080P format, it is necessary to treat each frame as a separate image file.
- For 1080P format, the individual files must have numbers which start from an even number (E.g.: consecutive numbers from 0000).

Directory operations

You can create a new directory within a hard disk or memory card, and carry out other operations, such as renaming and deleting *(see page 542)*.

File copying between different unit IDs

Switcher and DME files within the hard disk or memory card are managed by unit ID.
To copy files between different unit IDs, use the Unit ID Copy menu *(see page 543)*.

Saving data recalled by autoload

At power on, you can automatically recall data previously stored on the hard disk (Autoload function).
The following data can be loaded by the autoload function.

- Keyframe effect setting data
- Snapshot setting data
- Wipe snapshot setting data
- DME wipe snapshot setting data
- Key snapshot setting data
- Shotbox setting data
- Macro setting data
- Macro attachment data
- Frame memory image data

To use the autoload function, the data required must first be saved *(see page 553)*.

For details of saving operations, see "Setting Automatic Loading of Register Data at Power On (Autoload Function)" (page 554).

Locking file recall operations

For each of the following categories, in setup you can apply a lock on recalling files *(see page 563)*.
Setup, Initial Status, Key Memory, Video Proc Memory, Effect, Snapshot, Wipe Snapshot, DME Snapshot, Key Snapshot, Shotbox, Macro, Macro Attachment, Menu Macro, User Setup

A locked file cannot be downloaded from the File menu.

Operations on Individual Files

You can save or load the contents of an individual file or register. Carry out these operations in the File menu.

Displaying the Individual File Operation Menus

1 In the menu control block, press the top menu selection button [FILE].

2 Depending on the type of file to be manipulated, select the following VF and HF button combination.

Button	HF1	HF2	HF3	HF4	HF5	HF6	HF7
VF1	Setup	Initial Status	Key Memory	Video Proc Memory	User Setup	Export User Source Name	Import User Source Name
VF2	Effect 1-99	User DME Wipe Effect 101-199	User DME Wipe Effect 201-299	User DME Wipe Effect 301-399	DEV/PBUS Effect 1-250	–	–
VF3	Snapshot	Wipe Snapshot	DME Snapshot	Key Snapshot	–	–	–
VF4	Shotbox	Macro	Macro Attachment	Menu Macro	–	–	–
VF5	Frame Memory	Frame Memory Folder	File Name Data	–	–	–	–
VF6	All	Import/Export	–	–	–	–	–
VF7	Directory	Unit ID Copy	Group ID Copy	–	–	–	–


The following description refers to the example of carrying out operations on snapshot files, but the procedure is similar in the other menus.

Viewing Detailed File Information

As an example, to view detailed snapshot file information, carry out the following procedure.

1 In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’


The Snapshot menu appears.
The status area shows the device status, and a list of files present on the device.

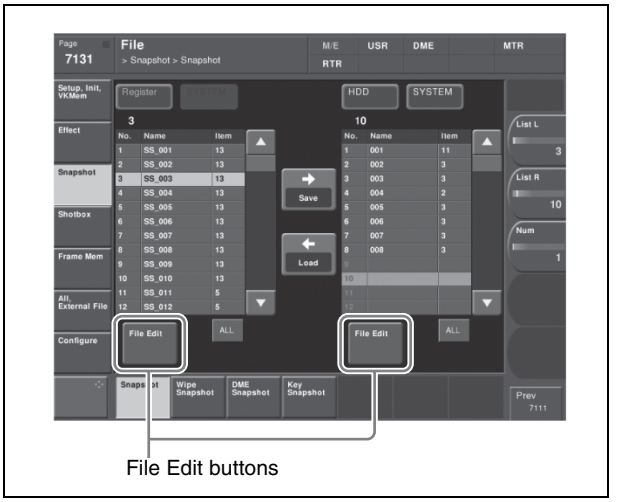

File Edit buttons

2 Press [File Edit].

The file details appear (reference region file name, creation date, regions including data) in table form.

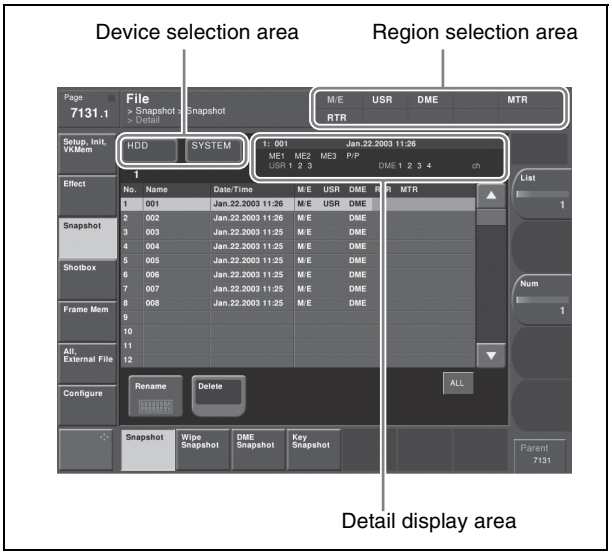

Selecting a particular file displays more detailed information about that file in the detail display area at the top right of the file list.
In the Frame Memory menu, the following items are also shown.
Pair: In the case of a pair file, “P” is shown.
Ext: In the case of an extended clip file, “Ext” is shown.

Selecting Regions

You can carry out a file operation on a number of regions simultaneously. However, a region selection is not required for the following files.
- Key memory
- Video process memory
- Shotbox
- Macro
- Macro attachment
- Frame memory
- Setup
- Initial status
- User Setup
- User source name

In the above list, for frame memory in Dual Simul mode you can select the switcher to be used for the operation in a way similar to the region selection. For setup and initial status, you can similarly separate the files to be operated on by device.

To make a region selection

1 Press the region selection area at the top right of the screen *(see page 533)*.

The region selection window appears.

2 Press the region names you do not want to select, turning them off.

3 Press [OK].

Selecting a Device for Operations

To carry out file operations, you need to specify the device holding the data (or file), as one of the following: register, hard disk, memory card, and so on. You can then further select a directory.
If you have enabled NFS (Network File System) in setup, you can add “Network” to the device for operations.
If you specify “Network,” you can access System Manager through the network for file saving and loading.

For details of the NFS settings, see “Making the Network Settings” (page 546).

Notes

- Files saved on the hard disk may be lost if the hard disk fails. Always keep separate backup copies of important files on a memory card.
- Format a memory card before using it for the first time *(see page 562)*.

As an example, to select a memory card, use the following procedure.

1 In the File menu, press the device selection indication above the file list (default is [HDD] (hard disk)).
If [Memory Card] appears, then since the memory card is already selected, steps **1** and **2** are not necessary.

A pull-down menu appears.

2 Press [Memory Card].

A list of directories on the memory card appears (Maximum 40 per page).
The maximum number of directories is 120 on a memory card and NFS, or 200 on an internal hard disk.

3 As required, press the ◀ or ▶ button, to switch directory pages.

4 Press the name of the directory you want to use.

This selects the specified directory on the memory card to be manipulated.

Saving Files

As an example, to save snapshot register data to hard disk or memory card, use the following procedure.

Notes

For key snapshots, snapshots, and effects, you cannot perform the following operation when [Src Patch Link] is lit on the menu screen *(see page 662)*.

1 In the File menu, select VF3 'Snapshot' and HF1 'Snapshot.'

2 In the device selection area on the left, select [Register].

3 In the device selection area on the right, select [HDD] or [Memory Card], then select a directory.

See "Selecting a Device for Operations" (page 533).

4 Using either of the following methods, select the data to be saved, and the file in which to save it.

- To select all files within the list, press [ALL] below the list.
- To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List L	Select the first register whose data is to be saved	1 to 99
2	List R	Select the first file to which data is to be saved	1 to 99
3	Num	Number of registers to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

5 Press [⟶ Save].

This saves the selected register data in the specified location.
If there is already data in the specified location, a confirmation message appears.
- Select "Yes" to overwrite the data.
- Select "No" to cancel saving all of the data.

Saving frame memory files

Notes

When the signal format is 1080P, saving a still image file creates two still image files for each frame. An 'A' is automatically appended to the first file name, and a 'B' is appended to the second file name. If either of these files is missing, it is not possible to recreate the image, and therefore for correct operation the two files must always be handled together.

Between steps **3** and **4** of the procedure above, "Saving Files," do as follows.

1 To select the frame memory folder, press [Default] in the device selection in the list on the left.

A pull-down menu appears.

2 Press the required folder name.

3 Carry out the same operations as in steps **1** and **2** on the list on the right.

4 Select the type of data to be displayed.

- To display still image files, press [Still].
- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip].
- To display all types of file, press [All].

Loading Files

As an example, to load a snapshot file from hard disk or memory card to a register, use the following procedure.

1 In the File menu, select VF3 'Snapshot' and HF1 'Snapshot.'

2 In the device selection area on the left, select [Register].

3 In the device selection area on the right, select where the file is held ([HDD] or [Memory Card]), and then specify a directory.

See "Selecting a Device for Operations" (page 533).

4 Using any of the following methods, select the register to which you want to load, and the file to be loaded.

- To select all files within the list, press [ALL] below the list.
- To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List L	Select the first register into which the data is to be loaded	1 to 99
2	List R	Select the first file in which data is held	1 to 99
3	Num	Number to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

5 Press [← Load].

This loads the contents of the selected file from the specified location (setup data is loaded first).

Loading frame memory files

Between steps **3** and **4** of the procedure above, "Loading Files," do as follows.

Notes

- When the signal format is 1080P, extended clip files cannot be recalled.
- In a still image file saved in 1080P signal format, there are two still image files for each frame. If either of these two files is missing, it is not possible to recreate the image, and therefore for correct operation the two files must always be recalled together.

1 To select the frame memory folder, press [Default] in the device selection in the list on the left.

A pull-down menu appears.

2 Press the required folder name.

3 Carry out the same operations as in steps **1** and **2** on the list on the right.

4 Select the type of data to be displayed.

- To display still image files, press [Still].
- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip].
- To display all types of file, press [All].

Copying Files

You can copy files either within a directory or between directories, on the hard disk, or memory card.
As an example, to copy a snapshot file from memory card to hard disk, use the following procedure.

1 In the File menu, select VF3 'Snapshot' and HF1 'Snapshot.'

2 In the device selection area on the left, specify the location of the file to be copied (in this case [Memory Card] and a directory) *(see page 533)*.

3 In the device selection area on the right, select the destination of the copied file (in this case [HDD] and a directory).

4 Using any of the following methods, select the source and destination files.

- To select all files within the list, press [ALL] below the list.
- To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List L	Select the first copy source file	1 to 99
2	List R	Select the first destination file	1 to 99
3	Num	Number to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

5 Press [→ Copy].

This copies the selected file or files to the specified destination.
If there is already data in the specified location, a confirmation message appears.
- Select "Yes" to overwrite the data.
- Select "No" to cancel copying all of the files.

Copying frame memory files

Between steps **3** and **4** of the procedure above, "Copying Files," do as follows.

Notes

In a still image file saved in 1080P signal format, there are two still image files for each frame. If either of these two files is missing, it is not possible to recreate the image, and therefore for correct operation the two files must always be copied together.

1 To select the frame memory folder, press [Default] in the device selection in the list on the left.

A pull-down menu appears.

2 Press the required folder name.

3 Carry out the same operations as in steps **1** and **2** on the list on the right.

4 Select the type of data to be displayed.

- To display still image files, press [Still].
- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip].
- To display all types of file, press [All].

Renaming Files

You can rename a file on the hard disk or memory card and a register. As an example, to rename a snapshot file, use the following procedure.

1 In the File menu, select VF3 ‘Snapshot’ and HF1 ‘Snapshot.’

The Snapshot menu appears. The status area shows the device status, and a list of files present on the device.

2 Press [File Edit].

A detailed list appears. Here too, you can select a device or specify a directory *(see page 533)*.

3 Using any of the following methods, select the file you want to rename.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	List	File selection	1 to 99

4 Press [Rename].

The keyboard window appears.

5 Enter a name of not more than eight characters, and press [Enter].

The name you have entered is reflected in the status area.

Notes

- Within the switcher, the names for Initial Status and Setup data are fixed.
  You can change the file names on the hard disk or memory card, but the next time they are reloaded they will revert to the default names.
- The following names cannot be used.
  CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9, LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

Renaming frame memory files

Notes

- In a still image file saved in 1080P signal format, there are two still image files for each frame. When a register is selected for the operation, if you change one of the file names, the other file name of the pair also changes automatically.
- When a device other than a register is selected for the operation, if you change one file name, the other file name of the pair does not automatically change. Except for the final ‘A’ or ‘B’ in the file name, you must manually keep the names matching.
  E.g.: img111A and img111B (file names must have the underscored parts the same)

1 In the File menu, select VF5 ‘Frame Mem’ and HF1 ‘Frame Memory.’

The Frame Memory menu appears. The status area shows the device status, and a list of files present on the device.

2 Press [File Edit].

3 Select the type of data to be displayed.

- To display still image files, press [Still].
- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip].
- To display all types of file, press [All].

4 Using any of the following methods, select the file you want to rename.
If you selected [Clip] or [Ext Clip] in step **3**, you cannot select multiple files.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	List L	File selection in the left list	1 to maximum value
2	List R	File selection in the right list	1 to maximum value
3	Num	Number to be selected	1 to maximum value

5 Press [Rename].

The keyboard window appears.

6 Depending on the selections of steps **3** and **4**, enter a name as follows and press [Enter].

- When you selected a single file with [Still] or [All]: Enter a name of not more than eight characters.
- When you selected more than one file with [Still] or [All]: Enter a name of not more than four characters.
- When you selected a clip file or an extended clip file: Enter a name of not more than four characters.

The name you have entered is reflected in the status area.

Notes

- If you select [Register] in the operation device selection block, then with [Still] or [All] select multiple files and change a file name, these still images are converted to a clip.
- It is not possible to simultaneously select a file for which the Ext field in the status area is empty and a file for which the Ext field shows "Ext" to change the name.
- When the signal format is 1080P, a still image file name must be a maximum of seven characters.

Deleting Files

You can delete data from the hard disk or memory card and snapshot or effect data from a register. As an example, to delete a snapshot file, use the following procedure.

1 In the File menu, select VF3 'Snapshot' and HF1 'Snapshot.'

The Snapshot menu appears. The status area shows the device status, and a list of files present on the device.

2 Press [File Edit].

A detailed list appears. Here too, you can select a device or specify a directory *(see page 533)*.

3 Using any of the following methods, select the file you want to delete.

- To select all files within the list, press [All] below the list.
- To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List	Select the first file	1 to 99
3	Num	Number to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or press directly on the list in the status area.

4 Press [Delete].

A confirmation message appears.
- Select "Yes" to delete.
- Select "No" to cancel the deletion.

Deleting frame memory files

Between steps **2** and **3** of the procedure above, "Deleting Files," do as follows.

Notes

- In a still image file saved in the 1080P signal format, there are two still image files for each frame. When a register is selected for the operation, if you delete one still image file, the other file of the pair is automatically deleted.
- When a device other than a register is selected for the operation, if you delete one still image file, the other file of the pair is not automatically deleted. You must manually delete both files.

1 To select the frame memory folder, press [Default] in the device selection in the list.

A pull-down menu appears.

2 Press the required folder name.

3 Select the type of data to be displayed.

- To display still image files, press [Still].
- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip].
- To display all types of file, press [All].

Converting Between Frame Memory Clips and Extended Clips

Notes

When the signal format is 1080P, this operation is not possible.

1 In the File menu, select VF5 'Frame Mem' and HF1 'Frame Memory.'

The Frame Memory menu appears. The status area shows the device status and a list of files on the device.

2 Press [File Edit].

3 In the device selection section of the list, select where the file is held ([HDD] or [Memory Card]), and specify the directory, and frame memory folder.

4 Press either of the following at the top of the list, to select the type of data displayed.

- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip].

5 Using any of the following methods, select the files you want to convert.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

• Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	List L	File selection in the left list	1 to maximum value
2	List R	File selection in the right list	1 to maximum value
3	Num	Number of files selected	1 to maximum value

6 Carry out either of the following.

- To convert clips to extended clips, press [Clip -> Ext Clip].
- To convert extended clips to clips, press [Ext Clip ->Clip].

Creating a frame memory folder on the device (HDD or Memory Card)

1 In the File menu, press VF5 'Frame Mem' and HF2 'Frame Memory Folder.'

The Frame Memory Folder menu appears. The status area shows the device status, and a list of files present on the device.

2 In the pull-down menu of the device selection section, select [HDD] or [Memory Card], and then specify the directory.

3 Press [New].

A keyboard window appears.

4 Enter a name of up to eight characters, and press [Enter].

The name entered appears in the status area as a frame memory folder.

Notes

- The following names cannot be used.
  Default, Flash1, Flash2
  CON, PRN, AUX, CLOCK$, NUL, COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9, LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9
- It is not possible to create 12 or more directories in the frame memory folder.

To rename a frame memory folder

1 Using any of the following methods, select the folder.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	List L	Folder selection	1 to maximum value

2 Press [Rename].

A keyboard window appears.

3 Enter a name of up to eight characters, and press [Enter].

The name entered appears in the status area as a frame memory folder.

To delete a frame memory folder

1 With the same operations as in step **1** of the procedure "To rename a frame memory folder," select the folder.

2 Press [Delete].

A confirmation message appears; select "Yes" to carry out the deletion.

Saving the List of Frame Memory Files to Hard Disk or Memory Card

If you save all files currently held in frame memory as a single backup data set, by high-speed recording on video tape or other medium, a file of file list data is created that is needed for successful frame memory file restore operation. It is necessary to save this file in a hard disk or memory card.

1 In the File menu, select VF5 'Frame Memory' and HF3 'File Name Data.'

2 In the operating device selection section on the left or right, select [Register].

The register name "FM_Bkup" appears. In the device selection section on the opposite side, the destination for saving automatically appears.

3 As the destination for saving select [HDD] or [Memory Card], then specify the directory.

4 Select the destination file for saving.

5
- To save to disk, press 'Save.'
- To load from disk, press 'Load.'

To view details of files

Press 'File Edit.'
A list of the saved file names appears. You can manipulate these files like any other files.

File Batch Operations

You can batch process all files or registers. Carry out these operations using the File >All, External File >All menu.

Displaying the Batch Operation Menu

1 Press the top menu selection button [FILE].

2 Select VF6 'All, External File' and HF1 'All.'

The All menu appears.

Batch Saving Files

To save the data of all registers to hard disk or memory card, use the following procedure.

Notes

- Files saved on the hard disk may be lost if the hard disk fails. Always keep separate backup copies of important files on a memory card.
- Format a memory card before using it for the first time *(see page 562)*.
- You cannot perform the following operation when [Src Patch Link] is lit on the menu screen *(see page 662)*.

1 In the device selection area of the All menu, select the destination for saving the files ([HDD] or [Memory Card] and directory) *(see page 533)*.

2 If there are registers you do not want to save, in the <Category> group, exclude them from the operation. To select all registers, press [All Select].

For details of the data to which operations apply, see "Files that can be manipulated" (page 529).

Notes

The frame memory is not selected when you press [All Select]. To apply the setting to frame memory, press [Frame Memory], turning it on. When frame memory is selected, it is not possible to apply settings to the <Category> group data.

3 Press [⟶ Save].

A confirmation message appears.
- Select "Yes" to carry out the batch save.
- Select "No" to cancel the batch save.

Batch Loading Files

To load files from hard disk or memory card, use the following procedure.

Notes

It is not possible to recall a file from a category for which recall operations are locked *(see page 563)*.

1 In the device selection area of the All menu, select where the files are held ([HDD] or [Memory Card] and directory) *(see page 533)*.

2 If there are files you do not want to load, in the <Category> group, exclude them from the operation. To select all files, press [All Select].

For details of the data to which operations apply, see "Files that can be manipulated" (page 529).

Notes

- The frame memory is not selected when you press [All Select]. To apply the setting to frame memory, press [Frame Memory], turning it on. When frame memory is selected, it is not possible to apply settings to the <Category> group data.
- You cannot select [User Setup] when [Src Patch Link] is lit on the menu screen *(see page 662)*.

3 Press [⟵ Load].

A confirmation message appears.
- Select "Yes" to carry out the batch load (setup data is loaded first).
- Select "No" to cancel the batch load.

To execute the load after clearing the data in the destination regions

Before pressing [⟵ Load], press [CLR Before Load], turning it on.
The following categories of data can be cleared before execution of the load.

Effect, Snapshot, Wipe Snapshot, DME Wipe Snapshot, Key Snapshot, Shotbox, and Macro

Notes

When frame memory is selected for the setting, the data is always deleted before recalling.

Batch Copying Files

To copy files between the hard disk and a memory card, use the following procedure.

1 In the operating device selection section to the left of the All menu, select the storage location ([HDD] or [Memory Card] and directory) of the source files *(see page 533)*.

2 In the operating device selection section to the right of the All menu, select the destination storage location ([HDD] or [Memory Card] and directory) *(see page 533)*.

3 If there are files you do not want to copy, remove them from the selection in the <Category> group. To select all files, press [All Select].

For details of the data to which the operation applies, see "Files that can be manipulated" (page 529).

Notes

The frame memory is not selected when you press [All Select]. To apply the setting to frame memory, press [Frame Memory], turning it on. When frame memory is selected, it is not possible to apply settings to the <Category> group data.

4 Press [→ Copy].

This copies the selected files to the specified destination.
If there is already data present in the destination location, a confirmation message appears.
- Select "Yes" to overwrite.
- Select "No" to cancel copying all of the files.

Importing and Exporting Files

You can import or export frame memory image data from or to external media.
Import: to transfer a file in a different format from hard disk or memory card to frame memory as image data.
Export: to change the file format of register data and save the data on hard disk or memory card.
To carry out these operations, use the File >All, External File >Import/Export menu.

For details of the formats supported for import and export, see "Importing or exporting files to or from frame memory" (page 530).

Notes

When the signal format is 1080P, exporting is not possible.

Displaying the Import/Export Menu

In the File menu, select VF6 'All, External File' and HF2 'Import/Export.'
The list on the left shows the frame memory registers, and the list on the right shows the content of the external recording media.

Importing Frame Memory Data

As an example, to import data in a bitmap format from a memory card to a frame memory register, use the following procedure.

Notes

When the signal format is 1080P, importing as an extended clip file is not possible.

About the points you should take note of when importing data, see "About import image size" (page 530).

1 In the Import/Export menu, press the file format selection area at the top of the screen to select [Frame Memory (.BMP)].

Files of the selected type are shown in the list on the right.

2 Press one of the buttons at the top left to select the type of data to display.

- To display still image files, press [Still].

- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip]

All of the selected type of frame memory data appears in the list on the left.

3 In the folder selection area on the left, select the frame memory folder to which you want to import the file.

4 Press the device selection area on the right to select [Memory Card].

5 Select the directory to hold the imported files.

Notes

Files on a memory card to be imported must always be in a directory immediately below root.

6 Using any of the following methods, select the file you want to import.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
4	List R	File selection	1 to maximum value

7 Press [← Import].

Exporting Frame Memory Data

As an example, to save image data from frame memory in a bitmap format on a memory card, use the following procedure.

1 In the Import/Export menu, press the file format selection area at the top of the screen to select [Frame Memory (.BMP)].

Files of the selected type are shown in the list on the right.

2 Press one of the buttons at the top left to select the type of data to display.

- To display still image files, press [Still].
- To display clip files, press [Clip].
- To display extended clip files, press [Ext Clip]

All of the selected type of frame memory data appears in the list on the left.

3 Press the device selection area on the right to select [Memory Card].

4 Select the directory to which to export the files.

Notes

The displayed directories are only those directories immediately below root.

5 In the folder selection area on the left, select the frame memory folder that contains the file you want to export.

6 Using any of the following methods, select the file you want to export from the list on the left.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	List L	Register selection	1 to maximum value
2	Num	Number of files to be selected	1 to maximum value

7 Press [→ Export].

This adds the image data from the frame memory in a bitmap format on the memory card.
If the specified destination file name already exists, an overwriting confirmation message appears.
- Select “Yes” to overwrite the data.
- Select “No” to cancel the whole file export operation.

Directory Operations

You can create a new directory on hard disk or memory card, rename, or delete a directory.
To carry out these operations, use the File >Configure >Directory menu.

Displaying the Directory Menu

In the File menu, select VF7 'Configure' and HF1 'Directory.'
The Directory menu appears.

Creating a New Directory

You can create a maximum of 120 directories on a memory card and NFS, or 200 on an internal hard disk.

1 In the device selection pull-down menu, select [HDD] or [Memory Card] *(see page 533)*.

2 Press [New].

The keyboard window appears.

3 Enter a name of not more than eight characters, and press [Enter].

A new directory with the name you have entered appears in the status area.

Notes

The following names cannot be used for directories:
CON, PRN, AUX, CLOCK$, NUL
COM0, COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8, COM9
LPT0, LPT1, LPT2, LPT3, LPT4, LPT5, LPT6, LPT7, LPT8, LPT9

Renaming a Directory

1 In the device selection pull-down menu, select [HDD] or [Memory Card] *(see page 533)*.

2 Using any of the following methods, select the directory.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	List	Directory selection	1 to maximum value

3 Press [Rename].

The keyboard window appears.

4 Enter a new name of not more than eight characters, and press [Enter].

The new name appears in the status area.

Deleting a Directory

1 In the device selection pull-down menu, select [HDD] or [Memory Card] *(see page 533)*.

2 Using any of the following methods, select the directory.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	List	Directory selection	1 to maximum value

3 Press [Delete].

A confirmation message appears.
- Select "Yes" to delete the directory.
- Select "No" to cancel the deletion.

Copying Files Between Different Unit IDs

Switcher and DME files on the hard disk or a memory card are handled separately for each unit ID *(see page 545)*. With the normal file copy operation, it is not possible to copy files between different unit IDs. To copy files between different unit IDs, use the following procedure.

Displaying the Unit ID Copy menu

In the File menu, select VF7 'Configure' and HF2 'Unit ID Copy.'
The Unit ID Copy menu appears.

Copying files between different unit IDs

To copy files between different unit IDs, grouped by category, use the following procedure.

1 In the Unit ID Copy menu, press the category selection section at the top right of the screen.

2 Press the categories you do not want to select, turning them off.

3 Press [OK].

4 In the operating device selection section on the left list, select the storage location of the source files, and in the operating device selection section on the right list, specify the destination storage location.

For details, see "Selecting a Device for Operations" (page 533).

5 Using either of the following methods, select the copy source and copy destination unit IDs.

- Press directly on the list for the copy source on the left of the status area, and on the right for the copy destination.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	List L	Selection of copy source unit ID	1 to 4
2	List R	Selection of copy destination unit ID	1 to 4

6 Press [→Copy].

A confirmation message appears.

- Select "Yes" to carry out the copy to the specified destination of the selected file categories.
- Select "No" to cancel the copy.

Notes

If there is already data present in the copy destination, note that this will overwrite all of the data.

Saving Files Recalled by Autoload

If you save effect setting data, frame memory image files and so on in the PWON_LD directory on the hard disk, then when the system is powered on this data is recalled automatically. This is known as the autoload function. To save the data to be recalled by the autoload function, use the menu for operations on individual files.

For the data recalled by the autoload function, see "Saving data recalled by autoload" (page 531).

For the setting enabling or disabling the autoload function, see "Setting Automatic Loading of Register Data at Power On (Autoload Function)" (page 554).

For example, to save snapshot data, use the following procedure.

1 In the File menu, select VF3 'Snapshot' and HF1 'Snapshot.'

The Snapshot menu appears.

2 In the device selection area on the left, select [Register].

3 In the device selection area on the right, select [HDD].

Be sure to select [HDD] as the saving destination.

4 Select the PWON_LD directory.

The PWON_LD directory is automatically created when [Power On File Load] is set to On in the System >Start Up menu. If set to Off, the directory does not appear.

5 Using any of the following methods, select the data to be saved, and the file in which to save it.

- To select all files within the list, press [ALL] below the list.
- To select multiple files, turn the knobs to select in the following ranges.

Knob	Parameter	Adjustment	Setting values
1	List L	Select the first register whose data is to be saved	1 to 99
2	List R	Select the first file to which data is to be saved	1 to 99
3	Num	Number of registers to be selected	1 to 99

- To select a single file, press the arrow keys to scroll the reverse video cursor, or directly press on the list in the status area.

6 Press [→Save].

The data from the selected registers is saved in the specified destination.
If the specified destination already contains data, a confirmation message appears.
- Select "Yes" to overwrite the existing data.
- Select "No" to cancel the entire saving operation.

System Setup (System)

Chapter 18

Setup for the Whole System

Carry out operations relating to setup for the whole system in the Engineering Setup menu.
To access the Engineering Setup menu, press the top menu selection button [ENG SETUP].
Here the "whole system" refers to all devices connected on the Control LAN.
The DCU is connected through the control panel, but is also included in the "whole system."

Setting the unit ID

When there are two switchers and connected DME units on the same network, it is necessary to set the unit ID on each device, as follows.

Switcher	ID
1st switcher	1
2nd switcher	2

DME	ID
DME1 for 1st switcher (channels 1 to 4)	1
DME2 for 1st switcher (channels 5 to 8)	2
DME1 for 2nd switcher (channels 1 to 4)	3
DME2 for 2nd switcher (channels 5 to 8)	4

Notes

The unit ID for the MKS-7470X/7471X is DME1 or DME3.

- DME1 (unit ID: 1) when connected to the 1st switcher (unit ID: 1).
- DME3 (unit ID: 2) when connected to the 2nd switcher (unit ID: 3).

When the signal format is 1080P

You can connect up to four MVE-8000A units to the first switcher. The unit IDs for these DMEs are assigned as follows.

DME	ID
DME1 for 1st switcher (Ch1/2)	1
DME2 for 1st switcher (Ch3/4)	2
DME3 for 1st switcher (Ch5/6)	3
DME4 for 1st switcher (Ch7/8)	4

Notes

- When the signal format is 1080P, the MKS-7470X is always assigned DME1 (unit ID: 1), supporting four channels. An external DME unit (MVE-8000A) is assigned DME3 (unit ID: 3) or DME4 (unit ID: 4).
- The signal format for the second switcher cannot be changed to 1080P.

For more details of how to make the unit ID settings, refer to the installation manual for the particular device.

Network Settings (Network Config Menu)

This provides automatic configuration of all devices connected to the Data LAN (excluding the DCU), and displays a list of them.
To make the network settings, use System >Network Config menu.

To display the Network Config menu
In the Engineering Setup menu, select VF1 'System' and HF1 'Network Config.'
The status area shows the device ID, and Control LAN and Data LAN IP addresses for each device excluding the DCU.

Making the Network Settings

Checking IP address automatically

1 In the System >Network Config menu, press [Auto Config].

This automatically checks all devices (excluding the DCU) connected to the Data LAN.

2 Temporarily switch to another menu, then display the Network Config menu again.

Now the status area of the System >Network Config menu shows the results of the automatic check.

Notes

Be sure to carry out this operation after reconfiguring the system, or after a software upgrade.

Using the NFS server

The address of the currently selected NFS server appears in the [NFS Server Address] box in the lower status area.

Notes

When the control panel is reset, no NFS server can be used via the Network Config menu. In this case, to use an NFS server, make sure to carry out the following procedure.

1 In the System >Network Config menu, press [NFS Server].

A keyboard window appears.

2 Enter the address of the server you want to use.

3 Press [NFS Mount].

System Settings (System Config Menu)

To make the system settings, use the System >System Config menu.
Specify the overall system operation mode and the hierarchical relationship of the devices.

To display the System Config menu

In the Engineering Setup menu, select VF1 'System' and HF2 'System Config.'

Notes

After changing the following settings, be sure to press [Execute] to save the new values. If you want to cancel the setting changes without saving them, press [Clear].

Device operating mode selection

The operating mode determines how many switcher and DME units can be controlled from the control panel.

Device hierarchical relationship setting

- **Panel Assign:** Specify the switcher controlled by a control panel.
- **Switcher Assign:** Specify the DME connected to a switcher.

Selecting the System Operation Mode

In the <Operation Mode> group of the System >System Config menu, select one of the following.

- **Single Proc mode:** The control panel controls a single switcher and DMEs.
- **Dual Simul mode:** The control panel controls two switchers and DMEs simultaneously. Also, it allows operation to continue on one switcher if the other switcher cannot communicate due to device failure or other cause.

Notes

Dual Simul mode cannot be selected if the signal format is 1080P or if it is set to 3D mode.

Selecting a system to set to Dual Simul mode

In Dual Simul mode, a target system must be selected in order to configure the two switchers and the DMEs connected to the switchers.

In the <Target System> group, press [System 1] or [System 2], turning it on. You can also turn both systems on and configure them simultaneously.

Specifying the Switcher Controlled by the Control Panel

The number of control panels that can be connected to a single switcher depends on the signal format setting.
1080P: 2
Other than 1080P: 4

1 In the System >System Config menu, press [Panel Assign].

The Panel Assign menu appears.

2 Select the switcher to be controlled by the selected control panel, as follows.

If there is only one switcher on the network: In the <1st Switcher> group, set either [SWR1] or [SWR2] to On to select the switcher to be operated.
In the <2nd Switcher> group, set both [SWR1] and [SWR2] to Off.

If there are two switchers on the same network: In the <1st Switcher> group and <2nd Switcher> group, select the switcher to be operated.
When the system operation mode (see previous item) is set to [Dual Simul], the switcher status set in <1st Switcher> appears on the control panel.

3 To set the selected control panel as tally control master panel, press [Tally Master], turning it on.

If there are multiple panels and processors, the control panel for which [Tally Master] is set to On carries out tally control for the whole system.

Notes

- When there are multiple control panels, make sure that one of them has [Tally Master] set to On. When you change the master panel, be sure to copy and save the setup tally (TLY) and router (RTR) data in the File menu, and make the same settings for other panels.
- If you load the master panel tally data into a panel with a different unit ID, then [Tally Master] changes to Off.

To select the lighting mode of the switcher bus selection buttons on the remote panel

When switching buses with the MKS-8080/8082 AUX Bus Remote Panel or other remote panel connected via S-

Bus data link, you can select the lighting mode of the bus selection buttons.
In the System >System Config >Panel Assign menu, select either of the following in the <S-Bus Remote Sw'er Status> group.

Mode 1: The inhibited buttons do not light even when pressed, and the other buttons light after a longer delay time than in Mode 2.

Mode 2: The delay time for button lighting is reduced, but even the inhibited buttons may light for a moment when pressed.

Notes

- Make sure that [Tally Master] is set to On.
- When simple connection is used between the center control panel and remote panel *(see page 664)*, this setting is disabled.

Specifying the DME Connected to the Switcher

1 In the System >System Config menu, press [Switcher Assign].

The Switcher Assign menu appears.

2 Using either of the following methods, select the switcher to which the settings apply.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

The selected switcher appears in reverse video.

3 Make the DME settings as follows.

When making DME settings for SWR1: For the first DME, select [DME1] in the <1st DME> group. For the second DME, select [DME2] in the <2nd DME> group. When a second DME is not connected, turn all buttons in the <2nd DME> group off.

When making DME settings for SWR2: For the first DME, select [DME3] in the <1st DME> group. For the second DME, select [DME4] in the <2nd DME> group. When a second DME is not connected, turn all buttons in the <2nd DME> group off.

Notes

If you use the MKS-7470X/7471X, select either DME1 or DME3.

When the signal format is 1080P

You can connect up to four MVE-8000A units to SWR1.

For SWR1, you can select a DME combination as follows, depending on the number of DMEs connected.

Only one DME connected: DME1
Two DMEs connected: DME1 and DME2
Three DMEs connected: DME1, DME2, and DME3
Four DMEs connected: DME1, DME2, DME3, and DME4

When you use both the MKS-7470X/7471X and MVE-8000A to the MVS-7000X, DME1 is assigned to the MKS-7470X/7471X and the selectable DME combinations are as follows.

Only one MVE-8000A unit connected: DME3
Two MVE-8000A units connected: DME3 and DME4

Depending on the selected DME combination, press [DME1] (first DME), [DME2] (second DME), [DME3] (third DME), or [DME4] (fourth DME), turning them on.
For SWR2, the signal format cannot be changed to 1080P.

Enabling the FM Data Port of the Switcher

With the FM data port enabled, frame memory data can be transferred in a short time between the switcher and the control panels.

1 In the System >System Config menu, press [Switcher Assign].

The Switcher Assign menu appears.

2 Using any of the following methods, select the switcher to be set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

The selected switcher is displayed in reverse video. If there is only one switcher on the network, make the setting only for SWR1 (the first switcher).

3 Press [FM Data Port Enbl], turning it on.

Setting the Signal Format (Format Menu)

To set the format, that is, the frame frequency and number of scan lines handled by each device, use the System >Format menu.

To display the Format menu

In the Engineering Setup menu, select VF1 'System' and HF3 'Format.'

Notes

After changing any of the following settings, be sure to press [Execute] (or [FC Format Execute] for changing the format converter signal format) to save the new values. If you want to cancel the settings and return to the original state, press [Clear] without pressing [Execute] or [FC Format Execute]. When you press [Execute], some data is lost (such as frame memory images). If you press [FC Format Execute], memory is not initialized, and this data is not lost.

Restrictions on signal formats and reentry

Reentry restrictions for an M/E on which a selected signal format can be used depend on whether or not the color corrector is used.

For details, see "Preparations" in Chapter 9 (Volume 1).

Setting the Signal Format

Specify the signal format to be handled by the devices. The combinations of signal formats that can be selected are as follows.

System	Field frequency	Effective number of scan lines
HD system	50	1080i
	59.94	
	50	1080P
	59.94	
	23.976	1080PsF
	24	
	25	
	29.97	
	50	720P
	59.94	
SD system	59.94	480i
	50	576i

Notes

When the MVS-8000X is used with the 1080P signal format or the MVS-7000X is used with multiple signal formats, you need to install software options *(see page 556)*.

1 In the System >Format menu, select the device for operations.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Device	Selection of device for operations	1 to maximum value

2 Press [Signal Format].

A pop-up window appears.



3 Press the button for the desired signal format.

Allowing 59.94(2x) Format Signals on an AUX Bus

When the signal format of this system is 1080i/59.94, it is possible to handle different (59.94(2x)) format signals on the AUX bus only.
You can output from a connector to which any of the following is assigned.

Preset, Edit Preview, AUX 1 to 48

Carry out the setting in the Engineering Setup >System >Format >AUX Signal Format menu.

1 Press [Signal Format] in the Engineering Setup >System >Format menu, and then select [1080i/59.94].

2 Press [AUX Signal Format].

The AUX Signal Format menu appears.



3 In the list, select the relevant data by any of the following methods.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Output No	Number to be selected	1 to 48

For each group, four outputs are selected together.

4 In the <AUX Signal Format> group, select [59.94Hz(2x)] from the following.

[59.94Hz]: Mode not allowing a 59.94(2x) signal on the AUX bus.
[59.94Hz(2x)]: Mode allowing a 59.94(2x) signal on the AUX bus.

5 Press [Execute].

A confirmation message appears.

6 To change the mode, select [Yes].

This changes operation to the selected mode.
Even if you press [Execute], the memory is not reinitialized, and therefore frame memory images and other data is not lost.

Notes

- When 3D mode is enabled, 59.94(2x) format setting is invalid.
- It is not possible to select a 59.94(2x) format signal as output to a small window in the multi viewer.
- If you assign 59.94(2x) to any of the following outputs, they will not work as a format converter output any longer.
  Output 1, Output 2, Output 25, Output 26

Switching the Input Reference Signal for HD System

Notes

The input reference signal for the MKS-7470X/7471X is used in common with the switchers.

This changes the input reference signal.
- **Tri Sync:** tri-level sync for an HD system
- **BB (Black Burst):** black burst or sync

The following table shows the relation between signal format and the frequency of a signal that can be used as the input reference signal.

Signal format	Input reference signal		
	Tri Sync	Black burst	
1080PsF/29.97 1080P/59.94, 1080i/59.94	59.94	Black Burst 59.94	Sync 59.94
1080PsF/25 1080P/50, 1080i/50	50	Black Burst 50	Sync 50
1080PsF/24	48	–	
1080PsF/ 23.976	47.952	Black Burst 59.94 a)	Sync 59.94 a)
720P/59.94	59.94	Black Burst 59.94	Sync 59.94
720P/50	–	Black Burst 50	Sync 50

a) Interlock mode

Setting Conversion Formats

Installing the MKS-8450X Format Converter Board in the MVS-8000X/7000X enables signal video format conversions.
This operation is valid only when BB is selected in the <Ref Input Format> group.
In the MVS-7000X, format conversion is assigned to primary inputs in advance.

For details about the primary input assignment, see "Selecting the Primary Input to be Used in the Format Converter" (page 614).

Format converter

Installing the Format Converter Board in the switcher enables the following signal video format conversions.
- Up-conversion: from SD (4:3) to HD (16:9)

- Down-conversion: from HD (16:9) to SD (4:3)
- Cross-conversion: from HD (720P) to HD (1080i), or from HD (1080i) to HD (720P)

In the MVS-8000X, the maximum number of input signals for which format conversion is possible is 16 (or 8 when only one MKS-8450X board is installed), and the maximum number of output signals is 4 (two outputs when the MKS-8160X is not installed).
In the MVS-7000X, the maximum number of primary input signals for which format conversion is possible is 8, and the maximum number of output signals is 4 (two outputs when the MKS-8160X is not installed).

Notes

- After format conversion, input and output signals have one-frame delays with respect to the reference signals. To synchronize converted input signals and unconverted input signals, it is possible to delay the unconverted input signal.
  For details, see "To delay unconverted input signals (frame delay function)" (page 552).
- When the input reference signal for HD system is set to Tri Sync, the format converter function is not available.
  For details, see "Switching the Input Reference Signal for HD System" (page 550).

To synchronize unsynchronized input signals (frame synchronizer)

When the signal format is set to 720P or 1080i, the input signal can be synchronized by the up-converter. When synchronizing, set the format converter to a format that supports the frame synchronizer ([480i/59.94 (with FS)], [576i/50 (with FS)]).

Notes

- You can synchronize the input signal to the reference signal within a range of ±0.5 frames with respect to the reference signal.
- If a frame synchronizer is used, the up-converter introduces the following delay.
  - If the signal format is 1080i: 2 frames with respect to the reference signal
  - If the signal format is 720P: 1.5 frames, 2 frames, or 2.5 frames with respect to the reference signal
- The frame delay function can be used as the frame synchronizer *(see page 552)*.

Format combinations allowing conversion

The supported combinations of switcher signal format and format converter (inputs 1 to 4, 5 to 8, 9 to 12 and 13 to 16) are as follows.
Inputs 9 to 12 and 13 to 16 are available only in the MVS-8000X.

Notes


The format converter cannot be used when the signal format is 1080PsF/23.976, 1080PsF/24, 1080P/50, or 1080P/59.94.

Switcher signal format setting	Format converter signal format setting	
	FC Input 1 to 4, 5 to 8 / 9 to 12 [a] / 13 to 16 [a]	FC Output 1, 2 / 3, 4
480i/59.94	720P/59.94 1080i/59.94 1080PsF/29.97	720P/59.94 1080i/59.94 1080PsF/29.97
576i/50	720P/50 1080i/50 1080PsF/25	720P/50 1080i/50 1080PsF/25
720P/50	576i/50 576i/50 (with FS) 1080i/50	576i/50 [b] 1080i/50 [b]
720P/59.94	480i/59.94 480i/59.94 (with FS) 1080i/59.94	480i/59.94 [b] 1080i/59.94 [b]
1080i/50	576i/50 576i/50 (with FS) 720P/50	576i/50 720P/50
1080i/59.94	480i/59.94 480i/59.94 (with FS) 720P/59.94	480i/59.94 720P/59.94
1080PsF/25	576i/50	576i/50
1080PsF/29.97	480i/59.94	480i/59.94

a) Only on MVS-8000X
b) Output signals converted from 720P format are not synchronized to the switcher input reference signal.
On the destination device, do not use an external reference signal, but use an operation mode that can sync to the format converter output signal.

Setting the conversion format

1 Display the System >Format menu.

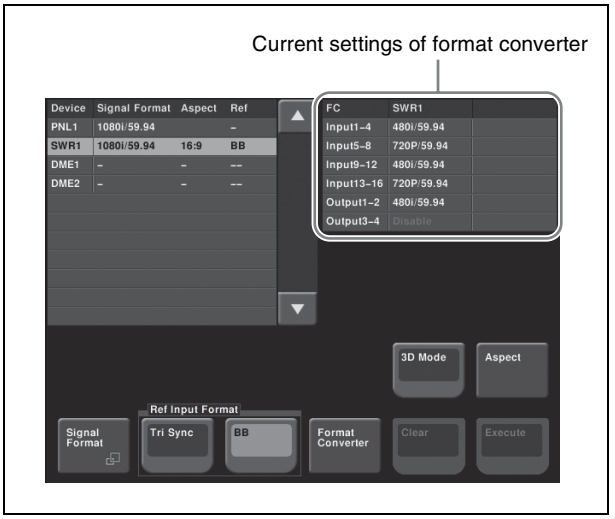

2 Click [Format Converter].

The Format Converter menu appears.

3 To select the conversion format for SWR1 format converter inputs 1 to 4, press [Input 1-4 Format] in the <SWR1 FC Input> group.

A pop-up window appears.

4 Press the button for the desired signal format.

5 For "Input 5-8 Format" (MVS-8000X/7000X), and "Input 9-12 Format" and "Input 13-16 Format" (MVS-8000X only), set the desired signal format in the same way as in steps **3** and **4**.

6 To set the output format for format converters 1 and 2, in the <SWR1 FC Output> group press [Output 1-2 Format], then press the button for the desired format.

7 For "Output 3-4 Format," set the desired signal format in the same way as in step **6**.

8 With reference to steps **3** to **7**, make the settings for SWR2.

To delay unconverted input signals (frame delay function)

When the signal format is 720P/59.94, 720P/50, 1080i/59.94, or 1080i/50, you can press [Frame Delay] in the pop-up window shown in step **3** and step **5** to delay input signals.
For the format of the format converter input signal, the same format as the signal format is shown.

Notes

- The amount of delay that can be configured is given below.
  - If the signal format is 1080i: up to 8 frames in 1-frame units
  - If the signal format is 720P: up to 16 frames in 2-frame units

  The input signal must be synchronized to the reference signal to obtain the same delay as that configured. *For details, see "Setting the Frame Delay Function" (page 614).*
- You can use the frame delay function as a frame synchronizer by setting the delay value to "1." However, the frame synchronizer introduces the following delay.
  - If the signal format is 1080i: 1 frame with respect to the reference signal
  - If the signal format is 720P: 0.5 frames, 1 frame, or 1.5 frames with respect to the reference signal

Setting the Screen Aspect Ratio (Format Menu)

Switch the screen aspect ratio to 16:9 or 4:3.
To set the screen aspect ratio, use the System >Format menu.

Setting the screen aspect ratio

1 In the System >Format menu, press [Aspect].

The Aspect menu appears.

2 In the <Screen Aspect> group, select one of the following.

- 16:9
- 4:3
- Independ: Set the screen aspect ratio separately for M/E, P/P, and USER on the switcher, and for each channel independently on the DME.

3 If you selected [Independ] in step **2**, select from the following.

Switcher Aspect: Make the setting for the switcher.
DME Aspect: Make the setting for the DME.
A menu appears according to the selection.

4 Carry out either of the following, depending on the selection you made in step **3**.

When you selected [Switcher Aspect]: In each of the <M/E-1>, <M/E-2>, <M/E-3>, <M/E-4>, <M/E-5>, <P/P>, and <USER> groups, select either [16:9] or [4:3].
When you selected [DME Aspect]: For each of the <CH1> to <CH4> groups, select either [16:9] or [4:3].

5 To confirm the above setting, press [Aspect Execute]. To cancel the setting and return to the original state, press [Clear] without pressing [Aspect Execute].

When you press [Aspect Execute], a confirmation message appears.

6 Press [Yes].

Selecting the State After Powering On (Start Up Menu)

Set the initial state of the devices when the system is powered on.
For each device, you can select Resume mode or Custom mode.

Resume mode
This resumes the setting state at the previous power-off operation. This setting is only available for the switcher processor and control panel.


Custom mode
This uses the settings saved in non-volatile memory or ROM within the device.
In this mode, there are Setup and Initial Status settings which can be set separately.

- **Setup mode:** Select the setup state to be used after powering on from the following.
  User: Start up using the user data previously saved with [Setup Define].
  Factory: Start up with the factory default settings.
- **Initial status mode:** Select the state of each device after powering on (excluding the settings to which "setup" applies).
  User: Start up using the user data previously saved with [Initial Status Define].
  Factory: Start up with the factory default settings.

For details of saving and recalling setup data, see "Saving and Recalling Setup Data" (page 553) and the appendix "Data Saved by [Setup Define] and [Initial Status Define]" (page 677).

Autoload function
Switch on or off the function to automatically load predetermined register data or frame memory image data at power on. Set the data to be read in the File menu.

Saving and Recalling Setup Data

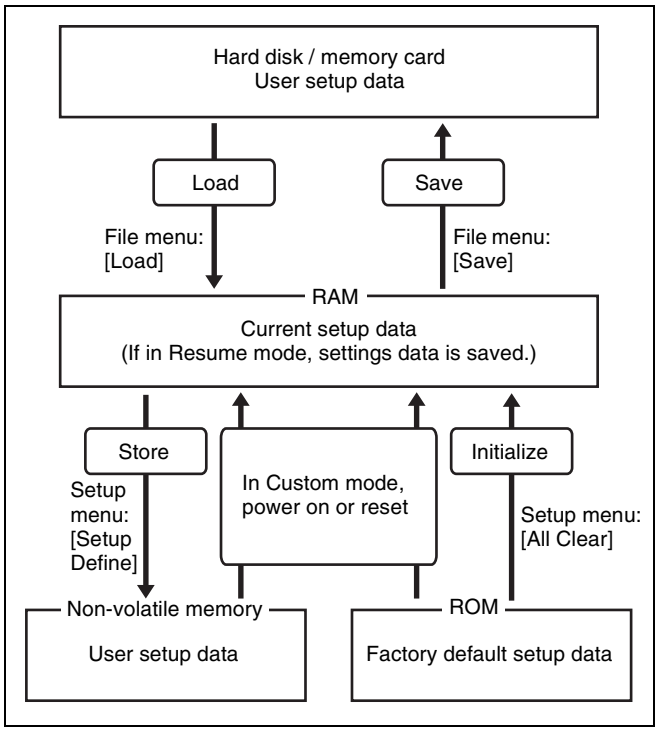

Concept of saving and recalling setup data

Updating the switcher or control panel setup data saves the updated setup data in RAM in each device.

- In Resume mode *(see page 553)*, even if devices are reset or powered off, the data is preserved in RAM, and recalled when the power is turned back on.

Notes

The Resume mode cannot be used for DMEs and DCUs.

- In Custom mode *(see page 553)*, the user-defined settings (user setup data) saved in non-volatile memory or factory default setup data held in ROM in each device is recalled when a reset is made or the power is turned back on *(see page 554)*.

Note that the setup data in RAM can also be saved to the control panel hard disk or memory card.
To set the initial state at start-up, use the System >Start Up menu.

Notes

It is not possible to set the DCU state at start-up, but its settings can be saved in the control panel.

To display the Start Up menu
In the Engineering Setup menu, select VF1 'System' and HF4 'Start Up.'
The status area shows the current start-up mode settings of each device.

Selecting the State at Start-up

1 In the status area of the System >Start Up menu, select the device to which the settings are to apply.

2 In the <Start Up Mode> group, select one of the following modes.

Resume: When this is on, Resume mode is enabled.
Custom: When this is on, Custom mode is enabled.

Notes

The Resume mode is only valid when a switcher or control panel is selected for the setting.

3 When Custom mode is selected, in each of the <Setup> group and <Initial Status> group, select one of the following.

User: When this is on, user-defined settings are used for the Setup or Initial Status settings. For the method of saving the user-defined settings, *see the next item*.
Factory: When this is on, factory default settings are used for the Setup or Initial Status settings.

4 To confirm the settings, press [Execute]. If you want to cancel the setting changes without saving them, press [Clear].

When [Execute] is pressed, a confirmation message appears.

5 Select [Yes].

Saving User-Defined Settings

Saving the Setup settings

1 After selecting the devices to which the settings apply to, in the System >Start Up menu, press [Setup Define].

A confirmation message appears.

2 Press [Yes].

This saves the setup settings for the selected devices in non-volatile memory within the respective devices.

For details about the settings which will be saved, see "Data Saved by [Setup Define] and [Initial Status Define]" (page 677).

Saving the Initial Status settings

1 After selecting the devices to which the settings apply to, in the System >Start Up menu, press [Init Status Define].

A confirmation message appears.

2 Press [Yes].

This saves the initial status settings other than the "setup" settings for the selected devices in non-volatile memory within the respective devices.

For details about the settings which will be saved, see "Data Saved by [Setup Define] and [Initial Status Define]" (page 677).

Setting Automatic Loading of Register Data at Power On (Autoload Function)

To have specified data read in at power on, in the System >Start Up menu, press [Power On File Load], turning it on. This enables the autoload function.
When the autoload function is enabled, a directory "PWON_LD" appears in the corresponding File menu.

For details about saving data which can be loaded by the autoload function, see "Saving Files Recalled by Autoload" (page 544).

Reset and Initialization (Initialize Menu)

To carry out a reset or memory initialization for a device, use the System >Initialize menu.

- **Reset:** Reset to state after powering on.
- **All Clear:** Clear the memory, and carry out initialization. The Network Config, System Config, Format, and Start Up setup values are set by reference to data stored in non-volatile memory, and the system automatically starts up. It is not necessary to reset the Date/Time settings.

For more details, see "Saving and Recalling Setup Data" (page 553).

To display the Initialize menu

In the Engineering Setup menu, select VF1 'System' and HF5 'Initialize.'
The status area shows the current start-up mode settings.

Resetting the device and initializing memory

Notes

When the MVS-7000X is reset, the MKS-7470X/7471X is also reset at the same time.

1 In the status area of the System >Initialize menu, select the device to which the settings are to apply.

2 In the <Initialize> group, select one of the following modes.

Reset: Reset the device.
All Clear: Initialize memory.

3 Press [Execute].

A confirmation message appears.

4 Select [Yes].

Depending on the selection in step **2**, the following is the result.

- When you selected [Reset], a reset is applied to the device causing it to be restarted in the start-up state.
- When you selected [All Clear], all memory in the device is cleared, including snapshots, keyframe effects, setup, and so on, and the device returns to its factory default settings. However, the Network Config, Format, Start Up, and Date/Time settings are not initialized.

Installation and Device Setup (Install/Unit Config Menu)

To install software or firmware in a device, use the System >Install/Unit Config menu.
This installs the software and firmware in all devices (including the DCU) connected to the Data LAN.

Notes

The MKS-7470X/7471X software is included in the MVS-7000X software.

To display the Install/Unit Config menu

In the Engineering Setup menu, select VF1 'System' and HF6 'Install/Unit Config.'
The status area shows the version of the software and the firmware installed in each device.
The following functions are available here.

Install: Automatically detects the software that can be installed on each device, and installs the selected software.
Detail Information: Gives details of the software and firmware installed in each device.
Unit Config: Makes switcher processor settings and changes the DME input/output signal format.
License: Makes the license valid or invalid.

Displaying installation details

In the System >Install/Unit Config menu, press [Detail Information].
This accesses the Detail Information menu, and displays the detailed information on the software and firmware installed in the currently selected device.

Notes

When the MKS-7470X/7471X is selected, the Detail Information menu cannot be opened.

Installing Software

1 Insert the memory card holding the software into the memory card slot.

2 In the System >Install/Unit Config menu, press [Install].

The Install menu appears; the status area shows the following information.

Upper list: For each connected device, this shows the device name, current software version (Current), and the latest version that can be installed (Install, Title).
- **OK:** Installation already completed.
- **On:** For installation, but not completed.
- **Error:** An error occurred during installation.
- **Cancel:** Installation canceled.

Lower list: For the device selected in the upper list, this shows an automatically detected list of software that can be installed on the particular device. Also, software selected as a candidate for installation in the upper list is marked in the lower list with an bullet.

3 If you are satisfied with the currently installed version of all items in the upper list, skip to step **6**.

To change the items to be installed, use any of the following methods to select the relevant device.
- Press directly on the list in the status area.
- Use the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Device	Device selection	1 to maximum value

The display of the lower list changes according to the selected device.

Notes

When the MKS-7470X/7471X is selected, no software is displayed in the lower list.

To display all related software
Press [Display All Software], turning it on.
The names of all related software for the selected device appear, not just the automatically detected software.

4 In the lower list, select the software you want to install.

- Press directly on the list in the status area.
- Use the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	No	Software selection	1 to maximum value

5 Press [Set].

The selection is reflected under “Install” and “Title” in the upper list.

6 Press [Install].

The “Install” box shows “On,” confirming that this is to be installed. To cancel this installation setting, press “Install” once more, making the box blank.

7 Repeat steps **3** to **6**, to confirm all software to be installed.

8 Press [Execute].

A confirmation message appears.

9 Press [Yes].

This carries out the installation, and when it completes normally, the “Install” box shows “OK.”

Making Settings Required to Use the Software

To use the software listed below, you are required to enter an install key which validates the software (if the software has been factory installed, the install key is not required). For the method of obtaining an install key, contact your Sony representative. To obtain a key, you may be required to submit the unique device ID of the switcher you are using. You can check the unique device ID in the Install/Unit Config menu of the switcher, using the following procedure.

When using the MVS-8000X

BZDM-9050	Texture Lighting Software (for MVE-9000)
BZS-8050	Editing Control Software
BZS-8200X	Multi Program 2 Software
BZS-8420X	Color Corrector Software
BZS-8560X	Switcher Upgrade Software
BZDM-8560	DME Upgrade Software a)

a) This can be used only on MVE-8000A.

When using the MVS-7000X

BZS-7500X a)	Switcher Upgrade Software
BZS-7510X	
BZS-7520X b)	
BZS-7530X c)	
BZS-7540X d)	DME Upgrade Software
BZS-7541X e)	
BZS-7561X	
BZDM-8560 f)	
BZDM-9050 g)	Texture Lighting Software
BZS-8050	Editing Control Software
BZS-7200X	Multi Program 2 Software
BZS-7420X	Color Corrector Software

BZS-7560X	Switcher Upgrade Software

a) This is used for license registration common to the MVS-7000X and the MKS-7470X/7471X.
b) This is used for license registration required to support multiple signal formats when two MKS-7210X boards are used.
c) This is used for license registration required to support multiple signal formats when three MKS-7210X boards are used.
d) This is used for license registration required to support multiple signal formats on the MKS-7470X.
e) This is used for license registration required to support multiple signal formats on the MKS-7471X.
f) This can be used only on MVE-8000A.
g) This can be used only on MVE-9000.


To display the unique device ID

1 In the System >Install/Unit Config menu, use either of the following methods to select the device for which you want to register the license.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

2 Press [License].

The License menu appears as follows.

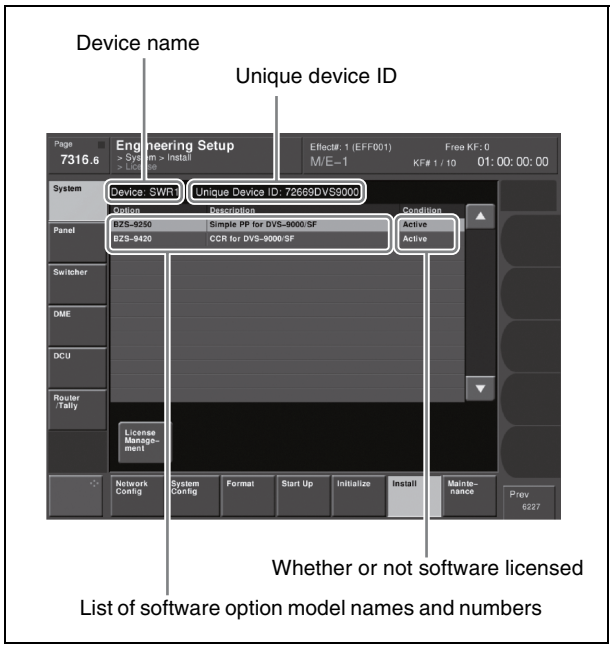

Entering the install key

When you have the install key, carry out the following procedure.

1 In the System >Install/Unit Config menu, use either of the following methods to select the device for which you want to register the license.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

2 Press [License].

The License menu appears.

3 Press directly on the name of the software you want to license (the Condition box is blank).

4 Press [License Management].

The License Management menu appears.

5 Press [Activate License].

A keyboard window appears.

6 Enter the 16-character install key you have been given, and press [Enter].

A license registration completed message appears.

7 Press [OK].

The status area Condition box shows “Active.”

8 Using either of the following methods, restart the device.

- In the System >Initialize menu, with only the device for which you registered the license being selected, press [Reset] in the <Initialize> group and then press [Execute].
- Power off and on again.

After restarting, the licensed software is now available for use.

In case it becomes necessary to cancel the license registration, you can use the following procedure.

To cancel the license registration

1 In the System >Install/Unit Config menu, use either of the following methods to select the device for which you want to cancel the license registration.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

2 Press [License].

The License menu appears.

3 Press directly on the name of the software for which you want to cancel the license registration (the Condition box shows “Active”).

4 Press [License Management].

The License Management menu appears.

5 Press [Deactivate License].

A confirmation message appears.

6 Press [Yes].

A license registration canceled message appears.

7 Press [OK].

The status area Condition box showing *"Active"* changes to blank.

8 Using either of the following methods, restart the device.

- In the System >Initialize menu, select only the device for which you registered the license, and press [Reset] in the <Initialize> group.
- Power off and on again.

After restarting, the software for which the license registration has been canceled is no longer available.

Adding User Texture Patterns

You can add user created texture patterns to the repertory of texture patterns with which the spotlighting function enables the light falls on the image surface.

Notes

This function is not supported on the MVE-8000A.

For details of spotlighting and texture patterns, see "Spotlighting Settings" in Chapter 11 (Volume 1).

The procedure for adding a texture pattern is as follows.

Prepare the texture file *(next item)*

↓

Create the texture package *(page 559)*

↓

Install the texture package *(page 560)*

To prepare a texture file

Create a texture file meeting the following conditions, and save it on a memory card.

File format: Windows bmp ("bitmap") (extension: bmp, 24-bit RGB)

File name: alphanumeric (maximum 8 characters) + extension (bmp)
Example: wood_01.bmp


Image size (horizontal × vertical): 128 × 128 to 1024 × 1024 pixels

The maximum number of texture files that can be handled by the system is related to the image size of the texture files, as shown in the following table (when all images are the same size).

	Maximum number of texture files handled			
Dimension (horizontal) / Dimension (vertical)	**128 pixels**	**256 pixels**	**512 pixels**	**1024 pixels**
128 pixels	64	32	16	8
256 pixels	32	16	8	4
512 pixels	16	8	4	2
1024 pixels	8	4	2	1


Notes

- Different image sizes can be combined, but this affects the total number of texture files that can be handled.
- The number of texture files that can be handled may be reduced, depending on the way in which they are stored in memory.
- For a texture file with an image size outside the specification, the minimum enclosing image size is applied *(see table above)*, and the region below and to the right is filled with black.
  Example: a 300 × 200 pixel texture file is treated as 512 × 256 pixels.

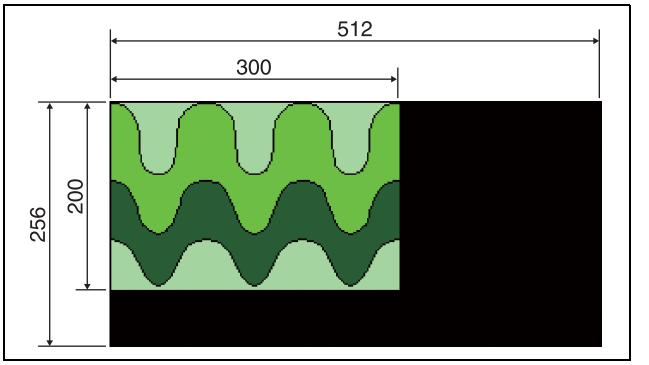

Texture Package menu

To create user texture patterns, use the Texture Package menu.

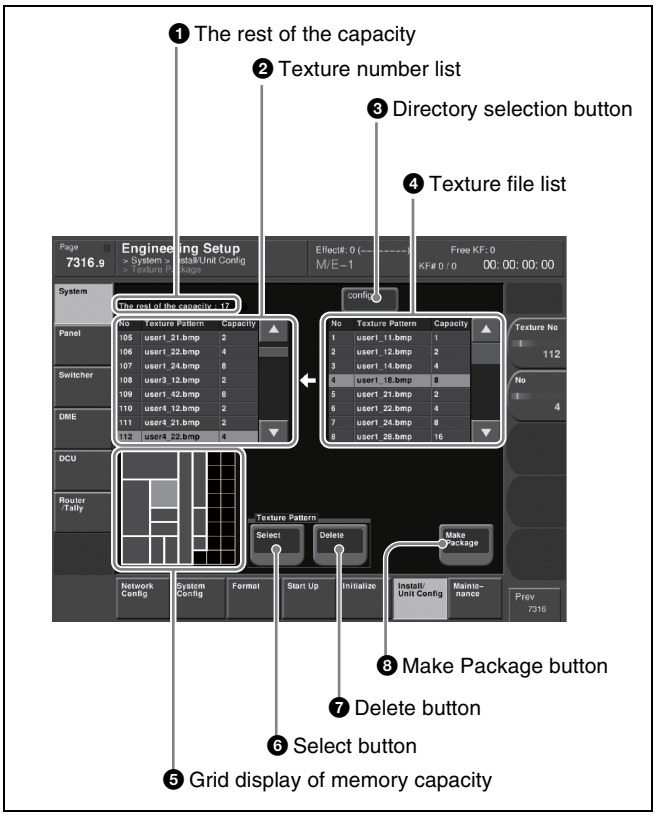

❶ The rest of the capacity (available memory space)
This shows an available memory space in units of 128×128 pixels (a maximum of 64 units of memory space is available).

❷ Texture number list
This shows the texture numbers (101 to 164) registered in the texture package.
The list Capacity shows the file size in units of 128×128 pixels (a total maximum of 64 units of texture files can be registered).

❸ Directory selection button
By pressing this button to display the popup window, you can select a directory on the memory card.

❹ Texture file list
This shows the texture files stored on the memory card.
If a texture file is stored in a directory, press the directory selection button and select the directory in the popup window, to show a list of files.
The list Capacity shows the file size in units of 128×128 pixels.

❺ Grid display of memory capacity
This shows how the texture files are stored in memory (an 8×8 grid, of 64 squares, each equivalent to 128×128 pixels).
And this shows the location where the texture files are stored in memory by bold frames. The grid for the texture file selected in the texture number list is shown in amber.

❻ Select button
Pressing this button assigns the texture file selected in the texture file list to the number selected in the texture number list.

❼ Delete button
Pressing this button deletes the texture file assigned to the number in the texture number list.

❽ Make Package button
Pressing this button creates the texture package.

Creating a texture package

To use a user-provided texture pattern with the spotlighting function, it is necessary to convert the texture files to vector files for bump mapping. This operation is referred to as “creating a texture package.”

1 Insert the memory card holding the texture file into the memory card slot.

2 In the Engineering Setup menu, select VF1 ‘System’ and HF6 ‘Install/Unit Config.’

The Install/Unit Config menu appears; the status area shows the version information for the software installed on the various devices.

3 Using any of the following methods, select a DME for which the spotlighting license is valid.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Notes

The MKS-7470X/7471X does not require license registration.

4 Press [Texture Package].

The Texture Package menu appears.

Notes

If you select a device for which the spotlighting license is not enabled, then [Texture Package] is not enabled.

5 In the texture number list, select the number for which you want to register the texture package, by any of the following methods.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Texture No	Texture number selection	101 to 164

6 In the texture file list, select the texture file by any of the following methods.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	No	Texture file selection	1 to maximum value [a)]

a) The range of the setting values depends on the number of saved files on a memory card.

7 In the <Texture Pattern> group, press [Select].

This assigns the texture file selected in step **6** to the number selected in step **5**, and updates the texture number list.
The grid display of memory capacity shows the location where the texture files are stored in memory by bold frames. The grid portion for the texture file selected in the texture number list is shown in amber.

8 Repeat steps **5** to **7**, to assign all of the texture files to texture packages.

Notes

- If you assign a texture file that is already in the texture number list to a different texture number, then the previous assignment is deleted. It is not possible to assign the same texture file to two or more different texture numbers.
- In the following cases, texture file assignment is not possible.
  - If there is no available memory space ("The rest of the capacity:0" appears)
  - If the selected texture file is too large to fit in the available memory space

To delete a texture file assignment
Select the texture file (multiple selections are not possible) you want to delete in the texture number list, and in the <Texture Pattern> group press [Delete].

9 To create the texture package, press [Make Package].

A confirmation message appears.

10 Select [OK].

The texture package is created in the same location that the texture file is stored on the memory card (extension: zsp, file name generated automatically).

Notes

- If you remove the memory card on which the texture file is stored, it is not possible to create the texture package.
- If a texture package is already present on the memory card, it is overwritten by a new texture package.
- If you carry out steps **9** and **10** without having assigned even one texture file, it is not possible to create a texture package.
- If there is insufficient space on the memory card to store the texture package, an error message appears, and the process is aborted. If this happens, delete unwanted files from the memory card using your computer, so that there is enough free space on the memory card, and repeat the process. As a guide, the space required is approximately equal to total number of bytes of the texture files assigned in steps **5** to **8**.

Installing the texture package

1 Insert the memory card holding the texture package into the memory card slot.

2 In the Engineering Setup menu, select VF1 'System' and HF6 'Install/Unit Config.'

The Install/Unit Config menu appears; the status area shows the version information for the software installed on the various devices.

3 Press [Install].

The System >Install/Unit Config >Install menu appears; the status area shows the following information.

Upper list: For each connected device, this shows the device name, current software version (Current), and the information about the texture package that can be installed (Install, Title).
- **OK:** Installation already completed.
- **On:** For installation, but not completed.
- **Error:** An error occurred during installation.
- **Cancel:** Installation canceled.

Lower list: For the device selected in the upper list, this shows an automatically detected list of software that can be installed on the particular device. Also, software selected as a candidate for installation in the upper list is marked in the lower list with an asterisk.

4 Using any of the following methods, select in the upper list a DME for which the spotlighting license is valid.

- Press directly on the list in the status area.

- Use the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Device	Device selection	1 to maximum value

5 Press [Display All Software], turning it on.

The lower list shows the texture packages.

6 Using any of the following methods, select the texture package you want to install from the lower list.

- Press directly on the list in the status area.
- Use the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	No	Package selection	1 to maximum value

7 Press [Set].

The selection is reflected under “Install” and “Title” in the upper list.

8 Press [Install].

The “Install” box shows “On,” confirming that this is to be installed. To cancel this installation setting, press “Install” once more, making the box blank.

9 To carry out the installation, press [Execute].

A confirmation message appears.

10 Select [Yes].

This carries out the installation, and when it completes normally, the “Install” box shows “OK.”

Saving a Frame Memory Clip With Ancillary Data

Notes

When the signal format is 1080P, this operation is not possible.

1 In the System >Install/Unit Config menu, select [SWRx], and press [Unit Config].

The Unit Config menu appears.

2 Press [FM Ancillary], turning it on.

On: Save with ancillary data.
Off: Save without ancillary data.

Notes

Switching on/off reinitializes all frame memory data. Always backup the required data before switching.

3 Press [Execute].

A popup window appears, displaying a message.

4 Check the message, and select [Yes].

Setting the DME Input/Output Signal Format

Notes

This setting is only valid when the system signal format is set to 1080P.

1 In the System >Install/Unit Config menu, select [SWRx], and press [Unit Config].

The Unit Config menu appears.

2 In the <DME I/F Type> group, press one of the following.

3G Mode: Use 3G mode (single 3G SDI signal) for DME input/output. [1)]
Dual Link Mode: Use dual link mode (two 1.5G SDI signals) for DME input/output. [2)]

1) 3G SDI: Standard defined by SMPTE 424M
2) Dual link: Standard defined by SMPTE 372M

Notes

- When the MKS-7470X/7471X is used, this setting is fixed to “3G Mode.”
- When “Dual Link Mode” is selected, half as many DME units can be connected to the switcher. In this case, the available channels are DME1 channels 1 and 2, and DME2 channels 3 and 4.
- When “Dual Link Mode” is selected, you cannot use an external DME unit (MVE-8000A/MVE-9000) connected via the SDI interface.

3 Press [Execute].

A popup window appears, showing a message.

4 Check the message, and select [Yes].

System Maintenance (Maintenance Menu)

- Date and time setting
- Formatting a memory card
- Primary settings for USB external storage device
- Reloading a USB driver
- Formatting the hard disk
- Locking setup menu operations
  - For each VF button group, selecting a set of candidate menus to be locked, then locking all of the candidates using a password. Except for list scrolling, moving menus, and similar operations, menu operations for all settings can be locked.
  - Changing the password
- Locking file recall operations
  - Locking file recall operations by category
  - Locking and removing the lock using the password (you can change the password).

To display the Maintenance menu

In the Engineering Setup menu, select VF1 'System' and HF7 'Maintenance.' In the status area, the current date and time, and details of the memory card appear.

Setting the Date and Time

1 In the System >Maintenance menu, turn the knobs to set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Hour	Hour	0 to 23
2	Min	Minute	0 to 59
3	Sec	Second	0 to 59

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Month	Month	1 to 12
2	Day	Day	1 to 31
3	Year	Year	2000 to 2037

The set date and time appears in the "Set" box in the status area.

2 Press [Set Date/Time].

This sets the current time to the date and time set in step **1**, and the setting in the "Current" box of the status area changes accordingly.

Using a Memory Card

Displaying memory card information

1 Insert the memory card into the memory card slot.

2 In the <USB Storage Device> group of the System >Maintenance menu, press [Refresh].

Formatting a memory card

Notes

Format a memory card before using it for the first time.

1 Insert the memory card in the memory card slot.

2 In the System >Maintenance menu, using either of the following methods, select the USB device.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

3 In the <USB Storage Device> group, press [Format].

A confirmation message appears.

4 To carry out the formatting, press [Yes].

Carrying Out the Primary Setting

To specify a USB device with a storage device connected as a primary device, use the following procedure.

Notes

Without this setting, you cannot use the "Memory Card" item in the File menu to access a memory card on a storage device connected to the USB device.

1 In the System >Maintenance menu, using any of the following methods, select the USB device you want to set as primary.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
5	Mount Point	USB device selection	1 to 18

2 In the <USB Storage Device> group, press [Set Primary].

Making the primary setting automatic
In the <USB Storage Device> group, press [Auto Detect].

Reloading a USB Driver

To reload a USB driver, in the System >Maintenance menu, press [Reload USB Driver].

Notes

If even after this operation the memory card is not recognized, remove the memory card and reinsert it, then try again.

Initializing the Hard Disk

If a file system corruption error has occurred on the hard disk, you should initialize the hard disk.

1 In the <HDD> group of the System >Maintenance menu, press [HDD Format].

An initialization confirmation message appears.

Notes

When the hard disk is operating normally, pressing [HDD Format] has no effect.

2 To execute the initialization operation, press [Yes]. To cancel, press [No].

If you have pressed [Yes], the hard disk initialization operation is executed, and a finished message appears. If you have pressed [No], the initialization operation is canceled, and the System >Maintenance menu appears again.

3 Press [OK].

Locking the Setup Menu Settings

To protect the data, you can inhibit operations in selected setup menus. Use the following procedure. Note that it is not possible to lock the Setup Operation Lock menu.

1 In the System >Maintenance menu, press [Setup Operation Lock].

The Setup Operation Lock menu appears.

2 In the <VF Group> group, select the group including the desired menu.

The status area shows a list of menu numbers and menu names in the selected group.

Subsequent lock operations apply within the group selected here.

3 Using any of the following methods, select the menu or the set of menus as candidates for the locking operation.

- Press directly on the list in the status area.
- Use the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	Selection of a menu by its number in the list	1 to maximum value
3	Num	Selection of number of menus in the list	1 to maximum value

- To select all setup menus within the selected group, press [ALL].

You can also select a menu while it is open *(see page 564)*.

4 Press [Lock Item Select].

This makes the selected menus candidates for locking, and a padlock icon appears in the “Lock” box in the unlocked state  .

Notes

If there are already one or more locked menus, selection of lock candidates is not possible.

To deselect a lock candidate
After selecting a menu, press [Lock Item Select] once more, to clear the Lock box.

To deselect all lock candidates in the selected VF group
Press [Lock Item All Clear].

5 Repeat steps **2** to **4**, to select all of the lock candidates.

6 Press [Lock].

A keyboard window appears.

7 Enter the password with a maximum of 16 characters, and press [Enter].

If the password is correct, the menus selected in the list of candidates are all locked. The padlock icon changes to the locked state  .

Releasing the lock
When a lock is already applied, use the following procedure.

1 In the System >Maintenance >Setup Operation Lock menu, press [Lock].

A keyboard window appears.

2 Enter the password.

If the password is correct, the lock is released, and the padlock icon disappears.

Changing the lock password

1 In the System >Maintenance >Setup Operation Lock menu, press [Change Password].

A confirmation message appears.

2 Press [Yes].

A keyboard window labeled “Old Password” appears.

3 Enter the old password, and press [Enter].

If the password is correct, a keyboard window labeled “New Password” appears.

4 Enter the new password, and press [Enter].

A keyboard window labeled “New Password (Confirm)” appears.


5 Enter the new password once more for confirmation, and press [Enter].

If the password is correct, the password change completed message appears.

6 Press [OK].

Selecting an opened setup menu for locking

With the menu you want to lock open, press [Lock Item Select] at the lower left.

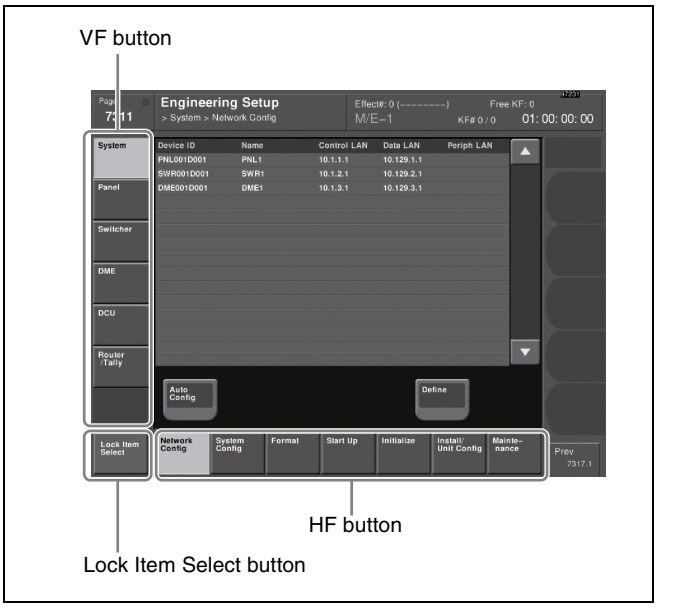


[Lock Item Select] turns red, and a padlock icon appears.



This selection is reflected in the lock candidate list in the Setup Operation Lock menu.

Notes

If there are already one or more locked menus, selection of lock candidates is not possible.
In this case, the indication of [Lock Item Select] changes as follows.

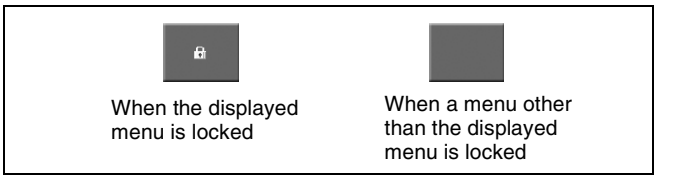

If you want to select lock candidates, first remove the lock in the Setup Operation Lock menu.

Locking File Loading Operations

You can inhibit load operations for a specified file category.

1 In the System >Maintenance menu, press [File Load Lock].

The File Load Lock menu appears.
The status area shows a list of file category numbers, category names, and the lock status.
Subsequent lock operations apply to the category selected here.

2 Using any of the following methods, select the category or the set of categories as candidates for the locking operation.

- Press directly on the desired list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	No	Selection of a category by its number in the list	1 to 14
3	Num	Selection of number of categories in the list	1 to 14

- To select all categories, press [ALL].

3 Press [Lock].

This makes the selected categories candidates for locking. The category name display color changes to yellow, and the indication "Lock" is displayed in yellow in the Lock box.

To deselect a lock candidate
After selecting a category, press [Clear] to clear the indication "Lock" in the Lock box.

4 Repeat steps **2** and **3**, to select all of the lock candidates.

5 Press [Execute].

A keyboard window appears.

6 Enter the password with a maximum of 16 characters, and press [Enter].

If the password is correct, the categories selected in the list of candidates are all locked. The category name display color and the "Lock" indication color in the Lock box both change to white.

To release the lock

When a lock is already applied, use the following procedure.

1 In the System >Maintenance >File Load Lock menu, press [Lock].

A keyboard window appears.

2 Enter the password.

If the password is correct, the lock is released, and the indication "Lock" in the Lock box disappears.

To change the lock password

In the System >Maintenance >File Load Lock menu, press [Change Password], and carry out step **2** and following of *"Changing the lock password" (page 564)*.

Control Panel Setup (Panel)

Chapter 19

Overall Control Panel Settings (Config Menu)

To carry out the overall control panel settings, use the Panel >Config menu.

To display the Config menu

In the Engineering Setup menu, select VF2 'Panel' and HF1 'Config.'

The status area shows the location numbers of the M/E and PGM/PST banks, the allocated bank names, and whether or not operation is enabled.

Panel Setup

In panel setup, you carry out settings particular to the control panel.

You can make the following settings.

Panel settings (Config)

- **M/E Assign:** Set the logical configuration of the M/E and PGM/PST banks.
- **M/E Operation:** For each of the M/E and PGM/PST banks, make operations possible, not possible, or disabled (Enable/Disable/Inhibit).
- **Dual M/E Assign:** Using two M/E banks, assign the shift and non-shift button rows of a single M/E bank.
- **Dual M/E Xpt Swap:** When a setting has been made for Dual M/E Assign, swap the shift and non-shift button rows.
- **DSK Fader Assign:** Carry out fader function assignment and key delegation for the key delegation buttons, in each of the maximum of four downstream key control blocks.
- **External Bus Link:** Make link settings relating internal switcher buses to routing switcher destinations.
- **Key Trans Link:** Select whether or not to link transitions between keyers, and if so which keyer to link to. You can set the links between keyers for each M/E bank separately.
- **Joystick/Trackball User Setting:** When a trackball module and a joystick module are both connected as device control blocks, select which is used as the reference. Also select whether key wipe positioning applies to keys 1 to 8, or to keys 1 to 4.
- **10 Key Region Assign:** Assign any regions to the region selection buttons in the numeric keypad control block. Also used for setting the regions included in the selection when the [ALL] button is pressed.
- **Program Button:** Make assignments for buttons of some control blocks such as assigning the buttons in a transition control block for controlling a VTR and assigning the Flexi Pad control block to macro operation.
- **Compact Key Module Assign:** You can select which keys can be operated with an independent key transition control block (simple type).
- **M/E Operation Inhibit:** For each M/E or PGM/PST bank, enable or inhibit utility 2 bus-related and key-related operations.
- **Joystick/Trackball Module:** Enable or inhibit DME channel selection operations from the device control block (trackball) or device control block (joystick).

Interchanging the Bank Order or Disabling Operation

1 In the Panel >Config menu, select the Bank you want to set, using any of the following methods.

- Press directly on the status area display.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Select the position of the bank you want to set	1 to 7

The Bank selection here indicates the physical position on the control panel, numbering from the top as the 1st Row, 2nd Row, 3rd Row, and 4th Row.
This is followed by the system control unit extension interface ports 1, 2, and 3.

2 Select the bank that you want to assign to the selected Bank number in the <M/E Assign> group.

The status area shows the interchanged state of the banks.

Notes

- It is not possible to assign the same M/E logical bank to more than one physical bank. Be sure to make different M/E assignments.
- When the bank order is changed, the state of region selection button assignment in the numeric keypad control block also changes correspondingly.

3 For the selected Bank number, in the <M/E Operation> group, select one of the following.

Enable: Enable panel display and operation of the bank.
Disable: Enable only panel display, and disable operation of the bank.
Inhibit: Disable both the panel display and operation of the bank.

Notes

When this is set to Inhibit, snapshots of the bank are not recalled.

Assigning Two M/E Banks to One M/E Bank

1 In the Panel >Config menu, select the M/E bank for which you want to make the setting.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Selection of position of bank for which you want to make the setting	1 to 7 a)

a) Depends on the center control panel configuration. When 7 (Ext 3) is selected, or a switcher bank is selected which is immediately above a switcher bank to which nothing is assigned, then [Dual M/E Assign] is disabled.

For example, if the furthest bank from you is assigned to M/E-1, and you want no shift button operation for the bank, select 1 (1st Row) for Bank.

2 Press [Dual M/E Assign].

This assigns the furthest M/E bank from you to the unshifted (shifted) cross-points and the M/E bank in front of it to the shifted (unshifted) cross-points. For fader lever operations, only the M/E bank closer to you is enabled.
The shift/non-shift assignment is set by [Dual M/E Xpt Swap].

For more details, see the next section, "Interchanging shifted and non-shifted operations for a dual M/E."

To return to the original assignment

Interchange the bank order *(see page 566)*.

Interchanging shifted and non-shifted operations for a dual M/E

1 In the Panel >Config menu, select the M/E bank for which the dual M/E setting is made.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Bank to be selected for dual M/E setting	1 to 7

2 Press [Dual M/E Xpt Swap], toggling it on or off.

On: The lower M/E bank is non-shifted, and the higher M/E bank is shifted.
Off: The lower M/E bank is shifted, and the higher M/E bank is non-shifted.

Assigning the Key Delegation in the Downstream Key Control Block

As an example, to assign key 4 of the M/E-1 bank to key delegation button 1 of the downstream key control block 1, use the following procedure.

1 In the Panel >Config menu, press the [DSK Fader Assign].

The DSK Fader Assign menu appears.

2 Directly press on the indications in the status area, to select the downstream key control block for which you want to make the setting, and select the key delegation.

Here, press on the intersection of the “1st Module” column and “Key1 Assign” row.

3 In the <M/E Select> group, select the bank of the key you want to assign.
Here, select [M/E-1] as an example.

4 In the <Key Link Select> group, select the key you want to assign.
Here, select [Key4] as an example.

5 Press [Fader Assign] in the DSK Fader Assign menu.

The Fader Assign menu appears.

6 To disable the fader lever of the selected downstream key control block, select [Disable] in the <Fader Assign> group.
To enable the fader lever, select one of the following in the <Fader Assign> group, determine the key to which the fader lever operation applies.

All: Key selected with one of the key delegation buttons
Key1 to Key4: Key assigned to key delegation buttons 1 to 4 ([DSK1] to [DSK4] buttons)

Inhibiting button operations in the downstream key control block

1 In the Panel >Config menu, press the [DSK Fader Assign].

The DSK Fader Assign menu appears.

2 Select the relevant module by any of the following methods.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.

3 Press [Inhibit], turning it on.

This inhibits operations.
To reenable operations, press the same button, turning it off.

Linking Switcher Bus and Router Destination

To provide links between the switcher bus and router destination, make the following settings as required.
Matrix selection: Select the target of link setting from the eight matrices (1 to 8).
Matrix position definition: Set the start address and level for the source and destination on the S-Bus.
Link table setting: Link a switcher cross-point button and matrix source.
Link bus setting: Link a switcher bus address and router destination.

Selecting a matrix number

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 In the <Link> group, press [External Bus Link].

The External Bus Link menu appears.
The status area shows the current link status.

3 Turn the knobs to select the matrix.

Knob	Parameter	Adjustment	Setting values
1	Link No	Link number	1 to 64
2	Link Matrix	Matrix number	1 to 8

In the status area, the color of the selected part changes.

4 Press [Link Matrix Set].

This confirms the matrix selection and the selected part in the status area returns to the previous color.

To delete a link
With the link selected, press [Clear].

Defining the position of a matrix

Specify where in the 1024 × 1024 S-Bus space the link matrix is to be provided, by setting the source and destination start address.
For the matrix selected in the External Bus Link menu, use the following procedure.

1 In the Panel >Config >Link/Program Button >External Bus Link menu, press [Link Matrix Adjust].

The Link Matrix Adjust menu appears.
The status area shows the status of the currently selected matrix, and a list of the source and destination start addresses that can be selected.
In this menu too, you can use the knobs to select the link for the setting.

2 Using any of the following methods, define the position of the matrix to be linked.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Source	Source start address	1 to 897
3	Destination	Destination start address	1 to 897
4	Level	Level	1 to 8

3 To confirm a source address selected in step **2**, press [Source Set], to confirm a destination address press [Destination Set], and to confirm a level press [Level Set].

This confirms the selection, which is reflected in the status area.

Setting a link table

For the link selected in the External Bus Link menu, make the settings as follows.

1 In the Panel >Config >Link/Program Button >External Bus Link >Link Matrix Adjust menu, press [Link Table Adjust].

The Link Table Adjust menu appears.
The status area lists the status of the currently selected link, combinations of video signals and sources, and the sources that can be selected.

2 Using any of the following methods, select the switcher cross-point button and the matrix source to be linked to the button.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Main No	Switcher cross-point button	1 to 300
2	Source No	Matrix source selection	1 to 128

3 To confirm the matrix source selection made in step **2**, press [Link Source Set].

This confirms the selection, which is reflected in the status area.

4 As required, repeat steps **2** and **3** to select the matrix sources to be linked to other cross-point buttons.

To initialize the set links

In the Panel >Config >Link/Program Button >External Bus Link >Link Matrix Adjust menu, press [Init Link Table].
A confirmation message appears.
Press [Yes].

The links set using the above procedure are initialized to the default settings, and this is reflected in the status area.

Making link bus settings

For the link number selected in the External Bus Link menu, use the following procedure.

1 In the Panel >Config >Link/Program Button >External Bus Link menu, press [Link Bus Adjust].

The Link Bus Adjust menu appears.
The status area lists the current link status, and the switcher buses and router destinations that can be selected.
In this menu too, you can use knob 1 to select the link to be set.

2 Using any of the following methods, select the switcher bus and the router destination to be linked to the switcher bus.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Internal Bus	Switcher bus selection	1 to 180
3	Destination	Router destination selection	1 to 128

3 To confirm the bus selected in step **2**, press [Master Bus Set], and to confirm the destination press [Linked Dest Set].

This confirms the selection, which is reflected in the status area.

Linking Transitions Between Keyers

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 In the <Link> group, press [Key Trans Link].

The Key Trans Link menu appears.
The status area shows the keyers for each M/E bank and the linked keyers.

3 Using any of the following methods, select the keyer to be the master.

- Press directly on the list in the status area.

- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Master Key	Select keyer to be master	1 to 48

The selected keyer appears in reverse video.

4 In the <Key Select> group, select the keyer to be linked to the transition of the master.

Notes

Linking does not apply to a transition carried out with the downstream key control block.

Linking the Next Transition Selection Buttons

To the transition links between keyers, you can add a link for the next transition selection buttons in the transition control block. The effect of this additional link is such that if for example, two keyers (Key 2 and Key 3) are linked with the master keyer (Key 1), pressing the [KEY1] next transition selection button also selects the [KEY2] and [KEY3] buttons.

1 Set the transition links between keyers.

For details of the operation, see the previous section "Linking Transitions Between Keyers."

2 Press [Next Trans Link], turning it on.

The [KEY1] to [KEY8] next transition selection buttons in the transition control block are now selected coupled to the settings in the Key Trans Link menu for transition links between keyers.

Notes

These settings apply to the whole Key Trans Link menu. It is not possible to make separate settings for each master keyer.

Selecting the Module to Be the Reference for Device Control Block

When both trackball and joystick device control blocks are connected, select which is to be the reference. Also select the range to which key wipe positioning applies.

To select the reference module

1 In the Panel >Config menu, press [JS/TB User Setting].

The JS/TB User Setting menu appears.

2 In the <Reference Module> group, select one of the following.

Trackball: Trackball device control block
Joystick: Joystick device control block

To select the range to which key wipe positioning applies

In the Panel >Config menu <Wipe Pos Key Select Module> group, select one of the following.
KEY1-4: Applies to keys 1 to 4.
KEY1-8: Applies to keys 1 to 8.

Notes


When "KEY1-8" is selected, after selecting more than one key it is not possible to carry out key wipe positioning. There is no such restriction when "KEY1-4" is selected.

Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block

You can set a maximum of four regions to each of the region selection buttons in the numeric keypad control block or Multifunction Flexi Pad control block.
In the Multifunction Flexi Pad control block, pressing the region selection button [MORE] displays the regions not assigned to the region selection buttons on the memory recall section numeric keypad buttons, so that you can select them, and set the assignment of regions to the numeric keypad buttons.
However, in the Multifunction Flexi Pad control block, it is not possible to assign a region to the [EXIT] button.

1 In the Panel >Config menu, press [10 Key Region Assign].

The 10 Key Region Assign menu appears.

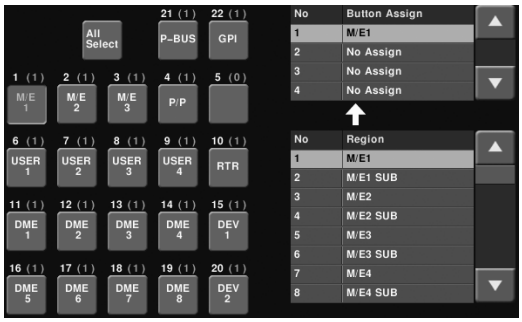

When a CCP-6224 or CCP-6324 control panel including a Multifunction Flexi Pad control block is connected, the display in the button area at the lower part of the status area changes as follows.



The left side of the status area shows region selection buttons; the upper part of the right side shows a list of regions assigned to region selection buttons, and the lower part shows a list of assignable regions.

2 To assign regions to the region selection buttons in the Multifunction Flexi Pad control block or the numeric keypad buttons in the memory recall section, press either of the following buttons in the <Flexi Pad Area Sel> group of the button area.

Region Sel Btn Area: When assigning a region to the region selection buttons

Mem Rcl Btn Area: When assigning a region to the numeric keypad buttons in the memory recall section

3 Press the indication of the button for the assignment.

The button you pressed appears in reverse video.

4 Using any of the following methods, select one of the four regions for the setting.

- Press directly on the list in the upper part of the right side.
- Press the arrow keys to scroll the reverse video cursor in the list in the upper part of the right side.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Button Assign	Selection to which setting applies	1 to 4

5 Using any of the following methods, select the region to be assigned.

- Press directly on the list in the lower part of the right side.
- Press the arrow keys to scroll the reverse video cursor in the list in the lower part of the right side.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Region	Region selection	1 to maximum value

6 Press [Set], to confirm the selection.

This assigns the region to the region selection button in the numeric keypad control block.

Notes

Only regions assigned here can be used for keyframe or snapshot recall.
If an M/E bank is not assigned to a region selection button in the numeric keypad control block, the M/E Flexi Pad control block cannot be used to recall a snapshot.

To return the region assignment to the factory default state

In the Panel >Config >10 Key Region Assign menu, press [Default].
This returns the assignment of region selection buttons in the numeric keypad control block to the factory default state.

To delete a region assignment

In step **3** of the procedure "Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block" *(page 570)*, make the selection to which the operation applies, then press [Clear].
This clears the assignment of the selected region.

Setting the region selection buttons selected when the [ALL] button is pressed

1 In the Panel >Config >10 Key Region Assign menu, press [All Select] in the button area, or the [All Select] button indication in the status area, setting it to On.

The [All Select] button indication in the status area changes to orange, and the system switches to a mode for assigning region selection buttons to the [ALL] button. In the factory default state, all buttons appear in reverse video, and are assigned to the [ALL] button.

2 If you do not want to assign any region selection button to the [ALL] button, press the corresponding button indication, setting it to Off.

The button you pressed returns to normal display.

Notes

Assignment to the [ALL] button is region by region. Changing the assignment of a region selection button does not change the regions assigned to the [ALL] button.

Setting Transition Control Block Button Assignments

There are three separate menus for these settings, for the left part of the transition control block (Transition Module1), upper right part (Transition Module2), and lower right part (Transition Module3).

The following example describes the operation for the left part (Transition Module1 menu), but operations in the Transition Module2 and Transition Module3 menus are similar.

1. In the Panel >Config menu, press [Link/Program Button].

   The Link/Program Button menu appears.

2. Press [Transition Module1].

   The Transition Module1 menu appears.

3. Select the bank of the transition control block you want to set in the <Bank Select> group.

   The current assignment of the buttons appears at the left.

4. Press the transition type selection button for which you want to change the assignment.

   The button you pressed appears in reverse video.

5. Using any of the following methods, select the function to be assigned, from the list on the right.

   - Press directly on the list.
   - Press the arrow keys to scroll the reverse video cursor.
   - Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Button Assign	Selection of function	1 to maximum value

6. Press [Set].

   The texts on the button illustrations change to reflect the selection.

To cancel the assignment
Press [Clear].

To make the assignment the default
Press [Default].

Setting the Assignment of Macro Operation Buttons

Notes

This setting applies to all simple type Flexi Pad control blocks on the control panel.

To switch the [UNDO] button on a simple type Flexi Pad control block to a [MCRO] button for macro operation, use the following procedure.

1. In the Panel >Config >Link/Program Button menu, press [Flexi Pad Module].

   The Flexi Pad Module menu appears.

2. Select the assignment of the [UNDO] button in the simple type Flexi Pad control block from the <UNDO Button Assign> group.

   UNDO: use as an [UNDO] button.
   MACRO: use as a [MCRO] button.

Assigning the Dual Background Bus Mode Switching Function

The dual background bus mode is a mode in which the background A row shifted signal can be selected with the key 1 row, and the background B row shifted signal can be selected with the key 2 row. To switch this mode on and off, it is necessary to assign this function to the cross-point control block [PRE MCRO] button.

For details of the dual background bus, see "Signal Selection" in Chapter 3 (Volume 1).

1. In the Panel >Config menu, press [Link/Program Button].

   The Link/Program Button menu appears.

2. Press [Xpt Module].

   The Xpt Module menu appears.

3. Using any of the following methods, select the bank.

   - Press directly on the list in the status area.
   - Press the arrow keys to scroll the reverse video cursor.
   - Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Bank selection	1 to 6

4 In the <PRE MCRO/POST MCRO> group, select [Dual Bkgd Bus].

This assigns the dual background mode to the [PRE MCRO] button, and disables the [POST MCRO] button.

Assigning the Utility/Shotbox Mode Switching Function

You can first assign functions to the key 2 row cross-point buttons, and then use them in the same way as the buttons in the utility/shotbox control block.
To switch this mode on and off, it is necessary to assign this function to the cross-point control block [PRE MCRO] button *(see page 597)*.

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Xpt Module].

The Xpt Module menu appears.

3 Using any of the following methods, select the bank.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Bank selection	1 to 6

4 Select [Utility/Shotbox] in the <PRE MCRO/POST MCRO> group.

This assigns the utility/shotbox mode to the [PRE MCRO] button, and disables the [POST MCRO] button.

Assigning the Function to Disable Cross-Point Button Operations to a Button

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Xpt Module].

The Xpt Module menu appears.

3 Using any of the following methods, select the bank.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Bank selection	1 to 6

4 Press [Inhibit Set] in the <PRE MCRO/POST MCRO> group.

This assigns the function to disable cross-point button operations to the [PRE MCRO] button.

Assigning the AUX Bus Control Mode Switching Function

You can switch the cross-point control block of the CCP-6224/6324 control panel to AUX bus control mode (AUX panel-less function). You can display the names of the sources or buses for the AUX buses in the source name displays.
The function for switching to AUX control (AUX Ctrl) mode is assigned to the [PRE MCRO] button. And the function for switching the source name displays to the names of the sources or buses for the AUX buses is assigned to the [POST MCRO] button.

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Xpt Module].

The Xpt Module menu appears.

3 Using any of the following methods, select the bank.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Bank selection	1 to 6

4 Select [Aux Ctrl/Aux Disply] in the <PRE MCRO/POST MCRO> group.

This assigns the Aux Ctrl function to the [PRE MCRO] button, and the Aux Display function to the [POST MCRO] button.

Assigning Keys to the DSK1 and DSK2 Buttons in the Downstream Key/Fade-to-Black Control Block

It is possible to select the key used for downstream key/fade-to-black control block operations.

1 In the Panel >Config >Link/Program Button menu, press [DSK/FTB Module].

The DSK/FTB Module menu appears.
The left side of the status area shows the [DSK1] and [DSK2] buttons, and the right side shows a list of keys to be assigned.

2 Press the indication (DSK1, DSK2) of the button for the assignment.

The button you pressed changes to reverse video.

3 Using any of the following methods, select the key to be assigned.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Key No	Selection of key assigned to button	1 to 48

4 Press [Set], to confirm the selection.

This assigns the selected key to the key delegation button.

To return the key delegation button assignment to the factory default state

In the DSK/FTB Module menu, press [Default].
This returns the key delegation assignment to the factory default state.

Assigning Keys to the Independent Key Transition Control Block (Simple Type)

It is possible to select the keys that can be used in an independent key transition control block (simple type) operation.

The control panel comprises a main base for installing the principal switcher bank control blocks, and an extension section for extended control blocks. The independent key transition control block (simple type) can be installed in either, but the assignable keys differ as follows.

When the independent key transition control block (simple type) is installed in the main base

Select the keys to be assigned from the following.

- Key1, 2 (keys 1 and 2) 1)
- Key3, 4 (keys 3 and 4) 1)
- Key5, 6 (keys 5 and 6) 1)
- Key7, 8 (keys 7 and 8) 1)
- DSK1, 2 (downstream keys 1 and 2)
- DSK3, 4 (downstream keys 3 and 4)
- DSK5, 6 (downstream keys 5 and 6)
- DSK7, 8 (downstream keys 7 and 8)
- N/A (no assignment)

1) The M/E bank depends on the settings in the M/E Assign menu where the independent key transition control block is installed.

When the independent key transition control block (simple type) is installed in the extension section

Select the keys to be assigned from the following.

- M/E-1 Key1, 2
- M/E-1 Key3, 4
- M/E-1 Key5, 6
- M/E-1 Key7, 8
- M/E-2 Key1, 2
- M/E-2 Key3, 4
- M/E-2 Key5, 6
- M/E-2 Key7, 8
- M/E-3 Key1, 2
- M/E-3 Key3, 4
- M/E-3 Key5, 6
- M/E-3 Key7, 8
- M/E-4 Key1, 2
- M/E-4 Key3, 4
- M/E-4 Key5, 6
- M/E-4 Key7, 8
- M/E-5 Key1, 2
- M/E-5 Key3, 4
- M/E-5 Key5, 6
- M/E-5 Key7, 8
- DSK1, 2
- DSK3, 4
- DSK5, 6
- DSK7, 8
- Key1, 2 1)
- Key3, 4 1)
- Key5, 6 1)
- Key7, 8 1)
- N/A (no assignment)

1) These keys are the keys of the M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, or PGM/PST bank depending on the settings of the M/E Assign menu of the interface port for the extension section in which the independent key transition control block is installed.

To assign a key to the main base

To assign a key to the independent key transition control block (simple type), use the following procedure. Here the example shown is the case in which keys 3 and 4 (“Key3, 4”) are assigned to the second row switcher bank of the main base.

1 In the Panel >Config menu, press [Compact Key Module Assign].

The Compact Key Module Assign menu appears. The left side of the status area shows data for the main base (physical layout and switcher bank names and key assignment).

2 Press directly on the display on the left, to select the control block for the assignment.
Here, press on the intersection of the “2nd Row” column and “Module” row.

3 Select the key from the table on the right.

4 Press [Set].

To return the key assignment to the default

In the Compact Key Module Assign menu, press [Default]. This returns all key assignments for the main base to their factory default state.

To assign a key to an extension

Press [Extension Port], to display the Extension Port menu, then continue as for the main base.
To return the extension assignments to their original values, press [Default].

Assigning Functions to Key Control Block Buttons

Select one of the four key control blocks installed in the main base and extension, then assign functions to the 30 buttons.

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.


2 Press [Key Control Module].

The Key Control Module menu appears.

3 Press one of [1st], [2nd], [3rd], and [4th], to select the key control block.

4 Press [Button Assign].

The assignment status of the control block you selected in step **3** above appears.

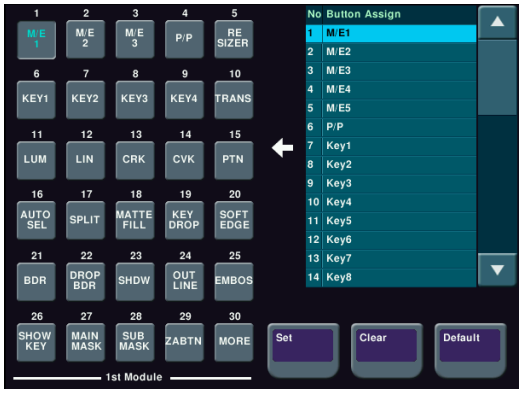

5 Press the button to which you want to assign a function, displaying it in reverse video.

6 Using any of the following methods, select the function you want to assign from the Button Assign list.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Button Assign	Select function to be assigned to button	1 to maximum value

7 When you have completed the required assignments, press [Set].

Assigning Preview Output to Preview Selection Buttons

It is possible to assign any preview output to a preview selection button.
This applies to the preview selection buttons in the fade-to-black control block and the downstream key/fade-to-black control block.

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Fade To Black Module].

The Fade To Black Module menu appears.
On the left of the status area, preview selection buttons (1 to 11) appear. On the right side a list of signals to be assigned appears.

3 In the button indications on the left, press the button for the assignment.

4 Using any of the following methods, select the signal to be assigned.

- Press directly on the list on the right.
- In the list on the right, press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Button	Button selection	1 to maximum value

5 Press [Set].

This assigns the signal selected in the list to the button.

To cancel an assignment

Select the button, then press [Clear].
This leaves nothing assigned.

To return all preview selection button assignments to the factory default state

In the Fade To Black Module menu, press [Default].

Assigning Functions to the Device Control Block

Assigning devices or functions to the device selection buttons and other buttons of the device control block (search dial)

You can assign devices and functions to the device selection buttons, SBOX buttons and [DELAY] button of the device control block (search dial).

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Device Control Module].

The Device Control Module menu appears.
The left of the status area shows the device selection buttons, SBOX buttons and [DELAY] button of the device control block (search dial). The list on the right shows the devices and functions that can be assigned.

3 In the button displays on the left, press the button for the assignment.

4 Using any of the following methods, select the device or function to be assigned.

- Press directly on the list on the right.
- In the list on the right, press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Device Function	Selection of device or function to be assigned	1 to maximum value

5 Press [Set].

To cancel an assignment

Select the button, then press [Clear].
This removes the assignment to that button.

To return all device selection button assignments to the factory default state

In the Device Control Module menu, press [Default].

Assigning devices and functions to the region selection buttons of the device control block (trackball)/device control block (joystick)

You can assign devices and functions to the region selection buttons of the device control block (trackball)/ device control block (joystick).

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Joystick/Trackball Module].

The Joystick/Trackball Module menu appears.

3 In the lower right <Mode Select> group, select [Device/Clip] or [Wipe/RSZR].

Device/Clip: Assignment while the device control block [DEV] button is lit
Wipe/RSZR: Assignment while no button is lit on the device control block or the [RSZR] button is lit
According to the selection, the left of the status area shows the region selection buttons of the device control block. The list on the right shows the devices and functions that can be assigned.

4 In the button displays on the left, press the button for the assignment.

5 Using any of the following methods, select the device or function to be assigned.

- Press directly on the list on the right.
- In the list on the right, press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Function	Selection of device or function to be assigned	1 to maximum value

6 Press [Set].

To cancel an assignment
Select the button, then press [Clear].
This removes the assignment to that button.

To return all device selection button assignments to the factory default state
In the Joystick/Trackball Module menu, press [Default].

Inhibiting Utility 2 Bus and Key Operations

You can inhibit operations on the utility 2 bus and keys 1 to 8 of the M/E and PGM/PST banks by menu operations. This inhibitions apply for the following control blocks.
- Cross-point control block
- Transition control block
- Independent key transition control block [1)]

1) Only when "Key1,2," "Key3,4," "Key5,6," or "Key7,8" are assigned by the Compact Key Module Assign menu.

Notes

In the auxiliary bus control block and other control blocks which are excluded from M/E and PGM/PST banks, the operations on the utility 2 bus and keys 1 to 8 are not inhibited.

1 In the Panel >Config menu, press [Operation Inhibit].

Operation Inhibit menu appears.

2 Press [M/E Operation Inhibit].

The M/E Operation Inhibit menu appears.

3 In the list in the status area, using any of the following methods, select the switcher bank for which operations are to be inhibited.

- Press directly on the desired switcher bank in the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	Switcher bank selection for inhibiting operations	1 to maximum value

4 In the <M/E Operation Inhibit> group, press the utility 2 bus or key button ([Util2 Bus] or [Key1] to [Key8]) for which operations are to be inhibited.

Inhibiting DME Channel Selection Operations

You can inhibit DME channel selection operations from the device control block (trackball) or device control block (joystick).

1 In the Panel >Config menu, press [Operation Inhibit].

The Operation Inhibit menu appears.

2 Press [Joystick/Trackball Module].

The Joystick/Trackball Module menu appears.

3 In the list in the status area, using any of the following methods, select the DME channel for which operations are to be inhibited.

- Press directly on the desired DME channel in the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	DME Ch	DME channel selection for inhibiting operations	1 to 8

4 Press [Inhibit].

Assigning Functions to the Menu Control Block Top Menu and User Preference Buttons

To these 41 buttons, you can freely assign a menu recall or user preference button function.

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Menu Panel].

The Menu Panel menu appears.
The left side of the status area shows the Top menu selection buttons and user preference buttons, and the right side shows a list of menus and actions to be assigned.

3 Using any of the following methods, scroll the display.

- Press the arrow keys.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Scroll	Scroll	1 to 5

4 In the button indications on the left, press the button for the assignment.

5 Using any of the following methods, select the menu or action to be assigned.

- Press directly on the right list.
- Press the arrow keys on the right list to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	Menu/ Action	Select the menu or action	1 to 45

6 Press [Set] you confirm the setting.

This assigns the menu or action selected in the list to the button.
To cancel an assignment, select the button, then press [Clear].
To return all button assignments to the factory default state, in the Menu Panel menu, press [Default].

Assigning Functions to the Buttons in the Multifunction Flexi Pad Control Block

You can assign functions to the buttons in the various parts of the Multifunction Flexi Pad control block in the following menus.
Mode selection buttons: Multi Function Module menu
Region selection buttons: 10 Key Region Assign menu
Memory recall buttons: Multi Function Module menu

For details of assignment of regions to the region selection buttons, see "Assigning a Region to the Region Selection Buttons in the Numeric Keypad Control Block or Multifunction Flexi Pad Control Block" (page 570).

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.

2 Press [Multi Function Module].

The Multi Function Module menu appears.

3 Press one of the following three buttons displayed in the button area.

Mode Sel Assign: To assign a function to the mode selection buttons
Eff Edit Assign: To assign a function to a button in the memory recall section for effect editing (when the [EFF] and [EDIT ENBL] buttons are pressed)
Macro Edit Assign: To assign a function to a button in the memory recall section for macro editing (when the [MCRO] and [EDIT ENBL] buttons are pressed)
The left side of the status area shows an image of each button, and the right side shows a list of modes and functions to be assigned.

4 In the button indications on the left, press the button for the assignment.

5 Using any of the following methods, select the mode or function to be assigned.

- Press directly on the right list.
- Press the arrow keys on the right list to scroll the reverse video cursor.
- Turn the knob.

When Mode Sel Assign is selected

Knob	Parameter	Adjustment	Setting values
1	Mode Sel Assign	Select the mode	1 to 9

When Eff Edit Assign or Macro Edit Assign is selected

Knob	Parameter	Adjustment	Setting values
1	Button Assign	Select the function	1 to maximum value

The following modes and functions can be selected.

Mode selection buttons

Mode	Button indication
Effect	EFF
Snapshot	SNAPSHOT
Shotbox	SHOTBOX
Macro	MCRO
Wipe snapshot	WIPE
DME wipe snapshot	DME WIPE
Transition rate	TRANS RATE
Key adjust	KEY ADJ
Key snapshot	KEY SS

Buttons in the memory recall section during effect editing

Function	Button indication
Undo	UNDO
Pause setting	PAUS
Copy	COPY
Paste	PSTE
Select all	ALL
Insert	INS
Modify	MOD
Delete	DEL
Keyframe loop count setting	KF LOOP
Effect duration setting	EFF DUR
Keyframe duration setting	KF DUR
Delay setting	DLY
Constant duration mode on or off	CNST DUR
Go to specified timecode	GOTO TC
Go to specified keyframe	GOTO KF
Set range	FROM TO
Return the button display to that before effect was executed	EXIT
Switch to numeric keypad input mode	STOR
Go to first keyframe	REWIND
Switch to shifted functions	SHFT
Go to previous keyframe	<< PREV
Go to next keyframe	>> NEXT
Execute effect	RUN

The functions of the buttons in the memory recall section during effect editing are on two pages; to set the functions of buttons on the second page, press [2] in the <Page Select> group in the button area.

Buttons in the memory recall section during macro editing

Function	Button indication
Undo	UNDO
Pause setting	PAUS
Auto insert mode on or off	AUTO INS
Copy	COPY
Paste	PSTE
Select all	ALL
Insert	INS
Modify	MOD
Delete	DEL
Set range	FROM TO
Go to specified event	GOTO EVNT

6 Press [Set] to confirm the setting.

To cancel an assignment

Select the button, then press [Clear].
To return all button assignments to the factory default state, press [Default].

Assigning a Function to the Independent Key Transition Control Block (Simple Type)

You can assign a function to the buttons in the independent key transition control block (simple type).
The assignment may be to the independent key transition type selection buttons and buttons in the independent key transition execution section.

1 In the Panel >Config menu, press [Link/Program Button].

The Link/Program Button menu appears.


2 Press [Compact Key Trans Module].

The Compact Key Transition Module menu appears.

3 In the <Bank Select> group, select the bank you want to manipulate.

4 According to the selected bank, select the control block to be assigned, in the <Module Select> group.

The currently assigned function is displayed in the area that displays the buttons in the selected control block.

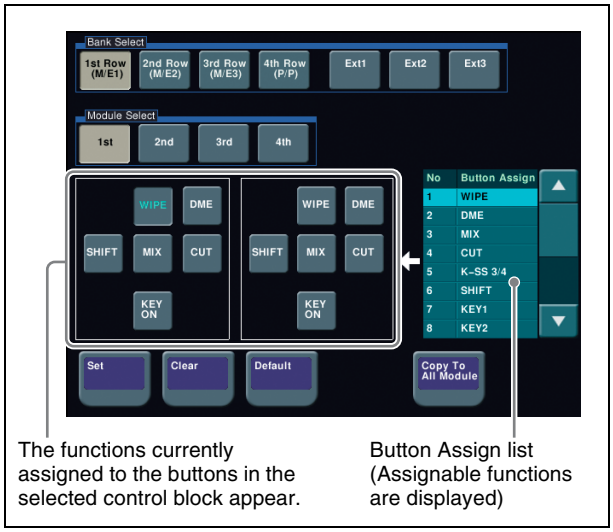

5 Press a button to which to assign a function so that the button is displayed in reverse video.

6 Using any of the following methods, select a desired function to be assigned in the Button Assign list.

- Press directly on the desired list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Button Assign No	Selection of a function to assign to the selected button	1 to 15

7 Press [Set].

The function selected in step **6** is assigned to the selected button.

To remove a function assignment

In step **5**, select the button whose function assignment you want to remove, and press [Clear].

To return the function assignments to the factory default state

Press [Default].

To make the same assignment for all control blocks on all banks

Press [Copy To All Module].

Cross-Point Settings (Xpt Assign Menu)

To carry out the cross-point settings, use the Panel >Xpt Assign menu.

To display the Xpt Assign menu

In the Engineering Setup menu, select VF2 'Panel' and HF2 'Xpt Assign.'
The status area shows a list of "cross-point assign tables" to use for the M/E banks, PGM/PST bank, and various buses.
The following functions are available here.

- **Xpt Assign:** For each control block or bus, display and set the assignments to the main table and tables 1 to 14. You can also carry out settings to link switcher signal selection to the audio mixer.
- **Main, V/K Pair Assign:** Make cross-point settings for the main table.
  - Assign video/key sources for button numbers 1 to 300.
  - For each table, specify whether the rightmost cross-point button in each row is used as a shift button, and the operation mode when it is used as a shift button.
  - For the [SHIFT] button in the cross-point control block and for each table, select the mode in which this is a shift button dedicated to the source name displays, or the mode in which it is a shift button for all buses.
  - Disable cross-point buttons to work.
- **Mixer Xpt Assign:** Assign audio mixer cross-points to cross-point buttons in the main table.
- **Table Button Assign:** Create tables 1 to 14 in the same way as the main table.
- **Src Name:** Set source names of up to 16 characters.
- **LCD Color:** Set the LCD color for source name display.
- **Table Copy:** Copy table contents from the main table to tables 1 to 14 or between tables 1 to 14 (it is not possible to copy tables 1 to 14 to the main table).
- **Name Export:** This function sends the source name and destination name to the S-Bus.
- **Side Flags Button Assign:** Assign the rightmost button in the background A/B row to the side flag function (inserting a selected image on both sides of a 4:3 image).

Creating Cross-Point Assign Tables

As cross-point assign tables, you can create a "main" table and up to 14 other tables (table 1 to table 14). However, you can only carry out assignment of the video and key combinations in the main table.

Creating the main table

In the main table, a pair consisting of a video signal and a key signal is assigned to each button number. You can also assign the same signal to another button number at the same time. Further, you can delete currently assigned signals from the main table.

1 In the Panel >Xpt Assign menu or Panel >Xpt Assign >Table Button Assign menu, press [Main, V/K Pair Assign].

The Main, V/K Pair Assign menu appears.
The left of the status area shows the video and key signal names, source number, and audio mixer cross-points (machine numbers) currently assigned in the main table. On the right is a list of the source numbers and signals that can be assigned. When the shift button is pressed, the number column is distinguished by color.

For details of audio mixer cross-point assignment operations, see "Setting the audio mixer cross-points" (page 585).

2 Using any of the following methods, select the button number.

- Press an auxiliary bus control block cross-point button.
  The auxiliary bus control block is in selection mode, only when the menu for cross-point button selection is showing.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	V/K Pair No	Selection of video and key pair number	1 to 300

3 When assigning a video signal, press [Video] in the <Assign> group. When assigning a key signal, press [Key]. You can select a video signal and a key signal at the same time.

Notes

[Video] and [Key] in the <Assign> group cannot be turned off at the same time. At least the one or the other is always on.

4 Use any of the following methods to select the signal to assign.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	Source No	Selection of source to be assigned	1 to 326 (MVS-8000X) 1 to 152 (MVS-7000X)

5 Using the buttons in the <Xpt Assign> group, assign the selected signal to the button number currently selected in the main table.

Set: Delete the signal currently assigned to the selected button number and make a new assignment.
Insert: Move down one line the signal currently assigned to the selected button number and following signals, and make a new assignment.

Notes

When a button number upper than 121 is selected, execution of "Insert" is impossible. The signal assignments to button numbers upper than 121 cannot be changed. When "Insert" is executed for any other number, moving down of signals ends at number 120, and the signals assigned to numbers upper than 121 are maintained in their original lines.

To disable a button

In the Panel >Xpt Assign >Main, V/K Pair Assign menu, select the button you want to disable, and press [Inhibit].

To delete any currently assigned signal

In the Panel >Xpt Assign >Main, V/K Pair Assign menu, select the button corresponding to the signal you want to delete, and press [Delete] in the <Xpt Assign> group. Signal deletion is executed in accordance with the selection in the <Assign> group, and the signal assigned to the button number next to the selected button number and following signals move up one line.

Notes

When a button number upper than 121 is selected, execution of "Delete" is impossible. The signal assignments to button numbers upper than 121 cannot be changed. When a signal assigned to any other button number is deleted, moving up of signals ends when the signal assigned to number 120 has moved to number 119, and the signals assigned to numbers upper than 121 are maintained in their original lines.

Creating tables 1 to 14

When creating tables 1 to 14, in the same way as when creating the main table, you can assign the same signal to more than one button number, or delete currently assigned signals. However, assignment of video and key combinations is impossible.

1 In the Panel >Xpt Assign menu, press [Table Button Assign].

The Table Button Assign menu appears.
The table number appears on the upper left part of the status area.
The left part of the status area shows the cross-point button numbers, video and key pair numbers, video signal source names and source numbers, and key signal source names and source numbers. When the shift button is pressed, the number column is distinguished by color.
The right part shows the video and key pair numbers, and the names of video signals and key signals set in the main table.
The Table Button Assign menu also allows you to access the Main, V/K Pair Assign menu and the Src Name/LCD Color menu.

2 Using the knob, select the table number.

Knob	Parameter	Adjustment	Setting values
1	Table No	Selection of the table to be set	1 to 14

3 Using any of the following methods, select the button number.

- Press an auxiliary bus control block cross-point button.
  The auxiliary bus control block is in selection mode, only when the menu for cross-point button selection is showing.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Button No	Cross-point button selection	1 to 300

4 Using any of the following methods, select the pair number.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	V/K Pair No	Selection of video and key pair number to be assigned	1 to 300

5 Using the buttons in the <Button Assign> group, assign the selected pair number to the button number currently selected in table 1.

Set: Delete the signal currently assigned to the selected button number and make a new assignment.
Insert: Move down one line the signal currently assigned to the selected button number and following signals, and make a new assignment.

Notes

When a button number upper than 121 is selected, execution of “Insert” is impossible. The signal assignments to button numbers upper than 121 cannot be changed. When “Insert” is executed for any other number, moving down of signals ends at number 120, and the signals assigned to numbers upper than 121 are maintained in their original lines.

To disable a button

In the Panel >Xpt Assign >Table Button Assign menu, select the button you want to disable, and press [Inhibit].

To delete any currently assigned signal

In the Panel >Xpt Assign >Table Button Assign menu, select the button corresponding to the signal you want to delete, and press [Delete] in the <Button Assign> group. The signal assigned to the button number next to the selected button number and following signals move up one line.

Notes

When a button number upper than 121 is selected, execution of “Delete” is impossible. The signal assignments to button numbers upper than 121 cannot be changed. When a signal assigned to any other button number is deleted, moving up of signals ends when the signal assigned to number 120 has moved to number 119, and the signals assigned to numbers upper than 121 are maintained in their original lines.

Returning the table to its default state

1 In the Panel >Xpt Assign >Main, V/K Pair Assign menu or Panel >Xpt Assign >Table Button Assign menu, press [Default Recall].

A confirmation message appears, asking whether or not to return to the default state.

2 To return to the default state, press [Yes], and to cancel the operation, press [No].

Setting the cross-point button shift operation

You can set the operation of the rightmost button in each row of cross-point buttons excluding the reentry buttons.

In the <Xpt Shift Mode> group of the Panel >Xpt Assign >Main, V/K Pair Assign menu or Panel >Xpt Assign >Table Button Assign menu, select one of the following for each cross-point table.

Hold: Acts as a shift button, and the shifted version of the cross-point buttons is enabled while the button is held down.

Lock: Acts as a shift button, and pressing the button toggles between the shifted version and the unshifted version.

Off: Acts as a cross-point button, in a 16-button system as button number 16, in a 24-button system as button number 24, and in a 32-button system as button number 32.

Setting the action of the [SHIFT] button in the cross-point control block

In the <Display Shift Mode> group of the Panel >Xpt Assign >Main, V/K Pair Assign menu or Panel >Xpt Assign >Table Button Assign menu, select either of the following.

Shift All Bus: When this is On, it functions as a shift button for all buses.

Key5-8 Select: This functions as a shift button dedicated to the key 1 and key 2 rows. When On, keys 5 to 8 are selected, and when Off, keys 1 to 4 are selected.

Notes

- It is not possible to make this setting separately for each of the M/E and PGM/PST banks.
- "Shift All Bus" is only valid when the cross-point button shift operation *(see previous item)* is set to "Lock" or "Off."
- If both "Shift All Bus" and "Key5-8 Select" are off, the [SHIFT] button functions as a shift button for the source name display. It is not possible to set both "Shift All Bus" and "Key5-8 Select" to On.

Setting the source signal name

1 In the Panel >Xpt Assign menu or Panel >Xpt Assign >Table Button Assign menu, press [Src Name/LCD Color].

The Src Name/LCD Color menu appears.

2 Turn the knob to select the signal to be set.

Knob	Parameter	Adjustment	Setting values
1	Source No	Source signal selection	1 to 326 (MVS-8000X) 1 to 152 (MVS-7000X)
2	Num	Number of source signals to be selected	

3 Press [Source Name].

A keyboard window appears.

4 Enter any name of not more than 16 characters, then press [Enter].

Sequential names for multiple signals

When you specify a number at the end of a signal name, all of the signals in the range selected by knobs 1 and 2 are automatically assigned names ending with sequential numbers.

Example:

To assign sequential names to source signal 2 through source signal 4

1. In step **2** above, set knob 1 to "2," and set knob 2 to "3."
2. Set the name of source signal 2 to "CAM2."

The name "CAM3" is assigned automatically to source signal 3, and the name "CAM4" is assigned automatically to source signal 4.

Setting the source name display color

1 In the Panel >Xpt Assign >Table Button Assign >Src Name/LCD Color menu, turn the knobs to select the setting target.

Knob	Parameter	Adjustment	Setting values
1	Source No	Source signal selection	1 to 326 (MVS-8000X) 1 to 152 (MVS-7000X)
2	Num	Number of source signals to be selected	

2 In the <LCD Color> group, select the color (Orange/Green/Yellow).

Copying Cross-Point Assign Tables

The contents of a cross-point assign table can be copied to another cross-point assign table, and vice versa.

Notes

The contents of a sub table cannot be copied to the main table.

1 In the Panel >Xpt Assign menu, press [Table Copy].

The Table Copy menu appears.
The status area shows a list of copy sources and a list of copy destinations.

2 Using any of the following methods, select the number of the table to use as the copy source and the number of the table you want to be the copy destination.

- Press directly on the list of copy sources (left-side list) or the list of copy destinations (right-side list) in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Left No	Selection of copy source	1 to 15
2	Right No	Selection of copy destination	1 to 14

3 Press [Copy].

A confirmation message appears, asking whether or not to execute the copy.

4 To execute the copy, press [Yes], and to cancel the operation, press [No].

Selecting Cross-Point Assign Tables

You can select the cross-point assign table to be used for each of the following banks or buses.
- M/E-1 to M/E-5 banks and PGM/PST bank
- Buses assignable to AUX delegation buttons

Notes

It is not possible to assign cross-point tables 5 to 14 to a bus of a switcher operated by an MKS-8080/8082 AUX Bus Remote Panel.

1 In the Panel >Xpt Assign menu, using any of the following methods, select the switcher bank or bus.

- Press directly on the list on the left of the status area.
- Press the arrow keys on the list on the left to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Bank/Bus No	Switcher bank or bus selection	1 to maximum value
2	Num	Number of selected switcher banks or buses	1 to maximum value

2 Using any of the following methods, select the table.

- Press directly on the list on the right of the status area.
- Press the arrow keys on the list on the right to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Values
3	Table No	Selection of table to be assigned	1 to 15

3 Press [Table Assign Set].

This sets the table for the selected switcher bank or bus.

Exporting Source Names and Destination Names

To send the source names and destination names to the S-Bus, use the following procedure.

1 In the Panel >Xpt Assign menu, press [Name Export].

The Name Export menu appears.

2 Turn the knob to set the station ID.

Knob	Parameter	Adjustment	Setting values
1	Station ID	Station ID setting	1 to 255 a)

a) If set to 255, the information is sent to all stations (with display of "All").

3 Press [Src Name Export].

This exports the source names to the station selected in step **2**.

4 Press [Dest Name Export].

This exports the destination names to the station selected in step **2**.

Notes

Since destination names cannot be selected freely, fixed names are used.

Making Settings for Audio Mixer

Enabling the function to link the audio mixer

Notes

For audio mixer operations in this system, it is necessary to set Mixer ESAM-II for the DCU 9-pin serial port.

For details, see "Serial Port Settings (Serial Port Assign Menu)" (page 645).

1 In the Panel >Xpt Assign menu, using any of the following methods, select the M/E bank or bus.

- Press directly on the list on the left of the status area.
- Press the arrow keys in the list on the left, to scroll the reverse video cursor.
- Turn the knob.

2 Press [Audio Follow].

"Enable" appears in the "Audio Follow" column.

Setting the audio mixer cross-points

To assign an audio mixer cross-point to a switcher cross-point pair (video/key), carry out the following procedure.

1 In the Panel >Xpt Assign menu, press [Mixer Xpt Assign].

The Mixer Xpt Assign menu appears.

2 In the list on the left, select the number for the setting.

3 In the list on the right, select the audio mixer cross-point (machine number).

4 Press [Set].


The audio mixer number appears in the "Mixer Xpt" column.

Assigning a Cross-Point Button to Enable/Disable Side Flags

By assigning the side flag function to the rightmost button in a cross-point button row, you can use this button to enable/disable side flags for each of the M/E and PGM/PST banks.
This setting applies to all of the M/E and PGM/PST banks. When you make this assignment, the [SHIFT] button (the button assigned to the shift function) is moved one to the left.

Notes

If a macro attachment is set, when you assign the button to the side flag function, the button numbers are offset, and therefore when you press the button this does not execute the macro. The settings, however, are maintained, so that when you cancel the side flag assignment, the macro can be accessed once more.

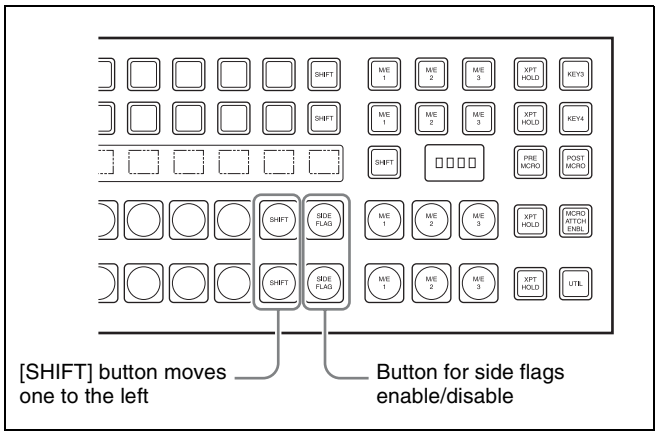

For details of side flag operations, see "Side Flag Settings" in Chapter 10 (Volume 1).

1 In the Panel >Xpt Assign menu, press [Side Flags Button Assign].

The Side Flags Button Assign menu appears.

2 Press [Side Flags Btn Assign], turning it on.

Auxiliary Bus Control Block Settings (Aux Assign Menu)

To carry out the settings of the AUX delegation buttons in the auxiliary bus control block, use the Panel >Aux Assign menu.
When using the AUX panel-less function with the CCP-6224/6324, use this menu to assign the AUX delegation buttons.

To display the Aux Assign menu

In the Engineering Setup menu, select VF2 'Panel' and HF3 'Aux Assign.'
The left side of the status area shows the delegation numbers, and the list of buses set; the right side shows a list of buses that can be assigned.
The following functions are available here.

- **Aux Assign:** Assign the AUX delegation buttons in the auxiliary bus control block to any bus.
- **Shift Mode:** Specify whether the rightmost button of the AUX delegation buttons is used as a shift button, and when it is used as a shift button, the operation mode.
- **RTR Mode Setting:** Carry out the following settings for using the auxiliary bus control block for router control.
  - Assigning destinations
  - Setting the shift operation in the destination selection button rows
  - Source table settings
  - Setting the shift operation in the source selection button rows
  - Assigning levels to the level selection buttons
  - Setting destination selection buttons to be used for snapshots

Notes

When using the AUX panel-less function with the CCP-6224/6324, these settings are invalid.

Assigning a Bus to an AUX Delegation Button

1 In the Panel >Aux Assign menu, using any of the following methods, select the delegation button and the bus to be assigned.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Deleg No	Selection of AUX delegation button	1 to 128 a)
2	Bus No	Selection of bus to be assigned	1 to 185 b)

a) The setting can be from 1 to 62. The valid settings, however, depend on the number of buttons and the delegation button shift mode.

Number of buttons	Shift mode	Valid settings
16	OFF	1 to 16
	ON	1 to 30
24	OFF	1 to 24
	ON	1 to 46
32	OFF	1 to 32
	ON	1 to 62

b) The buses that can be assigned are as follows.
In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).
Edit Preview, Aux1 to Aux48, Frame Memory Source1 and Frame Memory Source2, DME1V to DME8V, DME1K to DME8K, P/P Utility1 and P/P Utility2, M/E-x Utility1 to M/E-x Utility2, DSKx Fill/Source, M/E-x Keyx Fill/Source, P/P EXT DME, M/E-x EXT DME, DME Utility1 and DME Utility2, CCR1 and CCR2

- For a button for which you want to disable operation, press [Inhibit].

2 Press [Set] to confirm the selection.

To set the AUX delegation button shift operation

To set the operation mode of the rightmost button in the row of AUX delegation buttons, select one of the following in the <Shift Mode> group of the Panel >Aux Assign menu.

Hold: Acts as a shift button, and the shifted version of the AUX delegation buttons is enabled while the button is held down.

Lock: Acts as a shift button, and pressing the button toggles between the shifted version and the unshifted version of the AUX delegation buttons.

Off: Acts as an AUX delegation button. In a 16-button system it acts as button number 16, in a 24-button system as button number 24, and in a 32-button system as button number 32.

Using the Auxiliary Bus Control Block for Router Control

To make router control settings, display the Panel >Aux Assign >RTR Mode Setting menu.

To display the RTR Mode Setting menu

1 In the Engineering Setup menu, select VF2 'Panel' and HF3 'Aux Assign.'

The Aux Assign menu appears.

2 Press [RTR Mode Setting].

The RTR Mode Setting menu appears. The left of the status area shows the destination number assignment status and source table, and the right side lists the destinations that can be assigned.

Assigning a destination to a destination selection button

In the Panel >Aux Assign >RTR Mode Setting menu, use the following procedure.

1 Using any of the following methods, select a destination selection button and the destination to be assigned to the button.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Dest No	Destination selection button selection	1 to 128
2	No	Destination selection in S-Bus space	1 to 1024

For a button whose operation you want to disable, press [Inhibit].

Notes

When a destination selection button having a number in the range 65 to 128 is selected, source table selection automatically becomes invalid, and therefore the Inhibit function also becomes invalid.

2 Press [Dest Set] to confirm the selection.

3 If in step **1** you selected a value in the range 1 to 64, turn the knob to select the source table.

Knob	Parameter	Adjustment	Setting values
3	Source Table	Source table selection	1 to 5

4 Press [Source Table Set] to confirm the selection.

5 Repeat steps **1** to **4** as required.

To set the shift operation of the destination selection buttons

To set the operation mode of the rightmost button in the destination selection button row, select one of the following in the <Dest Shift Mode> group of the Panel >Aux Assign >RTR Mode Setting menu.

Hold: Acts as a shift button, and the shifted destination selection buttons are enabled while the button is held down.

Lock: Acts as a shift button, and pressing the button toggles between the shifted and unshifted states of the destination selection buttons.

Off: Acts as a destination selection button, that is, button number 16 on a 16-button system, button number 24 on a 24-button system, and button number 32 on a 32-button system.

Setting the source table

1 In the Panel >Aux Assign >RTR Mode Setting menu, press [Source Table Assign].

The Source Table Assign menu appears.

2 In the <Source Table Select> group, select the source table you want to manipulate.

3 Press [Table Assign].

The Table Assign menu appears.
The left of the status area lists the button numbers and set sources, and the right side lists the source that can be assigned.

4 Using any of the following methods, select a source selection button and the source you want to assign.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Source No	Source selection button selection	1 to 128
2	No	Source selection in S-Bus space	1 to 1024

For a button whose operation you want to disable, press [Inhibit].

5 Press [Source Set] to confirm the selection.

To set the shift operation of the source selection buttons

To set the operation mode of the rightmost button in the source selection button row with different destinations assigned to the 1st and 2nd rows, select the source table in the Source Table Assign menu, then in the <Xpt Shift Mode> group select one of the following.

Hold: Acts as a shift button, and the shifted source selection buttons are enabled while the button is held down.

Lock: Acts as a shift button, and pressing the button toggles between the shifted and unshifted states of the source selection buttons.

Off: Acts as a cross-point button, that is, button number 16 on a 16-button system, button number 24 on a 24-button system, and button number 32 on a 32-button system.

To expand the shift function

To set the [KEY] button as a shift operation expansion button, in the Source Table Assign menu select the source table, then in the <Expand Xpt Shift Assign> group, press [Key Button].

In order not to expand the shift operation, press [No Assign] in the <Expand Xpt Shift Assign> group.

Assigning levels to a level selection button

To assign levels to the [LEVEL1] to [LEVEL4] buttons in the auxiliary bus control block, use the following procedure.

1 In the Panel >Aux Assign >RTR Mode Setting menu, press [Level Button Assign].

The Level Button Assign menu appears. The status area shows a list of the assignment status of levels to each button.

2 In the <Level Button Select> group, select the button you want to set.

3 In the <Level Assign> group, press the levels you want to assign to the button, turning them on.

You can select plural of levels. You can also make a selection that overlaps that of another button.

Selecting a destination selection button for a snapshot

To set whether snapshots are recalled for each destination selection button individually, use the Panel >Aux Assign >RTR Mode Setting menu as follows.

1 Use any of the following methods to select the destination selection button to which the setting applies.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Dest No	Selection of destination selection button	1 to 128

2 Press [SS Enable], turning it on or off.

On: When a snapshot applying to the router is recalled, the recall also applies to the selected destination selection button.

Off: When a snapshot applying to the router is recalled, the recall does not apply to the selected destination selection button.

Notes

When a destination selection button is set to Inhibit, then even if SS Enable is on, the snapshot for that destination is not recalled.

Setting Button Assignments (Prefs/ Utility Menu)

Assign the [PREFS 1] to [PREFS 16] buttons in the menu control block, the utility/shotbox control block buttons, and the cross-Point control block.
This assigns recalling frequently used menus (menu shortcuts), enabling/disabling functions (recalling utility commands) and recalling shotbox registers or macro registers.

- **User Preference:** Make the settings for the user preference buttons in the menu control block.
- **Utility Module Assign:** Make the utility/shotbox control block settings.
- **KEY 2/4 Bus Button Assign:** Make the settings for the key 2 row buttons in the cross-point control block.

To display the Prefs/Utility menu

In the Engineering Setup menu, select VF2 'Panel' and HF4 'Prefs/Utility.'
The status area shows the settings of the user preference buttons.

Assigning Functions to User Preference Buttons

1 In the Panel >Prefs/Utility menu, using any of the following methods, select the button to be assigned.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	User preference button selection	1 to 16

2 In the <Action> group, select the function to be assigned.

Menu Shortcut: Assign a frequently used menu to be recalled (menu shortcut).
Utility Command: Assign a function enable/disable or similar operation (utility command).
Macro Recall: Assign a macro register recall.
Shotbox Recall: Assign a shotbox register recall.

3 Depending on the selection in step **2**, make the following settings.

When Menu Shortcut is selected: For the subsequent operations, *see "Assigning a menu shortcut to a user preference button" (page 592).*
When Utility Command is selected: A list of commands appears on the right of the status area; using any of the following methods, select the command you want to assign.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	Command	Utility command selection	1 to maximum value
4 a)	GPI No	GPI port number	1 to maximum value

a) When the Command parameter is set to Sw'er GPI Test Fire, Panel GPI Test Fire, or DCU GPI Test Fire

When Macro Recall is selected: Turn the knob to select the macro register you want to assign.

Knob	Parameter	Adjustment	Setting values
3	Macro	Macro register selection	1 to 250

When Shotbox Recall is selected: Turn the knob to select the shotbox register you want to assign.

Knob	Parameter	Adjustment	Setting values
3	Shotbox	Shotbox register selection	1 to 99

4 Press [Action Set].

This assigns the selected action, which is reflected in the status area.

To cancel an assignment

After selecting the relevant button, press [Clear].

To display register names in the Utility Command column

If in step **2** you select [Macro Recall] or [Shotbox Recall], press [Reg Name Display] to select whether or not register names appear in the Utility Command column.

Using the [PREFS 9] to [PREFS 16] settings

There are sixteen user preference buttons that can be set, [PREFS 1] to [PREFS 16], but there are only eight user preference buttons present in the menu control block. By default these buttons are assigned to the [PREFS 1] to [PREFS 8] settings. Therefore, to use the settings of [PREFS 9] to [PREFS 16], it is necessary to access the Engineering Setup >Panel >Config >Link/Program Button >Menu Panel menu, and assign these settings to buttons in the menu control block.

List of utility commands and user preference button status

The following table shows the utility commands that can be assigned to user preference buttons.

Command name [a)]	Function	Button status	
		Lit amber	Off
SWR Remote1 Enbl | SWR Remote4 Enbl	Switcher Remote 1 enabled/disabled | Switcher Remote 4 enabled/disabled	Enabled	Disabled
DME1 Editor Port Enbl	DME1 editor port enabled/disabled	Enabled	Disabled
DME2 Editor Port Enbl	DME2 editor port enabled/disabled	Enabled	Disabled
DME3 Editor Port Enbl	DME3 editor port enabled/disabled	Enabled	Disabled
DME4 Editor Port Enbl	DME4 editor port enabled/disabled	Enabled	Disabled
ME1 PGM1 ST | ME1 PGM4 ST	M/E-1 PGM1 output safe title on/off | M/E-1 PGM4 output safe title on/off	On	Off
ME1 PVW ST	M/E-1 preview output safe title on/off	On	Off
ME1 Clean ST	M/E-1 clean output safe title on/off	On	Off
ME1 K-PVW ST	M/E-1 key preview output safe title on/off	On	Off
ME2 PGM1 ST | ME2 PGM4 ST	M/E-2 PGM1 output safe title on/off | M/E-2 PGM4 output safe title on/off	On	Off
ME2 PVW ST	M/E-2 preview output safe title on/off	On	Off
ME2 Clean ST	M/E-2 clean output safe title on/off	On	Off
ME2 K-PVW ST	M/E-2 key preview output safe title on/off	On	Off
ME3 PGM1 ST | ME3 PGM4 ST	M/E-3 PGM1 output safe title on/off | M/E-3 PGM4 output safe title on/off	On	Off
ME3 PVW ST	M/E-3 preview output safe title on/off	On	Off
ME3 Clean ST	M/E-3 clean output safe title on/off	On	Off
ME3 K-PVW ST	M/E-3 key preview output safe title on/off	On	Off
ME4 PGM1 ST | ME4 PGM4 ST	M/E-4 PGM1 output safe title on/off | M/E-4 PGM4 output safe title on/off	On	Off
ME4 PVW ST	M/E-4 preview output safe title on/off	On	Off
ME4 Clean ST	M/E-4 clean output safe title on/off	On	Off
ME4 K-PVW ST	M/E-4 key preview output safe title on/off	On	Off
ME5 PGM1 ST | ME5 PGM4 ST	M/E-5 PGM1 output safe title on/off | M/E-5 PGM4 output safe title on/off	On	Off
ME5 PVW ST	M/E-5 preview output safe title on/off	On	Off
ME5 Clean ST	M/E-5 clean output safe title on/off	On	Off
ME5 K-PVW ST	M/E-5 key preview output safe title on/off	On	Off
PP PGM1 ST | PP PGM4 ST	P/P PGM1 output safe title on/off | P/P PGM4 output safe title on/off	On	Off
PP PVW ST	P/P preview output safe title on/off	On	Off
PP Clean ST	P/P clean output safe title on/off	On	Off
PP K-PVW ST	P/P key preview output safe title on/off	On	Off
DME Mon Video ST	DME Monitor Video output safe title on/off	On	Off
DME Mon Key ST	DME Monitor Key output safe title on/off	On	Off

Command name [a)]	Function	Button status	
		Lit amber	Off
Edit PVW ST	Edit preview output safe title on/off	On	Off
Preset ST	Preset output safe title on/off	On	Off
AUX1 ST | AUX48 ST	AUX1 output safe title on/off | AUX48 output safe title on/off	On	Off
FM Src1 Frame Freeze	Frame freeze of frame memory source 1	During frame freeze	Either of the other two states
FM Src1 Filed Freeze	Field freeze of frame memory source 1	During field freeze	Either of the other two states
FM Src1 Freeze Off	Release freeze of frame memory source 1	While freeze being released	Either of the other two states
FM Src2 Frame Freeze	Frame freeze of frame memory source 2	During frame freeze	Either of the other two states
FM Src2 Field Freeze	Field freeze of frame memory source 2	During field freeze	Either of the other two states
FM Src2 Freeze Off	Release freeze of frame memory source 2	While freeze being released	Either of the other two states
SWR GPI Enbl	Enable/disable switcher GPI	Enabled	Disabled
DME1 GPI Enbl	Enable/disable DME1 GPI	Enabled	Disabled
DME2 GPI Enbl	Enable/disable DME2 GPI	Enabled	Disabled
DME3 GPI Enbl	Enable/disable DME3 GPI	Enabled	Disabled
DME4 GPI Enbl	Enable/disable DME4 GPI	Enabled	Disabled
Panel GPI Enbl	Enable/disable panel GPI	Enabled	Disabled
SWR GPI1 Test Fire | SWR GPI8 Test Fire	Output test trigger from switcher GPI1 | Output test trigger from switcher GPI8	Output (lights only at the instant the button is pressed)	When the output is assigned
Panel GPI1 Test Fire | Panel GPI8 Test Fire	Output test trigger from panel GPI1 | Output test trigger from panel GPI8	Output (lights only at the instant the button is pressed)	When the output is assigned
DCU GPI1 Test Fire | DCU GPI50 Test Fire	Output test trigger from port assigned to DCU GPI1 | Output test trigger from port assigned to DCU GPI50	Output (lights only at the instant the button is pressed)	When the output is assigned
Macro Attachment Enbl	Enable/disable macro attachment	Enabled	Disabled
Macro Only Set	Macro only mode on/off	On	Off
Pre Macro	Set macro attachment in pre macro mode	Can be set only while pressed (lit)	When the function is assigned
Post Macro	Set macro attachment in post macro mode	Can be set only while pressed (lit)	When the function is assigned
Macro Take	Macro execution	During execution	When the function is assigned
Macro Cancel	Macro cancel	Lights only at the instant the button is pressed	When the function is assigned
Macro Auto Ins	Macro auto insert mode on/off	On	Off
Macro AT with Rate	When registering an auto transition macro event, on/off setting of mode to save transition rate	On	Off

Command name [a]	Function	Button status	
		Lit amber	Off
Macro AT with A/B Bus	When registering an auto transition macro event for the transition control block, on/off setting of mode to save A/B Bus cross-point settings	On	Off
Macro TL with Region	When registering a timeline macro event, on/off setting of mode to save applicable region	On	Off
DME Override	DME override on/off	On	Off
DME Graphic	DME graphics on/off (applies to graphics for channel selected in device control block)	On	Off
System Manager Enbl	Enable/disable operation from System Manager	Enabled	Disabled
Plug-In Editor Enbl	Enable/disable operation from an editing keyboard	Enabled	Disabled
Inhibit Set	Inhibit cross-point button	Can be set only while pressed (lit)	When the function is assigned
Inhibit All Clear	Clear all cross-point button inhibit settings	Can be set only while pressed (lit)	When the function is assigned
K-SS Store	Enable/disable key snapshot saving [b]	Enabled	Disabled
1st DSK Fader Inhibit	Inhibit operation of the first downstream key control block	On	Off
2nd DSK Fader Inhibit	Inhibit operation of the second downstream key control block	On	Off
3rd DSK Fader Inhibit	Inhibit operation of the third downstream key control block	On	Off
4th DSK Fader Inhibit	Inhibit operation of the fourth downstream key control block	On	Off
SWR1 LAN Status	SWR1 communications status [c]	Communications disconnected	During communication
SWR2 LAN Status	SWR2 communications status [c]	Communications disconnected	During communication

a) For the safe title on/off commands (from ME1 PGM1 ST-ME1 PGM4 ST to AUX1 ST-AUX48 ST), the name of the assigned output signal is shown.
b) Pressing this button to turn it on enables key snapshot operations for all control blocks.
c) Control LAN status only.

Assigning a menu shortcut to a user preference button

1 Referring to the procedure up to step **2** of "Assigning Functions to User Preference Buttons" *(page 589)*, select [Menu Shortcut].

The user preference buttons [PREFS 1] to [PREFS 16] flash amber.

2 Using any of the following methods, display the menu to which you want to make a shortcut.

- In the menu control block, press the relevant top menu selection button, then select VF and HF.
- Press the menu page number button in the upper left corner of the menu screen, then enter a menu number from the numeric keypad window.
- Press a particular control panel button twice in rapid succession.

3 Press the user preference button to which you want to assign the shortcut.

The menu screen goes back to the Panel >Prefs/Utility menu, and the selection is reflected in the status area. The user preference buttons [PREFS 1] to [PREFS 16] flash amber.

4 Repeat steps **2** and **3** as required, to assign all desired menu shortcuts to the user preference buttons.

To abandon the process of menu shortcut assignment

In the Prefs/Utility menu, press [Menu Shortcut] once more.
This exits the menu shortcut assignment mode.

Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block

1 In the Panel >Prefs/Utility menu, press [Utility Module Assign].

The Utility Module Assign menu appears. The status area shows the settings in the utility/shotbox control block.

2 Using any of the following methods, select the button to be assigned.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Bank	Bank selection	1 to 4
2	Button No	Control block button selection	1 to 24

3 In the <Action> group, select the function you want to assign.

Menu Shortcut: Assign a frequently used menu to be recalled (menu shortcut).
Utility Command: Assign a function on/off or similar operation (utility command).
Macro Recall: Assign a macro register recall.
Shotbox Recall: Assign a shotbox register recall.

4 Depending on the selection in step **3**, make the following settings.

When Menu Shortcut is selected: For the subsequent operations, *see "Assigning a menu shortcut to a memory recall button" (page 596).*
When Utility Command is selected: A list of commands appears on the right of the status area; using any of the following methods, select the command you want to assign.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
3	Command	Utility command selection	1 to maximum value
4 a)	GPI No	GPI port number	1 to maximum value

a) When the Command parameter is set to Sw'er GPI Test Fire, Panel GPI Test Fire, or DCU GPI Test Fire

When Macro Recall is selected: Turn the knob to select the macro register you want to assign.

Knob	Parameter	Adjustment	Setting values
3	Macro	Macro register selection	1 to 250

When Shotbox Recall is selected: Turn the knob to select the shotbox register you want to assign.

Knob	Parameter	Adjustment	Setting values
3	Shotbox	Shotbox register selection	1 to 99

5 Press [Action Set].

This assigns the selected action, which is reflected in the status area.
In the utility/shotbox control block, the assigned button lights orange.
If a shotbox register was assigned, the register name appears.

To cancel an assignment

After selecting the relevant button, press [Clear].

To display register names in the Utility Command column

If in step **3** you select [Macro Recall] or [Shotbox Recall], press [Reg Name Display] to select whether or not register names appear in the Utility Command column.

List of utility commands and memory recall button status

The following table shows the utility commands that can be assigned to memory recall buttons.

Command name a)	Function	Button status	
		Lit green	Lit orange
SWR Remote1 Enbl | SWR Remote4 Enbl	Switcher Remote 1 enabled/disabled | Switcher Remote 4 enabled/disabled	Enabled	Disabled
DME1 Editor Port Enbl	DME1 editor port enabled/disabled	Enabled	Disabled
DME2 Editor Port Enbl	DME2 editor port enabled/disabled	Enabled	Disabled

Command name [a]	Function	Button status	
		Lit green	Lit orange
DME3 Editor Port Enbl	DME3 editor port enabled/disabled	Enabled	Disabled
DME4 Editor Port Enbl	DME4 editor port enabled/disabled	Enabled	Disabled
ME1 PGM1 ST | ME1 PGM4 ST	M/E-1 PGM1 output safe title on/off | M/E-1 PGM4 output safe title on/off	On	Off
ME1 PVW ST	M/E-1 preview output safe title on/off	On	Off
ME1 Clean ST	M/E-1 clean output safe title on/off	On	Off
ME1 K-PVW ST	M/E-1 key preview output safe title on/off	On	Off
ME2 PGM1 ST | ME2 PGM4 ST	M/E-2 PGM1 output safe title on/off | M/E-2 PGM4 output safe title on/off	On	Off
ME2 PVW ST	M/E-2 preview output safe title on/off	On	Off
ME2 Clean ST	M/E-2 clean output safe title on/off	On	Off
ME2 K-PVW ST	M/E-2 key preview output safe title on/off	On	Off
ME3 PGM1 ST | ME3 PGM4 ST	M/E-3 PGM1 output safe title on/off | M/E-3 PGM4 output safe title on/off	On	Off
ME3 PVW ST	M/E-3 preview output safe title on/off	On	Off
ME3 Clean ST	M/E-3 clean output safe title on/off	On	Off
ME3 K-PVW ST	M/E-3 key preview output safe title on/off	On	Off
ME4 PGM1 ST | ME4 PGM4 ST	M/E-4 PGM1 output safe title on/off | M/E-4 PGM4 output safe title on/off	On	Off
ME4 PVW ST	M/E-4 preview output safe title on/off	On	Off
ME4 Clean ST	M/E-4 clean output safe title on/off	On	Off
ME4 K-PVW ST	M/E-4 key preview output safe title on/off	On	Off
ME5 PGM1 ST | ME5 PGM4 ST	M/E-5 PGM1 output safe title on/off | M/E-5 PGM4 output safe title on/off	On	Off
ME5 PVW ST	M/E-5 preview output safe title on/off	On	Off
ME5 Clean ST	M/E-5 clean output safe title on/off	On	Off
ME5 K-PVW ST	M/E-5 key preview output safe title on/off	On	Off
PP PGM1 ST | PP PGM4 ST	PP PGM1 output safe title on/off | PP PGM4 output safe title on/off	On	Off
PP PVW ST	P/P preview output safe title on/off	On	Off
PP Clean ST	P/P clean output safe title on/off	On	Off
PP K-PVW ST	P/P key preview output safe title on/off	On	Off
DME Mon Video ST	DME Monitor Video output safe title on/off	On	Off
DME Mon Key ST	DME Monitor Key output safe title on/off	On	Off
Edit PVW ST	Edit preview output safe title on/off	On	Off
Preset ST	Preset output safe title on/off	On	Off
AUX1 ST | AUX48 ST	AUX1 output safe title on/off | AUX48 output safe title on/off	On	Off
FM Src1 Frame Freeze	Frame freeze of frame memory source 1	During frame freeze	Either of the other two states
FM Src1 Filed Freeze	Field freeze of frame memory source 1	During field freeze	Either of the other two states

Command name [a)]	Function	Button status	
		Lit green	Lit orange
FM Src1 Freeze Off	Release freeze of frame memory source 1	While freeze being released	Either of the other two states
FM Src2 Frame Freeze	Frame freeze of frame memory source 2	During frame freeze	Either of the other two states
FM Src2 Field Freeze	Field freeze of frame memory source 2	During field freeze	Either of the other two states
FM Src2 Freeze Off	Release freeze of frame memory source 2	While freeze being released	Either of the other two states
SWR GPI Enbl	Enable/disable switcher GPI	Enabled	Disabled
DME1 GPI Enbl	Enable/disable DME1 GPI	Enabled	Disabled
DME2 GPI Enbl	Enable/disable DME2 GPI	Enabled	Disabled
DME3 GPI Enbl	Enable/disable DME3 GPI	Enabled	Disabled
DME4 GPI Enbl	Enable/disable DME4 GPI	Enabled	Disabled
Panel GPI Enbl	Enable/disable panel GPI	Enabled	Disabled
SWR GPI1 Test Fire | SWR GPI8 Test Fire	Output test trigger from switcher GPI1 | Output test trigger from switcher GPI8	Output (lights only at the instant the button is pressed)	When the output is assigned
Panel GPI1 Test Fire | Panel GPI8 Test Fire	Output test trigger from panel GPI1 | Output test trigger from panel GPI8	Output (lights only at the instant the button is pressed)	When the output is assigned
DCU GPI1 Test Fire | DCU GPI50 Test Fire	Output test trigger from port assigned to DCU GPI1 | Output test trigger from port assigned to DCU GPI50	Output (lights only at the instant the button is pressed)	When the output is assigned
Macro Attachment Enbl	Enable/disable macro attachment	Enabled	Disabled
Macro Only Set	Macro only mode on/off	On	Off
Pre Macro	Set macro attachment in pre macro mode	Can be set only while pressed (lit)	When the function is assigned
Post Macro	Set macro attachment in post macro mode	Can be set only while pressed (lit)	When the function is assigned
Macro Take	Macro execution	During execution	When the function is assigned
Macro Cancel	Macro cancel	Lights only at the instant the button is pressed	When the function is assigned
Macro Auto Ins	Macro auto insert mode on/off	On	Off
Macro AT with Rate	When registering an auto transition macro event, on/off setting of mode to save transition rate	On	Off
Macro AT with A/B Bus	When registering an auto transition macro event for the transition control block, on/off setting of mode to save A/B Bus cross-point settings	On	Off
Macro TL with Region	When registering a timeline macro event, on/off setting of mode to save applicable region	On	Off
DME Override	DME override on/off	On	Off
DME Graphic	DME graphics on/off (applies to graphics for channel selected in device control block)	On	Off
Plug-In Editor Enbl	Enable/disable operation from an editing keyboard	Enabled	Disabled

Command name [a]	Function	Button status	
		Lit green	Lit orange
Inhibit Set	Inhibit cross-point button	Can be set only while pressed (lit)	When the function is assigned
Inhibit All Clear	Clear all cross-point button inhibit settings	Can be set only while pressed (lit)	When the function is assigned
K-SS Store	Enable/disable key snapshot saving [b]	Enabled	Disabled
1st DSK Fader Inhibit	Inhibit operation of the first downstream key control block	On	Off
2nd DSK Fader Inhibit	Inhibit operation of the second downstream key control block	On	Off
3rd DSK Fader Inhibit	Inhibit operation of the third downstream key control block	On	Off
4th DSK Fader Inhibit	Inhibit operation of the fourth downstream key control block	On	Off
SWR1 LAN Status	SWR1 communications status [c]	Communications disconnected	During communication
SWR2 LAN Status	SWR2 communications status [c]	Communications disconnected	During communication

a) For the safe title on/off commands (from ME1 PGM1 ST-ME1 PGM4 ST to AUX1 ST-AUX48 ST), the name of the assigned output signal is shown.
b) Pressing this button to turn it on enables key snapshot operations for all control blocks.
c) Control LAN status only.

Assigning a menu shortcut to a memory recall button

1 Referring to the procedure up to step **3** in *"Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block" (page 593)*, select [Menu Shortcut].

The memory recall buttons in the utility/shotbox control block flash orange.

2 Using any of the following methods, display the menu to which you want to make a shortcut.

- In the menu control block, press the relevant top menu selection button, then select VF and HF.
- Press the menu page number button in the upper left corner of the menu screen, then enter a menu number from the numeric keypad window.
- Press a particular control panel button twice in rapid succession.

3 In the utility/shotbox control block, select the bank, and press the button to which you want to assign the shortcut.

The menu screen goes back to the Panel >Prefs/Utility >Utility Module Assign menu, and the selection is reflected in the status area.
The buttons in the utility/shotbox control block flash.

4 Repeat steps **2** and **3** as required, to assign all desired menu shortcuts to the buttons in the utility/shotbox control block.

To abandon the process of menu shortcut assignment

In the Utility Module Assign menu, press [Menu Shortcut]. This exits the menu shortcut assignment mode.

Setting names to be displayed in memory recall buttons

Notes

The name you set using the following procedure is displayed only when "Menu Shortcut" or "Utility Command" has been assigned to the selected memory recall button. To set a name for display in a memory recall button to which "Shotbox Recall" or "Macro Recall" has been assigned, use the Shotbox menu or Macro menu.

1 In the Panel >Prefs/Utility >Utility Module Assign menu, select the button using any of the following methods.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Bank	Bank selection	1 to 4
2	Button No	Control block button selection	1 to 24

2 Press [Name].

A keyboard window appears.

3 Enter a name of not more than eight characters, and press [Enter].

The name you have set is reflected in the status area and on the memory recall button in the utility/shotbox control block.

Assigning a Function to the Key 2 Row Cross-Point Buttons

You can assign a function to the key 2 row cross-point buttons of each of the M/E-1 to M/E-5, or PGM/PST banks, and use them in the same way as the buttons in the utility/shotbox control block.

1 In the Panel >Prefs/Utility menu, press [Key2/4 Bus Button Assign].

The Key2/4 Bus Button Assign menu appears. The cross-point settings for the key 2 row appear.

2 Refer to *"Assigning a Function to a Memory Recall Button in the Utility/Shotbox Control Block" (page 593)* to make the assignment. Note, however, the following differences.

- The bank setting of knob 1 is from 1 to 5.
- The adjustment range of knob 2 is from 1 to the number of cross-point buttons.
- The character string for a button name is a maximum of four characters.

For details of executing a utility/shotbox function with the key 2 row, see "Executing a Shotbox Function With the Key 2 Row Cross-Point Buttons" (page 494) and "Executing Utilities With the Cross-Point Buttons in the Key 2 Row" (page 488).

Interfacing With External Devices (Device Interface Menu)

To carry out setup relating to connections with external devices, display the Panel >Device Interface menu.

To display the Device Interface menu

In the Engineering Setup menu, select VF2 'Panel' and HF5 'Device Interface.'
The following functions are available here.

- **GPI Input:** Set the GPI input ports and trigger type, and make the action settings.
- **GPI Output:** Set the GPI output ports and trigger type, and make the action settings.
- **P-Bus Control:** Set the control mode for P-Bus devices.
- **DCU Serial Port Assign:** Assign the devices (disk recorder/VTR/Extended VTR) connected to a DCU and accessible from the control panel to the [DEV1] to [DEV12] buttons which become operative when you press the [DEV] button on the device control block. For a disk recorder or Extended VTR, you can also make settings relating to sharing of file lists. Further, you can make settings for devices (disk recorder/VTR/Extended VTR) operable from an editing keyboard.
- **Editor Port Assign:** When the BZS-8050 license is valid, make settings for the SCU editor panel port.
- **Aux Bus Override Mode:** Set the operating mode when "Aux ? O'ride Src ??" is selected as the GPI input action.

Making Control Panel GPI Input Settings

1 In the Panel >Device Interface menu, press [GPI Input].

The GPI Input menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port	Port selection	1 to 8

3 In the <Trigger Type> group, select the trigger type.

(Rising Edge): Apply the trigger on a rising edge of an input pulse.

(Falling Edge): Apply the trigger on a falling edge of an input pulse.

(Any Edge): Apply the trigger on a change in the polarity of the input signal.

(Level): Carry out the specified operation when the input is low or high.

No Operation: Apply no trigger on an input pulse.

4 In the <Target> group, select the action block.

M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, P/P: Set the action for one of the banks.

Common/Setup: Set an action for something other than the above, or a setup action.

5 Using any of the following methods, select the action to be set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Action	Action selection	1 to maximum value a)
4	Aux Bus No	AUX bus selection	1 to 48 b)
5	Reg No	Register number	1 to 4 c) 1 to 99 d) 1 to 250 e) 1 to 399 f)
5	Src No	Source signal selection	1 to maximum value b) h) i)
5	No	User preference button selection	1 to 16 g)

a) As for the setting values, see "Selectable actions for various trigger types" *(page 598)*.
b) When knob 2 selection is "Aux ? O'ride Src ??"
c) When knob 2 selection is "Key Snapshot"
d) When knob 2 selection is "Snapshot" or "Shotbox"
e) When knob 2 selection is "Macro"
f) When knob 2 selection is "Effect"
g) When knob 2 selection is "Prefs Button?"
h) The following values apply to the MVS-8000X.
For primary inputs: 1 to 144
For premium inputs: 145 to 164 ((PREM1) to (PREM20) indicated after the number)
For format converter dedicated inputs: 165 to 180 ((FC1) to (FC16) indicated after the number)
i) The values from 1 to 80 apply to the MVS-7000X.

6 Press [Action Set] to confirm the action selection.

The selected setting appears in the status area.

Selectable actions for various trigger types

- **When the trigger type is other than "Level"**
In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).

When Target is M/E-x: Cut, Auto Trans, Keyx Cut, Keyx Auto Trans, Keyx SS ? Recall

When Target is P/P: Cut, Auto Trans, DSKx Cut, DSKx Auto Trans, DSKx SS ? Recall, FTB Auto Trans, FTB Cut

When Target is Common/Setup: Master SS ? Recall, Master Effect ? Recall, SS ? Recall, Effect ? Recall, Effect ? Recall & Run, KF Run, KF Stop, KF Rewind, FM Src1 Frame Freeze, FM Src1 Field Freeze, FM Src1 Freeze Off, FM Src2 Frame Freeze, FM Src2 Field Freeze, FM Src2 Freeze Off, FM Src1 Clip Record, FM Src1 Clip Stop, FM Src2 Clip Record, FM Src2 Clip Stop, FM1 to FM8 Clip Cueup, FM1 to FM8 Clip Play, FM1 to FM8 Clip Stop, Shotbox ? Recall, Macro Take, Prefs Button?, Macro ? Recall, No Action

- **When the trigger type is only "Rising Edge" or "Falling Edge"**
Aux? O'ride Src ??
- **When the trigger type is "Level"**
When Target is M/E-1, M/E-2, M/E-3, M/E-4, M/E-5, or P/P: No Action

When Target is Common/Setup: System Format (overall system settings), Aspect (overall system settings), Level Enable, Panel Status, No Action

Notes

- "Level Enable" is a function that determines whether GPI inputs are enabled ("Enable") or disabled ("Disable") for the "Aspect" and "System Format" actions that can be used when the trigger type is Level. When Level Enable is used, if the input is "Disable" then it is not possible to switch "Aspect" or "System Format" by GPI input.
If a GPI to switch "Aspect" or "System Format" occurs when powering the system off, the action triggered by the GPI may start immediately before the power goes off and the power may go off before the action is completed. This may corrupt the setup settings. It is therefore recommended to use Level Enable to avoid such a situation.
- As for "Aux ? O'ride Src ??," when "Rising Edge" is selected, on a rising edge the set AUX bus input is used. On a falling edge, the original state of the cross-point is restored. If the GPI trigger is applied repeatedly at short intervals (0.5 second or less), the cross-point switching may not be carried out correctly. In this case, apply the GPI trigger again.
- If "System Format" is selected for "Action" when the format converter is used on the switcher, you can set the conversion format of the format converter for "FC Input 1-4," "FC Input 5-8," "FC Input 9-12" (MVS-8000X only), "FC Input 13-16" (MVS-8000X only), "FC Output 1-2," and "FC Output 3-4."
- In Dual Simul mode, you can select the target switcher for the panel status display using "Panel Status" (H=SWR1, L=SWR2).

Carrying out level settings

To set the low level and high level, first set the trigger type to "Level," then use the following procedure.

1 In the Panel >Device Interface >GPI Input menu, select the action to be set, and press [H/L Set].

The H/L Set menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Signal format/ screen aspect ratio selection	1 to maximum value

3 To apply the selection made in step **2** when the input is the GPI high level, press [H Set]. To apply the selection made in step **2** when the input is low, press [L Set].

This confirms the setting, which appears in the status area.

To set the level for the format converter

1 Set "Action" to "System Format" in step **5** of *"Making Control Panel GPI Input Settings" (page 597)*.

The format converter list appears.

2 Select the format converter that you want to set from the list.

3 In the <FC Input/Output> group, press [H Set] or [L Set] to set the high level or low level, respectively.

Making Control Panel GPI Output Settings

1 In the Panel >Device Interface menu, press [GPI Output].

The GPI Output menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port	Port selection	1 to 8

3 In the <Trigger Type> group, select the trigger polarity.

(Rising Edge): The trigger causes the relay to open or the output to go high level, and holds this state for the specified pulse width duration.

(Falling Edge): The trigger causes the relay to close or the output to go low level, and holds this state for the specified pulse width duration.

(Any Edge): When a trigger occurs, the relay opens/closes or the output goes high/low level, switching state.

Status: The relay opens/closes or the output goes high/low level in response to the status.

No Operation: The trigger has no effect on the relay state or output level.

4 Turning the knobs, select the pulse width and timing to be set.

Knob	Parameter	Adjustment	Setting values
3	Pulse Width	Pulse width	1 to 60 (fields)
4	Timing	Output timing	1 to 3 a)

a) 1: Field 1, 2: Field 2, 3: Any

When "⨉" is selected as the trigger polarity, there is no Pulse Width setting. When "Status" is selected, there is no Pulse Width or Timing setting.

5 In the <Source> group, select the action block.

M/E-1 to M/E-5 and P/P: Set an action for the M/E or PGM/PST bank.

Common: Set an action for error status.

6 Using any of the following methods, select the action to be set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Action	Action selection	1 to maximum value a)
5	Reg No	Register number	1 to 4 b)

a) **Action list when the trigger type is other than "Status"**
In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).
When Source is M/E-x: Keyx SS ? Recall, No Action
When Source is P/P: DSKx SS ? Recall, No Action
When Source is Common: KF Run, No Action
Action list when the trigger type is "Status"

In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).
When Source is M/E-x: Keyx SS ? Recall, Keyx On, No Action
When Source is P/P: DSKx SS ? Recall, DSKx On, No Action
When Source is Common: Error Make, Error Break, Keep Break, Keep Make, PREFS1, PREFS2, PREFS3, PREFS4, PREFS5, PREFS6, PREFS7, PREFS8, PREFS9, PREFS10, PREFS11, PREFS12, PREFS13, PREFS14, PREFS15, PREFS16, Device Recording, No Action

b) When knob 2 selection is "Key Snapshot"

7 Press [Action Set] to confirm the action selection.

The selected setting appears in the status area.

Test firing the trigger

To test fire the trigger, press [Test Fire].
This outputs a trigger from the selected output port. This is not output when the trigger type is "Status."

Setting the Control Mode for P-Bus Devices

In the <P-Bus Control> group of the Panel >Device Interface menu, select the mode.

Trigger: When a predetermined button is pressed, the action command assigned to that button is output, to control an external device.

Timeline: The external device is controlled as a keyframe effect controlled by the center control panel.

Setting the SCU Editor Panel Port

When an editing keyboard is used, this port setting is for the editing keyboard if the license for the BZS-8050 is valid *(see page 556)*, and for the serial tally if the license for the BZS-8050 is invalid.
If you want to use the port setting for the serial tally when the license for the BZS-8050 is valid, select [Serial Tally] from the <Editor Port Assign> group in the Panel >Device Interface menu.

Serial Tally: Use the SCU editor panel port for the serial tally.

Editor Keyboard: Use the SCU editor panel port for the editing keyboard.

Making DCU Serial Port Settings

You can assign buttons in the device control block (DEV1 to DEV12) to DCU serial ports, to operate the devices (disk recorder/VTR/Extended VTR) connected to these ports. For a disk recorder/Extended VTR, you can also set the sharing of file lists.

For details of DCU serial port settings, see "Serial Port Settings (Serial Port Assign Menu)" (page 645).

Associating a serial port with a device selection button

1 In the Panel >Device Interface menu, press [DCU Serial Port/MPE Assign].

The DCU Serial Port/MPE Assign menu appears.

2 Using any of the following methods, select the DCU serial port.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Serial port selection	1 to maximum value [a]

a) The range of the setting value depends on the DCU port settings.

The DCU number, slot number, and serial port number appear.

3 Select the device selection button to be assigned from the <Assign> group.

Notes

- It is not possible to assign more than one device selection button to the same port. The later assigned device selection button takes priority, and the previous selection is invalidated.
- If P-Bus/Mixer ESAM-II is assigned to a serial port, it is not possible to assign a device selection button to that port.

4 Repeat steps **2** and **3** as required to make assignments to other ports.

To select whether to use an editing keyboard

If you want to use an editing keyboard for the selected device, select a port using the same operation as in step **2**, then press [Plug-In Editor Enbl] to display "Enbl" in the Editor column. If you do not want to use an editing keyboard, press [Plug-In Editor Enbl] to make the "Enbl" display disappear.

Notes

- This selection is possible when the BZS-8050 license is valid *(see page 556)*.
- A port to which Mixer ESAM-II is assigned is automatically set to Enbl, and you cannot change this setting.

Sharing Disk Recorder/Extended VTR File Lists

To share files between devices connected to the same disk recorder/Extended VTR, use the following procedure.

Notes

The following operation can only be carried out for the ports to which a disk recorder or Extended VTR is assigned.

1 In the Panel >Device Interface >DCU Serial Port/MPE Assign menu, select the target disk recorder/Extended VTR.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Serial port selection	1 to maximum value [a)]

a) The range of the setting value depends on the DCU port settings.

2 Turn the knob to select the device selection button (DEV1 to DEV12) for sharing the file list.

Knob	Parameter	Adjustment	Setting values
2	File List	Device selection button for sharing the file list	1 to 12

3 Press [Same File List Set].

This is reflected in the file list in the status area.

4 Repeat steps **1** to **3** as required to select other devices for sharing the file list.

Setting the AUX Bus Override Operating Mode

Set the operating mode when the trigger type is “Rising Edge” or “Falling Edge,” and “Aux ? O’ride Src ??” is selected as the GPI input action.
In the <Aux Bus Override Mode> group of the Panel >Device Interface menu, select one of the following modes.

Momentary: On an input pulse rising (falling) edge, the input of the selected AUX bus is used, and on a falling (rising) edge this returns to the original cross-point.

Latch: On an input pulse rising (falling) edge, the input of the selected AUX bus is used, and this does not return to the original cross-point change even on a falling (rising) edge.

This setting is also valid when AUX bus override is selected as the DCU GPI input *(see page 641)*.

Operation Settings (Operation Menu)

To make settings relating to panel operation, use the Panel >Operation menu.

To display the Operation menu

In the Engineering Setup menu, select VF2 'Panel' and HF6 'Operation.'
The status area shows the items that can be set and a list of the settings.
The following functions are available here.

- **Button Tally:** Set whether or not the system tally generation results are reflected in the panel tally.
- **Key Row Operation:** Set the operation mode for cross-point control block key 1 and key 2 rows.
- **Trans Rate Display:** Select whether the transition rate display mode is in frames or timecode units.
- **S-Bus Name Link:** Copy the S-Bus description name to the source name.
- **Effect:** For keyframe effects, you can make the following settings.
  - Recall mode
  - Automatically turning off the [EDIT ENBL] button when an effect is recalled
  - Automatic insertion of a first keyframe when an empty register is recalled
  - Effect Auto Save
  - Default KF Duration
  - Setting whether or not to replay the first keyframe after rewinding a GPI/P-Bus/disk recorder/VTR/Extended VTR/Macro effect
- **Source/Dest Name:** For the Source/Dest (source/destination) names used by the system, select one of the following:
  - Source name set by cross-point assignment or fixed bus name
  - Description name set on routing switcher
  - "Type + Num" name set on routing switcher

  Names assigned with Xpt Assign can be replaced later with description names.
- **Name Display:** Specify the number of characters for display of the names selected in Source/Dest Name above, as two characters, four characters, or Auto.
- **Flexi Pad Mode:** Carry out Flexi Pad settings. Specify the delegation selection coupling, and display mode for the LCD buttons. You can also make menu settings for wipe snapshots.
- **Custom Button:** Set the following button operation modes.
  - [ALL] button for next transition selection
  - [AUTO TRANS], [TAKE] or [FTB] button during auto transition execution
  - [RUN] button during keyframe execution
  - [AUTO TRANS] and [CUT] button replacement
  - [TRANS PVW] button
  - [UTIL] button
  - [XPT HOLD] button in key rows
  - Selection of signal assigned to the key source bus (either key signal only, or either video signal or key signal selectable)
- **Sensitivity:** Adjust trackball, joystick and double-click sensitivity, or set the relationship between the angle of the search dial and the playback speed or the sensitivity for the search dial in jog mode.
- **Main Split Fader:** When the split fader is active, specify whether the fader to control other than mix is the left side or the right side.
- **Macro:** Set the macro execution mode and the mode in which to edit macros using the standard type Flexi Pad control block.

Setting the On-Air Tally

To set the high tally state reflected on the control panel, use the following procedure.

1 In the Panel >Operation menu, press [Button Tally].

The Button Tally menu appears.

2 In the <Tally Type> group, select either of the following.

[R1] to [R8]: Reflect any of tally groups 1 to 8 as the tally state.
Independent: Reflect only the switcher tally state.

3 Press [Execute].

A popup window appears and shows the progress of the operation.

Assigning a Key or AUX Bus to a Button in the Key 1 or Key 2 Row

These settings enable keys 1 to 8 and AUX bus selection in the key 1 and key 2 rows of the cross-point control block.

1 In the Panel >Operation menu, press [Key Row Operation].

The Key Row Operation menu appears.

2 In the <Key Row Mode> group, select one of the following.

Key Bus: Use the key 1 and key 2 rows as cross-point button rows for the keyers.

Key Deleg/AUX: Use the key 1 row as a key and AUX delegation button row, and the key 2 row as a delegation cross-point button row.

Setting key 1 row delegation

1 In the Key Row Operation menu, press [Key Deleg/AUX Assign].

The Key Deleg/AUX Assign menu appears.

2 Select the button you want to assign from the list on the right.

3 Using any of the following methods, select the key to be assigned from the list on the right.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Deleg No	Select button	1 to maximum value
2	Bus No	Select function to be assigned to button	1 to 82

Setting the Transition Rate Display Mode

To determine whether to display transition rate values in menus and on the control panel in frames or as timecode values, select either of the following in the <Trans Rate Display> group.
Frame: display in frames.
Timecode: display as timecode (SS:FF).

Making Settings Relating to Effects

To make settings relating to the functions used when carrying out keyframe effect operations, use the following procedure.

1 In the Panel >Operation menu, press [Effect Mode].

The Effect Mode menu appears.
The status area shows a list of the items with their settings.

2 Make the following settings as required.

Effect recall mode: To select the state of the first keyframe when an effect is recalled, select [Recall] (the first keyframe is not recalled) or [Recall&Rewind] (the first keyframe is recalled) in the <Recall Mode> group.
Automatically turning [EDIT ENBL] off: When an effect is recalled with the [EDIT ENBL] button on, to automatically turn this button off, disabling keyframe editing, turn [Edit Enable Auto Off] on.
Automatic first keyframe insertion: When an empty register is recalled, to automatically insert a first keyframe of the state at that point, turn [1st KF Auto Insert] on.
Automatic effect saving: To automatically save an effected when it is recalled after being edited, turn [Effect Auto Save] on.
Keyframe duration default value: Press [Default KF Duration], then enter the default value from the numeric keypad window.

Setting the First Keyframe When a Rewind is Executed

For P-Bus, GPI, and DDR/VTR timeline operations, to execute the first keyframe when a rewind is carried out, set each external device on in the <REWIND&1st KF> group in the Effect Mode menu.

Notes

When an effect is executed by pressing the [RUN] button with this setting on, the first keyframe action is not executed.

GPI: setting for the GPI timeline
P-Bus: setting for the P-Bus timeline
DDR/VTR: setting for the VTR/disk recorder/Extended VTR timeline
Macro: setting for the macro timeline

Setting the Source and Destination Names

To set the Source and Destination names used in the control panel, use the following procedure.

Notes

Before carrying out these settings, it is necessary to set the number of the S-Bus description name *(see page 653)*.

1 In the <Source/Dest Name> group of the Panel >Operation menu, select the names to be used from the following.

Sw'er Local: Source names set in the Xpt Assign menu, and fixed bus names
S-Bus Descript: Description names set in the router

S-Bus Type + Num: Type + Num set in the router (in this case always eight characters).

2 In the <Name Display Mode> group, select the method of display in the source name displays.

Auto: Optimize display according to number of characters. A name of up to two characters appears as two characters in one line. A name of up to four characters appears as four characters in one line. Otherwise, up to the first eight characters are shown in two lines.
2 Character: The first two characters appear.
4 Character: The first four characters appear.

To replace a name set in the Xpt Assign menu with an S-Bus description name

Turn [S-Bus Name Link] on.
This has such effect that each time a description name is changed on the router, the corresponding source name is automatically changed. Thus, the same description name can always be used both on the router and the switcher. Even when [Sw'er Local] is selected, the same name as when [S-Bus Descript] is selected can be displayed. The S-Bus description name can also be displayed in the Xpt Assign menu.

Settings for the Flexi Pad and Wipe Snapshot Menu

You can select the pattern numbers or register names as the button indications for Flexi Pad control block and the following menus.
- M/E-1 >Wipe >Wipe Snapshot menu
- M/E-1 >DME Wipe >DME Wipe Snapshot menu
- Misc >Snapshot menu

This setting is also valid in the Multifunction Flexi Pad control block.

1 In the Panel >Operation menu, press [Flexi Pad Mode].

The Flexi Pad Mode menu appears.
The status area shows a list of the items with their settings.

2 Make the following settings as required.

Coupling the transition type selection with the Flexi Pad control block mode selection: To make the Flexi Pad mode selection change automatically when [WIPE] or [DME] is selected in the transition control block, press [Wipe/DME Auto Deleg], turning it on.
Button indications in the memory recall section: When the Flexi Pad control block mode is [WIPE] or [DME], for the button indications in the memory recall section, select [Pattern] or [Register Name] in the <Wipe/DME Display> group. When the mode is [Snapshot], [Effect], or [MCRO], select [Register No] or [Register Name] in the <Snapshot/Effect Display> group.

Setting the Button Operation Mode

1 In the Panel >Operation menu, press [Custom Button].

The Custom Button menu appears.
The status area shows a list of the items with their settings.

2 Make the following settings as required.

Operation mode during an auto transition: For the operation mode when the [AUTO TRANS] or [TAKE] button is pressed once more during an auto transition, select [Continue] or [Cancel] in the <Auto Trans/Take> group.
- **Continue:** Continue the auto transition.
- **Cancel:** Cancel the auto transition and return to the state before starting the auto transition.

Operation mode during keyframe execution: For the operation mode when the [RUN] button is pressed once more during effect execution, select [Continue] or [Cancel] in the <Run> group.
- **Continue:** Continue the execution.
- **Cancel:** Cancel the execution and return to the state before starting the execution.

Status display for auto transition execution button: When the [AUTO TRANS] or [TAKE] button is pressed to carry out an auto transition, select whether the button is lit or off in the <Auto Trans/Take Key On Stats> group.
- **Disable:** Lights amber during the transition, and goes off at the end of the transition.
- **Enable:** Lights green during the transition, and at the end of the transition lights red if on air and amber if not on air.

Notes

This setting is only valid in the independent key transition execution section of the following control block.
- Transition control block (standard)
- Downstream key control block (DSK Fader Module)
- Independent key transition control block (simple type)
- Downstream key/fade-to-black control block

Interchanging the [AUTO TRANS] and [CUT] buttons: To interchange the [AUTO TRANS] and

[CUT] buttons in the transition control block, press [Auto Trans/Cut Swap], turning it on.

Transition preview operation mode: For the operation mode of the [TRANS PVW] button, select [Lock] or [Hold] in the <Trans Pvw> group. The setting as to whether to use the "One-time mode" in which the transition preview terminates when the transition completes, or to use button control, is made on the switcher side *(see page 623)*.

[KEY] button operation mode for key source bus operations: When the key source bus is selected with the delegation buttons in the auxiliary bus control block, specify the [KEY] button operation mode in the <Key Source Bus Select Mode> group, as follows.

- **Key:** If you select this, the [KEY] button is always lit, and this mode allows only key signals to be selected with the cross-point buttons.
- **Video & Key:** The [KEY] button is enabled, and either video or key signals can be selected.

CCP-6000/8000-specific button settings: Press [CCP-6000/8000 Button], and skip to step **3**. This setting is enabled when the CCP-6224/6324 is used.

3 If required, make the following settings.

Operation mode during a fade-to-black: To set the operation mode if the [FTB] button is pressed once more during a fade-to-black, select either of the following in the <FTB> group.

- **Continue:** Continue the fade-to-black.
- **Cancel:** Cancel the fade-to-black, and return to the state before executing the fade-to-black.

Operation mode of the [XPT HOLD] buttons in the key rows: Set the operation mode of the [XPT HOLD] buttons in the key rows in the <Key Bus Xpt Hold> group, as follows.

- **Normal:** The <Xpt Hold Mode> in the Switcher >Key/Wipe/FM/CCR menu is enabled.
- **Protect:** In this mode, pressing a panel button cannot change the cross-point settings.

Notes

The button On/Off state is preserved in each of the "Normal" and "Protect" modes. For example, if the [XPT HOLD] buttons are "On" in the Normal mode, and you switch to Protect mode, then if the [XPT HOLD] buttons were "Off" in this mode the previous time, the [XPT HOLD] buttons go off, and if they were "On" they light.

[UTIL] button operation mode: To set the operation mode of the [UTIL] button in the cross-point control block, press either of the following in the <Util Button> group.

- **Hold:** Acts as a utility button while held down, changing the assignment of the cross-point button rows.
- **Lock:** For the key rows, each time the button is pressed the cross-point button assignment toggles between the utility assignment and the normal assignment. The background A and B rows are fixedly assigned to the A and B rows, even if the [UTIL] button is pressed.

Setting the Operation Mode of the [ALL] Button in the Transition Control Block

Specify the next transition selected by pressing the [ALL] button in the transition control block.

Notes

If everything here is set to Off, then pressing the [ALL] button does not change the specification of the next transition.

1 In the Panel >Operation >Custom Button menu, press [Next Trans All].

The Next Trans All menu appears.

2 Press the button for the next transition you want to select with the [ALL] button, turning it On.

Setting Trackball, Joystick, Search Dial, and Double-Click Sensitivity

You can set the operational sensitivity for trackball, joystick and the buttons which recall the relevant menus when pressed twice, and the relation between the rotation angle of the search dial with the playback speed.

1 In the Panel >Operation menu, press the [Sensitivity].

The Sensitivity menu appears.
The status area shows a list of the items with their settings.

2 Make the following settings as required.

Trackball and Z-ring sensitivity in normal mode: In the <Trackball Normal Mode> group, select [×1], [×2], or [×4].

Trackball and Z-ring sensitivity in fine mode: In the <Trackball Fine Mode> group, select [$^1/_2$], [$^1/_4$], or [$^1/_8$].

Joystick sensitivity in normal mode: In the <Joystick Normal Mode> group, select [×1], [×2], or [×4].

Joystick sensitivity in fine mode: In the <Joystick Fine Mode> group, select [1/2], [1/4], or [1/8].
Touch sensitivity for recalling menus by double-clicking buttons: In the <Double Click> group, select [Fast], [Normal], or [Slow].

Making advanced settings for the search dial

1 In the Panel >Operation >Sensitivity menu, press [Search Dial].

The Search Dial menu appears.
The status area shows a list of the settings and their content.

2 Set the sensitivity for the search dial in jog mode.

When operated with the [JOG] button pressed to be lit amber: In the <Jog Sensitivity> group, press one of [1 (Slow)] to [6 (Fast)].
When operated with the [JOG] button held down: In the <Jog Sensitivity (While pressing [JOG] button)> group, press one of [1 (Slow)] to [6 (Fast)].

3 In the <SHTL/VAR Dial Range> group, select [Narrow] or [Wide] to set the sensitivity for the search dial in shuttle mode or variable mode.

Narrow: The search speed varies in a relatively narrow range.
Wide: The search speed varies in a relatively wide range.

For details of search dial operations, see "Controlling the Tape/Disk Transport" (page 422).

Specifying Main Split Fader

In the <Main Split Fader> group of the Panel >Operation menu, select [Left] or [Right].

Setting the Macro Execution Mode

1 Press [Macro] in the Panel >Operation menu.


The Macro menu appears.

2 In the <Macro Execution Mode> group, select the macro execution mode.

Normal: normal execution mode
Step: step execution mode

3 In the <Flexi Pad Edit Mode> group, set the macro editing mode of the standard type Flexi Pad to [Pause Only] or [Full Editing].

This enables the standard type Flexi Pad control block to be used for macro editing. Depending on the macro editing mode setting, functions are assigned to the memory recall buttons as shown in the following figure.

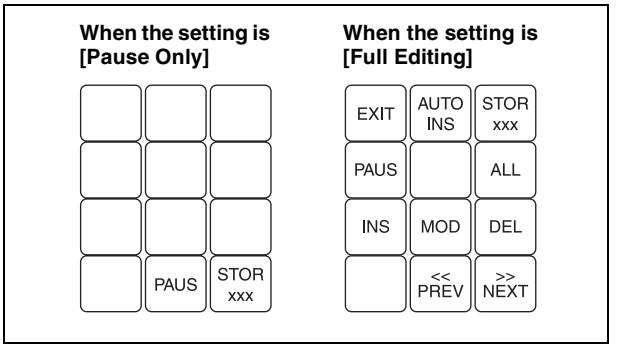

4 When making a macro attachment setting, select whether or not to enable cross-point button operations in the <Attachment Setting Mode> group.

With Btn Function: enable cross-point button operations
W/o Btn Function: disable cross-point button operations

5 Using the <Macro 2nd Recall Mode> group, set the action to occur during macro execution or when a macro is stopped, if the cross-point button with the macro attachment set is pressed again.

Continue: Execution of a macro that has been stopped is resumed, and an executing macro continues.
Cancel: A stopped macro, or a macro during execution is terminated.

6 Using the <Macro Recall Override> group buttons, set the action to occur during macro execution or when a macro is stopped, if another macro is recalled.

Disable: Ignore the other macro recall.
Enable: Execute the other macro.

To have a cross-point button with a macro attachment set lit continuously

Press [Attchd Btn Indication], turning it on.
When the [MCRO ATTCH ENBL] button in the cross-point control block is on, the cross-point button with a macro attachment is constantly lit green.

Screen Saver and Other Settings (Maintenance Menu)

To make settings relating to the screen saver, etc., use the Panel >Maintenance menu.

- **Screen Saver:** Make the menu display saver settings.
- **LCD Brightness:** Adjust the LCD brightness.
- **LED Brightness:** Adjust the LED brightness.
- **Switch Brightness:** Adjust the switch brightness.
- **Touch Beep:** Select whether or not to sound a beep when a menu operation is carried out.
- **Touch Panel Calibration:** Calibrate the touch panel.
- **Initial Menu Set:** Specify the menu to be displayed at menu startup.
- **Scrl Down = Clockwise/ Scrl Up = Clockwise:** Set the mouse wheel scrolling direction for parameter setting.
- **Mouse Slider Control:** Select the mouse button used for adjusting the bar positions of the knob parameters.

To display the Maintenance menu

In the Engineering Setup menu, select VF2 'Panel' and HF7 'Maintenance.'
The status area shows a list of the items with their settings.

Screen Saver Settings

To enable the menu display saver, use the following procedure.

1 In the Panel >Maintenance menu, press [Screen Saver], turning it on.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Sleep Time	Time until screen saver starts operation	1 to 300 (minutes)

Adjusting the Brightness

You can adjust the brightness of the following hardware parts.

LCD: Adjust the brightness of the source name displays and the LCD buttons in the Flexi Pad control block.
LED: Adjust the brightness of the LED displays in the numeric keypad control block and so forth.
Switch: Adjust the brightness of the panel switches.
The following description takes the LCD brightness as an example. Use a similar process for the other adjustments.

1 In the Panel >Maintenance menu, press [LCD Brightness].

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Brightness	LCD brightness	1 to 5 a)

a) The larger the value, the brighter the screen.

Setting Whether or not to Sound a Beep when a Touch Operation is Carried Out

In the Panel >Maintenance menu, press [Touch Beep]. Each time you press this button, it toggles the beep setting on and off.

Calibrating the Touch Panel

1 In the Panel >Maintenance menu, press [Touch Panel Calibration].

The following message appears.
"To Perform Calibration, please touch the center of each plus sign."

2 Press [Yes].

3 Press the center of the plus sign displayed on the screen.

When you press on the plus sign, it disappears and a diagonally opposite plus sign appears.

4 Press the center of the plus sign.

A confirmation message appears.
- Select "Yes" to restart the panel reflecting the new setting.
- Select "No" to cancel the setting and return to the Maintenance menu.

Setting the Menu to be Shown When the Menus Are Started

1 In the Panel >Maintenance menu, press [Initial Menu Set].

A popup window appears.

2 Enter the page number of the desired menu.

The next time the menus are started, the menu specified by this number appears.

Notes

To enable this setting, the initial state of the control panel when powered on must be set to one of the following.

- Set to Resume mode
- Set to Custom mode, with “User” selected in the <Setup> group.

For details of these settings, see “Selecting the State After Powering On (Start Up Menu)” (page 553).

Setting the Mouse Wheel Scrolling Direction for Parameter Setting

In the <Mouse Wheel Direction> group of the Panel >Maintenance menu, press one of the following buttons.

Scrl Down = Clockwise: Turning the mouse wheel in the direction to scroll down is the same as turning the parameter setting knob clockwise.

Scrl Up = Clockwise: Turning the mouse wheel in the direction to scroll up is the same as turning the parameter setting knob clockwise.

Selecting the Mouse Button Used for Adjusting the Knob Parameters

In the Panel >Maintenance menu, press either of the following buttons in the <Mouse Slider Control> group.

Left Button: Dragging the bar while holding down the left mouse button adjusts the parameter assigned to the knob.

Right Button: Dragging the bar while holding down the right mouse button adjusts the parameter assigned to the knob.

Notes

When Left Button selected, even pressing one of the knob parameter buttons in the menu control block does not display a numeric keypad window.

Switcher Setup (Switcher)

Chapter 20

Settings for Switcher Configuration (Config Menu)

To make settings for the switcher processor configuration, use the Switcher >Config menu.

To display the Config menu

In the Engineering Setup menu, select VF3 'Switcher' and HF1 'Config.'
The status area shows the output signal assignment for each of the M/E and PGM/PST banks.
The following functions are available here.

- **System Phase:** Adjust the switcher internal reference phase.
- **Switching Timing:** Specify the timing of video switching.
- **M/E Config:** Set the configuration for the M/E and PGM/PST outputs.
  - **Standard mode:** Fix the output configuration for the maximum of four outputs (Out1 to 4) as follows.
    Out1: Program output
    Out2: Preview output
    Out3: Clean output
    Out4: Key preview output [1)]
  - **Multi-program mode:** Increase the number of M/E or PGM/PST programs, and assign any of the following to the maximum of six outputs (Out1 to 6) (M/E Output Assign).
    Program outputs 1 to 4, preview output, key preview outputs [1)] 1 and 2, clean output.
    Further, you can select the program background from Clean or Utility2, and change the combination of signals from which the program output is configured (PGM Config).
  - **DSK mode:** Treats PGM/PSTs as DSKs by assigning one of the Out1 to Out6 outputs of M/E-1 to M/E-5 to the background on the PGM/PST program outputs. You can also change the signals that make up the output signal selection (M/E Output Assign), program output, and key preview output [1)] using PGM Config and K-PVW-Config.

1) For the key preview output, you can select either video mode (background and key) or key mode (key only), and select the background and key (K-PVW Config).

- **User 1 to 8 Config:** Assign the User regions, being color backgrounds 1 and 2, AUX1 to 48, frame memory 1 to 8, and color correctors 1 and 2, to any of User1 to User8.
- **Logical M/E Assign:** Make settings for handling PGM/PST hardware logically as an M/E.
- **DME Config:** Set the DME channel assignments used on the individual M/E and PGM/PST banks.
- **Side Flags:** Make settings relating to the side flag function (inserting a selected image on both sides of a 4:3 image).

Adjusting the Reference Phase

To adjust the switcher internal reference phase, in the Switcher >Config menu, set the following parameter.

Knob	Parameter	Adjustment	Setting values
3	Phase	Switcher internal reference phase	–32.00 to +96.00

Specifying the Video Switching Timing

1 In the Switcher >Config menu, press [Switching Timing].

The Switching Timing menu appears.

2 Select any of the following.

Any: Not specified
Field 1: Field 1 (odd fields)
Field 2: Field 2 (even fields)

Notes

When the signal format is set to 720P, 1080PsF or 1080P, this selection is not possible.

Setting the Operation Mode

In the <M/E Config> group of the Switcher >Config menu, select the operation mode for each M/E or PGM/PST bank from the following.

- **Standard:** Standard mode
- **Multi Program:** Multi-program mode
- **DSK:** DSK mode (PGM/PST only)

For details of the modes, see the explanation of the M/E Config function (page 609).

Notes

When Multi Program mode is selected, two or more transition type indication may light. It is also possible that more than one "Transition Type" has been selected in the Misc >Transition menu for each M/E.

Assigning the output of each bank in Multi Program mode

When you selected [Multi Program] as the operation mode, use the following procedure.

1 In the Switcher >Config menu, press [M/E Output Assign].

The M/E Output Assign menu appears.

2 On the list in the status area, select the bank output to be assigned.

The selected output appears in reverse video.

3 In the <M/E Output Assign> group, select the output signal to be assigned.

Setting the output configuration for each bank

When you selected [Multi Program] or [DSK] as the operation mode, use the following procedure.

1 In the Switcher >Config menu, press [PGM Config].

The PGM Config menu appears.
The status area shows the background and key configuration assigned to the output of each bank.

2 Using either of the following methods, select the output for which you want to make the setting.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No (PGM)	Output to which setting applies	1 to 24

The selected output appears in reverse video.

3 In the <Bkgd> group, select the background.

In Multi Program mode, select [Clean] or [Utility2], then skip to step **5**.
In DSK mode, select one of [Bkgd1] to [Bkgd4].

4 In DSK mode, turn the knobs to select the background signal.

Knob	Parameter	Adjustment	Setting values
2 to 5	Bkgd1 to 4	Background signal selection	1 to 30 a)

a) 1 to 6: M/E1 OUT1 to 6
7 to 12: M/E2 OUT1 to 6
13 to 18: M/E3 OUT1 to 6
19 to 24: M/E4 OUT1 to 6
25 to 30: M/E5 OUT1 to 6

5 In each of the <Key1> to <Key8> groups, select [Enable] or [Disable].

Setting the key preview configuration

You can make this setting at any time, regardless of the operation mode.

1 In the Switcher >Config menu, press [K-PVW Config].

The K-PVW Config menu appears.
The status area shows the key preview configuration for each bank.

2 Using either of the following methods, select the key preview to which the settings apply.

- Press directly on the list in the status area to make the selection.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No (K-PVW)	Key preview to which setting applies	1 to 12

The selected key preview appears in reverse video.

3 In the <Mode> group, select [Video] mode or [Key] mode.

If you select Key mode, skip to step **6**.

4 In the <Bkgd> group, select the background.

In Standard mode or Multi Program mode, select [Clean] or [Utility2], then skip to step **6**.
In DSK mode, select any of [Bkgd1] to [Bkgd4].

5 In DSK mode, turn the knobs to select the background signal.

Knob	Parameter	Adjustment	Setting values
2 to 5	Bkgd1 to 4	Background signal selection	1 to 30 a)

a) 1 to 6: M/E1 OUT1 to 6
7 to 12: M/E2 OUT1 to 6
13 to 18: M/E3 OUT1 to 6
19 to 24: M/E4 OUT1 to 6
25 to 30: M/E5 OUT1 to 6

6 In the <Key 1> to <Key 8> groups, select the corresponding key status from the following.

- **Link:** Follow the key on/off setting.
- **On:** Key is always on.
- **Off:** Key is always off.

Setting User Regions

Notes

If you change the user region settings, the previously stored snapshot data and keyframe effect data can no longer be used.

1 In the Switcher >Config menu, press [User1-8 Config].

The User1-8 Config menu appears. The status area shows the region names and assigned user region numbers.

2 Using any of the following methods, select the region you want to set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Region	Region selection	1 to maximum value

3 In the <User Region Assign> group, select the user region you want to assign. If you do not want to assign a user region, select [No Assign].

4 Repeat steps **2** and **3** as required to make the settings for other regions.

5 To confirm the setting, press [Execute]. To cancel the setting and return to the original state, press [Clear] before pressing [Execute].

When you press [Execute], a confirmation message appears.

6 Press [Yes].

Assigning PGM/PST Logically to an M/E

1 In the Switcher >Config menu, press [Logical M/E Assign].

The Logical M/E Assign menu appears. The status area shows the physical M/E and logical M/E organization.

2 Select the M/E you want to logically set to the PGM/PST from the <Logical M/E to Physical P/P> group.

P/P: Assign the physical PGM/PST as logical PGM/PST.
M/E-1: Assign the physical PGM/PST as logical M/E-1.
M/E-2: Assign the physical PGM/PST as logical M/E-2.
M/E-3: Assign the physical PGM/PST as logical M/E-3.
M/E-4: Assign the physical PGM/PST as logical M/E-4.
M/E-5: Assign the physical PGM/PST as logical M/E-5.

Notes

M/E-5 is not displayed on the MVS-8000X.

Setting the Assignments of DME Channels to Use on the Individual M/E Banks

The Switcher >Config >DME Config menu allows you to select the DME channels to use on the M/E and PGM/PST banks for processed keys or DME wipes.

1 In the Switcher >Config menu, press [DME Config].

The DME Config menu appears.

2 Using either of the following methods, select the M/E or PGM/PST bank for which you want to set a DME channel assignment.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

3 In the <DME Channel> group, press one of the [Ch1] to [Ch8] buttons turning it on to select the channel which you want to assign to the bank selected in step **2**.

4 Repeat steps **2** and **3** to assign DME channels to other banks.

Setting the Side Flag Video Material and Operation

Make settings relating to the video material (4:3 aspect ratio) for applying side flags.

For details of side flag operations, see "Side Flag Settings" in Chapter 10 (Volume 1).

Setting the aspect ratio (4:3/16:9)

1 In the Switcher >Config menu, press [Side Flags].

The Side Flags menu appears.
The status area lists the video/key pair numbers, video signal source names, and aspect ratio settings (16:9/4:3).

2 Using any of the following methods, select the pair number for which you want to make the setting.

- Press directly on the list in the status area.
- Use the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	V/K Pair No	Selection of a V/K pair by its number in the list	1 to 300
2	Num	Selection of number of V/K pairs in the list	1 to 300

- To select all of the pair numbers, press [ALL].

3 In the <Aspect> group, press [4:3].

If you select [16:9], no side flags are applied.

To set 4:3 video material to have side flags applied automatically

You can make a setting so that when a signal with aspect ratio set to 4:3 is selected in the cross-point control block, side flags are automatically applied.
To do so, in the Switcher >Config >Side Flags menu press [Auto Side Flags]. Pressing this button toggles the setting on and off.
This setting applies to all of the M/E and PGM/PST banks.

To set to crop to 4:3 when a DME wipe is executed

When side flags are enabled, you can automatically crop an image as set to be a 4:3 image when executing a DME wipe.
To do so, in the Switcher >Config >Side Flags menu press [Auto Crop]. Pressing this button toggles the setting on and off.
This setting applies to all of the M/E and PGM/PST banks.

Adjusting the width of the side flags

You can adjust the width of the side flags.

1 In the Switcher >Config >Side Flags menu, press [Width].

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
3	Left	Width of left side flag	–100.00 to +100.00
4	Right	Width of right side flag	–100.00 to +100.00
5	All	Width of both side flags	Left value shown

Displaying the menu for enabling/disabling the side flags

In the Switcher >Config >Side Flags menu, press [Misc >Enbl >Side Flags].

Displaying the menu for assigning the side flags on/off function to a cross-point button

In the Switcher >Config >Side Flags menu, press [Side Flags Button Assign].

Signal Input Settings (Input Menu)

For setup relating to signal inputs, use the Switcher >Input menu.

To display the Input menu

In the Engineering Setup menu, select VF3 'Switcher' and HF2 'Input.'
The status area shows source numbers and source names and through mode on/off setting.
The following functions are available here.

- **Through Mode:** Set the through mode for input. You can set this independently for each primary input or premium input.
- **Video Process:** Switch video processing on or off for each input signal, and adjust the brightness, hue and so forth.
- **Matte Illeg. Color Limit:** Switch the illegal limiter on or off for the signal generated by the switcher internal matte generator.
- **FC Input Select:** Select the primary input to be used in the format converter (MVS-7000X only).
- **FC Adjust:** Select the conversion (up-conversion, cross-conversion, or down-conversion) when the format converter is applied to an input.

Making Through Mode Settings

Notes

For the format converter dedicated inputs in the MVS-8000X, you cannot set through mode.
For the MVS-7000X, through mode is enabled for the input signals which have been converted in the format converter.

1 In the Switcher >Input menu, select the input signal to which the settings apply.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Src No	Input signal selection	1 to maximum value [a) b)]

a) The following values apply to the MVS-8000X.
For primary inputs: 1 to 144
For premium inputs: 145 to 164 ((PREM1) to (PREM20) indicated after the number)
b) The values from 1 to 80 apply to the MVS-7000X.

The selected input signal appears in reverse video.

2 To enable through mode, press [Through Mode], turning it on.

Making Video Process Settings

1 In the Switcher >Input menu, press [Video Process].

The Video Process menu appears.
The status area shows the source number, source name, and video process adjustment settings.

2 Using any of the following methods, select the input signal to which the settings apply.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
1	Src No	Input signal selection	1 to maximum value [a) b)]

a) The following values apply to the MVS-8000X.
For primary inputs: 1 to 144
For premium inputs: 145 to 164 ((PREM1) to (PREM20) indicated after the number)
For format converter dedicated inputs: 165 to 180 ((FC1) to (FC16) indicated after the number)
b) The values from 1 to 80 apply to the MVS-7000X.
For primary inputs: 1 to 80
Input signals which have been converted in the format converter: 81 to 88

3 Press [Video Process], turning it on.

4 Adjust the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
1	Video Gain	Video signal gain	–200.00 to +200.00
2	Y Gain	Y signal gain	–200.00 to +200.00
3	C Gain	Chrominance signal gain	–200.00 to +200.00
4	Hue Delay	Hue delay	–180.00 to +180.00
5	Black Level	Black level	–7.31 to +109.59

To set the parameter settings to their defaults, press [Unity].

Enabling the Illegal Color Limiter

To enable the illegal color limiter for the signals generated by the switcher internal matte generator, press [Matte Illeg Col Limit] in the Switcher >Input menu, turning it on.

Selecting the Primary Input to be Used in the Format Converter

On the MVS-7000X, the primary input used by the format converter must be specified.

1 In the Switcher >Input menu, press [FC Input Select].

The FC Input Select menu appears.
The status area shows the format converter list (left) and the primary input number list (right).

2 Using any of the following methods, select the number of the FC (format converter) that you want to set from the table on the left.

- Press directly on the list in the status area.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	FC	Format converter	1 to 8

3 Using any of the following methods, select the primary number.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Primary	Input signal to be converted	1 to 80

4 Press [Set].

5 To input the name of the input signal which has been converted in the format converter, press [FC Name].

A keyboard window appears. You can enter a name of not more than 16 characters.

6 Press [Enter].

Setting the Frame Delay Function

1 In the Switcher >Input menu, select the input signal for which you want to make the setting.

You can select the input signals for which the frame delay function is enabled in advance.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
2	Frame Delay	Delay amount	1 to 8 (frames) a)

a) If the signal format is 720P, the delay (number of frames) is twice the set adjustment value.

Selecting the Format Converter Conversion

Selecting the Format Converter Inputs to be Set


For four groups of FC1 to FC4, FC5 to FC8, FC9 to FC12, and FC13 to FC16, the same setting is applied in units of groups.

Notes

The two groups of FC9 to 12 and FC13 to FC16 can be used only on the MVS-8000X.

1 Display the Switcher >Input >FC Adjust menu.

The following figure illustrates the case when FC Input 1-4 are set to up-conversion, and FC Input 5-8 are set to cross-conversion.

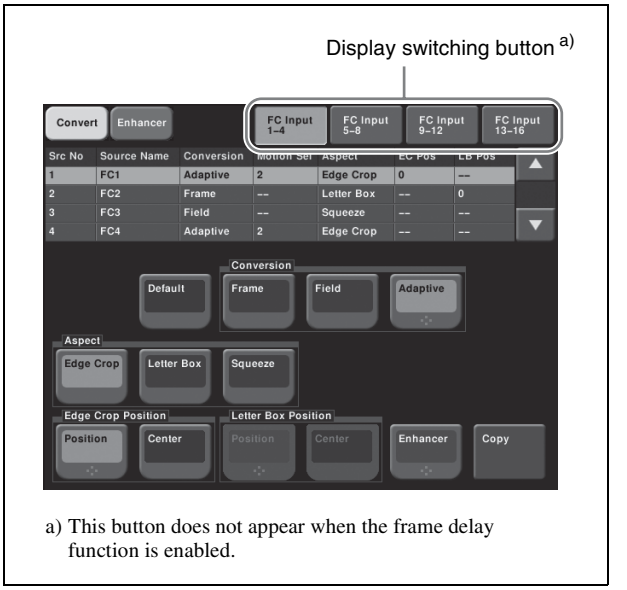

a) This button does not appear when the frame delay function is enabled.

2 Press [FC Input 1-4], [FC Input 5-8], [FC Input 9-12], or [FC Input 13-16] as required.

The list corresponding to the pressed button appears.

3 Using any of the following methods, select what the setting applies to.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Source No	Input selection	1 to maximum value [a]

a) The setting values vary with the button pressed in step **2**.

Making detailed settings for up-conversion

1 In the Switcher >Input >FC Adjust menu, select the input to which the setting applies.

2 In the <Conversion> group, select one of the following.


Frame: Conversion in frame units
Field: Conversion in field units
Adaptive: Automatically switching between the above two modes
When Adaptive is selected, adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
2	Motion Select	Motion detection sensitivity	1 to 3 [a]

a) 1: Still priority mode, 2: Standard mode, 3: Motion priority mode

3 In the <Aspect> group, select one of the following.

Edge Crop: Add black bars on the left and right sides of a 4:3 aspect ratio image to convert it to a 16:9 image.
Letter Box: Crop the top and bottom of a 4:3 aspect ratio image to convert it to a 16:9 image.
Squeeze: Stretch a 4:3 image horizontally to covert it to a 16:9 image.
For details of the image transformations, see the following figure.

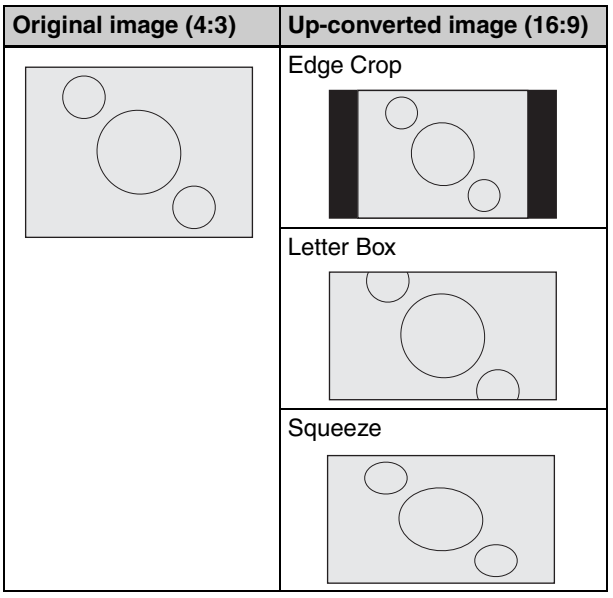

Setting the image position in edge crop up-conversion mode

1 In the <Edge Crop Position> group of the Switcher >Input >FC Adjust menu, press [Position], turning it on.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting format	Setting values
2	EC Position	Image position [a]	1080	–120 to +120
			720	–80 to +80

a) For down-conversion, the value is from –30 to +30 inclusive.

To return the edge crop image to the center

In the <Edge Crop Position> group, press [Center].

Setting the image position in letter box up-conversion mode

1 In the <Letter Box Position> group of the Switcher >Input >FC Adjust menu, press [Position], turning it on.

2 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting format	Setting values
2	LB Position	Image position	1080i/ 59.94, 1080PsF /29.97	–31 to +32
			1080i/ 50, 1080PsF /25	–36 to + 36
			720P/ 59.94, 720P/50	–30 to +30

To return the letterbox image to the center

In the <Letter Box Position> group, press [Center].

Making enhancer settings

1 In the Switcher >Input >FC Adjust menu, press [Enhancer], turning it on.

2 Set the following parameters.

Parameter group [1/2]

Knob	Parameter	Adjustment	Setting values
2	Detail Gain	Adjust the edge enhancement sharpness	0 to 127
3	Limiter	Adjust the maximum signal level to be added to the original signal	0 to 63
4	Crisp	Set the amplitude value for which a low-amplitude signal is not emphasized	0 to 15
5	Level Depend	Set the luminance range for edge enhancement	0 to 15

Parameter group [2/2]

Knob	Parameter	Adjustment	Setting values
2	Frequency	Set the central frequency for edge enhancement	0 to 3
3	H/V Ratio	Set the horizontal/ vertical ratio for edge enhancement	0 to 7

Making detailed settings for down-conversion

1 In the Switcher >Input >FC Adjust menu, select the input to which the setting applies.

2 In the <Aspect> group, select one of the following.

Edge Crop: Crop the left and right sides of a 16:9 image to convert it to a 4:3 image.







Letter Box 13:9: Crop the left and right sides of a 16:9 image to make a 13:9 image and add black bars at the top and bottom of the 13:9 image to make a 4:3 image.

Letter Box 14:9: Crop the left and right sides of a 16:9 image to make a 14:9 image and add black bars on the top and bottom of the 14:9 image to make a 4:3 image.

Letter Box 16:9: Add black bars on the top and bottom of a 16:9 image to convert it to a 4:3 image.

Squeeze: Compress a 16:9 image horizontally to convert it to a 4:3 image.

For details of the image transformations, see the following figure.

Original image (16:9)	Down-converted image (4:3)
	Edge Crop  Letter Box 13:9  Letter Box 14:9  Letter Box 16:9  Squeeze 

For down-conversion, the image position setting in edge crop mode is the same as for up-conversion. The value is from –30 to +30 inclusive.

For details, see "Setting the image position in edge crop up-conversion mode" (page 615).

For down-conversion, the enhancer settings are the same as for up-conversion.

For details, see "Making enhancer settings" (page 616).

Making cross-conversion settings

To make the cross-conversion settings, carry out steps **1** and **2** described in *"Making detailed settings for up-conversion" (page 615)*. No other settings are required.

Copying format converter input data

1 In the Switcher >Input >FC Adjust menu, press [Copy].

The Copy/Swap >Copy >Format Converter menu appears.
The status area shows lists of the copy source on the left, and the copy destination on the right.

2 Select [Input] in the <Data Select> group.

3 Using any of the following methods, select the data.

- Press directly on the list.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Left No	Select the copy source data	1 to maximum value
2	Right No	Select the copy destination data	1 to maximum value
3	Num	Select the number of items	1 to maximum value

4 Press [Copy].

Signal Output Settings (Output Menu)

For setup relating to signal outputs, use the Switcher >Output menu.

To display the Output menu

In the Engineering Setup menu, select VF3 'Switcher' and HF3 'Output.'
The status area shows the output signal numbers and names, and output signal phase for the signals output from the Output 1 to 48 connectors.
The following functions are available here.

Notes

For a format converter dedicated output, Video Clip, V Blank, Through, Safe Title, and 4:3 Crop settings are not possible.

- **Output Assign:** Assign the signals output from the Output1 to 48 connectors.
- **Video Clip:** Adjust the clip levels (White Clip, Dark Clip, and Chroma Clip) for the output signals from each of the Output1 to 48 connectors.
- **V Blank:** Adjust the vertical blanking width for the output signals from each of the Output1 to 48 connectors. The setting is the number of scan lines from the reference blanking position of field 1 for the particular format which should be masked.
- **Through:** Enable or disable through mode. Through mode can be enabled for AUX1 to 48 outputs, M/E and PGM/PST program outputs, and clean output.
- **Safe Title:** Enable or disable safe title, and carry out settings for box 1 and 2, cross and grid.
- **4:3 Crop:** Set the actual video image to be cropped to a 4:3 aspect ratio when an HD system has a screen aspect ratio of 4:3.
- **FC Adjust:** Set the format converter outputs.
- **Multi Viewer:** Make settings for the two-channel multi viewer.

Assigning Output Signals

To assign a signal to output from an output connector, use the following procedure.

1 In the Switcher >Output menu, press [Output Assign].

The Output Assign menu appears.
The status area shows the output connectors and assigned signals on the left, and a list of signals that can be assigned on the right.

2 In the <Output Assign> group, select either of the following.

[Re-Entry Source]: It is possible to make duplicate assignments.
M/E-1 Output 1 to 6 a)
M/E-2 Output 1 to 6 a)
M/E-3 Output 1 to 6 a)
M/E-4 Output 1 to 6 a)
M/E-5 Output 1 to 6 a)
P/P Output 1 to 6 a)
M/E-1 to 5 Proc Video
P/P Proc Video
M/E-1 to 5 Proc Key
P/P Proc Key
DME Monitor Video
DME Monitor Key
Color Corrector 1 and 2
Undefined
Color Bkgd 2
Frame Memory 1 to 8

[Aux Bus]: It is not possible to make duplicate assignments.
Preset
Edit Preview
AUX 1 to 48

a) M/E output signals selected in the M/E Output Assign menu.

3 Using any of the following methods, select the output connector number and signal to be assigned.

- Press directly on the list in the status area to make the selection.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Output No	Output connector number	1 to 48
2	Source No	Selection of signal to be assigned	1 to maximum value

- For output connectors not to be assigned, press [Inhibit].

The selected signal appears in reverse video.

4 Press [Set] to confirm the assignment.

Setting the Output Signal

In the following adjustment/setting operations, use any of the following methods to select the output signal before making the setting.

- Press directly on the list in the status area.

• Press the arrow keys to scroll the reverse video cursor.
• Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Output No	Output connector number selection	1 to 48

The selected output signal appears in reverse video.

Adjusting the video clip

To adjust the clip value for each of the output signals from the Output 1 to 48 connectors, use the following procedure.

1 In the Switcher >Output menu, press [Video Clip].

The Video Clip menu appears.
The status area shows the output connectors and assigned signals, and the white clip, dark clip, and chrominance clip values.

2 Adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
2	White Clip	Luminance signal white clip value	90.00 to 109.02
3	Dark Clip	Luminance signal dark clip value	–6.85 to +10.00
4	Chroma Clip	Chrominance signal clip value	90.00 to 113.17

To set the values to the default values, press [Default].

Making vertical blanking interval adjustment and through mode settings

1 In the Switcher >Output menu, press [V Blank/Through].

The V Blank/Through menu appears.
The status area shows the output connectors and the assigned signals, the vertical blanking interval, and the through mode Enable/Disable status.

2 Press [V Blank Mask].

3 Adjust the parameter.

Knob	Parameter	Adjustment	Setting values
2	Mask End	Final value for vertical blanking interval	See note a) below

a) Depending on the signal format, the adjustment range varies as follows.
480i: 10 to 19
576i: 6 to 22
1080i/1080PsF: 7 to 20
720P: 7 to 25
1080P: 15 to 41

To return the values to their defaults, press [Default].

4 To enable the through mode, press [Through Mode], setting it to Enable.
The through mode can be applied to the following outputs.

• Aux 1 to 48 outputs
• Program outputs of the M/E and PGM/PST rows
• Clean outputs of the M/E and PGM/PST rows

Making safe title settings

1 In the Switcher >Output menu, press [Safe Title].

The Safe Title menu appears.
The status area shows the output connectors and the assigned signals, with the box 1, box 2, cross, and grid states.

2 To enable the safe title on/off setting made in the Misc menu, press [Safe Title], turning it on.

3 Carry out either of the following operations.

To display a box: Press [Box1] or [Box2], turning it on.
In this case, carry out the following steps **4** and **5**.
To display a cross: Press [Cross], turning it on.
To display a grid: Press [Grid], turning it on.
In this case, carry out the following steps **4** and **5**.

4 When you selected [Box1] or [Box2] in step **3**, adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
2	Box Size	Box size	50.00 to 100.00
3	Luminance	Display brightness	0.00 to 100.00 a)

a) Adjustable for Box2

When in step **3** you selected [Grid], in the <Grid Size> group, select one of the following.
80.00%: Set the grid size to 80% of the screen frame
85.00%: Set the grid size to 85% of the screen frame
90.00%: Set the grid size to 90% of the screen frame
100.00%: Set the grid size to the full-screen size (100% of the screen frame)

5 When in step **3** you selected [Box1] or [Box2], in the <Box1 Adjust> or <Box2 Adjust> group, select the screen aspect ratio (16:9/14:9/4:3).

When in step **3** you selected [Grid], in the <Grid Adjust> group, select the screen aspect ratio (16:9/4:3).

Cropping the image to a 4:3 aspect ratio in an HD system

In an HD system, to crop an image having a screen aspect ratio of 16:9 to an aspect ratio of 4:3, use the following procedure.

1 In the Switcher >Output menu, press [4:3 Crop].

The 4:3 Crop menu appears.
The status area shows the output connectors and respective 4:3 Crop mode settings.

2 Press [4:3 Crop], turning it on.

This enables the crop setting, and this is reflected in the status area.

Notes

When the screen aspect ratio of 16:9 is selected for all M/E banks in the System >Format >Aspect menu, the setting of 4:3 Crop is disabled.

Setting the format converter outputs

To set the format converter

Display the Switcher >Output >FC Adjust menu. The subsequent operations are the same as for the format converter input settings.

For details of the operations, see "Selecting the Format Converter Conversion" (page 614).

To copy format converter output data

1 In the Switcher >Output >FC Adjust menu, press [Copy].

The Copy/Swap >Copy >Format Converter menu appears.


2 In the <Data Select> group, press [Output].

3 Use the same operations as in steps **3** and **4** of *"Copying format converter input data" (page 617)* to copy the data.


Making settings for the multi viewer

The multi viewer is a function for splitting the screen into some windows and simultaneously displaying multiple images in those windows.
The screen can be split into 4 or 10 windows, which can be individually set for each of 2-channel multi viewers.

Example of 4-split screen:

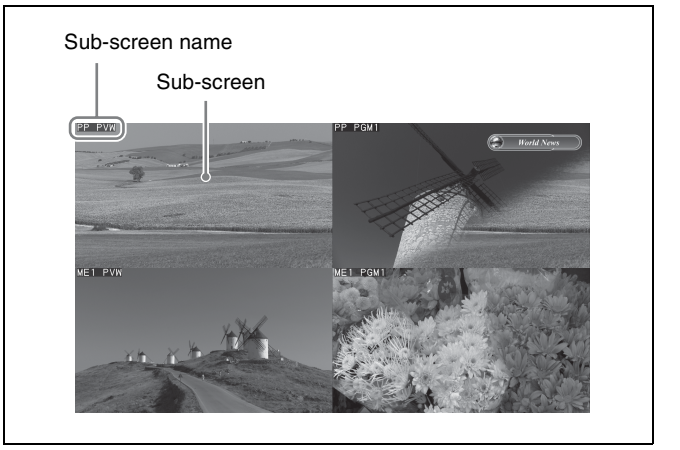

Example of 10-split screen:

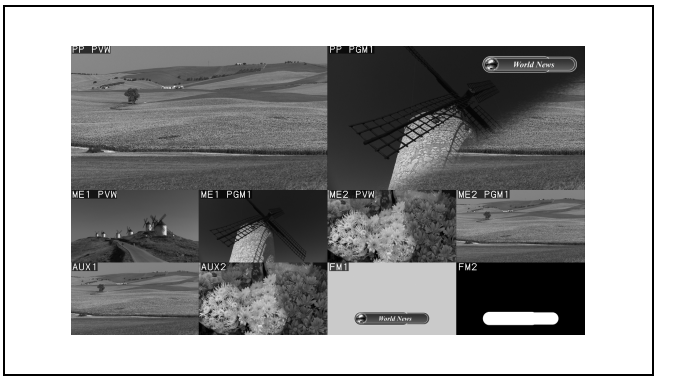

In the following description, a split window is referred to as a "sub-screen."

1 In the Switcher >Output menu, press [Multi Viewer].

The Multi Viewer menu appears.

2 In the <Multi Viewer> group, press [1] or [2] to select the setting target.

The status area shows a list of outputs assigned to the sub-screens.

3 In the <Split Mode> group, select the number of split windows.

Split 4: Split the screen into 4 windows.
Split 10: Split the screen into 10 windows.

4 To border the sub-screens, press [Border Enable] to turn it on.

Tally colors

Tallies are shown on the multi viewer screen. In this way, you can see, for example, which input signals are used in the on-air video.
Borders appear in the two following colors.
Red border: Video with a red tally.
Green border: Video with a green tally.

For details of tally settings, see "Setting the On-Air Tally" (page 602) or "Making New Tally Generation Settings" (page 655).

Notes

If "Independent" is set in the Engineering Setup >Panel >Operation >Button Tally menu, then tallies are not shown on the multi viewer.

To specify whether to show or hide the sub-screen names

1 In the Multi Viewer menu, use any of the following methods to select the target sub-screens.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Window No	Sub-screen selection	1 to 10

2 Press [Name Enable] to select either of the following.

Enable: Show the subs-screen name.
Disable: Hide the sub-screen name.
To make the setting for all of 10 sub-screens in a single operation, turn [All Name Enable] on or off.

3 To set the name display position, adjust the following parameters.

Notes

If you change any of the following parameter values, the name display position will change on all sub-screens. You cannot adjust the name display position for each sub-screen.

Knob	Parameter	Adjustment	Setting values
2	Name Position H	Horizontal position	0 to 100
3	Name Position V	Vertical position	0 to 100

To assign outputs to the sub-screens

1 In the Multi Viewer menu, press [Output Assign].

The Output Assign menu appears.

2 Use any of the following methods to select the target sub-screens in the list on the left.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Window No	Sub-screen selection	1 to 10

3 Use any of the following methods to select the target outputs in the list on the left.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Output No	Output selection	1 to 24 a)

a) For Multi Viewer 2, 25 to 48.

Notes

This selects the sub-screen output from among the signals assigned to numbers 1 to 24 (Multi Viewer 1) and 25 to 48 (Multi Viewer 2).

4 Press [Set].

Enabling AUX Mix Transitions

An AUX mix transition is enabled by assigning the combination of AUX buses used in the AUX mix transition to consecutive odd-numbered and even-numbered output connectors.

For details of AUX mix transitions, see "AUX Mix Transitions" in Chapter 3 (Volume 1).

Notes

When an AUX mix transition is enabled, the video process for the two AUX buses operates with the settings for the odd-numbered bus.

1 In the Switcher >Output menu, press [Aux Mix].

The Aux Mix menu appears.

2 In the list on the left, select the target odd-numbered and even-numbered output connectors (for example, 11 and 12).

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Output No	Output connector number	1 to 48

3 In the list on the right, select the AUX bus combination to use.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Aux Mix	AUX bus combination	1 to 25

To disable AUX mix transitions, select [Disable].

4 Press [Set].

To cancel a setting after pressing [Set], press [Clear].

5 Repeat steps **2** to **4** as required.

6 Press [Execute].

Settings Relating to Video Switching (Transition Menu)

For settings relating to video switching, use the Switcher >Transition menu.

To display the Transition menu

In the Engineering Setup menu, select VF3 'Switcher' and HF4 'Transition.'

The status area shows the transition preview, key transition, bus toggle, and split fader settings for each M/E and PGM/PST bank.

The following functions are available here.

- **Transition Preview:** Specify the operation mode for transition preview for each of the M/E and PGM/PST banks.
- **Key Transition:** Specify the operation mode for independent key transitions.
- **Bus Toggle:** Switch the bus toggle for each of the M/E and PGM/PST banks on or off.
- **Split Fader:** When the bus toggle is off, the split fader settings are enabled. For each of the M/E and PGM/PST banks, select enable or disable.
- **Fade To Black:** Enable or disable fade-to-black for each final program output.
- **Preset Color Mix:** Set the stroke mode for a preset color mix, the key status for a transition including a key, and the mode in which the transition type after a transition ends returns to the previous setting.
- **Transition Curve:** Set the relationship when carrying out a transition, between the fader lever position and the advancement state of the transition.

Selecting the Bank to Make the Settings

In the Transition menu, using any of the following methods, select the bank to which the settings apply, then make the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	M/E or P/P selection to which settings apply	1 to 6

The selected bank appears in reverse video.

Setting the transition preview mode

To select the transition preview mode, in the <Transition Preview> group of the Transition menu, select either of the following.

One Time: The transition preview ends after a single transition.

Normal: Switching the [TRANS PVW] button on or off switches between the transition preview mode and the normal mode.

Selecting the transition mode of the independent key transition control block

To select the key transition mode, select either of the following in the <Key Transition> group of the Transition menu.

Same: The transition settings for the On and Off directions are the same.

Independ: The transition settings for the On and Off directions can be set separately.

Selecting the background transition flip-flop mode

In the Transition menu, press [Bus Toggle], to switch between on and off.

On: Flip-flop mode

Off: Bus fixed mode

For details, see "Fader Lever Operation in Bus Fixed Mode" in Chapter 3 (Volume 1).

Setting the split fader to be enabled or disabled

In the Transition menu, press [Split Fader] to switch between Enable and Disable. This setting is only valid when using a simple transition module with Bus Toggle set to Off.

Enable: When the fader lever is split, the split fader effect is enabled.

Disable: Even when the fader lever is split, the normal fader lever effect is obtained.

Enabling/disabling the fade-to-black function

In the <FTB> group of the Transition menu, press the program output name to toggle between On and Off.

On: Enables fade to black.

Off: Disables fade to black.

Notes

The PGM2 to PGM4 settings are only valid in Multi Program mode or DSK mode.

Setting a preset color mix

1 In the Switcher >Transition menu, press [Preset Color Mix].

The Preset Color Mix menu appears.
The status area shows the stroke mode setting for each M/E bank, the setting for whether or not the key status is maintained, and the one-time mode setting.

2 In the <Stroke Mode> group, select whether to carry out a transition in one stroke or two strokes.

Normal: Carry out a preset color mix with two transition operations.

Single: Carry out a preset color mix with a single transition operation.

Notes

In bus fixed mode *(see page 623)*, the setting is fixed to "Single."

3 In the <Non Drop Key> group, select the key setting for a transition including a key.

To carry out the transition with the key state maintained, press [Key1] to [Key8], turning them on.

4 If each time a transition ends the transition type is to return to the previous setting, press [One Time Enable].

Settings relating to fader lever operations

To select the way in which the fader lever position and the transition progress are related, use the following procedure.

1 In the Switcher >Transition menu, press [Transition Curve].

The Transition Curve menu appears.

2 In the <Fader Curve> group, select the fader lever operation mode.

Normal: The transition progress is linear, according to the fader lever position (factory default setting).

Adv Tally Mode: When the fader lever is moved from the end of its travel, the tally is output slightly before the transition starts.

Settings Relating to Keys, Wipes, Frame Memory and Color Correction (Key/Wipe/FM/CCR Menu)

For settings relating to keys, wipes, frame memory and Color Correction, use the Switcher >Key/Wipe/FM/CCR menu.

To display the Key/Wipe/FM/CCR menu

In the Engineering Setup menu, select VF3 'Switcher' and HF5 'Key/Wipe/FM/CCR.'

The status area shows the key memory settings, mask and border processing order, key priority, cross-point hold, pattern limit transition, and wipe edge settings for each of the M/E and PGM/PST banks.

The following functions are available here.

- **Key Memory:** Set the key memory operation mode for each of the M/E and PGM/PST banks.
- **Video Proc Memory:** Enable or disable video process memory.
- **Show Key:** Enable or disable show key for edit preview, M/E and Pvw/K-Pvw of P/P.
- **Key Auto Drop:** For each switcher bank (M/E-1 to M/E-5, PGM/PST), specify a key to be turned off automatically when you press a cross-point button for the bus to be output as the background.
- **Mask/Border Process:** Set the processing order of masks and borders for each M/E or PGM/PST bank.
- **Key Priority:** Set the key priority operation mode for each of the M/E and PGM/PST banks. In DSK mode, the key priority is fixed.
- **Xpt Hold mode:** Set the operation mode for the cross-point hold button provided on the key bus for each of the M/E and PGM/PST banks.
- **Pattern Limit Transition:** Set the operation mode when the pattern limit is released for each of the M/E and PGM/PST banks.
- **Wipe Edge Default:** Adjust the wipe edge softness for each of the M/E and PGM/PST banks.
- **CCR Internal Signal Enable:** Select whether signals generated internally to the switcher can be selected as input material to the color corrector.
- **FM Auto Store:** Switch on or off the function to automatically attach a name and save in frame memory.

Switching Video Process Memory On or Off

In the Switcher >Key/Wipe/FM/CCR menu, press [Video Proc Memory], turning it on.

Settings for the Show Key Function

1 In the Switcher >Key/Wipe/FM/CCR menu, press [Show Key].

The Show Key menu appears.

2 In the <Show Key Enable> group, press the signal for which "show key" is enabled, turning it on.

3 To set the time for which "show key" is held, press [Hold Time].

4 Adjust the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Hold Time	Show key hold time	0 to 999 (frames)

Settings for Key Auto Drop Function


The "key auto drop" function automatically switches off a particular key when you press a cross-point button in a bus that outputs the background on the particular switcher bank (PGM/PST, or M/E-1 to M/E-5).

When the background output bus is in flip-flop mode, this is always the A bus. In bus-fixed mode, it is either the A bus or the B bus depending on the fader lever position.

For details of bus-fixed mode, see "Executing a Transition" in Chapter 3 (Volume 1).

1 In the Switcher >Key/Wipe/FM/CCR menu, press [Key Auto Drop].

The Key Auto Drop menu appears.

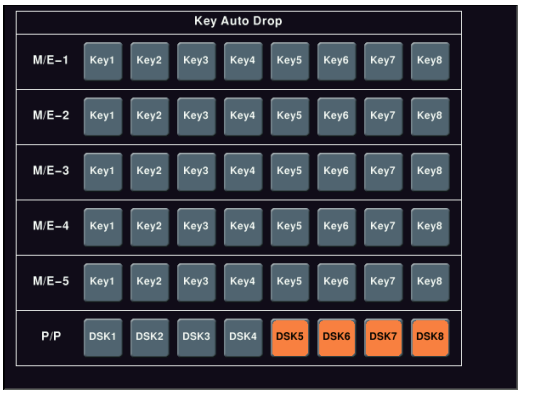

2 In the <Key Auto Drop> group, press the name of the keyer for which you want the key to be deleted automatically, turning it on.

Automatically Naming and Saving to Frame Memory

In the Switcher >Key/Wipe/FM/CCR menu, press [FM Auto Store], turning it on.

Selecting the Bank to Make the Settings

In the following procedures, select the bank to which the settings apply using any of the following methods, then make the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bank	M/E or P/P selection to which settings apply	1 to 6

The selected bank appears in reverse video.

Selecting the key memory mode

In the <Key Memory> group of the Switcher >Key/Wipe/FM/CCR menu, select one from Full (full mode)/Simple (simple mode)/Off.

For more details, see "Key Memory" in Chapter 4 (Volume 1).

Selecting the processing order of masks and borders

In the <Mask/Border Process> group of the Switcher >Key/Wipe/FM/CCR menu, select one of the following.

Mask >Border: Apply the Mask effect, then apply the Border effect.

Border >Mask: Apply the Border effect, then apply the Mask effect.

Selecting the key priority operation mode

In the <Key Priority> group of the Switcher >Key/Wipe/FM/CCR menu, select one of the following.

Normal: The key priority sequence can be varied freely.

Fix: Fixed at currently set priority sequence.

Setting the operation mode of the key bus [XPT HOLD] button

In the <Xpt Hold Mode> group of the Switcher >Key/Wipe/FM/CCR menu, select any of the following. This setting is applied for the attributes of snapshots as well as the operation mode of the [XPT HOLD] button.

Key Disable: The [XPT HOLD] button of the key bus functions not only as a cross-point hold button but also as a key disable button. When the [XPT HOLD] button is on, recalling a snapshot or keyframe effect does not reflect the key settings, including the cross-point selection information.

Key Dsbl with Status: Same as [Key Disable], and further disables the reflection of the key on/off status.

Xpt Hold: The [XPT HOLD] button of the key bus functions as a cross-point hold button. When the [XPT HOLD] is on, recalling a snapshot or keyframe effect does not reflect the cross-point selection information.

To change the cross-point hold attribute of a snapshot

If you select "Key Disable" above, this also applies key disable to the cross-point hold attribute.

If you select "Key Dsbl with Status," the key disable function is applied, including the key on/off status.

Setting the operation mode when the pattern limit is released

In the <Pattern Limit Transition> group of the Switcher >Key/Wipe/FM/CCR menu, select either of the following operation modes.

Auto: When the pattern limit is released, the remainder of the transition is carried out automatically at a special-purpose transition rate.

Manual: After the pattern limit is released, the transition waits for the next operation, then executes. Until you move the fader lever or press [AUTO TRANS], the transition is not executed.

Setting the default wipe edge softness

1 In the Switcher >Key/Wipe/FM/CCR menu, press [Wipe Edge Default], turning it on.

2 Set the following parameter.

Knob	Parameter	Adjustment	Setting values
3	Soft	Default value of wipe edge softness	–50.00 to +50.00

Setting the mode in which all signals can be selected for input to the color corrector

Press [CCR Intrnl Signl Enbl] in the Switcher > Key/Wipe/FM/CCR menu, turning it on.

You can select signals generated internally to the switcher as material for input to the color corrector.

Notes

When you select an M/E reentry signal as material for input to the color corrector, 1H delay occurs to the output signal of M/E.

Settings Relating to Function Links (Link Menu)

Carry out setup relating to links by displaying the Switcher >Link menu.

To display the Link menu

In the Engineering Setup menu, select VF3 'Switcher' and HF6 'Link.'
The status area shows the current link information.
The following functions are available here.

- **Internal Bus Link:** Make a setting of the bus link function that links together two buses internal to the switcher.
- **GPI Link:** Make settings for linking any cross-point buttons or [CUT] and [AUTO TRANS] buttons in the cross-point control block and GPI output ports.
- **M/E Link:** Make settings to link together two M/E banks.
- **Key Trans Link:** Make settings to link key transitions.

Setting a Cross-Point Button Link

To link together two buses internal to the switcher, use the following procedure.

1 In the Switcher >Link menu, press [Internal Bus Link].

The Internal Bus Link menu appears.
The status area shows the link source and link destination buses, and link table information.

2 Using any of the following methods, select what setting applies to.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Link No	Link number	1 to 64

3 Press [Link Bus Select].

The Link Bus Select menu appears.
The status area lists the current setting status of the selected link and the buses that can be selected.

4 In the <Bus Select> group, select [Master Bus] (link source bus).

5 Using any of the following methods, select the bus to be the link source, and press [Bus Set].

- Press directly on the list appearing in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	No	Bus selection	1 to maximum value [a)]

a) Only when [Master Bus] is selected, M/E-1 to M/E-5 Trans PGM, and P/P Trans PGM are available.
Only when [Linked Bus] is selected, AUX 1 to AUX 48 as Key are available.

Notes

With one of M/E-1 to M/E-5 Trans PGM and P/P Trans PGM selected for [Master Bus], the link setting become effective as soon as you start moving the fader lever.

6 In the <Bus Select> group, select [Linked Bus] (link destination bus).

7 Referring to step **5**, select the bus to be the link destination, and press [Bus Set].

8 Turn the knob to select the link table, and press [Link Table Set].

Knob	Parameter	Adjustment	Setting values
3	Link Table No	Link table selection	1 to 8

For more information about link tables, see the following item.

The selected link table number is confirmed, and this is reflected in the status area.

To delete a link

Select the link you want to delete, then press [Clear] in the Switcher >Link >Internal Bus Link menu.

Making Link Table Settings

1 In the Switcher >Link >Internal Bus Link menu, press [Link Table Select].

The Link Table Select menu appears.

2 Using any of the following methods, select the link source and link destination signals.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
4	Main No	Video/key signal for link source	1 to 300
5	No	Video/key signal for link destination	1 to 300

3 To confirm the selection, press [Link Src Set].

This links the link destination signal to the signal selected as Main No.

To initialize the set source address

In the Switcher >Link >Internal Bus Link >Link Table Select menu, press [Init Link Table].
A confirmation message appears; press [Yes].
The source addresses are reassigned, and this is reflected in the status area.

To change the link number and link table number

In the Switcher >Link >Internal Bus Link >Link Table Select menu, you can also change the link number and link table number. To do this, turn the knobs as follows to make the setting, then press [Link Table Set].

Knob	Parameter	Adjustment	Setting values
1	Link No	Link to which setting applies	1 to 64
3	Link Table No	Link table selection	1 to 8

Linking Cross-Point Buttons and GPI Output Ports

To link cross-point buttons or the [CUT] and [AUTO TRANS] buttons in the cross-point control block, and GPI output ports, use the following procedure.

1 In the Switcher >Link menu, press [GPI Link], to display the Switcher >Link >GPI Link menu.

The status area shows the output ports and the link status, and delay value information.

2 Using any of the following methods, select the GPI output port.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	GPI Port	GPI output port selection	1 to 8

3 Press [GPI Link Adjust].

The GPI Link Adjust menu appears.
The status area shows the current setting state of the selected link, and a list of the selectable video names or button names, together with the GPI link Enable/Disable setting for each bus.

4 Using any of the following methods, select what the setting applies to. For each GPI port there can be up to eight links.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	GPI Port	GPI output port selection	1 to 8
2	Link No	Link number selection	1 to 8
3	Video/ Button No	Selection of video or button name to be linked	1 to maximum value [a]

a) These include main pair numbers 1 to 300, and “Cut” and “Auto Trans” on each bank.

5 In the <Video/Button> group, press [Select].

The selected video or button name is reflected in the status area.

To clear a video/button name link
Make the selection to which the setting applies, then in the <Video/Button> group press [Clear].

6 To select for each bus whether the GPI link setting is enabled or disabled, use any of the following methods to select the bus to which the setting applies.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
4	Bus	Bus selection	1 to maximum value

7 In the <Bus> group, select any of the following.

Enable: Enable the GPI link setting for the selected bus.

Disable: Disable the GPI link setting for the selected bus.

All Enable: Enable the GPI link setting for all buses.

Setting the delay value

1 In the Switcher >Link >GPI Link >GPI Link Adjust menu, turn the knobs to select the output port for which you want to set the delay value, and the corresponding delay value.

Knob	Parameter	Adjustment	Setting values
1	GPI Port	GPI output port for the setting	1 to 8
5	Delay	Delay value for the output port	0 to 300 (fields)

2 Press [Delay Set].

This confirms the delay value, which is reflected in the status area.

Setting the reentry button operation mode

When you select a reentry button in the cross-point control block of an M/E block (downstream M/E block), the output of the upstream M/E block is read in. You can set the system so that when a GPI link is set for the cross-point selected on the A bus [a] of the upstream M/E block this triggers the GPI output.
In the Switcher >Link >GPI Link menu, set [Re-Entry Enable] to On or Off.
When this is On, the GPI is executed upstream.

a) When the bus toggle is set to Off, the applicable bus depends on the position of the fader lever.

Notes

- For reentry, “upstream” applies to a single stage only.
- This setting is common to all GPI output ports.
- GPI output execution on the upstream M/E block is only possible on buses for which GPI link is set to “Enable” in the GPI Link Adjust menu.
- GPI output occurs when you press a reentry button, the reentry button is selected by a macro execution, or you press the reentry button on the AUX bus remote panel.

Making a Setting for Linking Two M/E Banks

You can link any two M/E banks for some operations by using the Switcher >Link >M/E Link menu.
The operations for which you can link two M/E banks are as follows.

- Transition execution (auto transition, cut, and fader lever operation)
- Next transition selection
- Transition type selection

1 In the Switcher >Link menu, press [M/E Link].

The M/E Link menu appears.
The status area displays a link list showing link source banks (M/E and PGM/PST) and link destination banks, and a selection list.

2 Using any of the following methods, select the link number you want to set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Link No	Link number selection	1 to 8

3 In the <M/E Select> group, select [Master M/E] (link source).

4 Using any of the following methods, select the M/E or PGM/PST bank you want to be the link source, then press [M/E Set].

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	No	Bank selection	1 to 6 a)

a) 1: M/E-1
2: M/E-2
3: M/E-3
4: M/E-4
5: M/E-5
6: PGM/PST

5 In the <M/E Select> group, select [Linked M/E] (link destination).

6 In the same way as in step **4**, select the M/E or PGM/PST bank you want to be the link destination, then press [M/E Set].

To link the banks not only for transition execution but also for the other operations

Press [Transition Only] and turn it off.

To release the link setting

Use the same operation as in step **2** to select the link number for which you want to release the link setting, then press [Clear].

Making a Link Setting for Key Transition

You can make a link setting for key transition by using the Switcher >Link >Key Transition Link menu.
The operations for which you can link two banks are the following independent key transition operations.

- Auto transition
- Turning the key on or off
- Fader lever operation (on the downstream key control block)

1 In the Switcher >Link menu, press [Key Trans Link].

The Key Transition Link menu appears.
The status area displays a link list showing link sources and link destinations, and a key selection list.

2 Using any of the following methods, select the link number you want to set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Link No	Link number selection	1 to 32

3 In the <Key Select> group, select [Master Key] (link source).

4 Using any of the following, select the key you want to be the link source, then press [Key Set].

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	No	Key number selection	1 to maximum value a)

a) The keys and their numbers selectable as link source/link destination are as follows.
M/E-x Keyx, DSKx
In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).

5 In the <Key Select> group, select [Linked Key] (link destination).

6 In the same way as in step **4**, select the key you want to be the link destination, then press [Key Set].

To release the link setting

Use the same operation as in step **2** to select the link number for which you want to release the link setting, then press [Clear].

Interfacing With External Devices (Device Interface Menu)

To carry out setup relating to connections with external devices, display the Switcher >Device Interface menu.

To display the Device Interface menu

In the Engineering Setup menu, select VF3 'Switcher' and HF7 'Device Interface.'
The following functions are available here.

- **Remote Assign:** Set the use of the four 9-pin ports.
- **GPI Input:** Set the GPI input ports and trigger polarities, and make the action settings.
- **GPI Output:** Set the GPI output ports and trigger polarities, and make the action settings.
- **Aux Control:** Set whether operations on the AUX buses from the four 9-pin ports are inhibited.
- **DME Type Setting:** Make DME and interface settings, and for an SDI interface set the AUX bus outputs and reentry inputs.
- **DME SDI Interface:** Make AUX bus output and reentry input settings for connection to a DME.
- **Editor I/F:** Set the key off mode for control from an editor.

Making 9-Pin Port Device Interface Settings

The description in this section takes the REMOTE1 port as an example. For other REMOTE ports, carry out the same process as required.

1 In the Switcher >Device Interface menu, press [Remote Assign].

The Remote Assign menu appears.

2 Select the device interface you want to set for the REMOTE1 port from the <Remote1> group.

Editor A: assign Editor A to the REMOTE1 port.
Editor B: assign Editor B to the REMOTE1 port.
AUX: assign AUX to the REMOTE1 port.
The device interfaces which can be selected for REMOTE2 are the same as for REMOTE1. For REMOTE3 you can also select DME1, and for REMOTE4 you can also select DME2.

Notes

When REMOTE3 and REMOTE4 are respectively assigned to DME1 and DME2, you can switch the AUX

bus from the DME (DME-3000/7000) connected to these ports.
At this time, connect the DME input video signals and key signals as follows.
- DME1 video input: AUX1 output
- DME1 key input: AUX2 output
- DME2 video input: AUX4 output
- DME2 key input: AUX5 output

Note that for a DME external video signal, you can select any of AUX1 to AUX14 on the DME. Connect to the selected AUX bus.

Making Switcher Processor GPI Input Settings

1 In the Switcher >Device Interface menu, press [GPI Input].

The GPI Input menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Port	Port selection	1 to 8
2	No	Selection of number for action to be assigned	1 to 8

3 In the <Trigger Type> group, select the trigger type.

(Rising Edge): Apply the trigger on a rising edge of an input pulse.
(Falling Edge): Apply the trigger on a falling edge of an input pulse.
(Any Edge): Apply the trigger on a change in the polarity of the input signal.
(Level): Carry out the specified operation when the input is low or high.
No Operation: Apply no trigger on an input pulse.

4 In the <Target> group, select the action block.

M/E-1 to M/E-5, P/P: Set the action for one of the banks.
Common/Setup: Set an action for something other than the above, or a setup action.

5 Using any of the following methods, select the action to be set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
3	Action	Action selection	1 to maximum value [a]
4	Reg No	Register number	1 to 4 [b] 1 to 99 [c]

a) As for the setting values, see "Selectable actions for various trigger types" *(page 631)*.
b) When knob 3 selection is "Key Snapshot"
c) When knob 3 selection is "Snapshot" or "Effect"

6 Press [Action Set] to confirm the action selection.

The selected setting appears in the status area.

Selectable actions for various trigger types

- **When the trigger type is other than "Level"**
  In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).
  - When Target is M/E-x: Cut, Auto Trans, Keyx Cut, Keyx Auto Trans, SS ? Recall, Keyx SS ? Recall, Effect ? Recall, Effect ? Recall & Run, KF Run, KF Stop, KF Rewind, KF Rev Run, No Action
  - When Target is P/P: Cut, Auto Trans, DSKx Cut, DSKx Auto Trans, FTB Cut, FTB Auto Trans, SS ? Recall, DSKx SS ? Recall, Effect ? Recall, Effect ? Recall & Run, KF Run, KF Stop, KF Rewind, KF Rev Run, No Action
  - When Target is Common/Setup: FM Src1 Field Freeze, FM Src1 Frame Freeze, FM Src2 Field Freeze, FM Src2 Frame Freeze, FM Src1 Freeze Off, FM Src2 Freeze Off, FM Src1 Clip Record, FM Src1 Clip Stop, FM Src2 Clip Record, FM Src2 Clip Stop, FM1 to FM8 Clip Cueup, FM1 to FM8 Clip Play, FM1 to FM8 Clip Stop, User1 to 8 SS ? Recall, User1 to 8 EFF ? Recall, User1 to 8 EFF ? Recall & Run, User1 to 8 KF Run, User1 to 8 KF Stop, User1 to 8 KF Rewind, User1 to 8 KF Reverse Run, No Action
- **When the trigger type is "Level"**
  In M/E-x, the x is the M/E bank number (1 to 5).
  - When Target is M/E-x or P/P: Aspect, Bkgd A Side Flags, Bkgd B Side Flags, No Action
  - When Target is Common/Setup: Format, Aspect, Level Enable, No Action

Notes

- "Level Enable" is a function that determines whether GPI inputs are enabled ("Enable") or disabled ("Disable") for the "Aspect" and "Format" actions that can be used when the trigger type is Level. When Level Enable is used, if the input is "Disable" then it is not possible to switch "Aspect" or "Format" by GPI input. If a GPI to switch "Aspect" or "Format" occurs when powering the system off, the action triggered by the GPI

may start immediately before the power goes off and the power may go off before the action is completed. This may corrupt the setup settings. It is therefore recommended to use Level Enable to avoid such a situation.

- If "Format" is selected for "Action" when the format converter is used on the switcher, you can set the conversion format of the format converter for "FC Input 1-4," "FC Input 5-8," "FC Input 9-12" (MVS-8000X only), "FC Input 13-16" (MVS-8000X only), "FC Output 1-2," and "FC Output 3-4."

Carrying out level settings

To set the low level and high level, first set the trigger type to "Level," then use the following procedure.

1 In the Switcher >Device Interface >GPI Input menu, select the action to be set, and press [H/L Set].

The H/L Set menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Selection of setting for action	1 to maximum value

3 To apply the selection made in step **2** when the input is high, press [H Set]. To apply the selection made in step **2** when the input is low, press [L Set].

This confirms the setting, which appears in the status area.

Notes

- When the action is "Format," these settings conflict with the current settings, but after making the settings, agreement is restored after a pulse change or power off/on.
- When the Action is "Bkgd A Side Flags" or "Bkgd B Side Flags," the levels are fixed, as follows.
  High level: Off
  Low level: On

To Set the Level for the Format Converter

1 Set "Action" to "Format" in step **5** of the procedure in *"Making Switcher Processor GPI Input Settings" (page 631)*.

The format converter list appears.

2 Select the format converter that you want to set from the list.

3 In the <FC Input/Output> group, press [H Set] or [L Set] to set the high level or low level, respectively.

Making Switcher Processor GPI Output Settings

1 In the Switcher >Device Interface menu, press [GPI Output].

The GPI Output menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port	Port selection	1 to 8

3 In the <Trigger Type> group, select the trigger polarity.

(Rising Edge): The trigger causes the relay to open or the output to go high level, and holds this state for the specified pulse width duration.

(Falling Edge): The trigger causes the relay to close or the output to go low level, and holds this state for the specified pulse width duration.

(Any Edge): When a trigger occurs, the relay opens/closes or the output goes high/low level, switching state.

Status: The relay opens/closes or the output goes high/low level in response to the status.

No Operation: The trigger has no effect on the output.

4 Turn the knobs to select the pulse width and timing to be set.

Knob	Parameter	Adjustment	Setting values
3	Pulse Width	Pulse width	1 to 60 (fields)
4	Timing	Output timing	1 to 3 a)

a) 1: Field 1, 2: Field 2, 3: Any

When "⨉" is selected as the trigger polarity, there is no Pulse Width setting. When "Status" is selected, there is no Pulse Width or Timing setting.

5 In the <Source> group, select the action block.

M/E-1 to M/E-5 and P/P: Set an action for the M/E or PGM/PST bank.
Common: Set an action for error status.

6 Using any of the following methods, select the action to be set.

- Press directly on the list appearing in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Action	Action selection	1 to maximum value a)
5	Reg No	Register number	1 to 4 b) 1 to 99 c)

a) **Action list when the trigger type is other than "Status"**
In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).
- When Source is M/E-x: Cut, Auto Trans, Keyx Cut, Keyx Auto Trans, Keyx SS ? Recall, Effect ? Recall, Effect ? Recall & Run, KF Run, KF Stop, KF Rewind, No Action
- When Source is P/P: Cut, Auto Trans, DSKx Cut, DSKx Auto Trans, FTB Cut, FTB Auto Trans, DSKx SS ? Recall, Effect ? Recall, Effect ? Recall & Run, KF Run, KF Stop, KF Rewind, No Action
- When Source is Common: No Action

Action list when the trigger type is "Status"
In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).
- When Source is M/E-x: Keyx On, No Action
- When Source is P/P: DSKx On, No Action
- When Source is Common: Error Make, Error Break, No Action

b) When knob 2 selection is "Key Snapshot"
c) When knob 2 selection is "Snapshot" or "Effect"

7 Press [Action Set] to confirm the action selection.

The selected setting appears in the status area.

Test firing the trigger

To test fire the trigger, press [Test Fire].
This outputs a trigger from the selected output port. This is not output when the trigger type is "Status."

Enabling or Disabling AUX Bus Control

1 In the Switcher >Device Interface menu, press [Aux Control].

The Aux Control menu appears.

2 Select the 9-pin port for the setting, from the <Control> group.

Remote1: Make the settings for the REMOTE1 port.
Remote2: Make the settings for the REMOTE2 port.
Remote3: Make the settings for the REMOTE3 port.
Remote4: Make the settings for the REMOTE4 port.

3 Using any of the following methods, select the AUX bus.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	AUX bus selection	0 to 48 a)

a) 0: EDIT PVW
1 to 48: AUX1 to AUX48

4 Select whether to enable or disable AUX bus control from the <Control Mode> group.

Enable: enable control of the port selected in step **2**.
Disable: disable control of the port selected in step **2**.
Manual: make whether control of the port selected in step **2** is possible or not depend on the setting in the Misc menu.

5 Repeat steps **2** to **4** as required to make the settings for other ports.

Setting the Interface Between the DME and the Switcher

To set the interface between the DME and the switcher, proceed as follows.

1 In the Switcher >Device Interface menu, press [DME Type Setting].

The DME Type Setting menu appears.

2 In the <DME1 Type> group to set DME1 or in the <DME2 Type> group to set DME2, press either of the following, turning it on.

Dedicated: The DME has an dedicated interface.
SDI: The DME has an SDI interface.

Notes

If the system signal format is set to 1080P and the DME input/output signal format is set to Dual Link Mode, the SDI interface cannot be selected.

For details of the connection of DME units and the switcher, see "MVS-8000X-/7000X-C Installation Manual."

3 To select the number of keys that use DME on an M/E bank, make one of the following selections in the <DME Assignment for Proc Key> group.

Single DME unit: Mode in which a processed key operation is carried out only with the dedicated interface DME or the SDI interface DME.
Dual DME units: Mode in which two processed key operations with the dedicated interface DME and the SDI interface DME are both possible simultaneously on the same M/E. When this mode is selected, when combined by a processed key with the SDI interface DME, select the material for the second channel not on the DME external video bus, but on the AUX bus.

Setting the AUX Bus Output and Reentry Input

Select the signal input to the DME (AUX bus output) and the signal returned as the switcher primary input (reentry input) as follows.

1 In the Switcher >Device Interface menu, press [DME Type Setting].

The DME Type Setting menu appears.

2 Press [DME SDI Interface].

3 Using any of the following methods, select the DME channel to which operations apply.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	DME Ch No	DME channel selection	1 to 24

Notes

When using the MVE-8000A, it is not possible to select any of DME 1 Ext In to DME 8 Ext In.

4 In the <Select> group, select the AUX bus or reentry to be assigned to the DME channel.

Aux Bus: Set AUX bus.
Re-Entry: Set reentry.

5 Depending on the selection in step **4**, use any of the following methods to make the setting.

- Press directly on the list on the right of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

When Aux Bus is selected

Knob	Parameter	Adjustment	Setting values
2	Src No	AUX bus number	0 to 48

When Re-Entry is selected

Knob	Parameter	Adjustment	Setting values
2	Src No	Reentry number	0 to maximum value

6 Press [Set].

In the list on the right of the status area, the selected content is reflected in the specified DME channel.

Repeat steps **3** to **6** as required.

Selecting the Mode for Turning Off Keys Upon Receiving the Editor Command

Selects the mode for turning off keys when an “All Stop” command is received from the editor.

1 In the Switcher >Device Interface menu, press [Editor I/F].

The Editor I/F menu appears.

2 Select one of the following modes.

All: When an “All Stop” command is received, all keys for the selected regions are turned off.
Specified: When an “All Stop” command is received, among all the keys for the selected regions, only the keys specified by the editor are turned off.

Notes

When an “All Stop” command is received in the process of a transition, the keys selected for the next transition are also turned off.

DME Setup (DME)

Chapter 21

Settings Relating to Signal Inputs (Input Menu)

To make settings relating to DME input signals, display the DME >Input menu.

To display the Input menu

In the Engineering Setup menu, select VF4 ‘DME’ and HF1 ‘Input.’
The status area shows the initial crop information and the DME system phase.

The following functions are available here.

- **Initial Crop:** Make the initial crop setting.
- **Matte Illeg. Color Limit:** Switch the illegal limiter for the signal generated by the DME internal matte generator on or off.
- **System Phase:** Adjust the operation timing of the whole system with respect to the reference signal.
- **TBC Center:** Set the TBC window center position.

When the signal format is 1080P, up to four DMEs can be operated (DME1 to DME4).
In the following description, the settings for DME1 are given by way of example, but the settings for DME2 to DME4 are carried out in a similar way.

Setting the Initial Crop

1 In the DME1 <Aspect> group of the DME >Input menu, select the screen aspect ratio (16:9 or 4:3).

2 In the DME1 <Crop> group, press [Initial Crop] and adjust the following parameters.

If you selected 4:3 in step 1

Knob	Parameter	Adjustment	Setting values
1	Top	Position of top side	–3.00 to +3.00
2	Left	Position of left side	–4.00 to +4.00
3	Right	Position of right side	–4.00 to +4.00
4	Bottom	Position of bottom side	–3.00 to +3.00

If you selected 16:9 in step 1

Knob	Parameter	Adjustment	Setting values
1	Top	Position of top side	–9.00 to +9.00
2	Left	Position of left side	–16.00 to +16.00
3	Right	Position of right side	–16.00 to +16.00
4	Bottom	Position of bottom side	–9.00 to +9.00

To return the parameter values to their default values Press [Unity] in the <Crop> group.

Setting an Illegal Color Limit for Matte Signals

To enable the illegal color limiter for the signals generated by the DME internal matte generator, press [Matte Illeg Col Limit] for DME1 in the DME >Input menu, turning it on.

Making DME System Phase Adjustment

To adjust the DME reference phase, use the following procedure.

1 In the DME >Input menu, press [System Phase].

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	DME1 Phase	DME1 system phase adjustment	–32.00 to +96.00
2	DME2 Phase	DME2 system phase adjustment	–32.00 to +96.00

Setting the TBC Window Center Position

1 In the DME >Input menu, press [TBC Center].

The TBC Center menu appears.
The status area shows the TBC center position values for DME1, DME2, and external input signals.

Notes

The TBC center position values for external input signals are shown only when an MVE-9000 or MKS-7470X/7471X is used.

2 Using any of the following methods, select the input number for which you want to set the TBC center position.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Input number selection	1 to 8

3 In the <Video/Key> group (when SDI-interfaced MVE-8000A/9000 is used) or <External Video> group (when MVE-9000 or MKS-7470X/7471X is used), press the desired button, and set the TBC center position to 0H, 0.5H, or 1H.

Settings Relating to Signal Outputs (Output Menu)

To make settings relating to DME output signals, display the DME >Output menu.
You can select the signals output from the four monitor output connectors.

To display the Output menu

In the Engineering Setup menu, select VF4 'DME' and HF3 'Output.'
The following functions are available here.

- **Clip Adjust:** Adjust the video clip levels of DME1 and DME2 outputs. These settings are possible only when the DME is an MVE-9000 or SDI-interfaced MVE-8000A.
- **Monitor Output:** Set the signals output from the four monitor output connectors.

Adjusting the DME1 and DME2 Output Video Clip Levels

When the MVE-8000A/MVE-9000 is connected through SDI interface, you can adjust both DME1 and DME2 output video clip levels.
Use the following procedure (DME 1 is taken by way of example).

1 In the <DME1 (Ch1-Ch4)> group of the DME >Output menu, press [Clip Adjust], turning it on.

2 Set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	White Clip	White clip adjustment	90.00 to 109.02
2	Dark Clip	Dark clip adjustment	–6.85 to +10.00
3	Chroma Clip	Chroma clip adjustment	90.00 to 113.17

To return the setting to the default value

In the DME >Output menu, press [Default].

Setting the Monitor Output

To set the signals output from the four monitor output connectors, use the following procedure.

1 In the DME >Output menu, press [Monitor Output].

The Monitor Output menu appears.

2 In the <Select> group, select the DME to which the setting applies.

DME1: Select DME1.
DME2: Select DME2.
When the signal format is 1080P, you can also select DME3 or DME4 similarly.

3 In the list on the left of the status area, press directly on the monitor output for which you want to make setting.

Notes

On the MVE-8000A, when the signal format is 1080P, you cannot select MONI OUT#2 and MONI OUT#4.

4 In the list on the right of the status area, press directly on the signal you want to output.

5 Press [Set].

The selection is reflected in the monitor output.

Interfacing With External Devices (Device Interface Menu)

To carry out setup relating to DME connections with external devices, display the DME >Device Interface menu.

To display the Device Interface menu

In the Engineering Setup menu, select VF4 'DME' and HF4 'Device Interface.'
The following functions are available here.

- **Editor Protocol:** Set the protocol to be used on the Editor port.
- **Editor Port Setting:** Make settings relating to the control of the four editor ports installed in the DME.
- **GPI Input:** Set the GPI input ports and trigger polarities, and make the action settings.
- **GPI Output:** Set the GPI output ports and trigger polarities, and make the action settings.

When the signal format is 1080P, up to four DMEs can be operated (DME1 to DME4).
In the following description, the settings for DME1 are given by way of example, but the settings for DME2 to DME4 are carried out in a similar way.

Notes

On the MVE-8000A, when GPI Input and GPI Output are set, the settings apply to Ch1/Ch2 for DME1/DME3, and Ch3/Ch4 for DME2/DME4.

Setting the editor protocol

In the <DME1 Editor Protocol> group of the DME >Device Interface menu, press the following buttons to make the setting.
DME: Control by DME protocol through the editor port.
VTR: Control by VTR protocol through the editor port.

Notes

This setting is disabled for the MKS-7470X/7471X.

Making editor port settings

In the <DME1 Editor Port Setting> group of the DME >Device Interface menu, press either of the following to select the way in which the editor ports are used.
Common: Control all of channels 1 to 4 through editor ports 1 to 4.
Independ: Control channels 1 to 4 individually through Editor ports 1 to 4.

Notes

This setting is disabled for the MKS-7470X/7471X.

Making DME GPI Input Settings

1 In the DME >Device Interface menu, press [DME1 GPI Input].

The DME1 GPI Input menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Port	Input port selection	1 to 8
2	No	Selection of number for action to be assigned	1 to 8

3 In the <Trigger Type> group, select the trigger polarity.

(Rising Edge): Apply the trigger on a rising edge of an input pulse.
(Falling Edge): Apply the trigger on a falling edge of an input pulse.
(Any Edge): Apply the trigger on a change in the polarity of the input signal.
(Level): Carry out the specified operation when the input is low or high.
No Operation: Apply no trigger on an input pulse.

4 In the <Target> group, select what this applies to (channels 1 to 4, or Proc).

5 Using any of the following methods, select the action to be set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
3	Action	Action selection	1 to maximum value [a]
4	Reg No	Register number	1 to 99 [b] 1 to 399 [c]

a) As for the setting values, see "Selectable actions for various trigger types" *(page 638)*.
b) When knob 3 selection is "Snapshot"
c) When knob 3 selection is "Effect"

6 Press [Action Set] to confirm the action selection.

The selected setting appears in the status area.

Selectable actions for various trigger types

- **When the trigger type is other than "Level"**
  When Target is Ch1, Ch2, Ch3, or Ch4: Freeze, SS ? Recall, Effect ? Recall, Effect ? Recall & Run, KF Run, KF Stop, KF Rewind, KF Reverse Run, No Action
  When Target is Proc: No Action
- **When the trigger type is "Level"**
  When Target is Ch1, Ch2, Ch3, or Ch4: Aspect, No Action
  When Target is Proc: Format Aspect, Level Enable, No Action

Notes

- "Level Enable" is a function that determines whether GPI inputs are enabled ("Enable") or disabled ("Disable") for the "Aspect" and "Format" actions that can be used when the trigger type is Level. When Level Enable is used, if the input is "Disable" then it is not possible to switch "Aspect" or "Format" by GPI input. If a GPI to switch "Aspect" or "Format" occurs when powering the system off, the action triggered by the GPI may start immediately before the power goes off and the power may go off before the action is completed. This may corrupt the setup settings. It is therefore recommended to use Level Enable to avoid such a situation.
- When the DME is an MKS-7470X/7471X, "Format" is disabled.

Carrying out level settings

To set the low level and high level, first set the trigger type to "Level," then use the following procedure.

1 In the DME >Device Interface >DME1 GPI Input menu, select the action to be set, and press [H/L Set].

The H/L Set menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Signal format/ screen aspect ratio selection	1 to maximum value

3 To apply the selection made in step **2** when the input is high, press [H Set]. To apply the selection made in step **2** when the input is low, press [L Set].

This confirms the setting, which appears in the status area.

Making DME GPI Output Settings

1 In the DME >Device Interface menu, press [DME1 GPI Output].

The DME1 GPI Output menu appears.
The output port selection is fixed at 1.

2 In the <Trigger Type> group, select the trigger polarity.

Status: The relay opens/closes or the output goes high/low level in response to the status.
No Operation: The trigger has no effect on the relay state or output level.

3 Using any of the following methods, select the action you want to set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Action	Action selection	1 to 3 a)

a) Error Make, Error Break, No Action

4 Press [Action Set] to confirm the action selection.

The selected setting appears in the status area.

DCU Setup (DCU)

Chapter 22

Setup Relating to DCU

In DCU setup, carry out settings particular to the DCU. You can make the following settings.

- **Input Config:** Assign GPI inputs to Parallel input ports.
- **GPI Input Assign:** Make GPI input settings.
- **Output Config:** Assign GPI outputs to parallel output ports inserted in an option slot.
- **GPI Output Assign:** Make GPI output settings.
- **Serial Port Assign:** Set the protocol to match the devices connected to a 9-pin serial port. You can also select the control panel used to control each device.

Notes

For setup relating to DCU, it is necessary to make the same settings on multiple control panels (maximum three units) that are sharing the DCU. After carrying out the DCU setup on one control panel, make the same settings on the other control panels.

Settings Relating to Parallel Inputs (Input Config Menu)

To assign GPI inputs to DCU parallel input ports, display the DCU >Input Config menu.
The DCU parallel input ports are assigned with the following priority sequence.

1. When external boxes are set in the Router/Tally >Router >External Box Assign menu, the parallel inputs are assigned to the external box inputs in order.
2. When tally settings are carried out in the Router/Tally >Tally Enable menu, tally inputs are assigned automatically.

In this menu, you set only the input ports which are unused after making the above assignments.

To display the Input Config menu

In the Engineering Setup menu, select VF5 'DCU' and HF1 'Input Config.'
The status area shows input port information.

Assigning a GPI Input Port

1 In the DCU >Input Config menu, select what the setting applies to (DCU1 or DCU2) from the <DCU Select> group.

2 In the <Parallel Input Assign> group, press [GPI Input].

3 Using any of the following methods, assign the number of the GPI input to the input port.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Parallel Input	Input port	1 to 102 a)
3	GPI Input	GPI input	1 to 50

a) When the MKS-2700 is connected, select a value in the range 1 to 34.

4 To confirm the assignment in step **3**, press [GPI Input Set].

This assigns the GPI input, and this is reflected in the status area.

Releasing the Assignment of a GPI Input Port

1 In the DCU >Input Config menu, select what the setting applies to (DCU1 or DCU2) from the <DCU Select> group.

2 In the <Parallel Input Assign> group, if [GPI Input] is on, press it to turn it off.

3 Turn the knobs to adjust the following parameters.

Knob	Parameter	Adjustment	Setting values
1	From No	First port number	1 to To No
2	To No	Last port number	From No to 102

4 In the <Parallel Input Assign> group, press [No Assign].

GPI Input Setting (GPI Input Assign Menu)

To set the trigger type and so on for each GPI input, display the DCU >GPI Input Assign menu.

To display the GPI Input Assign menu

In the Engineering Setup menu, select VF5 'DCU' and HF2 'GPI Input Assign.'
The GPI input port setting status appears in the status area.

Making DCU GPI Input Settings

1 In the DCU >GPI Input Assign menu, using any of the following methods select what the setting applies to.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	GPI input	1 to 50

2 In the <Trigger Type> group, select the trigger polarity.

(Rising Edge): Apply the trigger on a rising edge of an input pulse.
(Falling Edge): Apply the trigger on a falling edge of an input pulse.
(Any Edge): Apply the trigger on a change in the polarity of the input signal.
(Level): Carry out the specified operation when the input is low or high.
No Operation: Apply no trigger on an input pulse.

3 In the <Target Device> group, select the control panel to handle the GPI input.

SCU1: ID1 control panel (PNL1)
SCU2: ID2 control panel (PNL2)
SCU3: ID3 control panel (PNL3)
The action set in the following step **4** is executed for the switcher and DME controlled by the selected control panel.

4 Using any of the following methods, select the action you want to set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Action	Action selection	1 to maximum value [a]
4	Aux Bus No	AUX bus selection	1 to 48 [b]
5	Reg No	Register number	1 to 4 [c] 1 to 99 [d] 1 to 250 [e] 1 to 399 [f]
5	Src No	Source signal selection	1 to maximum value [b] [g] [h]

a) As for the setting values, see "Selectable actions for various trigger types" *(page 642)*
b) When knob 2 selection is "Aux ? O'ride Src ??"
c) When knob 2 selection is "Key Snapshot"
d) When knob 2 selection is "Snapshot" or "Shotbox"
e) When knob 2 selection is "Macro"
f) When knob 2 selection is "Effect"
g) The following values apply to the MVS-8000X.
For primary inputs: 1 to 144
For premium inputs: 145 to 164 ((PREM1) to (PREM20) indicated after the number)
For format converter dedicated inputs: 165 to 180 ((FC1) to (FC16) indicated after the number)
h) The values from 1 to 80 apply to the MVS-7000X.

5 To confirm the setting in step **4**, press [Action Set].

This confirms the setting, which appears in the status area.

Selectable actions for various trigger types

- **When the trigger type is other than "Level"**
  In M/E-x, the x is the M/E bank number (1 to 5); in DSKx the x is the DSK number (1 to 8); in Keyx the x is the key number (1 to 8).
  M/E-x Cut, M/E-x Auto Trans, P/P Cut, P/P Auto Trans, M/E-x Keyx Cut, M/E-x Keyx Auto Trans, P/P DSKx Cut, P/P DSKx Auto Trans, FTB Auto Trans, FTB Cut, Master SS ? Recall, SS ? Recall, M/E-x Keyx SS ? Recall, P/P DSKx SS ? Recall, Master Effect ? Recall, Effect ? Recall, Effect ? Recall & Run, KF Run, KF Stop, KF Rewind, FM Src1 Field Freeze, FM Src1 Frame Freeze, FM Src1 Freeze Off, FM Src2 Field Freeze, FM Src2 Frame Freeze, FM Src2 Freeze Off, FM Src1 Clip Record, FM Src1 Clip Stop, FM Src2 Clip Record, FM Src2 Clip Stop, FM1 to FM8 Clip Cueup, FM1 to FM8 Clip Play, FM1 to FM8 Clip Stop, Shotbox ? Recall, Macro Take, Macro ? Recall, No Action
- **When the trigger type is only "Rising Edge" or "Falling Edge"**
  Aux? O'ride Src ??
- **When the trigger type is "Level"**
  In M/E-x, the x is the M/E bank number (1 to 5).
  System Format, System Aspect, M/E-x Aspect, P/P Aspect, DME Ch1 Aspect, DME Ch2 Aspect, DME Ch3 Aspect, DME Ch4 Aspect, DME Ch5 Aspect, DME Ch6 Aspect, DME Ch7 Aspect, DME Ch8 Aspect, Level Enable, Panel Status, No Action

Notes

- "Level Enable" is a function that determines whether GPI inputs are enabled ("Enable") or disabled ("Disable") for the "System Aspect" and "System Format" actions that can be used when the trigger type is Level. When Level Enable is used, if the input is "Disable" then it is not possible to switch "System Aspect" or "System Format" by GPI input.
  If a GPI to switch "System Aspect" or "System Format" occurs when powering the system off, the action triggered by the GPI may start immediately before the power goes off and the power may go off before the action is completed. This may corrupt the setup settings. It is therefore recommended to use Level Enable to avoid such a situation.
- As for "Aux ? O'ride Src ??," when "Rising Edge" is selected, on a rising edge the set AUX bus input is used. On a falling edge, the original state of the cross-point is restored. If the GPI trigger is applied repeatedly at short intervals (0.5 second or less), the cross-point switching may not be carried out correctly. In this case, apply the GPI trigger again.
- If "System Format" is selected for "Action" when the format converter is used on the switcher, you can set the conversion format of the format converter for "FC Input 1-4," "FC Input 5-8," "FC Input 9-12" (MVS-8000X only), "FC Input 13-16" (MVS-8000X only), "FC Output 1-2," and "FC Output 3-4."
- In Dual Simul mode, you can select the target switcher for the panel status display using "Panel Status" (H=SWR1, L=SWR2).

Carrying out level settings

To set the low level and high level, first set the trigger type to "Level," then use the following procedure.

1 In the DCU >GPI Input Assign menu, select the action to be set, and press [H/L Set].

The H/L Set menu appears.

2 Using any of the following methods, select the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	Signal format/ screen aspect ratio selection	1 to maximum value

3 To apply the selection made in step **2** when the input is the GPI high level, press [H Set]. To apply the

selection made in step **2** when the input is low, press [L Set].

This confirms the setting, which appears in the status area.

To Set the Level for the Format Converter

1 Set “System Format” for “Action” using the same operation in Step **4** of *“Making DCU GPI Input Settings” (page 641)*.

The format converter list appears.

2 Select the format converter that you want to set from the list.

3 In the <FC Input/Output> group, press [H Set] or [L Set] to set the high level or low level, respectively.

Parallel Output Settings (Output Config Menu)

For the DCU parallel output ports, after carrying out tally settings in the Router/Tally >Tally Enable menu, you can assign GPI outputs to output ports that are still unused. To assign DCU outputs to DCU parallel output ports, display the DCU >Output Config menu.

To display the Output Config menu

In the Engineering Setup menu, select VF5 ‘DCU’ and HF3 ‘Output Config.’
The status area shows output port information.

Assigning a GPI Output Port

1 In the DCU >Output Config menu, select what the setting applies to (DCU1 or DCU2) from the <DCU Select> group.

2 In the <Parallel Output Assign> group, press [GPI Output].

3 Using any of the following methods, select the output port and GPI output number.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Parallel Output Slot	Output port slot	2 to 6 a)
2	Parallel Output Port	Output port	1 to 54 b)
5	GPI Output	GPI output	1 to 50

a) When the MKS-2700 is connected, select 2.
b) When the MKS-2700 is connected, select a value in the range 1 to 36.

4 To confirm the selected setting, press [GPI Output Set].

This confirms the selection, which is reflected in the status area.

Releasing the Assignment of a GPI Output Port

1 In the DCU >Output Config menu, select what the setting applies to (DCU1 or DCU2) from the <DCU Select> group.

2 In the <Parallel Output Assign> group, if [GPI Output] is on, press it to turn it off.

3 Turn the knobs to select the slot and port to which the setting applies.

Knob	Parameter	Adjustment	Setting values
1	From Slot	First port slot	2 to 6
2	From Port	First port number	1 to 54
3	To Slot	Last port slot	2 to 6
4	To Port	Last port number	1 to 54

4 In the <Parallel Output Assign> group, press [No Assign].

GPI Output Settings (GPI Output Assign Menu)

To set the trigger type and so on for each GPI output, display the DCU >GPI Output Assign menu.

To display the GPI Output Assign menu

In the Engineering Setup menu, select VF5 'DCU' and HF4 'GPI Output Assign.'
The GPI output port setting status appears in the status area.

Making DCU GPI Output Settings

1 In the DCU >GPI Output Assign menu, using any of the following methods select what the setting applies to.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	No	GPI output	1 to 50

2 In the <Trigger Type> group, select the trigger polarity.

 **(Rising Edge):** The trigger causes the relay to open or the output to go high level, and holds this state for the specified pulse width duration.

 **(Falling Edge):** The trigger causes the relay to close or the output to go low level, and holds this state for the specified pulse width duration.

 **(Any Edge):** When a trigger occurs, the relay opens/closes or the output goes high/low level, switching state.

Status: The relay opens/closes or the output goes high/low level in response to the status.

No Operation: The trigger has no effect on the relay state or output level.

3 Turning the knobs, select the pulse width and timing to be set.

Knob	Parameter	Adjustment	Setting values
3	Pulse Width	Pulse width	1 to 60 (fields)
4	Timing	Output timing	1 to 3 [a)]

a) 1: Field 1, 2: Field 2, 3: Any

When "⟋" is selected as the trigger polarity, there is no Pulse Width setting. When "Status" is selected, there is no Pulse Width or Timing setting.

4 In the <Source Device> group, select the control panel or DCU to handle the GPI output.

SCU1: ID1 control panel (PNL1)
SCU2: ID2 control panel (PNL2)
SCU3: ID3 control panel (PNL3)
DCU1: ID1 DCU
DCU2: ID2 DCU
When the action set in the following step **5** is carried out on the control panel selected here, this causes a GPI output. It is also possible to output error information. When the DCU is selected, you can output error information by means of the action set in step **5**.

5 Using any of the following methods, select the action you want to set.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
2	Action	Action selection	1 to maximum value [a]
5	Reg No	Snapshot register number	1 to 4 [b]
5	GPI No	GPI number selection	1 to 32 [c]

a) **Action list when the trigger type is other than "Status"**
In M/E-x, the x is the M/E bank number (1 to 5); in Keyx the x is the key number (1 to 8); in DSKx the x is the DSK number (1 to 8).
When Source Device is SCU: M/E-x Keyx SS ? Recall, P/P DSKx SS ? Recall, Editor GPI-?? (only when BZS-8050 license is valid), No Action
When Source Device is DCU: No Action
Action list when the trigger type is "Status"
In M/E-x, the x is the M/E bank number (1 to 5); in Keyx the x is the key number (1 to 8); in DSKx the x is the DSK number (1 to 8).
When Source Device is SCU: M/E-x Keyx SS ? Recall, P/P DSKx SS ? Recall, M/E-x Keyx On, P/P DSKx On, Error Make, Error Break, Keep Make, Keep Break, Device Recording, No Action
When Source Device is DCU: Error Make, Error Break, No Action
b) When knob 2 selection is "Key Snapshot"
c) When knob 2 selection is "GPI"

6 To confirm the selection, press [Action Set].

This confirms the selection, which appears in the status area.

Test firing the trigger

In the DCU >GPI Output menu press [Test Fire].
This outputs a trigger from the selected output port. This is not output when the trigger type is "Status."

Serial Port Settings (Serial Port Assign Menu)

To set the protocol to match a device connected to a 9-pin serial port, display the DCU >Serial Port Assign menu.

To display the Serial Port Assign menu

In the Engineering Setup menu, select VF5 'DCU' and HF5 'Serial Port Assign.'
The serial port setting status appears in the status area.

Making Serial Port Settings

1 In the DCU >Serial Port Assign menu, select the target for the setting (DCU1 or DCU2) from the <DCU Select> group.

2 Using any of the following methods, select the serial port.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port	1 to maximum value [a]

a) The setting value range depends on the DCU port setting. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Using any of the following methods, select the protocol for the connected device.

- Press directly on the list on the right of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	Device Type	Protocol selection	1 to 10 [a]

a) 1. No Assign: nothing is connected to the serial port.
2. P-Bus: P-Bus device.
3. VTR: VTR
4. DDR SD9P: disk recorder (Sony disk 9-pin protocol)
5. DDR VDCP: disk recorder (video disk communication protocol)
6. Simple VDCP: disk recorder with low-performance communications (video disk communications protocol)
7. DDR Odetics: disk recorder (Odetics protocol)
8. Extended VTR (Abekas A53 protocol)
9. Mixer ESAM-II
10. AS ES-BUS: device supporting the AS ES bus protocol

Notes

Mixer ESAM-II cannot be operated from this system. It can only be operated from an editing keyboard.

4 Press [Device Type Set].

The selected protocol is reflected on the left of the status area.

5 To enter the name of the serial port, press [Set] in the <Name> group.

A keyboard window appears. You can enter a name of not more than 16 characters.
If no name is set for the serial port, it is displayed as "DCUd_PORTs-p."
d: 1 or 2 (DCU No.)
s: 2 to 6 (Slot No.)
p: 1 to 6 (Port No.)

6 Press [Enter].

To return the set name to the default name
Press [Clear] in the <Name> group.

7 From the <SCU Select> group, select the control panel (SCU1, SCU2 or SCU3) assigned to operations on the external device connected to the serial port.

Deleting the serial port assignment

1 In the DCU >Serial Port Assign menu, select the target for the setting (DCU1 or DCU2) from the <DCU Select> group.

2 Using any of the following methods, specify the serial port.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port	1 to maximum value [a)]

a) The range of setting values depends on the DCU port setting. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Press [Clear].

Making Detailed Settings on the External Device Connected to the Serial Port

After setting the external device for each serial port, it is necessary to make further detailed settings for operation of the external device.

Making detailed settings for a P-Bus device

1 In the DCU >Serial Port Assign menu, select the setting target (DCU1 or DCU2) from the <DCU Select> group.

2 Using any of the following methods, select the serial port connected to the P-Bus device for which you want to make the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port number	1 to maximum value [a)]

a) The range of setting values depends on the DCU port setting. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Press [Port Setting].

The DCU >Serial Port Assign >P-Bus Setting menu appears.
At the top of the status area, the relevant serial port, slot number, protocol, serial port name, and SCU number appear. In the lower part of the status area, the device name and response speed settings appear.

4 Using any of the following methods, select the ID for which you want to make a device name setting.

- Press directly on the device name list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	ID	ID selection	0 to 23

5 In the <Name> group, press [Set] to display a numeric keypad window.

6 Input the desired name, and press [Enter].

The input device name appears in the device name list.

To return the device name for the selected ID to the default name
Press [Clear] in the <Name> group.

7 Using any of the following methods, specify the command to which the response speed setting applies.

- Press directly on the delay list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	No	Command number selection	1 to 18

8 Turn the knob to set the response speed (in field units) of the device.

Knob	Parameter	Adjustment	Setting values
3	Delay	Response speed setting	0 to 60

9 Press [Delay Set].

10 Repeat steps **4** to **9** as required to make the settings for other commands.

Making detailed settings for a VTR

1 In the <DCU Select> group of the DCU >Serial Port Assign menu, select the target for the setting (DCU1 or DCU2).

2 Using any of the following methods, select the serial port connected to the VTR for which you want to make the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port	1 to maximum value [a)]

a) The range of setting values depends on the DCU port setting. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Press [Port Setting].

The DCU >Serial Port Assign >VTR Setting menu appears.
At the top of the status area, the relevant serial port, slot number, protocol, serial port name, SCU number, and timecode source appear. In the lower part of the status area, the VTR constants appear.

4 In the <TC Source> group, select the timecode source (reference signal for determining the tape position) from the following.

LTC (Longitudinal Time Code): Use LTC. When interpolation data is returned from a VTR, use that interpolation data.
LTC: VITC (Vertical Interval Time Code): Normally use LTC, but when the tape is moving at speeds at which LTC cannot be read, use VITC. When interpolation data is returned from a VTR, use that interpolation data.
VITC: Use VITC.
CTL (Control): CTL pulses or timer counter pulses are used. Use this only for a tape on which no timecode is recorded.
The displayed tape position is based on the reference signal specified here.

5 Using any of the following methods, specify the VTR constants.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Item	Item selection	1 to 16

6 Press [Set].

A numeric keypad window for hexadecimal input appears.

7 Set the VTR constants using values in the range 00 to FF.

Block	Byte	Setting item
BLOCK 1	1	HI-BYTE (DEVICE TYPE)
	2	LO-BYTE (DEVICE TYPE)
	3	HI-BYTE (FRAME) (PREROLL TIME)
	4	LO-BYTE (FRAME) (PREROLL TIME)
	5	EDIT DELAY (FRAME)
	6	EE DELAY (FRAME)
	7	OVER RUN (FRAME)
	8	TRAJECTORY

Block	Byte	Setting item
BLOCK 2	1	TC READ DELAY (FRAME)
	2	START DELAY (FRAME)
	3	AFTER SYNC DELAY–
	4	AFTER SYNC DELAY+
	5	MODE1
	6	MODE2
	7	MAX PRRL SPEED
	8	QUICK PVW PRRL TIME (FRAME)

8 Press [Enter].

9 Repeat steps **5** to **8** as required to set other VTR constants.

Making detailed settings for a disk recorder (Sony disk 9-pin protocol)

1 In the <DCU Select> group of the DCU >Serial Port Assign menu, select the target for the setting (DCU1 or DCU2).

2 Using any of the following methods, select the serial port connected to the disk recorder for which you want to make the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port	1 to maximum value [a]

a) The range of setting values depends on the DCU port setting. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Press [Port Setting].

The DCU >Serial Port Assign >DDR SD9P Setting menu appears.
At the top of the status area, the relevant serial port, slot number, protocol, serial port name, SCU number, and disk recorder type appear. In the lower part of the status area, the response speed settings appear.

4 Using any of the following methods, specify the item to which the response speed setting applies.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Item No	Item selection	1 to 4 [a]

a) 1. Maximum Open Delay: maximum time required to open a file
2. Maximum Cueup Delay: maximum time required to cue up a file
3. Play After Cueup Delay: delay time from the cued-up state to begin playback
4. Play After Open Next Delay: delay time from the Open Next state to begin playback

5 Turn the knob to set the disk recorder response speed.

Knob	Parameter	Adjustment	Setting values
2	Setting	Response speed setting	0 to 255

6 Press [Set].

7 Repeat steps **4** to **6** as required to make the settings for other items.

Making detailed settings for a disk recorder (video disk communications protocol)

1 In the <DCU Select> group of the DCU >Serial Port Assign menu, select the target for the setting (DCU1 or DCU2).

2 Using any of the following methods, select the serial port connected to the disk recorder for which you want to make settings.


- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port	1 to maximum value [a]


a) The range of setting values depends on the DCU port setting. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Press [Port Setting].

When “DDR VDCP” is selected as the protocol, the DCU >Serial Port Assign >DDR VDCP Setting menu appears.

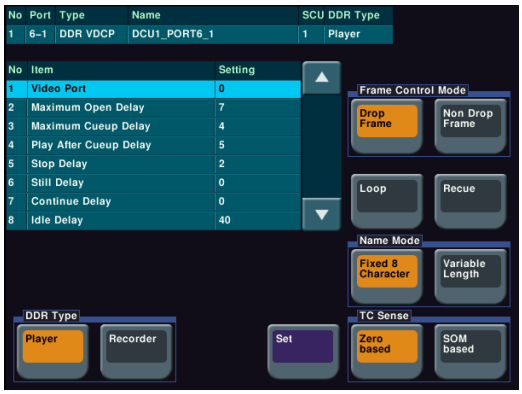

When "Simple VDCP" is selected as the protocol, the Simple VDCP Setting menu appears.

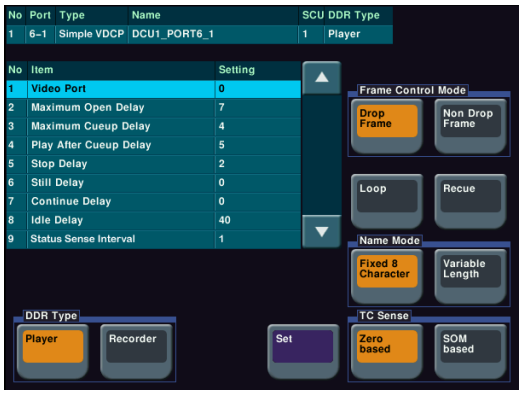

4 In the <DDR Type> group, select the type of disk recorder.

Player: Functioning as a player.
Recorder: Functioning as a recorder.

5 In the <Name Mode> group, select the file name character count mode.

Fixed 8 Character: Use 8-character file names.
Variable Length: Use variable-length file names. The file name is limited to 23 characters.

6 In the <TC Sense> group, select the type of timecode sensing.

Zero based: Mode in which timecode is sensed (detected) taking the first frame of the recalled file as 00:00:00:00.
SOM based: Mode in which timecode saved in the recalled file is detected.

Notes

The details of the above operation modes depend on the connected device. For more information, consult the documentation for the connected device.

7 When using a disk recorder that does not support the timecode drop frame bit, in the <Frame Control Mode> group, select the drop frame mode or non-drop frame mode.

Drop Frame: Drop frame mode.
Non Drop Frame: Non-drop frame mode.

Notes

This setting is only valid when the system field frequency is one of the following values.
29.97, 30, 59.94, 60

8 Using any of the following methods, specify the item to which the video port number or response speed setting applies.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Item No	Item selection	**DDR VDCP Setting menu:** 1 to 8 a) **Simple VDCP Setting menu:** 1 to 9 a)

a) 1. Video Port: Number of the video port associated with the serial port to which the setting applies
For a player, the output port setting
For a recorder, the input port setting
2. Maximum Open Delay: maximum time required to open a file
3. Maximum Cueup Delay: maximum time required to cue up a file
4. Play After Cueup Delay: delay time from the cued-up state to begin playback
5. Stop Delay: delay time from issuing the Stop command until actually stopping
6. Still Delay: delay time from issuing the Still command until actually stopping
7. Continue Delay: delay time from issuing the Continue command until actually stopping
8. Idle Delay: delay time from unloading a file until entering the idle state (the idle state is a state wherein a file has been unloaded but a new file has not been loaded yet, that is, a state wherein no file is loaded).
9. Status Sense Interval: time until the next Status Sense command is issued (Simple VDCP Setting menu only)

9 Turn the knob to set the disk recorder video port number or response speed.

When setting the video port number

Knob	Parameter	Adjustment	Setting values
2	Setting	Video port number	0 to 127 a)

a) 0: No assignment

When setting the response speed

Knob	Parameter	Adjustment	Setting values
2	Setting	Response speed setting	0 to 255 b)

b) Status Sense Interval: 1 to 10

10 Press [Set].

11 If required, repeat steps **8** to **10**, to set other items.

To enable or disable the loop and recue functions

Press [Loop] and [Recue], respectively.

Loop: Replay the recalled file in a continuous loop.

Recue: After playing the recalled file, recue to the beginning and then stop.

Making detailed settings for a disk recorder (Odetics protocol)

1 In the DCU >Serial Port Assign menu, select the target for the setting (DCU1 or DCU2) from the <DCU Select> group.

2 Using any of the following methods, select the serial port connected to the disk recorder for which you want to make the settings.

- Directly press the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port	1 to maximum value a)

a) The range of the setting value depends on the DCU port settings. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Press [Port Setting].

The DCU >Serial Port Assign >DDR Odetics Setting menu appears.
The target serial port and slot number, protocol, serial port name, and SCU number are displayed at the top of the status area. The setting status is displayed in the lower part of the status area.

4 In the <TC Sense> group, select the type of timecode sensing.

Zero based: Mode in which timecode is sensed (detected) taking the first frame of the recalled file as 00:00:00:00.

SOM based: Mode in which timecode saved in the recalled file is sensed.

Notes

The details of the above operation modes depend on the connected device. For more information, consult the documentation for the connected device.

5 Using any of the following methods, specify the item to which the setting applies.

- Directly press the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Item No	Item selection	1 to 12 a)

a) 1. Maximum Open Delay: Maximum time required to open a file
2. Maximum Cueup Delay: Maximum time required to cue up a file
3. Play After Cueup Delay: Delay time from the cued-up state to begin playback
4. Stop Delay: Delay time from issuing the Stop command until actually stopping
5. Still Delay: Delay time from issuing the Still command until actually stopping
6. Command Delay (Auto Mode): Delay time from issuing the Auto Mode On/Off command until the command takes effect.
7. Command Delay (Out Preset): Delay time from issuing the Out Preset command until the command takes effect.
8. Command Delay (Preview In Preset): Delay time from issuing the Preview In Preset command until the command takes effect.
9. Internal Parameter (1): For future expansion (set to “255”)
10. Internal Parameter (2): For future expansion (set to “255”)
11. Internal Parameter (3): For future expansion (set to “255”)
12. Internal Parameter (4): For future expansion (set to “255”)

6 Turn the knob to set the value.

Knob	Parameter	Adjustment	Setting values
2	Setting	Response speed setting	0 to 255

7 Press [Set].

8 Repeat steps **5** to **7** as required to make the settings for other items.

Making detailed settings for an Extended VTR

1 In the DCU >Serial Port Assign menu, select the setting target (DCU1 or DCU2) from the <DCU Select> group.

2 Using any of the following methods, select the serial port connected to the Extended VTR for which you want to make the settings.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Port No	Serial port number	1 to maximum value a)

a) The range of setting values depends on the DCU port setting. When the MKS-2700 is connected, select 2 for the slot and a value in the range 1 to 6 for the port.

3 Press [Port Setting].

The DCU >Serial Port Assign >Extended VTR Setting menu appears.
At the top of the status area, the relevant serial port, slot number, protocol, serial port name, and SCU number appear. In the lower part of the status area, the response speed settings appear.

4 Using any of the following methods, specify the item to which the response speed setting applies.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Item No	Item selection	1 to 4 a)

a) 1. Maximum Open Delay: maximum time required to open a file
2. Maximum Cueup Delay: maximum time required to cue up a file
3. Play After Cueup Delay: maximum delay time from the cued-up state to begin playback
4. Stop Delay: delay time from issuing the Stop command until actually stopping

5 Turn the knob to set the response speed of the Extended VTR.

Knob	Parameter	Adjustment	Setting values
2	Setting	Response speed setting	0 to 255

6 Press [Set].

7 Repeat steps **4** to **6** as required to make the settings for other items.

Chapter 23 Setup Relating to Router Interface and Tally (Router/Tally)

Router Interface Settings (Router Menu)

In this system, the interface with a router (routing switcher) uses the S-Bus protocol. It is therefore necessary to assign inputs and outputs of the switcher and so on to an S-Bus space.
To carry out this assignment, use the Router/Tally >Router menu. The assignment is common to the parallel and serial tallies.

To display the Router menu

In the Engineering Setup menu, select VF6 'Router/Tally' and HF1 'Router.'
The status area shows the device names to be assigned to the S-Bus space, the matrix size, source address, destination address, and level.
The following functions are available here.

- **Matrix Size:** Assign the switcher matrix of each switcher processor to S-Bus space, and select the matrix size and positioning level, source address settings, and so on.
- **External Box:** To obtain the signal selection status of external devices with a parallel input, assign a matrix as an external selector in the S-Bus space. Make the matrix size, assignment level, source address, and other settings.
- **Alias Name Gp:** Set the group number for an S-Bus description name to be displayed in the source name displays for a cross-point operation.

Assigning Switcher Inputs and Outputs to S-Bus Space

1 In the <Device> group of the Router/Tally >Router menu, select the device to which the settings apply.

SWR1: Settings apply to switcher 1.
SWR2: Settings apply to switcher 2.

Notes

When there are two switchers on the same network, the SWR2 (second switcher) settings are required. If there is only one switcher, the settings are not required.

2 In the <Matrix Size> group, select the matrix size.

320 × 348 (Standard): Assign to S-Bus space with the switcher input/output at 320×348 size.
272 × 274: Assign to S-Bus space with the switcher input/output at 272×274 size.
182 × 256: Assign to S-Bus space with the switcher input/output at 182×256 size.
136 × 138: Assign to S-Bus space with the switcher input/output at 136×138 size.
128 × 128: Assign to S-Bus space with the switcher input/output at 128×128 size.

3 Turn the knobs to set the parameters for the following items.

Source: Specify the start address of the matrix source.
Destination: Specify the start address of the matrix destination.
Level: Specify the level in the S-Bus space.

Knob	Parameter	Adjustment	Setting values
1	Source	Source start address	1 to maximum value [a)]
2	Destination	Destination start address	1 to maximum value [b)]
3	Level	Level	1 to 8

a) The maximum setting values for each matrix size:
705 for [320x348 (Standard)], 753 for [272x274], 843 for [182x256], 889 for [136x138], 897 for [128x128]
b) The maximum setting values for each matrix size:
677 for [320x348 (Standard)], 751 for [272x274], 769 for [182x256], 887 for [136x138], 897 for [128x128]

Setting External Boxes 1 to 12

1 In the Router/Tally >Router menu, press [External Box Assign].

The External Box Assign menu appears.

2 In the <Device> group, select what the setting applies to (one of External Box 1 to 12).

3 In the <Matrix Size> group, select the number of inputs for the external box.

No Assign: Do not use.
4×1: 4 inputs and 1 output.
8×1: 8 inputs and 1 output.
16×1: 16 inputs and 1 output.
32×1: 32 inputs and 1 output.

Notes

The maximum total number of inputs for all 12 external boxes is 102.

4 Turn the knobs to make adjustments.

Knob	Parameter	Adjustment	Setting values
1	Source	Source start address	1 to 1021 a) 1 to 1017 b) 1 to 1009 c) 1 to 993 d)
2	Destination	Destination start address	1 to 1024
3	Level	Level	1 to 8

a) When Matrix Size is 4×1
b) When Matrix Size is 8×1
c) When Matrix Size is 16×1
d) When Matrix Size is 32×1

Coupling external boxes

By coupling a number of external boxes, the number of inputs can be increased.
Here the example of coupling External Box1 and External Box2 is described.

1 In the Router/Tally >Router >External Box Assign menu, select [External Box1] from the <Device> group.

2 In the <Matrix Size> group, select [8×1].

3 Turn the knobs to make adjustments.

Knob	Parameter	Adjustment	Setting values
1	Source	Source start address	1 to 1017
2	Destination	Destination start address	1 to 1024
3	Level	Level	1 to 8

4 In the <Device> group, select [External Box2].

5 In the <Matrix Size> group, select [32×1].

6 Turn the knobs to make adjustments.
At this point make the settings of Destination and Level the same as in step **3**.

This automatically couples External Box1 and External Box2, forming an external box with 40 (8+32) inputs.

Setting the group number of an S-Bus description name

1 In the <Alias Name Gp> group of the Router/Tally >Router menu, press [Gp No].

2 Turn the knob to set the following parameter.

Knob	Parameter	Adjustment	Setting values
1	Gp No	Group number of S-Bus description name	0 to 7 a)

a) When a setting value of 1 to 7 is selected: If the name is not set, the description name for "0" appears.
If the description name for "0" is not registered either, the Type and No values appear.

3 In the <Alias Name Gp> group, press [Set].

This confirms the setting, which is reflected in the status area.

Notes

Transmit the description name selected here from the router.

Tally Group Settings (Group Tally Menu)

With the S-Bus protocol, tally control is possible for groups 1 to 8, but in this system you can use either groups 1 to 4 or groups 5 to 8.
You can also select whether or not to transfer the tally information over the S-Bus.
To select the tally groups, use the Router/Tally >Group Tally menu.

To display the Group Tally menu

In the Engineering Setup menu, select VF6 'Router/Tally' and HF2 'Group Tally.'
The following functions are available here.

- **Tally Group:** Select the group tally (Gp1 to 4 or Gp5 to 8) which can be used. For the parallel tally, all groups can be used regardless of this setting.
- **SBus Tally Enable:** Specify S-Bus tally enabled or disabled.

Setting the tally groups

1 To select a consecutive sequence of groups from each of groups 1 to 4 and groups 5 to 8, set [All Group Enable] to On in the Group Tally menu.

2 In the <Tally Group> group, select the desired groups.

Wiring Settings (Wiring Menu)

When configuring a system in which the switcher inputs and outputs are connected to a router, setting this connection configuration (referred to as "wiring") in the S-Bus space, or inputting the information which specifies the physical wiring, is necessary.
To make the wiring settings, use the Router/Tally >Wiring menu. The settings are common to the parallel and serial tallies.

To display the Wiring menu

In the Engineering Setup menu, select VF6 'Router/Tally' and HF3 'Wiring.'
The status area shows the wiring settings.

Making New Wiring Settings

1 In the Router/Tally >Wiring menu, press [New].

The New menu appears.

2 With a knob or menu operation, set the destination.

When switcher inputs and outputs are connected to the router in a group, you can specify the start and end destination addresses.

Destination From: Specify the start destination address for the wiring configuration.

Destination To: When the wiring configuration is multiple, specify the end destination address. For a single wiring connection, this setting is not required.

Destination Level: Specify the destination level of the wiring configuration.

Knob	Parameter	Adjustment	Setting values
1	Destination (From)	Destination start address	1 to 1024
2	Destination (To)	Destination end address	From start address to 1024
3	Destination (Level)	Destination level	1 to 8

3 Set the source.

Source From: Specify the source start address for the wiring configuration.

Source Level: Specify the source level for the wiring configuration.

Knob	Parameter	Adjustment	Setting values
4	Source (From)	Source start address	1 to 1024
5	Source (Level)	Source level	1 to 8

4 Press [Execute].

This makes the wiring setting according to the specifications in steps **2** and **3**.

Changing the Wiring Settings

1 In the Router/Tally >Wiring menu, press [Modify].

The Modify menu appears.

2 Referring to steps **2** and **3** in the preceding section "Making New Wiring Settings," change the parameters as required. In this case, however, it is not possible to specify multiple destinations in a single operation, and a single "Destination Address" must be specified.

3 Press [Execute].

Deleting Wiring Settings

1 In the Router/Tally >Wiring menu, using either of the following methods, select the wiring whose settings you want to delete.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

2 Press [Delete].

Sorting Wiring Settings

In the Router/Tally >Wiring menu, press [Sort].
The sorting of wiring settings is executed in the following order.

Destination level order (ascending)→Destination address order (ascending)→Source level order (ascending)

Tally Generation Settings (Tally Enable Menu)

For settings relating to tally generation, use the Router/Tally >Tally Enable menu.
Specify the destination to be the reference for tally generation, and make various settings.
The settings are common to the parallel and serial tallies.

To display the Tally Enable menu

In the Engineering Setup menu, select VF6 'Router/Tally' and HF4 'Tally Enable.'
The status area shows the tally generation settings.
The following functions are available here.

- **Tally Type:** Specify the tally type.
- **Destination:** Specify the address and level.
- **Tally Enable:** Specify the timing at which a tally is enabled.
  - **Enable:** Always enabled.
  - **Disable:** Always disabled.
  - **Tally Input:** Follow the tally input status.

Making New Tally Generation Settings

1 In the Router/Tally >Tally Enable menu, press [New].

The New menu appears.

2 Turn the knobs to set the following parameters.

Knob	Parameter	Adjustment	Setting values
1	Destination Address	Destination address	1 to 1024
2	Destination Level	Destination level	1 to 8
3	Tally Type	Tally type	1 to 16 a)

a) 1:R1, 2:G1, 3:R2, 4:G2, 5:R3, 6:G3, 7:R4, 8:G4, 9:R5, 10:G5, 11:R6, 12:G6, 13:R7, 14:G7, 15:R8, and 16:G8 (R is an abbreviation of "Red Tally," and G of "Green Tally").

3 In the <Tally Enable> group, specify the tally generation mode.

Enable: Always generate a tally.
Disable: Never generate a tally.
Tally Input: Generate a tally from the tally input state.

4 When you selected Tally Input as the tally generation mode in step **3**, select either of the following in the <Tally Input> group.

DCU1: Generate tally with reference to signal input to DCU1 port. Set the port number with the knob.
DCU2: Generate tally with reference to signal input to DCU2 port. Set the port number with the knob.

5 Turn the knob to select the tally input port number.

Knob	Parameter	Adjustment	Setting values
5	Input No	Tally input port number	1 to 102

6 Press [Execute].

This sets the settings made in steps **2** to **5** as the settings for tally generation.

Modifying Tally Generation

1 In the Router/Tally >Tally Enable menu, press [Modify].

The Modify menu appears.

2 With reference to steps **2** to **5** in the preceding section "Making New Tally Generation Settings," change the parameters as required.

3 Press [Execute].

Deleting Tally Generation Settings

1 Using either of the following methods in the Router/Tally >Tally Enable menu, select the tally generation entry you want to delete.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.

2 Press [Delete].

Tally Copy Settings (Tally Copy Menu)

You can copy the tally information pertaining to a particular source to a different source.
For settings relating to the tally copy function, use the Router/Tally >Tally Copy menu. The settings are common to the parallel and serial tallies.

To display the Tally Copy menu

In the Engineering Setup menu, select VF6 'Router/Tally' and HF5 'Tally Copy.'
The status area shows the tally copy status.

Making New Tally Copy Settings

1 In the Router/Tally >Tally Copy menu, select [New].

The New menu appears.

2 Turn the knob to select the copy-from source.
When setting more than one tally copy, you can specify the copy-from source start and end addresses.

Knob	Parameter	Adjustment	Setting values
1	Copy From (From)	Copy-from source start address	1 to 1024
2	Copy From (To)	Copy-from source end address	1 to 1024

3 Specify the copy-to source address.

Knob	Parameter	Adjustment	Setting values
3	Copy To (From)	Copy-to source (start) address	1 to 1024
4	Copy To (To)	Copy-to source (end) address	1 to 1024

4 Press [Execute].

This makes the tally copy setting according to the specifications in steps **2** and **3**.

Modifying Tally Copy Settings

1 In the Router/Tally >Tally Copy menu, press [Modify].

The Modify menu appears.

2 Use the knobs to select the copy source and copy destination.

Knob	Parameter	Adjustment	Setting values
1	Copy From	Copy-from source	1 to 1024
2	Copy To	Copy-to source	1 to 1024

3 Press [Execute].

Deleting Tally Copy Settings

1 In the Router/Tally >Tally Copy menu, using any of the following methods, select the tally copy whose settings you want to delete.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Copy No	Tally copy setting selection for deletion	1 to maximum value

2 Press [Delete].

Parallel Tally Settings (Parallel Tally Menu)

For settings relating to parallel tally, use the Router/Tally >Parallel Tally menu.
Make the parallel port settings for output of tally information pertaining to sources and destinations.
For each of the tally output terminal numbers, specify the tally type, and source address or destination level and address.

To display the Parallel Tally menu

In the Engineering Setup menu, select VF6 'Router/Tally' and HF6 'Parallel Tally.'
The status area shows the parallel tally settings.

Making or Modifying Parallel Tally Settings

1 In the <Device> group of the Router/Tally >Parallel Tally menu, select DCU1 or DCU2.

2 Using any of the following methods, select the slot number and port number.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Slot No	Parallel tally slot number	2 to 6 a)
2	Port No	Parallel tally port number	1 to 54 b)

a) When the MKS-2700 is connected, select 2 for the slot.
b) When the MKS-2700 is connected, select a value in the range 1 to 36.

3 Press [Set].

The Set menu appears.

4 In the <Source/Destination> group, select the tally type.

Src: Return a tally to all sources output to the destination.
Dest: Return a tally to the destination outputting the source to which a source tally is returned.

5 Set the destination address and level.

The level setting is only required when in step **4** you selected Destination.

Knob	Parameter	Adjustment	Setting values
1	Address	Destination address	1 to 1024
2	Level	Destination level	1 to 8

6 When setting the tally type, set the following parameter.

Knob	Parameter	Adjustment	Setting values
3	Type	Tally type	1 to 16 a)

a) 1:R1, 2:G1, 3:R2, 4:G2, 5:R3, 6:G3, 7:R4, 8:G4, 9:R5, 10:G5, 11:R6, 12:G6, 13:R7, 14:G7, 15:R8, and 16:G8 (R is an abbreviation of "Red Tally," and G of "Green Tally").

7 Press [Execute].

This makes the parallel tally settings, in accordance with the settings in steps **1** to **6**.

Deleting Parallel Tally Settings

1 In the Router/Tally >Parallel Tally menu, using any of the following methods, select the parallel tally whose settings you want to delete.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knobs.

Knob	Parameter	Adjustment	Setting values
1	Slot No	Parallel tally slot number	2 to 6
2	Port No	Parallel tally port number	1 to 54

2 Press [Clear].

Serial Tally Settings (Serial Tally Menu)

To make serial tally settings, display the Router/Tally >Serial Tally menu.
Make the serial tally settings, including tally type and source address for each serial tally port.

To display the Serial Tally menu

In the Engineering Setup menu, select VF6 'Router/Tally' and HF7 'Serial Tally.'
The serial tally settings appear in the status area.

Setting or Changing the Serial Tally Settings

1 In the <Serial Tally Port> group of the Router/Tally >Serial Tally menu, select the port to which the setting applies.

2 In the <Tally Group> group, select the tally group.

3 In the <Tally Type> group, press the tally types to select. You can select up to four.

Notes

The selectable tally types depend on the settings in step **2**.

4 In the <Tally Data Size> group, press one of the following to select the data size.

128 Bit: 128 bits
256 Bit: 256 bits

Making the Serial Tally Source Address Settings

To set the serial tally source address for each port, use the following procedure.

1 In the Router/Tally >Serial Tally menu, press [Source Assign].

The Source Assign menu appears.
In the status area, the tally types and source address set for the serial tally port appear.

2 In the <Serial Tally Port> group, select the port to which the setting applies.

3 Using any of the following methods, select the port bit number.

- Press directly on the list on the left of the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	Bit No	Bit selection	1 to maximum value

4 Turn the knob to select the source address.

Knob	Parameter	Adjustment	Setting values
2	Source Addr	Source address selection	1 to 1024

5 Press [Source Address Set].

Clearing a Source Address Setting

To clear a source address setting for a particular bit

In the Router/Tally >Serial Tally >Source Assign menu, select the serial tally port and bit number *(see steps **2** and **3** in the previous item),* then press [Clear].
This clears the source address setting for the selected bit.

To clear all source address settings

In the Router/Tally >Serial Tally >Source Assign menu, select the serial tally port, then press [All Clear].
A confirmation message appears.

- If you select "Yes," this clears all source address settings for the selected serial tally port.
- If you select "No," the clear operation is canceled.

To return all source address settings to the default

In the Router/Tally >Serial Tally >Source Assign menu, select the serial tally port, then press [Default Recall].
A confirmation message appears.

- If you select "Yes," this returns all source address settings for the selected serial tally port to the default.
- If you select "No," the operation is canceled.

Source Patch

The source patch is a function whereby signal pairs recorded in applicable data are automatically converted to use key snapshots, snapshots, and keyframes in different switcher systems as is.

Sequence of Source Patch Operations

In the following description, two different switcher systems are referred to as Switcher A and Switcher B.

In Switcher A, assign a name (user source name) to each signal pair.

↓

Export the user source name file to a memory card.

↓

In Switcher B, import the user source names from the memory card.

↓

Create a signal pairs conversion correspondence table (patch table).

↓


In Switcher B, recall the snapshot, key snapshot, or keyframe file created in Switcher A (signal pairs are replaced according to the patch table).

Exporting a User Source Name File to the Memory Card

In Switcher A, use the following procedure.

1 In the User Setup menu, select VF1 ‘Source Patch’ and HF1 ‘User Source Name.’

The User Source Name menu appears.

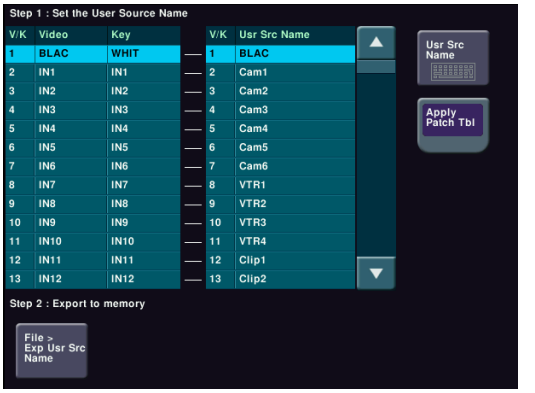

2 Use either of the following methods to select the target pair in the list on the left.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	V/K Pair No	Signal pair selection	1 to maximum value

3 Press [Usr Src Name] outside the list.

The keyboard window appears.

4 Enter a name of not more than 16 characters, and press [Enter].

The name you have entered is reflected in the Usr Src Name area.

5 Repeat steps **2** to **4**, to set all of the necessary names.

6 Press [File >Exp Usr Src Name].

The Export Usr Src Name menu appears.

7 Select Memory Card as the destination, and press [⟶ Export].

The user source name file is exported to the memory card.

To apply the signal pairs in the patch table to this menu

Press [Apply Patch Tbl].


For more information about the patch table, see the following item.

Creating a Patch Table (Conversion Table)

Load the memory card created in Switcher A to Switcher B, and use the following procedure in Switcher B.

1 In the User Setup menu, select VF1 ‘Source Patch’ and HF2 ‘Patch Table.’

The Patch Table menu appears.

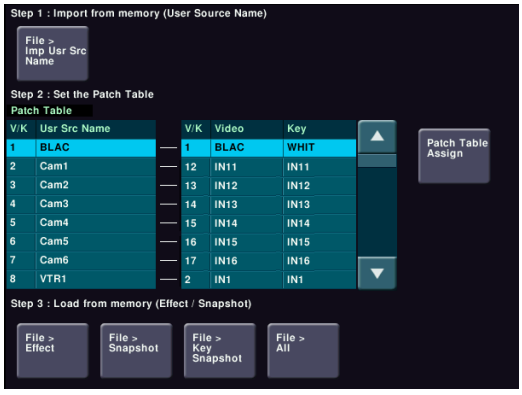

2 Press [File >Imp Usr Src Name].


The Import Usr Src Name menu appears.

3 Select Memory Card as the import source, and press [← Import].

The user source name file is loaded from the memory card.

4 Press [Patch Table Assign].

The Patch Table Assign menu appears.
The user source names in Switcher A imported by step **3** are listed on the left and the pairs of videos and keys set in Switcher B are listed on the right.

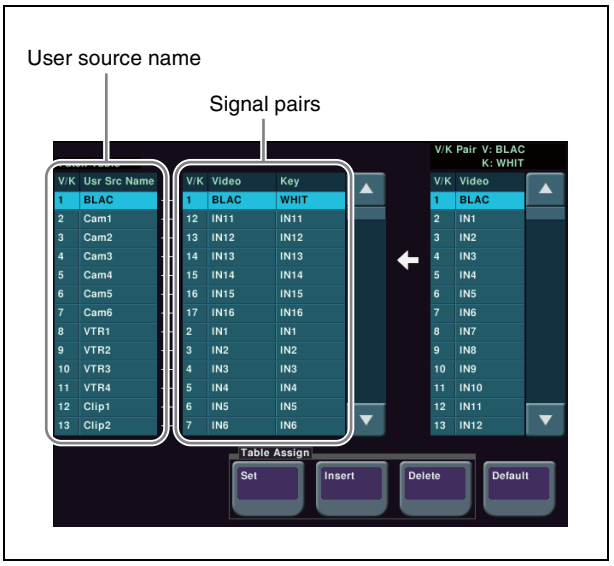

5 Using either of the following methods, select the target user source name from the list on the left.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
1	User Source	User source name selection	1 to maximum value

6 Using either of the following methods, select the video signal that you want to assign from the list on the right.

- Press directly on the list in the status area.
- Press the arrow keys to scroll the reverse video cursor.
- Turn the knob.

Knob	Parameter	Adjustment	Setting values
2	V/K Pair No	Signal pair selection	1 to maximum value

7 In the <Table Assign> group, press [Set].

The video/key signal name selected in the list on the right is reflected in the list on the left.

8 Repeat steps **5** to **7** to create a patch table.

It is also possible to execute the following editing operations using the buttons in the <Table Assign> group.

- Press [Insert] to insert a signal name above the signal name selected in the list on the left.
- Press [Delete] to delete the signal name selected in the list on the left.

Replacing Signal Pairs Using the Patch Table

The source patch is effective for key snapshots, snapshots, and keyframes.
The following describes the operation for a snapshot as an example.
Copy a snapshot file created in Switcher A to the memory card in advance.

1 In the Patch Table menu, press [File >Snapshot].

The File menu appears.



2 In the list on the right, select the file you want to recall to the register.

3 Press [Src Patch Link] to turn it on.

4 Press [← Load].

The snapshot of which signal pairs have been replaced according to the patch table is recalled to Switcher B.

DIAGNOSIS


Chapter 25

Checking the Communications Status

In the Diagnosis menu, you can check the communications status of the control LAN and data LAN within the system.

Communications Status Display

To display the communications status, in the Diagnosis menu select VF3 ‘System Info’ and HF1 ‘LAN Status’. The following communications status screen appears.

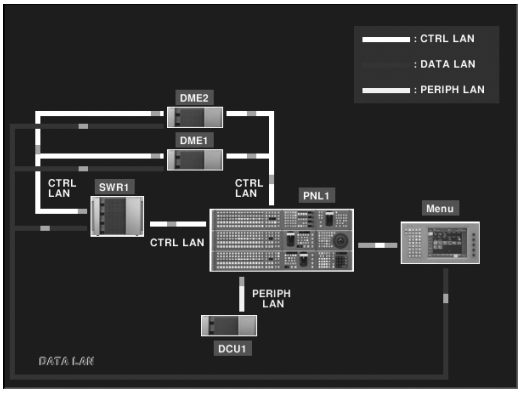

Devices constituting the system only appear if they are connected.
You can check connection information in the Engineering Setup >System >System Config menu *(see page 547)*.
Even if a DCU is connected, if there is a communications error, it does not appear.
The LAN communications status is shown as follows.

- Control LAN (CTRL LAN)
  - **When connected:** White
  - **When not connected:** Red and white flashing
- Data LAN (DATA LAN)
  - **When connected:** Blue
  - **When not connected:** Red and blue flashing
- Peripheral LAN (PERIPH LAN)
  - **When connected:** Amber
  - **When not connected:** Not shown

If the connection between the menu panel and another panel is broken, it does not appear.

Appendix (Volume 2)

Simple Connection of the MKS-8080/8082 AUX Bus Remote Panel

Procedure for Simple Connection

To connect the MKS-8080/8082 AUX Bus Remote Panel to the center control panel using an S-Bus data link requires a BKPF-R70A Routing Switcher Controller Board or similar primary station and various settings for connection.
However, using a simple connection, the need for an S-Bus data link primary station is avoided, and direct connection to the MKS-8080/8082 is possible.
A simple connection is possible if the following conditions are met:

- There are no devices other than the center control panel and MKS-8080/8082 connected on the S-Bus data link.
- There are no more than 16 MKS-8080/8082 units connected on the S-Bus data link.

To carry out simple connection of the MKS-8080/8082 AUX Bus Remote Panel, use the following procedure.
For settings on the MKS-8080/8082, see the section "Making the Setting With Buttons (Setup Function)" in the Operation Manual for the MKS-8080/8082.

1 Carry out initialization of the MKS-8080/8082 settings.
This can be done on the MKS-8080/8082 separately.

2 Set the MKS-8080/8082 station number in the range 2 to 17.
This can be done on the MKS-8080/8082 separately.

3 Set the S-Bus data link primary station to the center control panel by setting the STATION ID switches on the front of the board in the SCU SLOT 1 to 001 (switch 1 only to the OPEN position).

System control unit	Board	STATION ID switches
MKS-8010A	FP-141	S108
MKS-8010B	CA-76	S9108

4 In the Engineering Setup >System >Initialize menu, select PNL, and carry out a reset.

This carries out a restart, and when the restart is completed connection to the MKS-8080/8082 is possible.

5 In the Engineering Setup >Router/Tally >Router menu, set the position of the MVS-8000X/7000X system in S-Bus space.

Select the setting from SWR1 and SWR2, and set each of Source, Destination, and Level to 1.

Setting Status of the MKS-8080/8082 in Simple Connection

As a result of making the simple connection, the MKS-8080/8082 operates in AUX bus mode, and the settings are the following factory defaults.
With regard to the meaning of the following settings, see the section "Menu Operations" in the Operation Manual for the MKS-8080/8082.

C: SET SWITCHER ID (for AUX mode)

This is set to 001, which is the station number of the center control panel.

D: SET AUX DESTINATION/SOURCE (for AUX mode)

The source is set to IN001 and following, and destination is set to OUT001 and following.

H: SET PHANTOM TABLE (for Router mode)

This is not set, since the unit does not operate in router mode.

N: SET PANEL TABLE (for Router mode)
The source is set to IN001 and following, and destination is set to OUT001 and following. However, since the unit does not operate in router mode, these settings are not used.

R: SET ROUTE
Since when using the simple connection the switcher and router cannot be connected in cascade, no route setting is required, and this is not set.

O: SET AVAILABLE SOURCE/DESTINATION
Set the source and destination ranges so that the MVS-8000X/7000X inputs and outputs can be selected.

Y: SET DISPLAY MODES
The DISPLAY MODES/PANEL FUNCTION setting is set to NORMAL.
The TALLY GROUP setting is set to be the same as the setting in Engineering Setup >Router/Tally >Tally Group on the MVS-8000X/7000X.

Z: SET PANEL STATUS
The various settings are the same as the factory default settings.

Macro File Editing Rules

When editing a macro file, follow the rules described below.

Macro File Syntax

The macro file syntax is as follows.

File format
The file is in CSV (comma-separated value) format.

Newline code
CR (ASCII code 0D), LF (ASCII code 0A), or CRLF may be used.

Statement syntax
There are four types of statement, each terminated by a newline code.

File header: This must always appear as the first line of the file. It comprises 28 characters, as follows.
Example: PNL (space)
0001PNL_rrrr.PMRnnnnnnnn
rrrr: macro register number (0001 to 0099)
nnnnnnnn: In a file created on the switcher, this is a register name automatically set by the switcher. When creating a new file, it is recommended to set this to be the same as the file name *(see page 666)*.
The name is limited to eight characters.
The following characters may not be used.
space, \, /, :, ;, , (comma), . (period), <, >, *, ?, ", |

Comment: Begins with "#". The content of the line following the "#" up to the next newline has no effect on macro execution, and can be used as a comment.

Notes

You can only use comments in files saved to the hard disk or a memory card. When you load a macro file into a register, the comments are discarded.

Event statement: Begins with "Event?", and defines the macro event.

For details, see next item, "Syntax of Event and Continue Statements."

Continue statement: Begins with "Continue?", and defines the macro event.

For details, see next item, "Syntax of Event and Continue Statements."

Some events cannot be used *(see page 667)*.

Syntax of Event and Continue Statements

An event can be written with an Event statement only, or with an Event statement followed by any number of Continue statements. The Event statements and Continue statements have the following syntax.

Word separator character

Use "," (comma).

Ignored

Spaces and tabs are ignored. There is no distinction between lowercase and uppercase. If two or more separator characters appear consecutively, later ones are ignored. Separator characters at the beginning of a line are also ignored.

Content of line

Must begin with "Event?" or "Continue?", followed by symbols and parameters.

Event?,[symbol], [parameter], [parameter], …
Continue?,[symbol], [parameter], [parameter], …

symbol: ASCII character string showing the type of event *(see page 667)*.

parameter: Shows details of an event. Consists of parameter names and arguments, and these must appear in pairs. The number and type of parameters depends on the event *(see page 668)*.
If the same parameter appears twice or more, the last occurrence is valid.

How to use Continue statements

When a single parameter has more than one argument, use a Continue statement. The following example is of a snapshot event.

An event to recall a snapshot in region M/E-1 is written as:

Event?,Snapshot,Region?,ME1,Register?,1,Attribute?,Off,Time?,Current

In the Event statement, only one region can be specified. To specify both regions M/E-1 and DME1, use a Continue statement, thus:

Event?,Snapshot,Region?,ME1,Register?,1,Attribute?,Off,Time?,Current
Continue?,Snapshot,Region?,DME1,Register?,1,Attribute?,Off,Time?,Current

To specify more than one argument for a region parameter, follow the Event statement by a Continue statement on the next line.

File Name

Set the file name as follows.

Example: nnnnnnnn.PNL_rrrr.PMR

nnnnnnnn: In a file created on the switcher, this is a register name automatically set by the switcher.
The name is limited to eight characters.
The following characters may not be used.
space, \, /, :, ;, , (comma), . (period), <, >, *, ?, ", |


rrrr: macro register number (0001 - 0099)

Saving and Recalling a File

For a newly created file, if you create a directory on the memory card *(see figure below)*, and move the file to the prescribed location, you can then recall it in the File >All, External File menu.

Notes

When amending a file saved on the switcher, be sure to save it in the original directory.

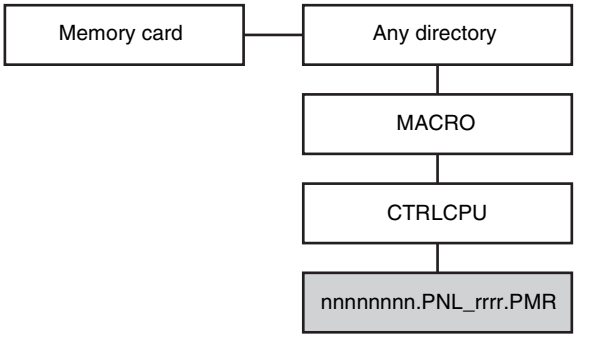

Path example: Memory Card\Sample\MACRO\CTRLCPU\nnnnnnnn.PNL_rrrr.PMR

Errors

If any of the following problems occur, it is not possible to recall the file. Attempting to recall the file will produce an error message *(see page 684)*.

- If there is a syntax error.
- If a required parameter is not present.

Correspondence Between Events and Symbols

For details of events, see "Events" (page 496).

Event	Symbol	Using Continue
Cross-point selection in the auxiliary bus control block	AuxXpt	No
Cross-point selection in the auxiliary bus control block in router control mode	RouterXpt	Yes
Cross-point selection in the cross-point control block	MEXpt	Yes
Auto transition and take in the transition execution section	MEAutoTransition	Yes
Cut in the transition execution section	MECut	No
Transition type selection	TransitionType	No
Next transition setting	NextTransition	No
Pattern limit on/off	PatternLimit	No
Fade-to-black execution	FadeToBlack	No
Auto transition and take in the independent key transition execution section	KeyAutoTransition	Yes
Key insertion and deletion in the independent key transition execution section	KeyCut	Yes
Independent key transition type selection	KeyTransitionType	No
VTR/DDR/clip start point setting	StartTc	Yes
VTR/DDR/clip playback	Play	Yes
VTR/DDR/clip stop	Stop	Yes
VTR/DDR/clip cue-up	Cue	Yes
VTR/DDR/clip fast forward	FF	Yes
VTR/DDR/clip rewind	Rewind	Yes
Disk recorder/Extended VTR file recall	DiskFileLoad	No
Recall snapshot	Snapshot	Yes
Recall key snapshot	KeySnapshot	Yes
Recall wipe snapshot	WipeSnapshot	Yes
Recall DME wipe snapshot	DMEWipeSnapshot	Yes
Recall shotbox	Shotbox	No
Recall master snapshot	MasterSnapshot	No
Recall master timeline	MasterTimelineRecall	No
Recall effect	TimelineRecall	Yes
Execute effect	TimelineRun	Yes
Rewind keyframe	TimelineRewind	Yes
Fast forward effect	TimelineFF	Yes
Effect execution direction selection (normal)	TimelineDirectionNormal	Yes
Effect execution direction selection (reverse)	TimelineDirectionReverse	Yes
Effect execution direction selection (normal/reverse on)	TimelineNormalReverseOn	Yes
Effect execution direction selection (normal/reverse off)	TimelineNormalReverseOff	Yes
Pause [a)]	Pause	No
Recall of function assigned to memory recall button/user preference button	UtilityButton	No
Recall of function assigned to the key 2 row cross-point buttons	Key Bus Utility Button	No
Frame memory clip loop on/off	FMLoop	Yes
Menu macro recall and execution	MenuMacroRun	No
Recall of frame memory clip	ClipRecall	No

Event	Symbol	Using Continue
Record with device	DeviceRecord	Yes
AUX mix transition on/off	AuxMix	No

a) For details of pause events, see *"Macro Execution" (page 498)*.

Symbols and Parameters

n: indicates a numeral 0 to 9.

x: indicates an alphanumeric character.

Symbol	Parameter name	Arguments	Description
MEXpt	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	MEBus?	A, B, Key1 to Key8, Key1Source to Key8Source, Utility1, Utility2, DMEExternalVideo	Applicable bus
	Xpt?	1 to 300	Main table cross-point button number set in the Xpt Assign menu
	VideoKey?	Video, Key	Signal type selected on the applicable bus (video signal or key signal)
AuxXpt	AuxBus?	EditPreview, AUX1 to AUX48, FrameMemory1, FrameMemory2, DME1Video to DME8Video, DME1Key to DME8Key, DME1Video2nd to DME8Video2nd (a), DME1Key2nd to DME8Key2nd (b), DMEUtility1, DMEUtility2, CCR1, CCR2	Applicable AUX bus (a): DMEnVideo2nd= Bus for selecting back video signal of DMEn channel (n=1 to 8), (b): DMEnKey2nd= Bus for selecting back key signal of DMEn channel (n=1 to 8)
	Xpt?	1 to 300	Cross-point button number in the main table set in the Xpt Assign menu
	VideoKey?	Video, Key	Type of signal (video signal or key signal) to be selected on the applicable bus
MEAutoTransition	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Time?	Current (a), 0 to 999	Transition rate (number of frames) (a): Mode in which the current value set on the transition control block is used
	ABusXpt?	Current (a), 1 to 300	A bus or B bus cross-point button number. Use the button number of the main table set in the Xpt Assign menu. (a): Mode in which the cross-point number set for the current A bus or B bus is used
	BBusXpt?	Current (a), 1 to 300	
MECut	ME?	ME1 to ME5, PP	Control blocks on the applicable bank

Symbol	Parameter name	Arguments	Description
KeyAutoTransition	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Key?	Key1 to Key8	Key of the applicable independent key transition control block
	Time?	Current (a), 0 to 999	Transition rate (number of frames) (a): Mode in which the current value set on the independent key transition control block is used
	Direction?	ToOn (a), ToOff (b), Any (c)	Transition execution mode (a): Key is inserted (b): Key is deleted (c): Transition is always executed
KeyCut	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Key?	Key1 to Key8	Key of the applicable independent key transition control block
	Direction?	ToOn (a), ToOff (b), Any (c)	Transition execution mode (a): Key is inserted (b): Key is deleted (c): Transition is always executed
Play	Device?	1 to 12, FrameMemory1Clip to FrameMemory8Clip	Applicable device
	Mode?	Normal (a), Recue (b), Loop (c)	Playback mode (a): Normal mode As for Frame Memory 1 Clip to Frame Memory 8 Clip, settings are ignored and operation mode is fixed to “Normal.” (b): Recue mode (c): Loop mode
Cue	Device?	1 to 12, FrameMemory1Clip to FrameMemory8Clip	Applicable device
	Timecode?	Current (a), hh:mm:ss:ff	Start point timecode hh=hours (00 to 23) As for Frame Memory 1 Clip to Frame Memory 8 Clip, hh is fixed to “01.” mm=minutes (00 to 59) ss=seconds (00 to 59) ff=frames (00 to 29) (a): Mode in which the currently set timecode is used
Stop	Device?	1 to 12, FrameMemory1Clip to FrameMemory8Clip	Applicable device
FF	Device?	1 to 12, FrameMemory1Clip to FrameMemory8Clip	Applicable device
Rewind	Device?	1 to 12, FrameMemory1Clip to FrameMemory8Clip	Applicable device
DiskFileLoad	Device?	1 to 12	Applicable device
	FileName?	File Name	Name of file being set (max. 23 characters)

Symbol	Parameter name	Arguments	Description
Snapshot	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, Router	Applicable region
	Register?	1 to 99	Applicable register number
	Attribute?	Off, Dissolve, AutoTransition, Dissolve&AutoTransition	Applicable snapshot attributes
	Time?	Current (a), 0 to 999	Duration of effect dissolve (number of frames) (a): Mode in which the currently set value is used
KeySnapshot	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Key?	Key1 to Key8	Applicable key
	Register?	1 to 4	Applicable register number
WipeSnapshot	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Register?	1 to 10	Applicable register number
DMEWipeSnapshot	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Register?	1 to 10	Applicable register number
TimelineRecall	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI	Applicable region
	Register?	1 to 399	Applicable register number
TimelineRun	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI, Current (a)	Applicable region (a): Mode in which operation takes place in the region currently specified in the numeric keypad control block
TimelineRewind	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI, Current (a)	Applicable region (a): Mode in which operation takes place in the region currently specified in the numeric keypad control block
TimelineFF	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI, Current (a)	Applicable region (a): Mode in which operation takes place in the region currently specified in the numeric keypad control block
Shotbox	Register?	1 to 99	Applicable register number
Pause	Time?	0 to 999	Time for which macro is paused (number of frames)
StartTc	Device?	1 to 12, FrameMemory1Clip to FrameMemory8Clip	Applicable device
MasterSnapshot	Register?	1 to 99	Applicable register number
MasterTimelineRecall	Register?	1 to 99	Applicable register number
RouterXpt	DestinationButton?	1 to 128	Router cross-point button
	Source?	1 to 1024	Router source number
	Level?	1 to 8	Router level selection
PatternLimit	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Status?	ToOn (a), ToOff (b), Any (c)	Pattern limit status (a): Pattern limit applies (b): Pattern limit does not apply (c): The pattern limit status always changes

Symbol	Parameter name	Arguments	Description
TransitionType	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	TransitionType?	Mix, NAM, SuperMix, PresetColorMix, Wipe, DMEWipe, FM1&2Clip, FM3&4Clip, FM5&6Clip, FM7&8Clip	Transition type
KeyTransitionType	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	Key?	Key1 to Key8	Key of the applicable independent key transition control block
	Direction?	On (a), Off (b), Any (c)	Independent key transition execution mode (a): Key is inserted (b): Key is deleted (c): Transition is always executed
	KeyTransitionType?	Mix, Wipe, DMEWipe, Cut	Transition type of the independent key transition control block
NextTransition	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	All?	On, Off	Applicable next transition
	KeyPriority?	On, Off	Applicable next transition
	BKGD?	On, Off	Applicable next transition
	Key1? to Key8?	On, Off	Applicable next transition
FadeToBlack	Time?	Current (a), 1 to 999	Transition rate (number of frames) (a): Mode in which the current value set for fade to black is used
TimelineDirectionNormal	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI, Current (a)	Applicable region (a): Mode in which operation takes place in the region currently specified in the numeric keypad control block
TimelineDirectionReverse	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI, Current (a)	Applicable region (a): Mode in which operation takes place in the region currently specified in the numeric keypad control block
TimelineNormalReverseOn	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI, Current (a)	Applicable region (a): Mode in which operation takes place in the region currently specified in the numeric keypad control block
TimelineNormalReverseOff	Region?	ME1 to ME5, PP, User1 to User8, DME1 to DME8, PBus, Device1 to Device12, GPI, Current (a)	Applicable region (a): Mode in which operation takes place in the region currently specified in the numeric keypad control block
UtilityButton	UtilityModule?	UserPrefs, UtilityBox	Applicable control block
	Button?	1 to 96	Applicable button
	UtilityStatus?	On, Off, Current (a)	Status of function assigned to button (a): Operates according to currently assigned function
FMLoop	Device?	FrameMemory1Clip to FrameMemory8Clip	Applicable clip
	FMLoopMode?	On (a), Off (b)	Frame memory clip loop on/off (a): Loop is enabled (b): Loop is disabled
MenuMacroRun	Register?	1 to 99	Applicable register number

Symbol	Parameter name	Arguments	Description
KeyBusUtilityButton	ME?	ME1 to ME5, PP	Control blocks on the applicable bank
	BANK?	Bank1 to Bank5	Applicable bank
	KeyBusUtilityButton?	1 to 32	Applicable button
	UtilityStatus?	On, Off, Current (a)	Status of function assigned to button (a): Operates according to currently assigned function
ClipRecall	Device?	FrameMemory1Clip to FrameMemory8Clip	Applicable clip
	ClipType?	Pair, Single	File type of clip (pair/single)
	Clip?	Clip Name	Name of clip (up to four characters)
Device Record	Device?	1 to 12	Applicable device
AuxMix	AuxMixBus	Aux1, Aux3, Aux5, to Aux47	Target AUX bus (odd-numbered bus)
	AuxMixStatus	On, Off	AUX mix transition on/off

Example of File Contents

Line	Content	Description
1	PNL 0001PNL_0000.PMRMACROREG	File header
2	#,Sample,	Comment
3	Event?,Snapshot,Region?,ME1,Register?,1,Attribute?,Off,Time?,Current	Simultaneously recall snapshots from register number 1 in the M/E-1 and DME1 regions.
4	Continue?,Snapshot,Region?,DME1,Register?,1,Attribute?,Off,Time?,Current	
5	Event?,MEXpt,ME?,ME2,MEBus?,A,Xpt?,121,VideoKey?,Video	Select button number 121 on the M/E-2 A bus.

About the Macro Attachment List Display

The Button column in the macro attachment list displayed in the status area of the Macro >Attachment menu screen shows character strings which identify macro attachment assigned buttons. Each of these character strings is in fact a combination of characters shown in the Button (1), Button (2), and Button (3) columns in the following tables. For example, if Block and Button (1) to Button (3) are combined as:
Block: P/P XPT
Button(1): UTIL1 Bus
Button(2): V
Button(3): XPT2
The Button column in the macro attachment list in the Macro >Attachment menu screen shows "UTIL1 Bus V XPT2," which means "utility 1 bus, video signal, cross-point number 2."

M/E and PGM/PST Banks

The following table shows only the macro attachment assignable buttons in the PGM/PST bank.
For the M/E-1 (M/E-2 to M/E-5) bank, "P/P" in the Block Select and Block columns changes to "M/E-1" ("M/E-2" to "M/E-5") and "DSK" in the Button (1) and Button (2) columns changes to "KEY." The contents of the Button (3) column do not change.

Block Select: P/P, Block: P/P XPT

Button (1)	Button (2)	Button (3)
A Bus B Bus DSK1 Bus : DSK8 Bus	(nothing) Shift	XPT 1 : XPT 128 M/E 1 M/E 2 M/E 3 P/P
DSK1 Src Bus : DSK8 Src Bus	V K V Shift K Shift	
Sub A Bus Sub B Bus Sub DSK1 Bus : Sub DSK8 Bus Main&Sub A Bus Main&Sub B Bus Main&Sub DSK1 Bus : Main&Sub DSK8 Bus	(nothing) Shift	
Sub DSK1 Src Bus : Sub DSK8 Src Bus Main&Sub DSK1 Src Bus : Main&Sub DSK8 Src Bus	V K V Shift K Shift	
UTIL1 Bus UTIL2 Bus EXT DME Bus DMEUtility1 DMEUtility2 Sub UTIL1 Bus Sub UTIL2 Bus Sub EXT DME Bus Main&Sub UTIL1 Bus Main&Sub UTIL2 Bus Main&Sub EXT DME Bus	V K V Shift K Shift	
Dual A Bus Dual B Bus Sub Dual A Bus Sub Dual B Bus Main&Sub Dual A Bus Main&Sub Dual B Bus	V Shift	
Utility/Shotbox Sub Utility/Shotbox Main&Sub Utility/Shotbox	Bank 1-1 : Bank 1-32 Bank 2-1 : Bank 2-32 Bank 3-1 : Bank 3-32 Bank 4-1 : Bank 4-32 Bank 5-1 : Bank 5-32	(nothing)

Block Select: P/P, Block: P/P Trans

Button (1)	Button (2)	Button (3)
(blank) DSK1 : DSK8 Sub Sub DSK1 : Sub DSK8 Main&Sub Main&Sub DSK1 : Main&Sub DSK8	MIX a) NAM a) SUPER MIX a) PST COLOR MIX a) WIPE a) DME a) TAKE b) DSK_ON c) AUTO TRANS d) CUT d) ALL a) d) KEY PRIOR a) d) BKGD a) d) DSK1 a) d) : DSK4 a) d) NORM a) d) NORM/REV a) d) REV a) d) PTN LIMIT a) c) LIMIT SET a) c) KF a) c) PTN LIMIT b) Fader PRIOR SET a) c) TRANS PVW a) c) K-SS c) e) K-SS STORE c) e) K-MOD ENBL c) e) K-TR ENBL c) e) DSK1 c) e) : DSK4 c) e)	(nothing)

a) These buttons can be assigned with their functions in the setup menu. They can be assigned with any of the following functions: transition type selection (MIX, NAM, SUPER MIX, PST COLOR MIX, WIPE, DME, FM1&2, FM3&4, FM5&6, FM7&8), next transition selection (BKGD, DSK1 to DSK8, PRIOR, ALL), wipe direction selection (NORM, NORM/REV, REV), PLAY, CUE, STOP, and PTN LIMIT.
b) For the simple type transition control block.
c) For the standard type transition control block.
d) For the standard type or compact type transition control block.
e) These buttons can be assigned with their functions in the setup menu. Thy can be assigned with any of: MIX, WIPE, and DME.

Block Select: P/P, Block: P/P Key Trans

Button (1)	Button (2)	Button (3)
DSK1 : DSK8 Sub DSK1 : Sub DSK8 Main&Sub DSK1 : Main&Sub DSK8	MIX WIPE DME CUT TAKE DSK_ON	(nothing)

Auxiliary Bus Control Block

Block Select: Aux, Block: AUX-1, AUX-2

Button (1)	Button (2)	Button (3)
EDIT PVW AUX 1 : AUX 48 FM1 FM2	V K V Shift K Shift V 2nd Row K 2nd Row V 2nd Row Shift K 2nd Row Shift	XPT 1 : XPT 128 M/E 1 M/E 2 M/E 3 P/P
DME1V : DME8V DME1K : DME8K	(nothing) Shift 2nd Row 2nd Row Shift	
DMEUtility1 DMEUtility2	V K V Shift K Shift V 2nd Row K 2nd Row V 2nd Row Shift K 2nd Row Shift	
DME1V2nd : DME8V2nd DME1K2nd : DME8K2nd	(nothing) Shift 2nd Row 2nd Row Shift	
CCR1 CCR2 P/P UTIL1 P/P UTIL2 M/E-1 UTIL1 M/E-1 UTIL2 M/E-2 UTIL1 M/E-2 UTIL2 M/E-3 UTIL1 M/E-3 UTIL2 M/E-4 UTIL1 M/E-4 UTIL2 M/E-5 UTIL1 M/E-5 UTIL2	V K V Shift K Shift V 2nd Row K 2nd Row V 2nd Row Shift K 2nd Row Shift	

Button (1)	Button (2)	Button (3)
DSK1 : DSK8 M/E-1 KEY1 : M/E-1 KEY8 M/E-2 KEY1 : M/E-2 KEY8 M/E-3 KEY1 : M/E-3 KEY8 M/E-4 KEY1 : M/E-4 KEY8 M/E-5 KEY1 : M/E-5 KEY8	(nothing) Shift 2nd Row 2nd Row Shift	XPT 1 : XPT 128 M/E 1 M/E 2 M/E 3 P/P
DSK1 Src : DSK8 Src M/E-1 KEY1 Src : M/E-1 KEY8 Src M/E-2 KEY1 Src : M/E-2 KEY8 Src M/E-3 KEY1 Src : M/E-3 KEY8 Src M/E-4 KEY1 Src : M/E-4 KEY8 Src M/E-5 KEY1 Src : M/E-5 KEY8 Src P/P EXT DME M/E-1 EXT DME M/E-2 EXT DME M/E-3 EXT DME M/E-4 EXT DME M/E-5 EXT DME	V K V Shift K Shift V 2nd Row K 2nd Row V 2nd Row Shift K 2nd Row Shift	

Other Blocks

Block Select: Others, Block: Keyframe

Button (1)	Button (2)	Button (3)
RUN REWIND FF NORM REV NORM/REV	(nothing)	(nothing)

Block Select: Others, Block: Multi Function Flexi Pad [a)]

Button (1)	Button (2)	Button (3)
DSK1 : DSK8 M/E-1 KEY1 : M/E-1 KEY8 M/E-2 KEY1 : M/E-2 KEY8 M/E-3 KEY1 : M/E-3 KEY8 M/E-4 KEY1 : M/E-4 KEY8 M/E-5 KEY1 : M/E-5 KEY8 Sub DSK1 : Sub DSK8 M/E-1 Sub KEY1 : M/E-1 Sub KEY8 M/E-2 Sub KEY1 : M/E-2 Sub KEY8 M/E-3 Sub KEY1 : M/E-3 Sub KEY8 M/E-4 Sub KEY1 : M/E-4 Sub KEY8 M/E-5 Sub KEY1 : M/E-5 Sub KEY8	AUTO TRANS KEY_ON	(nothing)
EFF	RUN REWIND NORM REV NORM/REV	

a) The Multifunction Flexi Pad control block appears as “10KeyPad.”

Block Select: Others, Block: Joystick, Trackball

Button (1)	Button (2)	Button (3)
DEV	CLR WORK BUFR (CUEUP) Y (PLAY) TRGT (STOP) AXIS LOC (START TC)	(nothing)

Block Select: Others, Block: Device Control

Button (1)	Button (2)	Button (3)
(nothing)	CUEUP PLAY STOP START TC	(nothing)

Block Select: Others, Block: Utility Box 1, Utility Box 2, Menu

Button (1)	Button (2)	Button (3)
Utility 1 : Utility 96	(nothing)	(nothing)

Block Select: Others, Block: DSK/FTB

Button (1)	Button (2)	Button (3)
Key1 Key2	AUTO TRANS KEY_ON FTB	(nothing)

Block Select: Others, Block: FTB

Button (1)	Button (2)	Button (3)
(blank)	FTB	(nothing)

Block Select: Others, Block: DSK Fader 1 to DSK Fader 4

Button (1)	Button (2)	Button (3)
P/P M/E1 M/E2 M/E3 M/E4 M/E5	KEY1 : KEY8	MIX WIPE DME CUT TAKE KEY_ON

Menu Operations Not Recorded in a Menu Macro

The menu operations not recorded in a menu macro comprise some operations common to all menus and some operations inhibited in individual menus.

Operations not recorded in menu macros, common to all menus

- Recalling a menu
- Delegation operations: region selection, channel delegation, operations assigning a parameter to a knob, and so forth
- Parameter setting operations using the knobs, trackball, or joystick (value input operations from the numeric keypad are recorded)

Operations not recorded in menu macros, in individual menus

Menu number	Menu including operations not recorded
0011 to 0023	All menus under Home
2541	Frame Memory >File >Pair Recombination
2542	Frame Memory >File >Auto Extraction
2544	Frame Memory >File >Move
2545	Frame Memory >File >Delete
2546	Frame Memory >File >Rename
2551	Frame Memory >File >Folder
2561	Frame Memory >External Device >Ext HDD Format
2562	Frame Memory >External Device >Ext HDD Backup/Restore
5333	Device >DDR/VTR >File List
5412 to 5441	All menus under Macro
7111 to 7173	All menus under File
7311 to 7317	All menus under Engineering Setup >System
7327	Engineering Setup >Panel >Maintenance

Data Saved by [Setup Define] and [Initial Status Define]

This section lists the data saved in the Engineering Setup >System >Start Up menu, by each of [Setup Define] and [Initial Status Define].

Data Saved by [Setup Define]

Included in Panel Setup

Menu number	Menu path	Saved data
0022	Home >Favorites >Group Edit	All data relating to Group Edit menu
0023	Home >Favorites >Button Edit	All data relating to Button Edit menu
7321	Engineering Setup >Panel >Config	All data relating to Config menu
7321.1	Engineering Setup >Panel >Config >DSK Fader Assign	All data relating to DSK Fader Assign menu
7321.2	Engineering Setup >Panel >Config >Link/Program Button >Key Trans Link	All data relating to Key Trans Link menu
7321.3	Engineering Setup >Panel >Config >Link/Program Button >External Bus Link	All data relating to External Bus Link menu
7321.7	Engineering Setup >Panel >Config >10 Key Region Assign	All data relating to 10 Key Region Assign menu
7321.8	Engineering Setup >Panel >Config >Link/Program Button	All data relating to Link/Program Button menu
7321.11	Engineering Setup >Panel >Config >MP2 Main/Sub Assign	All data relating to MP2 Main/Sub Assign menu
7321.15	Engineering Setup >Panel >Config >Compact Key Module Assign	All data relating to Compact Key Module Assign menu
7321.26	Engineering Setup >Panel >Config >M/E Operation Inhibit	All data relating to M/E Operation Inhibit menu
7321.31	Engineering Setup >Panel >Config >JS/TB User Setting	All data relating to JS/TB User Setting menu
7322	Engineering Setup >Panel >Xpt Assign	Data relating to Table assignments for each bus [Audio Follow] setting
7322.1	Engineering Setup >Panel >Xpt Assign >Table Button Assign	All data relating to Table Button Assign menu
7322.5	Engineering Setup >Panel >Xpt Assign >Main, V/K Pair Assign	<Xpt Shift Mode> And <Display Shift Mode> Group Data
7322.10	Engineering Setup >Panel >Side Flags Button Assign	All data relating to Side Flags Button Assign menu
7322.11	Engineering Setup >Panel >Xpt Assign >Mixer Xpt Assign	All data relating to Mixer Xpt Assign menu
7323	Engineering Setup >Panel >Aux Assign	Data relating to bus assignment to AUX delegation buttons
7323.1	Engineering Setup >Panel >Aux Assign >RTR Mode Setting	All data relating to RTR Mode Setting menu
7324	Engineering Setup >Panel >Prefs/Utility	All data relating to function assignment to user preference buttons

Menu number	Menu path	Saved data
7324.1	Engineering Setup >Panel >Prefs/Utility >Utility Module Assign	All data relating to function assignment to utility/ shotbox control block
7324.2	Engineering Setup >Panel >Prefs/Utility >Key 2/4 Bus Button Assign	All data relating to utility/shotbox assignment to cross-point buttons in the key 2 row
7325	Engineering Setup >Panel >Device Interface	All data relating to Device Interface menu
7325.1	Engineering Setup >Panel >Device Interface >GPI Input	All data relating to GPI Input menu
7325.3	Engineering Setup >Panel >Device Interface >GPI Output	All data relating to GPI Output menu
7325.4	Engineering Setup >Panel >Device Interface >DCU Serial Port/MPE Assign	All data relating to DCU Serial Port/MPE Assign menu
7326	Engineering Setup >Panel >Operation	All data relating to Operation menu
7326.2	Engineering Setup >Panel >Operation >Effect Mode	All data relating to Effect Mode menu (excluding [Default KF Duration] setting values)
7326.3	Engineering Setup >Panel >Operation >Flexi Pad Mode	All data relating to Flexi Pad Mode menu
7326.4	Engineering Setup >Panel >Operation >Custom Button	All data relating to Custom Button menu
7326.5	Engineering Setup >Panel >Operation >Sensitivity	All data relating to Sensitivity menu
7326.6	Engineering Setup >Panel >Operation >Macro	All data relating to Macro menu
7326.9	Engineering Setup >Panel >Operation >ButtonTally	All data relating to ButtonTally menu
7326.12	Engineering Setup >Panel >Operation >Key Row Operation	All data relating to Key Row Operation menu
7327	Engineering Setup >Panel >Maintenance	• Setting data for the following buttons: - [Screen Saver] - [LCD Brightness] - [LED Brightness] - [Switch Brightness] - [Touch Beep] • Setting data for Initial Menu
7351 to 7355	Engineering Setup >DCU	All data relating to DCU
7361 to 7367	Engineering Setup >Router/Tally	All data relating to router interface and tally interface
7371 to 7373	Engineering Setup >MPE	All data relating to MPE
—	—	Data of Color Palette window

Included in Switcher Setup

Menu number	Menu path	Saved data
3221	Misc >Safe Title	All data relating to Safe Title menu
7322.5	Engineering Setup >Panel >Xpt Assign >Main, V/K Pair Assign	Cross-point assignment settings (excluding <Xpt Shift Mode> and <Display Shift Mode> groups)
7322.6	Engineering Setup >Panel >Xpt Assign >Src Name/ LCD Color	• Names of source signals • Color of source name display for each source signal
7326.2	Engineering Setup >Panel >Operation >Effect Mode	Setting of [Default KF Duration] for switcher keyframes
7331 7331.1 7331.2 7331.3	• Engineering Setup >Switcher >Config • Engineering Setup >Switcher >Config >M/E Output Assign • Engineering Setup >Switcher >Config >PGM Config • Engineering Setup >Switcher >Config >K-PVW Config	• All data relating to Config menu • All data relating to M/E Output Assign menu • All data relating to PGM Config menu • All data relating to K-PVW Config menu

Menu number	Menu path	Saved data
7331.4	Engineering Setup >Switcher >Config >User1-8 Config	All data relating to User1-8 Config menu
7331.5	Engineering Setup >Switcher >Config >Logical M/E Assign	All data relating to Logical M/E Assign menu
7331.6	Engineering Setup >Switcher >Config >DME Config	All data relating to DME Config menu
7331.7	Engineering Setup >Switcher >Config >Side Flags	All data relating to Side Flags menu
7331.8	Engineering Setup >Switcher >Config >Switch Timing	All data relating to Switch Timing menu
7331.9	Engineering Setup >Switcher >Config >3D Config	All data relating to 3D Config menu
7332	Engineering Setup >Switcher >Input	All data relating to Input menu
7332.1	Engineering Setup >Switcher >Input >Video Process	All data relating to Video Process menu
7332.2	Engineering Setup >Switcher >Input >FC Adjust	All data relating to FC Adjust menu
7332.3	Engineering Setup >Switcher >Input >FC Input Select	All data relating to FC Input Select menu
7333.1	Engineering Setup >Switcher >Output >Output Assign	All data relating to Output Assign menu
7333.2	Engineering Setup >Switcher >Output >Video Clip	All data relating to Video Clip menu
7333.3	Engineering Setup >Switcher >Output >V Blank/ Through	Setting of [V Blank Mask], and [Through Mode] setting data for each output
7333.4	Engineering Setup >Switcher >Output >Safe Title	All data relating to Safe Title menu
7333.5	Engineering Setup >Switcher >Output >4:3 Crop	All data relating to 4:3 Crop menu
7333.6	Engineering Setup >Switcher >Output >FC Adjust	All data relating to FC Adjust menu
7333.9	Engineering Setup >Switcher >Output >Multi Viewer	All data relating to Multi Viewer menu
7333.12	Engineering Setup >Switcher >Output >Aux Mix	All data relating to AUX Mix menu
7334	Engineering Setup >Switcher >Transition	All data relating to Transition menu
7334.1	Engineering Setup >Switcher >Transition >Preset Color Mix	All data relating to Preset Color Mix menu
7334.2	Engineering Setup >Switcher >Transition >Transition Curve	Setting data for <Fader Curve> group
7335	Engineering Setup >Switcher >Key/Wipe/FM/CCR	All data relating to Key/Wipe/FM/CCR menu
7335.1	Engineering Setup >Switcher >Key/Wipe/FM/CCR >Show Key	All data relating to Show Key menu
7335.2	Engineering Setup >Switcher >Key/Wipe/FM/CCR >Key Auto Drop	All data relating to Key Auto Drop menu
7336.1	Engineering Setup >Switcher >Link >Internal Bus Link	All data relating to Internal Bus Link menu
7336.4	Engineering Setup >Switcher >Link >GPI Link	All data relating to GPI Link menu
7336.6	Engineering Setup >Switcher >Link >M/E Link	All data relating to M/E Link menu
7336.7	Engineering Setup >Switcher >Link >Key Transition Link	All data relating to Key Transition Link menu
7337.1	Engineering Setup >Switcher >Device Interface >Remote Assign	All data relating to Remote Assign menu
7337.2	Engineering Setup >Switcher >Device Interface >GPI Input	All data relating to GPI Input menu
7337.4	Engineering Setup >Switcher >Device Interface >GPI Output	All data relating to GPI Output menu
7337.5	Engineering Setup >Switcher >Device Interface >AUX Control	All data relating to AUX Control menu
7337.6	Engineering Setup >Switcher >Device Interface >DME Type Setting	All data relating to DME Type Setting menu

Menu number	Menu path	Saved data
7337.8	Engineering Setup >Switcher >Device Interface >Editor I/F	All data relating to Editor I/F menu

Included in DME Setup

Menu number	Menu path	Saved data
7326.2	Engineering Setup >Panel >Operation >Effect Mode	• Settings relating to [Default KF Duration] for DME keyframes • Setting data for [Effect Auto Save]
7341	Engineering Setup >DME >Input	All data relating to Input menu
7343.1	Engineering Setup >DME >Output >Monitor Output	All data relating to Monitor Output menu
7344	Engineering Setup >DME >Device Interface	All data relating to Device Interface menu
7344.1	Engineering Setup >DME >Device Interface >DME1 GPI Input	All data relating to DME1 GPI Input menu
7344.3	Engineering Setup >DME >Device Interface >DME1 GPI Output	All settings relating to DME1 GPI Output menu
7344.4	Engineering Setup >DME >Device Interface >DME2 GPI Input	All settings relating to DME2 GPI Input menu
7344.6	Engineering Setup >DME >Device Interface >DME2 GPI Output	All settings relating to DME2 GPI Output menu

Data Saved by [Initial Status Define]

Included in Panel

Menu number	Menu path	Saved data
—	—	Setting data and LCD displays for the following panel buttons • Key Control Block: Delegation buttons, [AUTO DELEG] • Numeric Keypad Control Block: Mode selection buttons, [TC], [RCALL], [STORE] • Menu Control Block: User preference buttons assigned for Plug-in Editor Enbl and System Manager Enbl functions • [SUB MENU SITE] • Utility/Shotbox Control Block: [BANK1] to [BANK4], memory recall button • Downstream Key Control Block: [DSK1] to [DSK4], [K-SS], key source name display/key snapshot buttons • Device Control Block: [RSZR], [ASP], [LOC] • Cross-Point Control Block: [KEY3], [KEY4], Delegation buttons for bus assigned to key 1 row, [DSPLY], [DEST], [KEY], [SHIFT], [UTIL], [MCRO ATTCH ENBL], [DUAL BKGD BUS], [UTIL/SBOX] • Keyframe Control Block: [EDIT ENBL] • Auxiliary Bus Control Block: Bus delegation buttons, [SHIFT], [DEST], [2ND], [KEY], [RTR], [LEVEL1] to [LEVEL4] • Transition Control Block (standard type): [SHIFT], [ADD], [KEY1] to [KEY8], [K-MOD ENBL], [K-TR ENBL], [K-SS], key source name display/key snapshot buttons • Flexi Pad Control Block: [WIPE], [DME], [SNAPSHOT], [EFF], [SHOTBOX], [MCRO], [TRANS RATE], [BANK0], [BANK1], memory recall buttons • Transition Control Block and Flexi Pad Control Block (simple type): [WIPE], [DME], [SNAPSHOT], [INH], memory recall section • Independent Key Transition Control Block (simple type): [K-SS], [K-SS3/4], [KEY1] to [KEY8], key source name display/key snapshot buttons • Downstream Key/Fade-to-Black Control Block: [DSK1], [DSK2], [K-SS], key source name display/key snapshot buttons, Edit PVW Shift ON/OFF • Multifunction Flexi Pad Control Block: [WIPE], [DME WIPE], [SNAPSHOT], [EFF], [SHOTBOX], [MCRO], [TRANS RATE], [KEY ADJ], [KEY SS], memory recall buttons
3211	Misc >Enable >Port Enable	Setting of [System Manager]
3212	Misc >Enable >Plug-In Editor	All data relating to Plug-In Editor menu
6351	Snapshot >Key Snapshot >Attribute	Settings of <Recall Mode> group

Included in Switcher (Same as data saved in Snapshots)

Notes

In Multi Program 2 mode, M/E Config settings are saved in a snapshot when [Recall M/E Config] is set to ON, but are not saved by [Initial Status Define].

Menu number	Menu path	Saved data
—	—	• For each M/E, setting data relating to the following: cross-points, transitions, Key1 to Key8 (including settings in the independent key transition control block), wipes, DME wipes, video processing • Color backgrounds 1/2 • Frame memory • AUX bus (including video processing and AUX mix transition settings)
3211	Misc >Enable >Port Enable	Setting data for <Switcher> group
3213	Misc >Enable >Side Flags	All data relating to Side Flags menu

Included in DME

Menu number	Menu path	Saved data
3211	Misc >Enable >Port Enable	<DME1> and <DME2> group data
4100	DME >Status	Three-dimensional transformation data
4111	DME >Edge >Border/Crop	All data relating to Border/Crop menu
4112	DME >Edge >Beveled Edge	All data relating to Beveled Edge menu
4121 to 4124	DME >Video Modify	All data relating to Video Modify menu
4131	DME >Freeze >Freeze	All data relating to Freeze menu
4141 (4141.1 to 4141.28)	DME >Non Linear/Corner Pin >Non Linear	All data relating to Non Linear menu
4151	DME >Light/Trail >Lighting	All data relating to Lighting menu
4152	DME >Light/Trail >Trail	All data relating to Trail menu
4153	DME >Light/Trail >Motion Decay	All data relating to Motion Decay menu
4154	DME >Light/Trail >KF Strobe	All data relating to KF Strobe menu
4161	DME >Input/Output >Bkgd	All data relating to Bkgd menu
4162	DME >Input/Output >Video/Key	All data relating to Video/Key menu
4163	DME >Input/Output >Process	All data relating to Process menu
4164	DME >Input/Output >Graphic	All data relating to Graphic menu
4211, 4221	Global Effect >Ch1-Ch4 >Combine Priority Global Effect >Ch5-Ch8 >Combine Priority	All data relating to Combine Priority menu
4212, 4222	Global Effect >Ch1-Ch4 >Brick Global Effect >Ch5-Ch8 >Brick	All data relating to Brick menu
4213, 4223	Global Effect >Ch1-Ch4 >Shadow Global Effect >Ch5-Ch8 >Shadow	All data relating to Shadow menu
4113	DME >Edge >Key Border	All data relating to Key Border menu
4114	DME >Edge >Art Edge	All data relating to Art Edge menu
4115	DME >Edge >Flex Shadow	All data relating to Flex Shadow menu
4116	DME >Edge >Wipe Crop	All data relating to Wipe Crop menu
4117	DME >Edge >Color Mix	All data relating to Color Mix menu
4127	DME >Video Modify >Mask	All data relating to Mask menu
4155	DME >Light/Trail >Wind	All data relating to Wind menu


Menu number	Menu path	Saved data
4156	DME >Light/Trail >Spot Lighting	All data relating to Spot Lighting menu
4171	DME >Enhanced Video Modify >Sketch	All data relating to Sketch menu
4172	DME >Enhanced Video Modify >Metal	All data relating to Metal menu
4173	DME >Enhanced Video Modify >Dim & Fade	All data relating to Dim & Fade menu
4174	DME >Enhanced Video Modify >Glow	All data relating to Glow menu

Error Messages

Error messages appear in the following three formats.
- A list display in the Error Status menu (7411)/Error Log menu (7412)
- Message boxes
- List based on the Error Information menu (9900)

Error Messages Displayed in the Error Status/Error Log Menu

When an error occurs, the word “ERROR” appears in red on the menu title button.
When “ERROR” is displayed, pressing the menu title button displays the Error Status menu or Error Log menu.
When an error is current effective: the Error Status menu appears *(see page 684)*.
When an error has already been cleared: the Error Log menu appears *(see page 684)*.

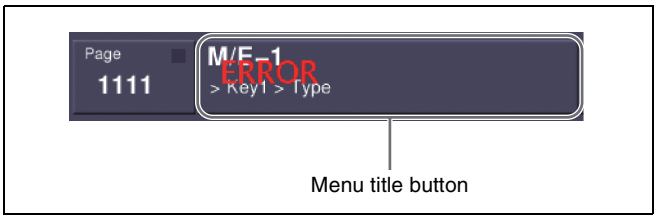

You can select whether or not to indicate the occurrence of an error by the word “ERROR” shown on the menu title button, by setting [Error Popup] in the Error Status menu or Error Log menu.

To display the error status or error log regardless of whether there is currently an error

1 Carry out either of the following.

- Press the [DIAG] button of the top menu selection buttons.
- Press the menu page number button at the upper left of the menu screen, to display the top menu window, then enter 7411 or 7412, and press [Enter].

The Diagnostic menu appears.

2 Press VF1 ‘Error Info.’


The error information menu appears.

3 Press either of the following buttons.

HF1 ‘Error Status’: display the Error Status menu
HF2 ‘Error Log’: display the Error Log menu

Error Status menu

The Error Status menu lists currently occurring error information, listed with the most recent information at the top.
When an error has been cleared, the error disappears from the list.

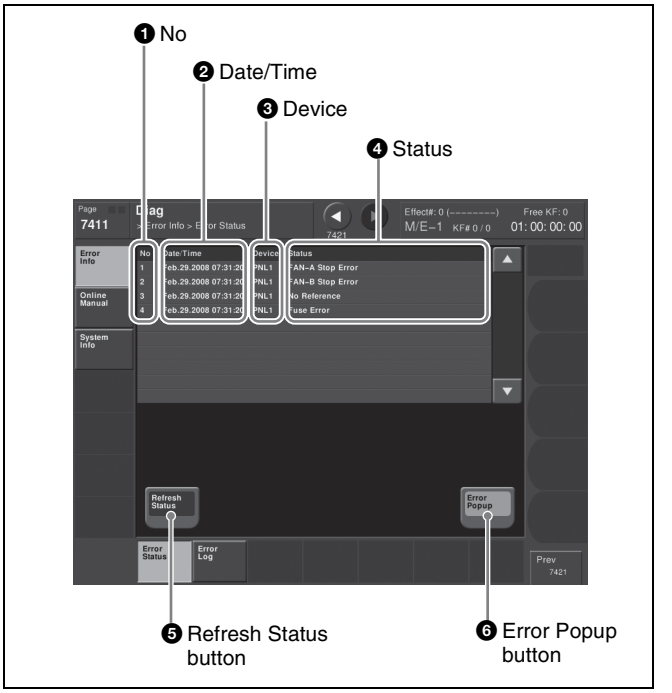

❶ No
This is a sequential number assigned to the error status.

❷ Date/Time
This shows the date and time the error occurred.

❸ Device
This shows the device on which the error occurred.

❹ Status
This shows the details of the error.


❺ Refresh Status button
This refreshes the list display.

❻ Error Popup button
This selects whether or not to display “ERROR” on the menu title button when an error occurs. This button is linked to [Error Popup] in the error log menu.
On: if a device error occurs, display “ERROR” on the menu title button.
Off: if a device error occurs, do not display “ERROR” on the menu title button.

Error Log menu

The Error Log menu lists changes in the error status from the time that the menu display in the menu operating

section is started up, listed with the most recent information at the top.
A maximum of 1024 error status changes appear, and when the number exceeds 1024, the oldest items disappear from the list.

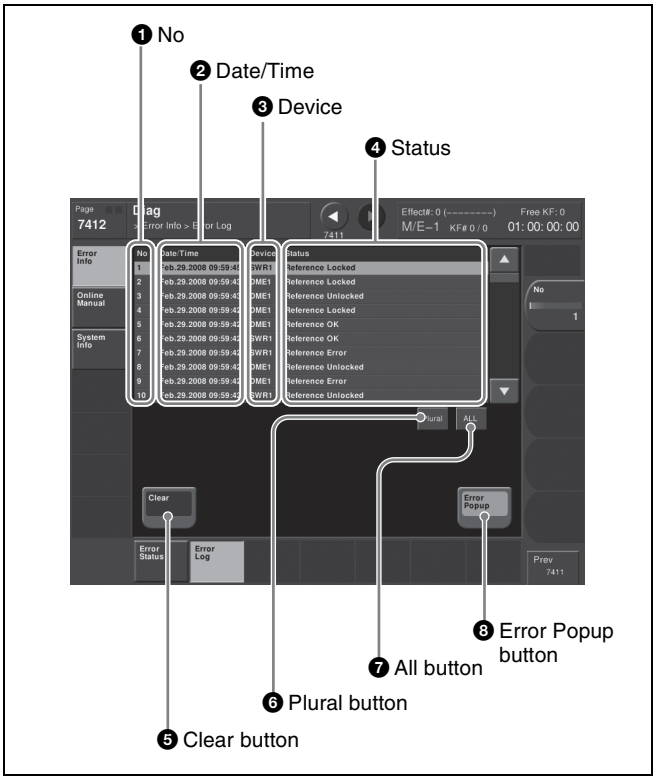

❶ No
This is a sequential number assigned to the items in the error log.

❷ Date/Time
This shows the date and time the status change occurred.

❸ Device
This shows the device on which the status change occurred.

❹ Status
This shows the details of the status change.
If you press on the list, this switches the display to reverse video, and selects the item. You can also select items in the error log by turning the knob.

❺ Clear button
This deletes the selected error log item from the list.


❻ Plural button
When this is on, you can select more than one error log. To cancel the selection, press once again to return to the normal display.

❼ All button
When this is on, all error log items are selected. To cancel the selection, press once again to return to the normal display.

❽ Error Popup button
This selects whether or not to display “ERROR” on the menu title button when an error occurs. This button is linked to [Error Popup] in the error status menu.
On: if a device error occurs, display “ERROR” on the menu title button.
Off: if a device error occurs, do not display “ERROR” on the menu title button.

Error Messages Appearing in a Message Box

Corresponding to the content of the message, an icon appears.

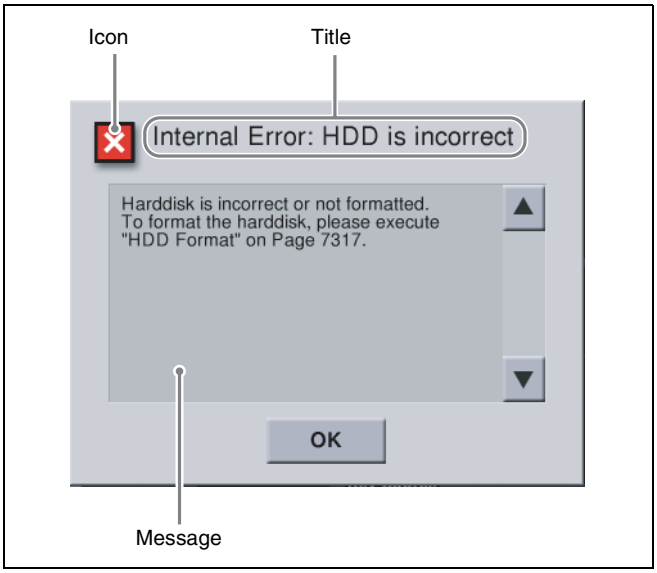

Icon	Message	Description
Activate License		
	License key was successfully entered. The license will be activated after rebooting your system.	7316.7: Engineering Setup >System >Install/Unit Config >License >License Management The Activate License procedure was completed successfully.
	The license key you entered is invalid. Please check and enter again.	7316.7: Engineering Setup >System >Install/Unit Config >License >License Management The Activate License procedure failed because the entered information was incorrect. Check the license key, and enter again.
Append Key Frame		
	[Append Key Frame] cannot be executed. FMx is not assigned to a user region.	2515: Frame Memory >Still >Create Key Frame When [Append Key Frame] was pressed, the frame memory output (FMx) was not assigned to a User region. Assign the output in menu 7331.4 (Engineering Setup >Switcher >Config >User1–8 Config), and try again.
	[Append Key Frame] cannot be executed. Key Frame Register is locked. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Append Key Frame] was pressed, the key frame register (UserX region) was locked. Unlock the register.
	[Append Key Frame] cannot be executed. Key Frame Register is busy. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Append Key Frame] was pressed, files were being loaded into register (UserX region). Try again after file loading has finished.
	[Append Key Frame] cannot be executed. Key Frame Register is being edited. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Append Key Frame] was pressed, keyframe creation or editing was in progress using the register (UserX region). Try again after the keyframe operation has finished.
	[Append Key Frame] cannot be executed. Key Frame Register is full. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Append Key Frame] was pressed, there were no remaining keyframes in the register (UserX region).
	[Append Key Frame] cannot be executed. Key Frame Register is not active. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Append Key Frame] was pressed, the region selection button for a register in the numeric keypad control block was not selected. Select the region selection button [UserX] in the numeric keypad control block, and try again.
Backup		
	Success!!	2562: Frame Memory >External Device >Ext HDD Backup/Restore Saving files into the external hard disk was completed successfully.
	Success!! But the number of folder exceeds the limit (12) and the files expected for the folders were backed up in the default folder. Or the name was changed because it was the same file name.	2562: Frame Memory >External Device >Ext HDD Backup/Restore Saving files into the external hard disk was completed successfully. However, the limit on the number of folders was reached, and therefore files were backed up in the default folder. Alternatively, the file name was changed because a file of the same name already exists.
	External HDD Backup/Restore is running (–2).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, a backup/restore operation to/from the external hard disk was in progress.
	FM file auto extraction is running (–3).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, extraction of frame memory file data to the VTR was in progress.
	Clip is recording (–4).	2564: Frame Memory >External Device >Backup to DDR/VTR An external device was recording clips.
	FM DDR/VTR Backup/Restore is running (–5).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, a backup/restore operation to/from the VTR/DDR was in progress.
	No external HDD was found (–2).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the external hard disk could not be found. Check that the external hard disk is correctly connected.

Icon	Message	Description
✕	Format operation failed (–10). Format operation failed (–11).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, formatting of the hard disk failed.
✕	Cannot access the partition (–12).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the logical drives of the external hard disk could not be accessed. Check that the external hard disk is correctly formatted.
✕	Cannot access the directory (–20). Cannot access the directory (–21).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the directory of the external hard disk could not be accessed.
✕	The external HDD is busy (–22).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the external hard disk was busy and could not be accessed. Check that the access lamp of the hard disk or the menu indicator is turned off, and try again.
✕	ERROR (–31).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the external hard disk could not be written to because the clip is currently playing or recording.
✕	Backup operation failed (–34). Backup operation failed (–36).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the process to store the file to the external hard disk failed.
✕	Cannot be executed. Amount of FM files exceeds the capacity of usable frame memory.	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the number of files exceeded the storage limit.
✕	Cannot be executed. The function requires two frames of frame memory.	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, two files were required but there was only one file remaining.
✕	No directory exists (–50).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, the specified directory did not exist.
✕	Rename operation failed (–52). Rename operation failed (–53).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Backup] was pressed, renaming the directory failed.
✕	Invalid FM OutCh (–6).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, the specified frame memory output channel could not be used.
✕	Specified FM OutCh was locked (–7).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, the specified frame memory output channel was locked.
✕	Not enough free register area for Backup or Restore process (–10).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, there was insufficient capacity to carry out the backup.
✕	Prepare failed, not any file was found on this board (–11).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, no image files were found.
✕	Backup failed, not prepared yet (–12).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, the device was not yet ready.
✕	Backup failed, Clip recall failed (–13).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, All One Clip recall failed (internal processing error).
✕	Prepare failed, Clip create failed (–14).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, All One Clip creation failed (internal processing error).
✕	Prepare failed, insufficient Clip id (–15).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, there were insufficient Clip IDs (internal processing error).
✕	Prepare failed, symbol files create failed (–16).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, marker frame file creation failed (internal processing error).

Icon	Message	Description
	Prepare failed, all one Clip recall failed (–17).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, All One Clip recall failed (internal processing error).
	ERROR (–19). Bad register number.	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, the Register Number was an invalid value (internal processing error).
	Prepare failed, because there is clip playing (–22).	2564: Frame Memory >External Device >Backup to DDR/VTR When [Backup Start] was pressed, processing failed because clip playback was in progress.

Change Password

	The password has been successfully changed.	7317.1: Engineering Setup >System >Maintenance >Setup Operation Lock The password was successfully changed.
	Failed. The password was not changed.	7317.1: Engineering Setup >System >Maintenance >Setup Operation Lock The password could not be changed.

Create Key Frame

	[Create Key Frame] cannot be executed. FMx is not assigned to a user region.	2515: Frame Memory >Still >Create Key Frame When [Create Key Frame] was pressed, the frame memory output (FMx) was not assigned to a User region. Assign the output in menu 7331.4 (Engineering Setup >Switcher >Config >User1–8 Config), and try again.
	[Create Key Frame] cannot be executed. Key Frame Register is locked. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Create Key Frame] was pressed, the register (UserX region) was locked. Unlock the register.
	[Create Key Frame] cannot be executed. Key Frame Register is busy. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Create Key Frame] was pressed, files were being loaded into the register (UserX region). Try again after file loading has finished.
	[Create Key Frame] cannot be executed. Key Frame Register is being edited. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Create Key Frame] was pressed, keyframe creation or editing was in progress using register (UserX region). Try again after the keyframe operation has finished.
	[Create Key Frame] cannot be executed. There is no free Key Frame. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Create Key Frame] was pressed, an insufficient number of usable keyframes were in UserX region.
	[Create Key Frame] cannot be executed. Key Frame Register is not active. (UserX)	2515: Frame Memory >Still >Create Key Frame When [Create Key Frame] was pressed, the region selection button for the register in the numeric keypad control block was not selected. Select the region selection button [UserX] in the numeric keypad control block, and try again.

Deactivate License

	The license will be deactivated after rebooting your system.	7316.7: Engineering Setup >System >Install/Unit Config >License >License Management The Deactivate License procedure was completed successfully.

Disk Format

	Success!!	7317: Engineering Setup >System >Maintenance Formatting of the removable disk was completed successfully.
	Failure. Make sure of the memory card.	7317: Engineering Setup >System >Maintenance Formatting of the removable disk failed. Check that the memory card is correctly inserted.

Error

	This operation is cancelled, because the register is locked. Please change the register status to be unlocked first.	6211.1: Effect >Master Timeline >Store >Edit 6311.1: Snapshot >Master Snapshot >Store >Edit 6411.1: Shotbox >Register >Store/Recall >Edit An attempt was made to assign a locked register. Unlock the register before carrying out the assignment.

Icon	Message	Description
	The file was not able to be read.	7142.1: File >Shotbox, Macro >File Edit When [Off Line Edit] was pressed, the selected file could not be read. Select the file again, and press [Off Line Edit] once more.
	It was not possible to make a file.	7142.3: File >Shotbox, Macro >File Edit >Off Line Edit The file could not be written when storing. Try to store once more.
	Failed...	7162: File >All, External File >Import/Export Importing a file failed. Check the format of the original file, and try again.
	The Source and the target are the same directory. Please change the source or the target directory.	7172: File >Configure >Unit ID Copy The same directory and ID were selected for source and target. Select different directories and IDs.

Extraction

	FM file auto extraction is running (–9).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, a CG wipe extraction function was already in progress.
	FM 1394 HDD Backup or Restore is processing. (–11).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, a frame memory file data backup/restore operation to/from the external hard disk was in progress.
	FM DDR/VTR Backup/Restore is running (–16).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, a backup/restore operation using the VTR/DDR was in progress.
	ERROR (–1).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, an internal processing error occurred.
	Create thumbnail failed (–2).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, thumbnail creation failed (internal processing error).
	Red Symbol file not match (–3).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, a red marker frame file was invalid.
	Blue Symbol file not match (–4).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, a blue marker frame file was invalid.
	No data between two symbol files (–5).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, there was no data between two marker frames.
	Cannot find symbol file (–8).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, the marker frame file could not be found.
	Clip frame error (–10).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, the number of frames in a clip was invalid (internal processing error).
	Clip not found (–12).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, the specified clip did not exist.
	Clip is playing or being edited (–13).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, the specified clip was being played back or edited.
	Clip register error (–14).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, the data in the specified register could not be processed (internal processing error).
	Can't extract pair clip (–15).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, an attempt was made to extract a pair clip.
	Clip id not enough (–50).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, there were over 100 clips.
	Still frame on FM 2nd board (–51).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, a still image was extracted from an external clip.

Icon	Message	Description
	Clip frame number can't be ODD in 720P format (–9).	2542: Frame Memory >File >Auto Extraction When [Extraction Start] was pressed, an odd number of clips were extracted (720P format only).

File Frame Memory

	Some requests are skipped. Following operation is not permitted. — Loading that will cause duplicate register name.	7151: File >Frame Memory 7162: File >All, External File >Import/Export An attempt was made to load a file with the same name as a file already in the register.

File Open Status

	ERROR (01)	533X: Device >DDR/VTR An error was returned from the DDR/VTR, and one of the messages on the left appears, depending on the error number. Use menu 7355 (Engineering Setup >DCU >Serial Port Assign) or menu 7325.4 (Engineering Setup >Panel >Device Interface >DCU Serial Port/ MPE Assign) to check the device settings.
	ERROR (02)	
	ERROR (FF): No target device has been assigned	

GPI Input

	Please set Target.	7325.1/2: Engineering Setup >Panel >Device Interface >GPI Input 7337.2/3: Engineering Setup >Switcher >Device Interface >GPI Input 7344.1/2: Engineering Setup >DME >Device Interface >DME1 GPI Input 7344.4/5: Engineering Setup >DME >Device Interface >DME2 GPI Input 7352/7352.1: Engineering Setup >DCU >GPI Input Assign An incorrect parameter setting value was specified. Check the settings, and try again.
	Please set Trigger Type.	
	Please set Reg No.	
	Please set Aux Bus No.	
	Please set Src No.	

GPI Output

	Please set Target.	7325.3: Engineering Setup >Panel >Device Interface >GPI Output 7337.4: Engineering Setup >Switcher >Device Interface >GPI Output 7344.3: Engineering Setup >DME >Device Interface >DME1 GPI Output 7344.6: Engineering Setup >DME >Device Interface >DME2 GPI Output 7354: Engineering Setup >DCU >GPI Output Assign An incorrect parameter setting value was specified. Check the settings, and try again.
	Please set Trigger Type.	
	Please set Reg No.	
	Please set Pulse Width.	
	Please set Pulse Timing.	

HDD Format

	Success!!	2561: Frame Memory >External Device >Ext HDD Format Formatting of the external hard disk was completed successfully.
	Success!! System will be restarted.	7317: Engineering Setup >System >Maintenance Formatting of the hard disk was completed successfully. Press [OK] to restart the system.
	Success!! But some partitions cannot be created because the capacity of the HDD is not enough.	7317: Engineering Setup >System >Maintenance Formatting of the hard disk was completed successfully. However, because of insufficient hard disk capacity, only the possible number of partitions were created.
	Failure. HDD device is busy. In order to complete HDD format, System needs to be restarted and formatted again. System will be restarted, then please execute HDD format again.	7317: Engineering Setup >System >Maintenance Formatting of the hard disk failed. If the hard disk is functioning correctly, or in some cases when there is damage to the disk, it may not be possible to format the disk correctly in a single attempt. In such cases, it is necessary to restart the system, and then carry out formatting again. Press [OK] to restart the system.
	No external HDD was found (–2).	2561: Frame Memory >External Device >Ext HDD Format When [5 Partition] or [15 Partition] was pressed, the external hard disk could not be found. Check that the external hard disk is correctly connected.
	Format operation failed (–11).	2561: Frame Memory >External Device >Ext HDD Format When [5 Partition] or [15 Partition] was pressed, formatting of the hard disk failed.
	Cannot access the partition (–12).	2561: Frame Memory >External Device >Ext HDD Format When [5 Partition] or [15 Partition] was pressed, the external hard disk logical drive could not be accessed. Check that the external hard disk is correctly formatted.

Icon	Message	Description
	Cannot access the directory (–20).	2561: Frame Memory >External Device >Ext HDD Format When [5 Partition] or [15 Partition] was pressed, the external hard disk directory could not be accessed.
	The external HDD is busy (–22).	2561: Frame Memory >External Device >Ext HDD Format When [5 Partition] or [15 Partition] was pressed, the external hard disk was in use and could not be accessed. Check that the access lamp of the hard disk or the menu indicator is turned off, and try again.

Import

	Cannot create the clip file, because the number of selected files is insufficient.	7162: File >All, External File >Import/Export When importing a clip file, insufficient files were selected to create the clip.

Initial Read

	Initializing now...	When starting up the menu system, this popup message is displayed while system information is being loaded.

Install

	All processes have succeeded.	7316.10: Engineering Setup >System >Install/Unit Config >Install The installation procedure was completed successfully.
	An error occurred during the install process. For more details, see Page 9900.	7316.10: Engineering Setup >System >Install/Unit Config >Install The menu software installation package does not match the model on which it is to be installed.
	Not Found. The software package does not exist on the removable disk.	7316.10: Engineering Setup >System >Install/Unit Config >Install The software package to be installed could not be found. Check that the memory card is correctly inserted, and try the installation once more.
	No Task. Select a package on the list.	7316.10: Engineering Setup >System >Install/Unit Config >Install The package for installation was not selected. Select a package to be installed.

Internal Error: Data HDD

	The user data partition of hard disk drive is damaged, and all data is lost. The hard disk drive needs to be reformatted. Please execute HDD format on Page 7317.	When starting up the menu system, an error was found on the hard disk. Execute [HDD Format] in menu 7317 (Engineering Setup >System >Maintenance).

Internal Error: HDD is incorrect

	Hard disk is incorrect or not formatted. To format the hard disk, please execute “HDD Format” on Page 7317.	When starting up the menu system, an error was found on the hard disk. Execute [HDD Format] in menu 7317 (Engineering Setup >System >Maintenance).

Internal Error: Recovery HDD

	The recovery data partition of hard disk is damaged, and all data is lost. The data needs to be recovered. Please execute Restore Data on Page 9999.	During menu startup, an error was found in the recovery data partition of the hard disk. Restore the recovery data using menu 9999. [a)]

Internal Error: Temporary HDD

	The system data partition of hard disk drive is damaged. The hard disk drive needs to be reformatted. Please execute HDD format on Page 7317. Please make sure to save all data in the user data partition of hard disk drive to any other device or media, before reformatted.	When starting up the menu system, an error was found on the hard disk. Execute [HDD Format] in menu 7317 (Engineering Setup >System >Maintenance).

Icon	Message	Description
Invalid Name		
✕	Empty...	2512: Frame Memory >Still >Freeze/Store A Store operation was carried out without specifying a name. 71XX: File Menu 7171: File >Configure >Directory When renaming a file or creating a directory, a name was not entered. Specify the correct name.
✕	The file exists already...	2512: Frame Memory >Still >Freeze/Store The file name specified when [Store] was executed already exists in the switcher. Specify a different name.
Loading Texture Pattern		
✕	Target File: XXXXX Failed to load target bmp file./Illegal Name. This operation is canceled.	7316.9: Engineering Setup >System >Install/Unit Config >Texture Package An error occurred when loading a texture file. Delete texture files with an illegal size or illegal file name, then try again.
	Target File: XXXXX Failed to load target bmp file./Illegal Size. This operation is canceled.	
Make Package		
✕	Texture file: XXXXX Not Found. This texture file does not exist on the removable disk.	7316.9: Engineering Setup >System >Install/Unit Config >Texture Package When loading an existing texture package, a texture file within the texture package could not be found.
✕	This operation is cancelled, because capacity is full. Please clear texture pattern.	7316.9: Engineering Setup >System >Install/Unit Config >Texture Package When making a texture package using Make Package, there was insufficient space on a memory card.
Password		
✕	Password Incorrect	7317.1: Engineering Setup >System >Maintenance >Setup Operation Lock The wrong password was entered. Enter the correct password.
Record		
✕	Cannot be executed. Maximum number of clips are created.	2523: Frame Memory >Clip >Record When [Rec Start] was executed, the number of recorded clips reached the upper limit.
Recovery Complete		
!	System disk has been damaged, and then recovered. Shutdown and restart the system is recommended to exit from recovery mode.	Corruption has been detected in the flash memory for starting the menu CPU, but this has been recovered. Since the system is operating in recovery mode, shut down and restart as soon as practicable. [a)]
Refresh Status		
✕	No external HDD was found (–2).	2561: Frame Memory >External Device >Ext HDD Format 2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Refresh Status] was pressed, the external hard disk could not be found. Check that the external hard disk is correctly connected.
✕	Cannot access the partition (–12).	2561: Frame Memory >External Device >Ext HDD Format 2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Refresh Status] was pressed, the logical drives of the external hard disk could not be accessed. Check that the external hard disk is correctly formatted.
✕	Cannot access the directory (–20).	2561: Frame Memory >External Device >Ext HDD Format 2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Refresh Status] was pressed, the directory of the external hard disk could not be accessed.
	Cannot access the directory (–21).	

Icon	Message	Description
	The external HDD is busy (–22).	2561: Frame Memory >External Device >Ext HDD Format 2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Refresh Status] was pressed, the external hard disk was busy and could not be accessed. Check that the access lamp of the hard disk or the menu indicator is turned off, and try again.

Rename

	This operation is inhibited because of the illegal combination in the selected files.	7151.1: File >Frame Memory >Frame Memory >File Edit When [Rename] was pressed, multiple files of different types were selected. Check that the selected files are all of the same type.
	Files currently used for playback cannot be renamed.	2546: Frame Memory >File >Rename When [Rename] was pressed, the selected files included a movie (clip) currently being played back.
	No external HDD was found (–2).	2546: Frame Memory >External Device >Ext HDD Backup/Restore When [Rename] was pressed, the external hard disk could not be found. Check that the external hard disk is correctly connected.
	Cannot access the directory (–20).	2546: Frame Memory >External Device >Ext HDD Backup/Restore When [Rename] was pressed, the external hard disk directory could not be accessed.
	The external HDD is busy (–22).	2546: Frame Memory >External Device >Ext HDD Backup/Restore When [Rename] was pressed, the external hard disk was in use and could not be accessed. Check that the access lamp of the hard disk or the menu indicator is turned off, and try again.

Restore

	Success!!	2562: Frame Memory >External Device >Ext HDD Backup/Restore Recalling a file from the external hard disk was completed successfully.
	External HDD Backup/Restore is running (–2).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, a backup/restore operation to/from the external hard disk was in progress.
	FM file auto extraction is running (–3).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, extraction of frame memory file data to the VTR was in progress.
	Clip is recording (–4).	2565: Frame Memory >External Device >Restore from DDR/VTR An external device was recording clips.
	FM DDR/VTR Backup/Restore is running (–5).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, a backup/restore operation to/from the VTR/DDR was in progress.
	Success!! But some files were not restored.	2562: Frame Memory >External Device >Ext HDD Backup/Restore Recalling a file from the external hard disk was completed successfully. However, some files were not restored because of a different video format or file corruption.
	Success!! But the number of folder exceeds the limit (12) and the files expected for the folders were restored in the default folder. Or the name was changed because it was the same file name.	2562: Frame Memory >External Device >Ext HDD Backup/Restore Recalling a file from the external hard disk was completed successfully. However, the limit on the number of folders was reached, and therefore files were restored to the default folder. Alternatively, the file name was changed because a file of the same name already exists.
	Success!! But the number of folder exceeds the max limit (12) and the files expected for the folders were restored in the default folder (–50)!	2565: Frame Memory >External Device >Restore from DDR/VTR Recalling a file from the external device was completed successfully. However, the limit on the number of folders was reached, and therefore files were restored to the default folder.
	Success!! But some still files had been renamed because the same file name already existed (–51)!	2565: Frame Memory >External Device >Restore from DDR/VTR Recalling a file from the external device was completed successfully. However, some files were renamed because of still image file name conflicts.

Icon	Message	Description
!	Success!! But some Clip files had been renamed because the same Clip name already existed (–52)!	2565: Frame Memory >External Device >Restore from DDR/VTR Recalling a file from the external device was completed successfully. However, some clips were renamed because of clip name conflicts.
✕	No external HDD was found (–2).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, the external hard disk could not be found. Check that the external hard disk is correctly connected.
✕	Format operation failed (–10).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, formatting of the hard disk failed.
	Format operation failed (–11).	
✕	Cannot access the partition (–12).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, the logical drives of the external hard disk could not be accessed. Check that the external hard disk is correctly formatted.
✕	Cannot access the directory (–20).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, the directory of the external hard disk could not be accessed.
	Cannot access the directory (–21).	
✕	The external HDD is busy (–22).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, the external hard disk was busy and could not be accessed. Check that the access lamp of the hard disk or the menu indicator is turned off, and try again.
✕	ERROR (–41).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, the file could not be recalled from the external hard disk because the clip is currently playing or recording.
✕	Restore operation failed (–43).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, recalling a file from the external hard disk failed.
	Restore operation failed (–46).	
✕	No directory exists (–50).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, the specified directory did not exist.
✕	Rename operation failed (–52).	2562: Frame Memory >External Device >Ext HDD Backup/Restore When [Restore] was pressed, renaming the directory failed.
	Rename operation failed (–53).	
✕	Invalid FM OutCh (–6).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, the specified frame memory output channel could not be used.
✕	Specified FM OutCh was locked (–7).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, the specified frame memory output channel was locked.
✕	Restore failed, some Clip files cannot be deleted on this board (–8).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, restoring failed because a clip file could not be deleted.
✕	Not enough free register area for Backup or Restore process (–10).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, there was insufficient capacity to carry out the restore operation.
✕	Prepare failed, insufficient Clip id (–15).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, there were insufficient Clip IDs (internal processing error).
✕	Restore failed, Cannot find symbol files on this tape (–18).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, a marker frame file could not be found.
✕	ERROR (–19). Bad register number.	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, the Register Number was an invalid value (internal processing error).
✕	Restore failed, file name already exist, try to rename but unsuccessful (–20).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, renaming failed.
✕	Cannot find the File Name Data, please load the File Name Data first (–21).	2565: Frame Memory >External Device >Restore from DDR/VTR When [Restore Start] was pressed, the file list was not loaded.

Icon	Message	Description
Restore Data		
	Restoring...	Recovery data is being restored using menu 9999. a)
	Success!!	Restoring recovery data using menu 9999 was completed successfully. a)
	Recovery binary on the USB storage device is not found.	When restoring recovery data using menu 9999, recovery data could not be found on the memory card. Check that the recovery data has been correctly copied to the memory card, restart the system, and try again. a)
	Failure. Copying recovery data hasn't finished.	Restoring recovery data using menu 9999 failed. Check that the recovery data has been correctly copied to the memory card, restart the system, and try again. a)
Set Time/Date		
	Error: Wrong Format.	7317: Engineering Setup >System >Maintenance A correct date and time was not specified. Specify the correct date and time.
Trim		
	The Start TC or Stop TC is not properly set.	2522: Frame Memory >Clip >Play When [Trim] was pressed, neither the Start TC nor the Stop TC was set.
		2522: Frame Memory >Clip >Play When [Trim] was pressed, the interval between Start TC (or Clip Begin) and Stop TC (or Clip End) was the entire clip.
		2522: Frame Memory >Clip >Play When [Trim] was pressed, the Start TC (or Clip Begin) value was greater than the Stop TC (or Clip End) value.
	This file is locked.	2522: Frame Memory >Clip >Play When [Trim] was pressed, the file was locked.
	This file is using for playback.	2522: Frame Memory >Clip >Play When [Trim] was pressed, the target file was being played back.
Warning		
	This operation will be cancelled, because the register is locked. Please change the register status to be unlocked first.	6211.1: Effect >Master Timeline >Store >Edit 6311.1: Snapshot >Master Snapshot >Store >Edit 6411.1: Shotbox >Register >Store >Edit When [Store] was pressed, the target register was locked. Unlock the register before executing [Store].
	No Switcher information available. Please confirm "Network Configuration" on Page 7311.	When starting up the menu system, the switcher was not present in the system information. Check the Data LAN connections, and retry [Auto Config] in menu 7311 (Engineering Setup >System >Network Config).
Warning (System Config)		
	Illegal Network Config Information (Page 7311)	When starting up the menu system, one of the messages on the left appears, depending on the status, if the system information read from the control panel is not correct. According to the message, execute menu 7311 (Engineering Setup >System >Network Config) or 7312 (Engineering Setup >System >System Config) again.
	Illegal Panel Assign Information for Dual Simul Operation (Page 7312)	
	No Panel Assign Information (Page 7312)	
	No Switcher Assign Information (Page 7312)	
	No System Operation Mode Information (Page 7312)	
	No DME Channel Information	

a) MKS-8010A only

Error Messages Shown in the Error Information Menu

If a file transfer related error occurs, the Error Information menu appears to the following error messages.

Error message	Error description/measures
[Error] Packet Format	Load/save the data again. Still then the message is displayed, contact a Sony service representative.
[Error] No Request	
[Error] No Request File	
[Error] Illegal Host	
[Error] Not Supported	
[Error] USB Access	
[Error] Get File System Info	
[Error] Copy Result	
[Error] Remove Result	
[Error] Move Result	
[Error] Make Dir Result	
[Error] Path Info	
[Error] Dir Operation	
[Error] Command Result	
[Error] Transfer Result	
[Error] Source File Name	
[Error] Source File Open	
[Error] Source File Read	
[Error] Destination File Name	
[Error] Destination File Open	
[Error] Destination File Read	
[Error] Destination File Write	
[Error] Illegal Format	
[Error] Edit Header	
[Error] Local File Access	
[Error] FTP Connect	
[Error] FTP Busy	
[Error] FTP Access	
[Error] FTP No Result	
[Error] FTP Put Command	
[Error] FTP Delete	
[Error] FTP Delete Command	
[Error] FTP Delete Result	
[Error] Control Table No Space	
[Error] Control Table Same Name	
[Error] No Queue	
[Error] Resize BMP	
[Error] Make Vector	
[Error] Uncompress	
[Error] Compress	

Error message	Error description/measures
[Error] Server Not Respond	No reactions are returned from the processor. Check your Data-LAN connections and the power source of the processor.
[Error] No Space	There is not sufficient space in the memory card or hard disk.

Index

Numerics

2ND AUX MIX button 58
3D 26, 260

A

Action setting 417
  for rewind 418, 421, 431
Additive mix 130
Ancillary data 213, 218
Angle 170
Anti-moiré filter 347
Art edge settings 292
Aspect ratio 171, 177
Attributes 473
Audio mixer 94
Auto
  chroma key adjustments 132
  transition 109, 472
AUTO button 56
AUTO DELEG button 45
AUTO INS button 54
Auto/manual transition combination 110
Autoload function 531, 544, 554
AUX
  bus settings 236
  delegation buttons 57
  menu operations 236
AUX bus control enable/disable 633
AUX bus control mode switching function 573
AUX bus override 601
AUX bus remote panel 664
AUX delegation button
  settings 586
  shift operation 586
AUX menu 377
AUX MIX button 36, 73
AUX mix transitions 119
AUX Panel-less Function 92
Auxiliary bus control block
  for AUX buses 56
  for router control 58
Axis location 272

B

Background
  changing 21
  mask 125
  settings 344
  transition flip-flop mode 623
Bank selection buttons 61
Banks and registers 505
Basic menu operations 75
Beep 607
Beveled edge settings 291
Blind settings 320
Blink
  function 141
Blur settings 304
Border 124
  parameters 144
  processing order 625
  settings 289
Brick settings 353
Brightness adjustment 607
Broken glass settings 319
BS button 82
Bus fixed mode
  fader operation 110
Bus selection 89
Button
  assignment settings 589
  numbers 92, 93
  operation mode 604
Button assignments 589

C

Calibration 607
Caps Lock button 82
CCP-6224
  AUX Panel-less Function 92
CCP-6224 2M/E Control Panel 71
CCP-6324
  AUX Panel-less Function 92
CCP-6324 3M/E Control Panel 71
CCR menu 377
Channel ID 274
Character Trail settings 328
Chroma key 124
  adjustments 131
  shadow 132
  shadow adjustment 134
  window 131
Circle settings 324
Clean mode 123
Clear button 81, 82
Clip function 213
Clip transition 95
  operations 219
Close button 81, 82
Color
  combination 228
  matte settings 103
  vector key 123
Color background
  selection 228
  setting operations 228
  settings menu 228
Color Bkgd menu 376
Color cancel 131
  adjustments 133
Color corrector 240
Color data
  copy 231
  swap 231
Color mix 228
  for edge fill matte 168
  for key fill 130
Color Mix settings 302
Combiner settings 350
Communications status 663
Contrast settings 307
Control panel 30
  configuration 1 30
  configuration 2 31
  configuration 3 32
Control panel settings 566
Coordinate axes 274
Copy 230, 231
Copy/Swap menu 378
Copying 468
Corner Pinning 347
Crop settings 290
Cross-point
  assign tables 580
  button numbers 34
  button shift operation 582
  buttons 33
  control block 32
  hold 472
  settings 580
Cross-point assign tables 584
Cueup & Play 425
  automatic execution 426
  settings in a menu 427
Custom mode 553
Cut 96
Cylinder settings 325

D

Date and time 562
DCU
  serial port settings 600
  setup 640
Dead zone 199
Default recall button 79
Default wipe edge softness 625
Defocus settings 303
Del button 82
Delay setting 438, 459
Delegation buttons 42
DEST button 57
Destination names 603
Detents 271

Device
interface 597, 630, 637
menu 380
setup 555
DEVICE connectors 60
Device control block
joystick 48
search dial 49
trackball 45
Device interface 637
Device management 562
Diagnosis 663
Diagnostic menu 392
Digital multi effects 27, 269
Dim and fade settings 309
Direct store 418
Direction 167, 175, 189
Directory operations 542
creating a directory 542
deleting a directory 542
renaming a directory 542
Disk recorder
control 421
Cueup & Play 425
file operations 432
information check 424
recording to 424
settings 648
timeline 428
timeline editing 430
Display 44, 55
DME 27
applying to a key 139, 146
channel selection buttons 44
menu 379
special effects 274
DME channel
copy 231
swap 231
DME override 233
DME patterns
user programmable 197
DME setup 635
DME wipe pattern 183
edge modification 189
groups 183
selection 187
DME wipe pattern list
for one-channel mode 361
for two-channel mode 366
DME wipe settings 187
for independent key transitions 193
DME wipes 24, 183
copy 230, 231
direction 189
modifiers 189
modify clear 192
position 189, 193
resizer 195
snapshot 196
swap 230, 231
Door 362
Double-click sensitivity 605
Downstream key control block 66
Drop border 124
parameters 145
Dual background bus mode 572
dual resizer effects 159
Duration
effect 437
keyframe 437
modes 436
setting buttons 53
Duration mode setting 454
Dust mix 165, 166

E

Edge
fill 125
modifiers 124
EDIT ENBL button 51
Edit point specification buttons 51
Edit points 448
setting 449
Editing buttons 52
Editing keyboard 600
EFF LOOP button 54
Effect 436
attribute settings 467
attributes 436
dissolve 436, 472
duration 437
duration setting 459
editing 436
execution 440, 461
execution direction 462
menu 383
repeating 462
resizer 156
saving 463
saving/recalling 436
settings 603
status display 468
Effect execution direction selection buttons 53
Effect register
copy/move/swap 468
data deletion 469
editing 468
merge 469
naming 470
write-protecting 468
Emboss 124
Engineering setup 545, 566, 609, 635, 640, 652, 664
Engineering Setup menu 387
Enhanced wipes 358
Enter button 81, 82
Error messages 684
Error Information menu 696
error status/log 684
message box 685
Explosion settings 326
Extended VTR 421, 650
External
box setting 653
device control 416
processed key 141, 148
External devices 27
shared control functions 416
External hard disk drive 223

F

Fade to black 118
control block 56
transition rate 119
Fader lever operations 623
Fade-to-black function 623
File
locking load operations 564
File menu 386
File operations 432
autoload function 544
batch operations 539
copying 535, 543
deleting 537
directory operations 542
displaying menus 532
import/export 540
individual files 529
loading 534, 539
renaming 536
saving 533, 539
selecting a device 533
selecting regions 533
viewing detailed information 532
Files 28, 529
autoload function 531
deleting 221
operations 529
renaming 222
Film effect 312
Fine mode 285
Flag settings 315
Flex shadow settings 296
Flexi Pad
settings 604
Flexi Pad control block
simple type 62
standard type 40

Flip tumble 363
Flying bar settings 320
Format converter 550
conversion 614
outputs 620
Formatting a memory card 562
Formatting the hard disk 563
Frame
in-out 363, 370
memory data export 541
memory data import 540
Memory menu 376
Frame input mode 105
Frame memory
clip function 213
continuously capturing still images (record) 211
extracting images 226
feed 141, 148
pair file processing 221
recalling a continuous sequence of still images (animation) 211
Frame memory folder 538
Frame memory operations 204
capturing an input image 207
clip 214
input image selection 206
menu display 204
preparations 204
selecting frame memory 207
selecting outputs 207
Freeze settings 312
Fringe 173
FTB button 56
FULL LINK 165
Function
assignment user preference buttons 589
button area 79
links 626
selection buttons 55
Functions assignable to trackball/Z-ring 285

G

Global
coordinate space 269
Effect menu 380
effect operations 349
Glow settings 310
GPI
device control 420
output port settings 420
timeline creation/editing 420
GPI input settings
for control panel 597
for DCU 641
for DME 638
for switcher processor 631
GPI output 473
GPI output settings
for control panel 599
for DCU 644
for DME 639
for switcher processor 632
Graphics
outputting to the monitor 287
Graphics display 273, 287
Grid 274

H

Hard disk 223
partition 223
Hard freeze effect 312
HDD 223
HF buttons 79

I

Illegal color limiter 614, 635
Image
data management 221
extracting 226
Image file
deletion 221
renaming 222
Independent key transition 23, 113
DME wipe settings 193
simple transitions 122
type 116
type selection buttons 40, 65, 66
wipe modifiers 175
wipe settings 175
Independent key transition control block
simple type 65
standard type 115
Independent key transition execution section 40, 65, 66, 71
Independent key transition rate 117
display 118
setting by a menu operation 118
setting in the Flexi Pad control block 117
setting in the numeric keypad control block 117
Initialization
hard disk 563
Input
string 82
value 81
Input reference signal 550
Installation 555
Interpolation settings 346
Invert settings 345
Item display 81, 82

J

Joystick 48
Joystick sensitivity 605

K

Kaleidoscope settings 323
Key 23
1/2 row 34
auto drop 624
border settings 292
bus selection buttons 34
control block 42
default 126
delegation assign 567
delegation buttons 40, 66
deleting 22
density settings 346
disable 472
edge modifications 134, 144
Frame menu 382
inserting 22
mask 125
memory 125
memory mode 625
modifier buttons 43
modifiers 124
modify clear 141
output destination 141
output status display 100, 121
priority operation mode 625
settings 624
signal adjustments 133
snapshot attributes 484
source selection 346
status display 39, 64, 70
using keys 5 to 8 397
Key active 131
adjustment 132
KEY button 57
Key fill
selection 128
selection buttons 43
Key priority 98
display 100, 121
for keys 1 to 8 101
setting by a menu operation 100
setting in the transition control block 98
Key setting
using menus 126
Key snapshot 160
buttons 40, 67

recalling 160, 162
saving 160, 162
setting buttons 40, 67
using simple transition module 161
Key source
name display 40, 67
selection 128
selection buttons 43
Key transition
selection buttons 63
Key type
selection buttons 43
setting 127
Key/AUX bus delegation mode 36
Key/Wipe/FM/CCR menu 624
Keyer
copy 230
swap 230
Keyframe 27, 436, 450
control block 51
copying 452
creation 450
delay setting 459
deletion 452
duration 437
duration setting 458
effect registers 435
insertion 450
loop 453
modification 450
moving 452
operations 441
path setting 460
pause 453
register operations 467
status 79
strobe settings 334
KF button 39
Knob 44, 60
parameter buttons 79
K-SS button 65

L

Left button 82
Lens settings 323
Level selection buttons 58
Lighting settings 329
Line feed button 82
Linear key 123
Link
cross-point buttons 626, 627
key transition 629
M/E banks 628
Local coordinate space 269
Location
size 272
XYZ 271
Lock function 210
Locking the setup data 563
Luminance key 123

M

M/E
bank display 35
copy 230
swap 230
M/E configuration switching 266
M/E-1 to M/E-5 menus 371
M/E-4 bank, using 396
M/E-5 bank, using 396
Macro 28, 496
assignment of operation buttons 572
attachment 28
attachment removal 519
attachment setting 518
auto insert mode 500
creating 497
creation/editing 500
creation/saving 506
editing 497, 498
events 496
execution 498, 500, 505
execution by attachment 521
execution mode 606
file editing rules 665
menu 381
menu macro 522
offline editing 514
online editing 511
overview 496
register recalling 500, 505
registers 496
saving 503
timeline 28
Macro attachment list 520
Macro operations
in Flexi Pad control block 504
in keyframe control block 499
in numeric keypad control block 499
Macro register
editing 511
recalling 500
Macro timeline 526, 527
Magnitude 170
MAIN and SUB delegation button 255
Main mask 125
using 137, 146
Main menu site 84
Main/sub modifier link 165
Manual transition 109
Mask processing order 625
Mask settings 310
Masks 125, 137, 146
Master
region 434
timeline registers 435
timelines 441
Master snapshot creation/saving 485
Master timeline creation/saving 464
with the menu 466
with the numeric keypad control block 464, 465
Matte data
copy 231
swap 231
Max./min. value indication 81
Melt settings 327
Memory
card slot 60
recall buttons 62
Memory card formatting 562
Memory card/USB adaptor block 60
“Memory Stick”/USB connections block 60
“Memory Sticks” 61
Menu
accessing 76, 77
control block 59
display 60
organization 75
page number button 78
screen 77
shortcut menu 86
shutting down 80
switching between the main menu sites 84
title button 78
top menu list 75
MENU button 48
Menu macro 522
creation/editing 524
editing a register 526
executing 522
recalling a register 522
Menu shortcut assignment
memory recall button 596
user preference buttons 592
Menu tree 371
Merging 469
Metal settings 309
Minus button 81
Mirror settings 322
Misc menu 378
Misc menu operations 233
Mix 95, 164
Mixing images 352
MKS-8080/8082
setting status 664
simple connection 664

Mode selection buttons 41, 54, 64
Modulation 172
Monitor output
graphics 287
Mono settings 306
MORE button 44
Morphing 165
Mosaic
glass settings 315
settings 307
wipes 359
Motion decay settings 333
Mouse wheel setting 608
Moving 468
Multi 171, 177
mirror settings 322
move settings 305
Multi Program 2 25
basic operation 254
restriction 259
Multi Viewer 620
Multifunction Flexi Pad Control Block
DME Wipe Pattern Operations 200
Wipe Pattern Operations 180
Multifunction Flexi Pad control block
effect 463
keyframe 457
macro operations 510
master timeline 465
shotbox 493
snapshot 479
Multifunction flexi pad control block
assigning functions 578
MVE-8000A 282
MVE-9000 283
MVS-8000X Multi Format Switcher System 20

N

NAM 95
Nega settings 307
Negative NAM 164
Network settings 546
Next transition 95
selecting 95
selection buttons 37, 69
NFS server 546
Non-additive mix 95
Nonlinear effects settings 313
Non-Sync state 110
Normal
edge 145
mix 130
Numeric display 42, 64
Numeric keypad 55
control block 54

O

ON AIR indicators 44
On-air tally 602
One-stroke mode 103
One-time mode 103
Operation
buttons 46
modes 203
Operation mode setting 610
Operation settings 602
Outline 124
parameters 145
Output
destination specification buttons 44
OVERRIDE button 45

P

Page Roll 364
Page turn 364
settings 324
Pair file processing 221
Pair mode 203
Pairing 172
Panorama settings 324
Parallel
input settings 640
output settings 643
tally settings 657
Parameter group button 79
Path setting 460
Path type
for Curve 460
for Hue 460
for Xpt 461
Paths 438
DME 439
switcher 438
types 440
Pattern limit 107, 625
buttons 39, 64
setting by a menu operation 108
setting with the fader lever 108
transition 108
Pattern mix 164
types 164
Pause
event 507
insertion 507
P-Bus
action setting 417
timeline creation/editing 417
trigger 419
P-Bus devices 416
control 417
control mode setting 600
Perspective 273
PGM/PST
logical assignment to M/E 611
menu 374
Picture-in-picture 363, 367
Plane function 130
Positioner 169, 175, 189, 193
Positive NAM 164
Posterization 306
Power-on state 553
Preset color mix 95
Preset color mix setting 623
Preview 112
selection buttons 56
Previous page button 79
Primary setting 562
PRIOR SET button 39, 70

R

Random/diamond dust wipes 360
Recording
to DDR 225
to VTR 225
Recording to VTR/disk recorders 424
Reentry buttons 89
Reference
phase adjustment 609
Reference region 434
Region
selecting 448
Regions 434
selection buttons 54
Register
displaying list 470, 485
menu macro 522
operations in the menus 467
recalling 444
Register editing
menu macro 526
Registers 435
Related manuals 19
Replication 177
Reset 555
Reset/initialization 555
Resizer DME wipe 195
Resizer DME wipe patterns 370
Resume mode 553
Right button 82
Ripple settings 316
Rotary wipes 358
Rotation 170, 176, 272
Rotation of key 154
Router destination 568
Router interface settings 652
Router interface/tally setup 652
Router menu 380
RTR button 58

Run mode setting 462

S

Safe title settings 619
Screen
saver 607
SCU editor panel port 600
Search dial 49, 423
advanced settings 606
Second (2ND) button 57
Selected
bus display 57
source name displays 57
SEMI LINK 165
Separate sides settings 344
Sepia settings 306
Serial
port settings 645
tally setting 658
Setup 29
for control panel 566
for DCU 640
for the whole switcher system 545
locking the data 563
Setup data saving/recalling 553
Shadow 124
parameters 145
Shadow settings 355
Shaped video settings 344
SHIFT button 35
Shift button 82
Shortcut 86
Shotbox 28
Shotbox execution
in the Flexi Pad control block 493
in the utility/shotbox control block 494
Numeric Keypad Control Block 493
Shotbox menu 385
Shotbox register creation
in the numeric keypad control block 489, 490
using the menus 491
Shotbox register editing 495
SHOW KEY button 44
Show key function 148, 624
Side flags 585
aspect ratio 612
assigning a cross-point button 585
auto crop 612
auto side flags 612
cropping 612
DME wipe action 251
MISC menu 250
wipe action 251
Signal
assignment to buttons 92
name display 94
selection 89
Signal format setting 549
Signal input settings
for DME 635
for switcher processor 613
Signal output settings
for DME 636
for switcher processor 618
Simple
transition 120
Sketch settings 307
Skew 273
Slide 361, 366, 370
Snapshot 28
attributes 472
banks/registers 476
menu 384
register editing 485
saving/recalling 474, 477, 479
status display 484
Snapshot operations
from the numeric keypad control block 474
in the Flexi Pad control block 476
in the menus 482
Soft edge 124, 175
Softening
edge 145
wipe pattern edge 175
Software
installation 555
setting required 556
Solarization 306
Source
coordinate space 269
name displays 57
Source name 603
Source patch 660
Source signal name 583
Space button 82
Speed 170
Sphere settings 326
Spin 272
Spiral 174
Split 167, 361
fader 121
fader setting 623
settings 321
slide settings 321
Spotlighting settings 336
user texture patterns 558
Spring 173
Squeeze 361, 367, 370
Standard wipe patterns 163
Standard wipes 357
Start-up state 554
Status area 79
Status menu 236, 378
STOP NEXT KF button 54
Sub (subsidiary) mask 125
using 138, 146
Subsidiary menu site 84
Super mix 95
settings 102
Swap 230, 231
Swapping 468
Swirl settings 326
Switcher configuration 609
Switcher setup 609
System
maintenance 562
settings 547

T

Tally
copy settings 656
generation settings 655
group settings 654
Tape transport control 422
Target coordinate space 269
TBC window center position 636
TC button 81
Temporary attributes 436, 473
Three-dimensional
coordinate space 269
parameter display 274
parameters 270
transformations 269
Three-dimensional parameters
display 285
entering 286
values 286
Three-dimensional transformation 269
Through mode settings 619
Time
settings 458
strobe effect 312
Time offset execution 114
Timecode input mode 105
Timeline menu 442, 443
main parts 442
recalling 442
Top menu list 75
Top menu selection buttons 59
Touch panel calibration 607
TRACE button 45
Trackball sensitivity 605
Trail settings 331
TRANS PVW button 39, 70
Transformation operation modes 271

Transition
execution 105
mode 437, 623
next 95
preview 112
preview mode setting 623
Transition control block
simple type 62
standard type 37
Transition execution
section 38, 63, 70
with the fader lever 109
Transition indicator
function 105
Transition rate 105
AUX mix transitions 235
setting by a menu operation 107
setting in the Flexi Pad control block 106
setting in the MISC menu 234
setting in the numeric keypad control block 106
Transition type 95
selecting by a menu operation 102
selection buttons 38, 63, 69
Trim button 81
Twist settings 315

U

UNDO button 41, 64
USB driver reloading 563
User preference button 60
User programmable DME 366, 368
Notes on keyframe creation 197
patterns 197
transition mode 197, 454
User region setting 611
User regions 434
User Setup menu 392
User-defined settings 554
UTIL button 34
Utility 28
Utility execution 487
in the utility/shotbox control block 487
with user preference buttons 487
Utility/shotbox control block 61

V

V/K mode 203
Vertical blanking interval adjustment 619
VF buttons 79
Video
clip adjustment 619
processing 88, 142
signal adjustment 132
switching settings 622
switching timing 609
Video process 238
memory 238
settings 238
Video process memory 624
Virtual image cancellation 287
VTR
control 421
Cueup & Play 425
information check 424
Loop 428
recording to 424
Recue 428
timeline 428
timeline editing 430

W

Wave settings 313
Wind settings 335
Window adjustment 132, 133
Wipe 24, 95
copy 230
enhanced 163
modify clear 174
mosaic 163
pattern list 357
random/diamond dust 163
rotary 163
settings 624
standard 163
swap 230
Wipe Crop settings 300
Wipe direction 167, 175
selection buttons 39, 64, 70
Wipe modifiers 166
Wipe pattern
aspect ratio 171, 177
edge modification 167
key 124
modulation 172
replication 171, 177
rotation 170
selection 163
types 163
Wipe pattern/modifier combinations 174
Wipe position 169, 175
Wipe settings 163
for independent key transitions 175
Wipe snapshot 177
deleting 178
recalling 178
saving 178
Wire frames 273
Wiring settings 654
Working buffer clearing 286
Wrap Around 288
Write-protecting 468

X

XPT HOLD
buttons 34, 57
status display 64
XPT HOLD button operation mode 625

Y

Y balance 132
adjustment 133

Z

Zabton 124, 137, 146
Z-ring 47

The material contained in this manual consists of information that is the property of Sony Corporation and is intended solely for use by the purchasers of the equipment described in this manual.
Sony Corporation expressly prohibits the duplication of any portion of this manual or the use thereof for any purpose other than the operation or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

MVS-8000X System
MVS-7000X System
(SY)
4-470-637-**01** (1)

Sony Corporation

http://www.sony.net/

© 2013